


Session 02 SQL Basics & Commands
Trainer Coverage: SQL syntax rules. DDL commands: CREATE, ALTER, DROP. Creating basic users and expenses tables. Demo: Execute commands in MySQL CLI / Workbench.

Q:-01 Open MySQL Workbench or CLI and write a CREATE TABLE statement to create a table called 'restaurants' with columns: id (INT, primary key, auto-increment), name (VARCHAR(100)), location (VARCHAR(100)), and rating (DECIMAL(2,1)).

```
create table restaurants(  
  
id integer primary key auto_increment,  
  
name varchar(100),  
  
location varchar(100),  
  
rating real);
```

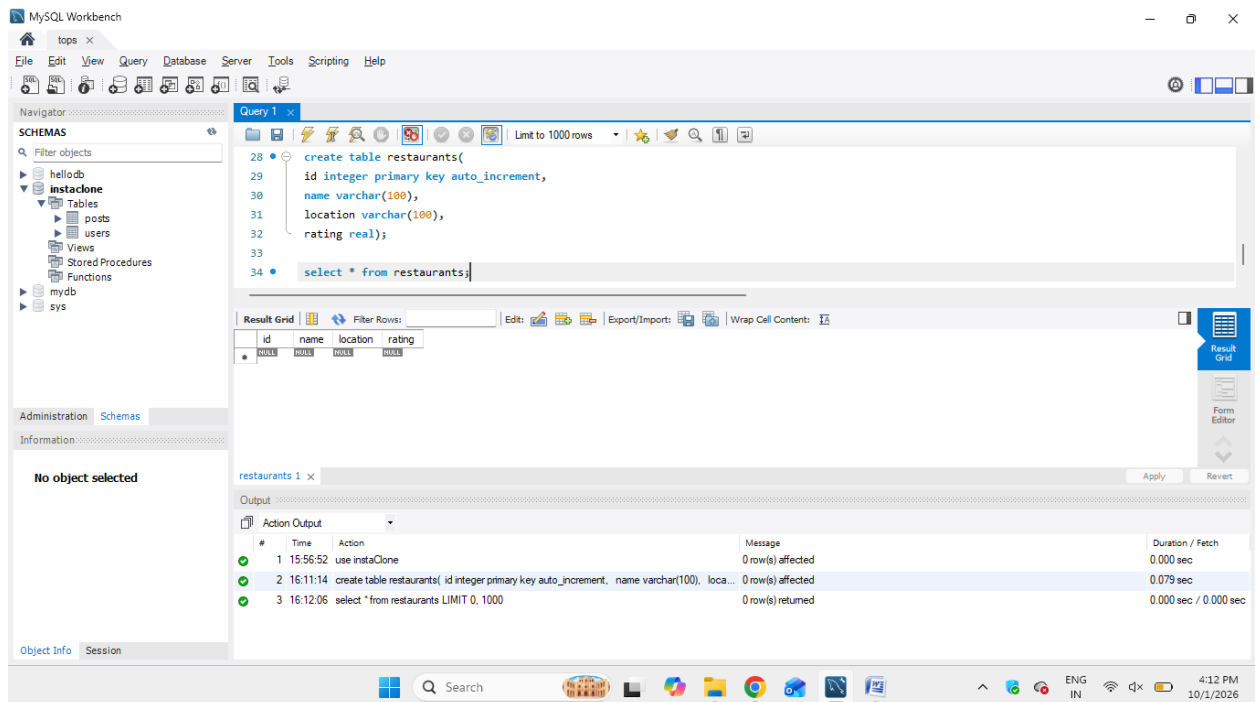

Q:-02 Use the ALTER TABLE command in MySQL to add a new column 'average_cost' (INT) to your 'restaurants' table. Remember to specify the data type when adding a new column.

alter table restaurants add column average_cost integer;

insert into restaurants (name, location, rating, average_cost)

values

('Honest', 'Ahmedabad', 4.5, 500),

('Dominos', 'Rajkot', 4.2, 800),

('Sankalp', 'Surat', 4.0, 1000);

The screenshot shows the MySQL Workbench interface. The 'Query' tab is active, displaying the following SQL commands:

```
30 name varchar(100),
31 location varchar(100),
32 rating real);
33
34 • select * from restaurants;
35
36 • alter table restaurants add column average cost integer;
```

The 'Result Grid' shows the output of the 'select * from restaurants;' query:

	id	name	location	rating	average_cost
▶	1	Honest	Ahmedabad	4.5	500
	2	Dominos	Rajkot	4.2	800
	3	Sankalp	Surat	4	1000

The 'Output' tab shows the execution log:

#	Time	Action	Message	Duration / Fetch
1	16:49:37	use instaClone	0 row(s) affected	0.000 sec
2	16:49:49	select * from restaurants LIMIT 0, 1000	3 row(s) returned	0.000 sec / 0.000 sec

Q:-03 Write a SQL statement to DROP the 'restaurants' table you created earlier. Double-check your command before running it to avoid accidental data loss.

drop table restaurants;

Q:-04 Create a new table called 'playlists' for a music app like Spotify, with columns: playlist_id (INT, primary key, auto-increment), title (VARCHAR(50)), created_by (VARCHAR(50)), and created_at (DATE).

create table playlists (

playlist_id integer primary key auto_increment,

title varchar(50),

created_by varchar(50),

created_at date);

