


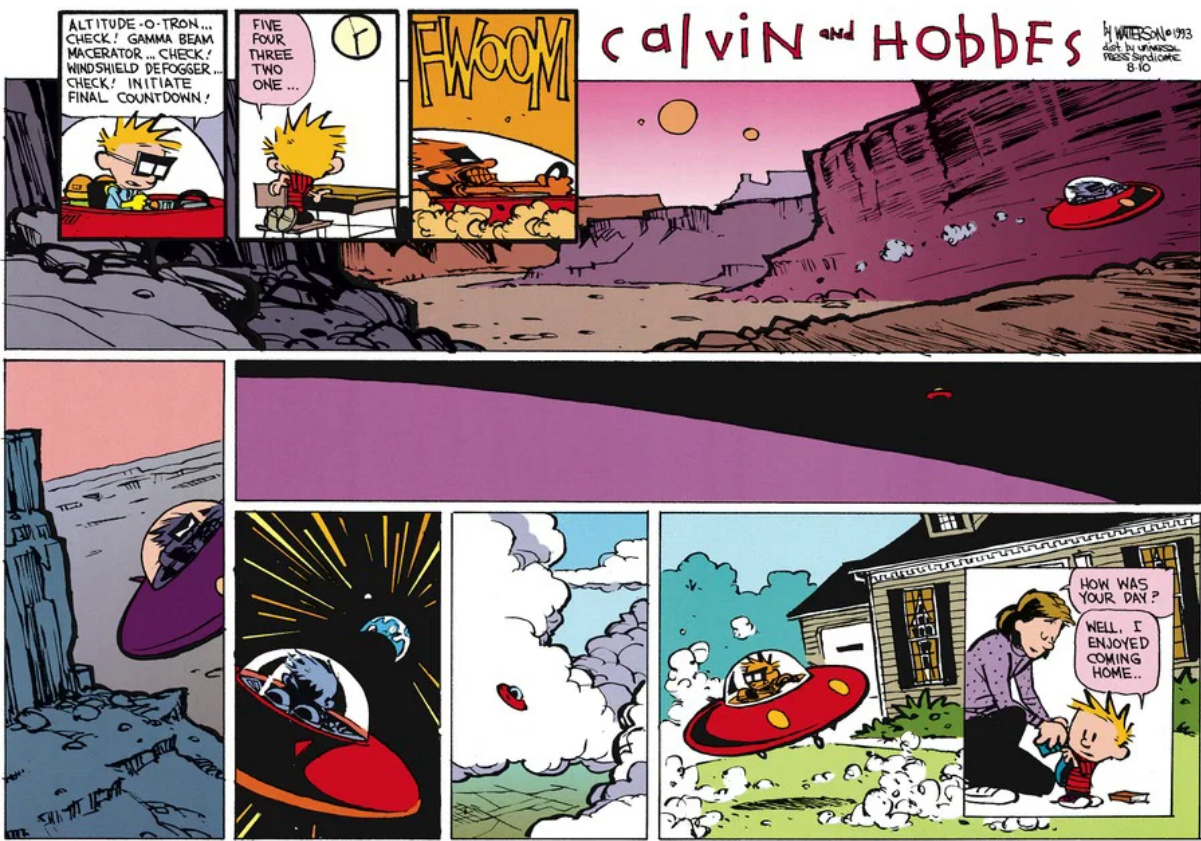

Claim  $\rightarrow$  17

S1 - context window is 200k

S2 - context size is 500k

S1 > S2 for same model, with diff context.

Long term.

1000s Q/A  $\rightarrow$  HIT  
n .


DB

For a question if it takes > x compute you can retrieve from DB.

Dual Encoder < New approach < Cross Encoder

new approach = Importance (0-10) + Recency + Cosine similarity  
weightage: 1 1 0.5

Multi Armed Bandit approach (RL)

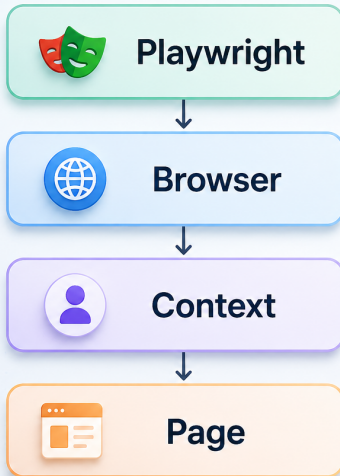

Playwright follows a **Browser** → **Context** → **Page** hierarchy.




Contexts act like **isolated user profiles**, enabling multiple sessions inside one browser.

The screenshot shows a ShopHub website interface with various elements annotated for Playwright selectors. The annotations include:

- Role-based selector**: Targets by accessibility role. Example: `getByRole('link', { name: 'Products' })`. This points to the 'Products' link in the navigation bar.
- Text selector**: Targets visible text content. Example: `getByText('Wireless Headphones')`. This points to the product title 'Wireless Headphones'.
- Label selector**: Targets form labels. Example: `getByLabelText('Quantity')`. This points to the 'Quantity' label next to the input field.
- CSS selector**: Use as last resort for styling hooks. Example: `locator('button.add-to-cart')`. This points to the 'Add to cart' button.

At the bottom, a summary states: **Robust selectors target semantic meaning (roles, labels, text) instead of fragile CSS classes.**

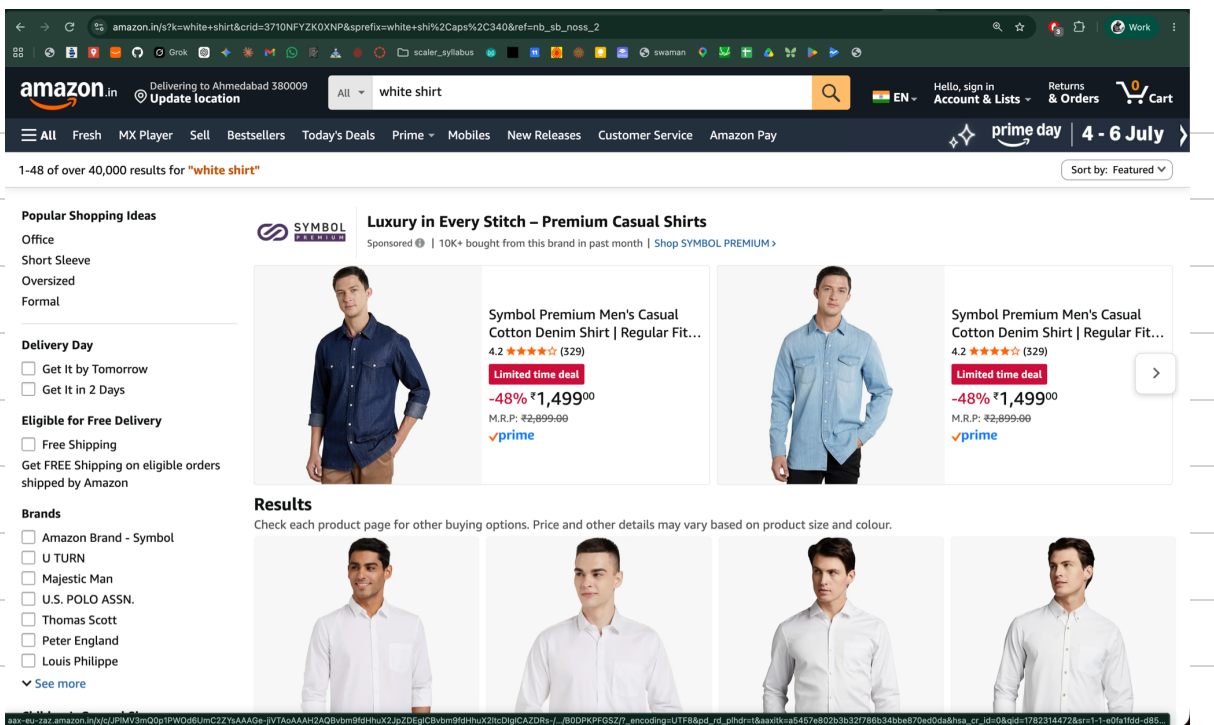

max\_steps

If on a same problem, if we approach 75% of allotted step. 10, 8 loops, and you solve it on 9th loop.

Trigger another API: Task, Context, generate a lesson what went wrong, and how to solve it in future.

lesson\_1

lesson\_1 is either stored in vectorDB or .md file.

can you give us more time to practice the notebooks ?