

tranSMART Quick Start Guide

Selecting Data


Use these tips to select data in tranSMART for comparison and analysis.

Selecting folders vs. single items

- If an entire folder is placed in a Subset box, all samples with a value for that data point are included in the subset regardless of the value (e.g. dragging the folder “Gender” would include all samples with values of “1: Female” and “2: Male”).
- If only a single term is included, then only samples having that value are included (e.g. dragging “1: Female” would include only those samples assigned a value of “Female”).

Numerical values

If a numeric term is selected, values can be further restricted by choosing a filtering option from the pop-up menu. Select “No Value” to use all samples with any value. Use the “Show Histogram” button (A) to find out what the available range of values.

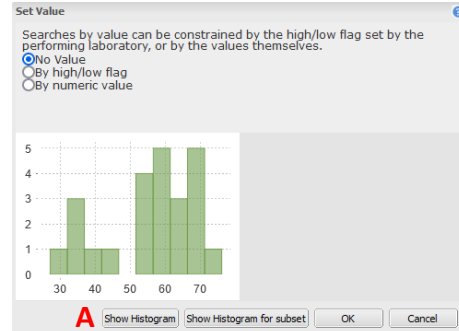

AND vs. OR

- Terms in the same subset box are part of an “OR” statement: “Statin = Atorvastatin OR Simvastatin” (B).
- Separate subset boxes are joined together in “AND” statements: “Gender = Female” AND “Diabetic neuropathy = Yes” (C).

Setting up comparisons

Two different subsets (Subset 1 and Subset 2) can be defined and compared. In the example below, Subset 1: “Female” AND “Atorvastatin” OR “Simvastatin” is compared to Subset 2: “Female” AND “No Statin Use”.

B

Subset 1

Include Exclude Clear Panel

abc Atorvastatin (12)

abc Simvastatin (4)

Subset 1

Include Exclude Clear Panel

abc 1: Female (12)

abc Atorvastatin (12)

abc Simvastatin (4)

AND

Subset 2

Include Exclude Clear Panel

abc 1: Female (12)

abc 0: No (6)

C

Subset 1

Include Exclude Clear Panel

abc 1: Female (12)

AND

Include Exclude Clear Panel

abc 1: Yes (13)