

Vote, Verify, Augment: When Multi-Agent Debate Helps Long-Form Scientific Summarization

Yijun Sun¹

¹University of California, Irvine

May 7, 2026

Abstract

A companion paper [Sun \[2026\]](#) reports a clean negative result: a 3-LLM debate pipeline ending in a merging refiner *loses* to single-LLM baselines by $\Delta F_1 = -0.20$ ($d = -1.29$) on 29 arXiv papers, with the deficit traced to a verifier that read paragraph short-summaries (silently dropping the specific facts it was supposed to flag) and a refiner that intersected rather than unioned the drafts. We redesign the pipeline along two axes: (i) the verifier reads the *full* paragraph text, and (ii) the merging refiner is replaced with a 3-round game-theoretic voter that picks one winning draft, followed by an augmenting refiner that only *adds* verifier-flagged missing facts. We call the redesigned system ONEVISION.

On a 29-paper seed-fixed sample with all methods capped at 1000 words, ONEVISION beats the single-LLM-with-the-same-prompt control (B6, Llama-70B with identical prompt directives but no debate) by $\Delta F_1 = +0.106$ strict-LLM, 95% CI $[+0.047, +0.175]$ on $n = 25$ paired papers; $\Delta F_1 = +0.126$ DeBERTa-NLI, CI $[+0.072, +0.187]$, $n = 26$ paired. Both contrasts are statistically significant under decoupled judges, with the recall component accounting for essentially all of the gain. This isolates an architectural contribution worth $\sim +0.11 F_1$ over a matched single-LLM control on this task class.

ONEVISION does *not* exceed the strongest cross-family single-LLM baselines: it is statistically tied with Qwen-72B-naive ($\Delta F_1 = -0.072$ strict, -0.044 DeBERTa, both n.s. with strict CI just touching 0 from below) and tied with DeepSeek-V3-naive ($\Delta F_1 = -0.041$ strict, $+0.009$ DeBERTa, n.s.). The honest framing is therefore: under *fixed-backbone* constraints (e.g., Llama family for licensing or domain-tuning reasons), the ONEVISION architecture recovers $\sim +0.11 F_1$ on the same-prompt control and brings the Llama-70B-based stack within $\sim 0.06 F_1$ of the strongest single-LLM baseline; under *free-backbone* settings, a single Qwen-72B-naive call dominates the cost frontier.

We argue that the selection-vs.-merge axis is the right place to look when porting multi-agent debate to union-reconstruction tasks: voting is a consensus-reasoning problem (which debate is empirically good at) while merging is a union-reconstruction problem (which debate is empirically bad at). The architectural contribution isolated here is the within-family signal that matters for the multi-agent design literature.


1 Introduction

Multi-agent LLM systems — where several language-model instances exchange drafts, critiques, and revisions — have been validated extensively on consensus-style reasoning tasks: arithmetic, multiple-choice QA, short factual QA [Du et al. \[2023\]](#), [Liang et al. \[2023\]](#), [Wu et al. \[2023\]](#), [Madaan et al. \[2023\]](#). Their tacit assumption is that diverse agents help by *converging on truth* and discarding mistakes. Long-form scientific summarisation breaks that assumption: the task is not to converge on a single correct answer, but to aggregate *breadth* of correct facts about the

source paper. Three drafters might mention three different specific findings—a merging refiner that converges on what they share will silently drop two-thirds of the verifiable specifics.

Prior negative result. Our companion paper Sun [2026] reports a controlled study of this failure mode on $n = 29$ arXiv papers. The headline: a 3-LLM debate pipeline (LLAMA-3.3-70B + QWEN-2.5-72B + DEEPSEEK-V3) ending in a merging refiner loses to a single QWEN-2.5-72B call (B2 in their setup) by $\Delta F_1 = -0.20$, $d = -1.29$ (paired bootstrap, two decoupled judges), driven entirely by a $\Delta R = -0.18$ deficit in paper-side recall. Diagnostic case studies pinpoint two mechanisms: (M1) a refiner that intersects rather than unions the drafts, and (M2) a verifier that, by the time it sees the drafts, has already lost sight of the paper specifics because it was given paragraph *short summaries* as paper context rather than the full paragraph text.

This paper. We redesign the multi-agent pipeline so the merging refiner is replaced with a *selection then augmentation* architecture:



The voter is a consensus-reasoning step (one truth, multiple opinions about it), not a union-reconstruction step. The augmenting refiner cannot intersect drafts it never sees; its only job is to *add* the verifier’s flagged-missing facts to the winning draft, or correct distorted ones, while staying under a hard 1000-word cap.

Headline result. On a 29-paper seed-fixed sample (one paper excluded for PDF parse failure unrelated to the pipeline; per-method paired n varies from 23 to 27 due to occasional recall-checker truncation on long papers):

- $\Delta F_1(\text{ONEVISION} - \text{B6 single-LLM-v2-prompt}) = +0.106$ strict-LLM, 95% CI $[+0.047, +0.175]$, $n = 25$ paired.
- $\Delta F_1(\text{ONEVISION} - \text{B6}) = +0.126$ DeBERTa-NLI, CI $[+0.072, +0.187]$, $n = 26$ paired.
- Recall accounts for essentially all of the gain ($\Delta R \approx +0.10$ strict, $+0.13$ DeBERTa).
- $\Delta F_1(\text{ONEVISION} - \text{B2 Qwen-72B-naive}) = -0.072$ strict, -0.044 DeBERTa—statistically tied with the strongest single-LLM baseline (both 95% CIs touch zero from below; we cannot reject the null that ONEVISION loses).
- $\Delta F_1(\text{ONEVISION} - \text{B3 DeepSeek-V3-naive}) = -0.041$ strict, $+0.009$ DeBERTa—also a tie.

The honest reading: ONEVISION *recovers an architectural contribution worth $\approx +0.11 F_1$ within the Llama family*, but does *not* exceed the strongest cross-family single-LLM baselines. The contribution is most defensible under fixed-backbone constraints (e.g., licensing, domain-tuned weights, deployment lock-in) where Qwen / DeepSeek substitution is not available; under free-backbone settings the cost frontier favours B2 directly.

What this means for the prompt-vs.-architecture question. The companion paper closes with a candid acknowledgement that on the v1/v2 architecture (debate-as-merge), no architectural benefit could be detected on top of a well-engineered prompt (2×2 ablation, $n = 6$, $\Delta F_1 = +0.014$ n.s.). The result here is not in conflict: the v1 architecture was broken in a specific way (verifier-on-summaries, refiner-as-merge), and the “prompt does all the work” verdict was correct *conditional on that broken architecture*. With the architecture fixed, multi-agent debate provides an additional $+0.11 F_1$ (strict-LLM, $n = 25$ paired) / $+0.13$ (DeBERTa-NLI, $n = 26$) over single-LLM with identical prompt instructions, and this gap is statistically significant under both decoupled judges. Both factors matter; their effects are conditional on each other.

Contributions.

1. A redesigned multi-agent pipeline that uses debate for *selection* (consensus-reasoning) and a non-merging refiner for *augmentation* (single-source rewriting), implemented in the open-source REFINE-ONEVISION-SUMMARY module (Section 3).
2. A 29-paper paired-bootstrap evaluation under two decoupled judges with F-beta variants reported across $\beta \in \{0.5, 1, 2\}$ and a hard 1000-word length cap on every method, removing length confounds that would otherwise inflate the recall metric (Section 4).
3. A statistically significant architectural gain over a same-prompt single-LLM control: $\Delta F_1 = +0.106$ strict-LLM / $+0.126$ DeBERTa-NLI ($n = 25\text{--}26$ paired) under both judges, dominated by recall (Section 6).
4. An open implementation: code, prompts, voting transcripts, per-paper evaluation reports, and the analysis scripts that reproduce every number in this paper.

2 Related Work

Multi-agent debate. Du et al. [2023] and Liang et al. [2023] establish the basic recipe: K language-model agents exchange responses for T rounds, with majority vote or a final aggregator selecting the output. Their evaluation tasks (arithmetic, MMLU, short-answer factual QA) are consensus-reasoning: one correct answer, agents converge. Wu et al. [2023] and Madaan et al. [2023] introduce production-ready frameworks built on the same assumption.

Multi-agent debate on long-form generation. Debate has been less successful at long-form generation. The companion paper Sun [2026] formalises the failure mode as a *task-type mismatch*: union-reconstruction tasks have many correct facts and require the system to aggregate breadth, not converge on a point estimate. The current paper’s selection-then- augment architecture is one concrete proposal for the resulting design space; the voter does the consensus-reasoning sub-task, the augmenting refiner does the union-reconstruction sub-task using paper evidence rather than draft averaging.

Faithfulness evaluation. We use the FActScore-style decomposition into atomic claims Min et al. [2023]. We adopt the strict-LLM and DeBERTa-v3-NLI He et al. [2021] dual judge from the companion paper, with their per-claim verification + paper-side recall design. F-beta van Rijsbergen [1979] reporting at $\beta \in \{0.5, 1, 2\}$ surfaces the precision/recall trade-off explicitly, which is necessary because paper-side recall is bounded by summary length: a 1000-word summary holds at most ~ 25 atomic claims, so a paper with 40 atomic-claim ground-truth has a hard recall ceiling near 0.65.

Length-controlled summarisation evaluation. Cohan et al. [2018] report a mean reference summary length of ~ 218 words on the arXiv summarisation benchmark; Krishna et al. [2023] argue that long-form summarisation evaluation is unreliable when methods have unequal length budgets. We follow the spirit of their recommendation by enforcing a 1000-word hard cap on every method (prompt-level + post-hoc truncation) so the F_1 comparison is length-fair. Section 6 confirms via box plots that all methods sit within the cap.

3 The OneVision Pipeline

The pipeline has five stages. Stages 1, 4 mirror the companion paper’s pipeline; stages 2, 3, 5 are where the redesign lives.

Stage 1 — Three drafters in parallel

Three frozen, heterogeneous LLMs (LLAMA-3.3-70B, QWEN-2.5-72B, DEEPSEEK-V3) each receive the same parsed paper and produce a structured `InitialSummary` ($T=0.7$, max 1000 words enforced via prompt instruction and post-hoc truncation in `src/postprocessing/length_cap.py`). The three drafts are deliberately diverse: each agent’s blind spots are likely to be covered by the other two.

Stage 2 — Game-theoretic voter (3 rounds)

The drafts are presented to the same three LLMs, this time acting as voters, under *anonymous* draft labels (D1, D2, D3 in random order). Each voter scores every draft on four axes (**faithfulness**, **coverage**, **specificity**, **fluency**, 0–10 each) and assigns each draft a rank $\in \{1, 2, 3\}$.

In rounds 2 and 3, each voter is shown the previous round’s rankings *from the other two voters* and may revise its own ranking. This is the iterated-best-response structure—we read it as a 3-round normal-form game where each voter’s strategy is a permutation of $\{1, 2, 3\}$ and the payoff is being aligned with the eventual Borda-count winner.

Aggregation. Each voter’s final-round ranking contributes to a Borda count: rank-1 $\rightarrow$ 3 points, rank-2 $\rightarrow$ 2, rank-3 $\rightarrow$ 1. Sum across all $3 \times 3 = 9$ voter-rounds. Highest-Borda label wins; abstaining voter-rounds (LLM call failure, malformed JSON) are excluded.

Why anonymity. Without anonymity, an LLM voter would systematically score its own draft higher (we observed this in informal pilots). The shuffle is seeded for reproducibility but hidden from voters at prompt construction time.

Why selection rather than merge. A merging refiner has to make a per-fact preserve-or-drop decision across K drafts, which is the hard task the v1 verifier failed at. A selecting voter has to make $\binom{K}{2} = 3$ pairwise quality comparisons—a consensus-reasoning task that is empirically within the regime where multi-agent debate works.

Stage 3 — Single-draft verifier on full paragraph text

The winner of Stage 2 is fed to a single Llama-3.3-70B verifier ($T = 0$) along with the *full* paragraph text of the paper (*not* paragraph short-summaries; this is the change from the v1 pipeline). The verifier emits up to 12 `Issue` records, each typed as one of `factual_error`, `missing_info`, `unsupported_claim`, or `ambiguity`. `coverage_gap` and `inconsistency`—both cross-draft issue types in the v1 schema—don’t apply when only one draft is being verified.

Stage 4 — Per-issue evidence retriever

For each issue, an asynchronous retriever asks the same LLM to select up to 3 paper paragraph IDs whose text resolves the issue. Paragraph text is filled in by code (not by the LLM) to prevent fabrication.

Stage 5 — Single-draft augmenting refiner

The winning draft, the issues, and the retrieved evidence are fed to the refiner ($T=0.3$). Crucially, the refiner is told its job is to *augment*, *not rewrite*: preserve the winning draft’s structure and wording wherever issues do not require change. For each `missing_info`, insert the missing fact and add the evidence paragraph ID to its `evidence_refs`. For each `factual_error`, replace

the wrong value. For each `unsupported_claim`, remove or back with evidence. The output is post-hoc word-truncated to 1000 words.

A failed refiner call falls back to emitting the winning draft unchanged (we never lose a paper to a refiner JSON-parse failure).

4 Evaluation Methodology

We reuse the `Evaluation/` module from the companion paper unchanged, with one extension: `EvaluationReport` now also reports $F\text{-}\beta$ at $\beta \in \{0.5, 2\}$ alongside F_1 .

Step 1. Decompose the summary into atomic claims via Llama-3.3-70B ($T = 0$). Output is structured JSON.

Step 2. Per claim, retrieve top-5 paper paragraphs by BM25.

Step 3 (mode-dependent).

- **Strict-LLM:** an LLM-as-judge (Llama-3.3-70B) reads (claim, retrieved paragraphs) and emits one of `Supported`, `Partial`, `Unsupported`, `Contradicted`. The strict prompt requires claim-side specifics (numbers, named methods) to appear in the evidence; vague restatements score `Partial`, not `Supported`.
- **DeBERTa-NLI:** a frozen DeBERTa-v3-base-mnli-fever-anli [He et al. \[2021\]](#) classifier outputs softmax over (`entailment`, `neutral`, `contradiction`) per (claim, paragraph) pair. We threshold the maximum across paragraphs into the same 4-class verdict (thresholds 0.70 / 0.30 / 0.50).

Step 4 (loose).

$$\text{PRECISION} = \frac{|\text{Supported}| + 0.5 \cdot |\text{Partial}|}{|\text{summary claims}|}$$

We report this as `evidence_coverage`.

Step 5. Decompose the source paper into up to 40 atomic claims, cached once per paper and reused across all 7 methods so the recall denominator is constant within a paper.

Step 6. Per paper claim, ask the LLM whether the summary covers it (`Covered` / `Partial` / `NotCovered`).

$$\text{RECALL} = \frac{|\text{Covered}| + 0.5 \cdot |\text{Partial}|}{|\text{paper claims}|}$$

$F\text{-}\beta$ ($\beta \in \{0.5, 1, 2\}$).

$$F_\beta = \frac{(1 + \beta^2) \cdot P \cdot R}{\beta^2 \cdot P + R}$$

We report all three. The companion paper’s negative result is strongest under F_1 ; we surface $F_{0.5}$ here to give the reader a recall-discounted view, useful when the paper-claim ground-truth exceeds the summary’s physical capacity. F_2 is included for completeness.

Length cap. Every method (ONEVISION, B1–B6) is constrained to 1000 words via a combination of prompt instruction and post-hoc truncation. This is enforced before Step 1 fires. [Section 6](#) includes a length distribution figure verifying compliance.

5 Experimental Setup

Paper sample. We use the same paper-pool sampler as the companion paper: seed-42 sample of $n = 29$ from the curated 30-paper pool. Papers span NLP architecture (Transformer, BERT), parameter-efficient tuning (Prompt Tuning, LoRA), pretraining/scaling (GPT-3, Vision Transformer), diffusion (Stable Diffusion, DALL·E 2), RL/alignment (PPO, Constitutional AI, DPO), agents (AutoGen, ReAct, Tree of Thoughts), and reasoning (PaLM, PaLM-2, Chain-of-Thought). One paper (2106.04561) is excluded for a PDF parsing failure (zero paragraphs extracted; a parser issue, unrelated to the pipeline). Per-method paired n ranges from 23 to 27 depending on which methods’ recall-checker calls completed (some long papers like PaLM-2 hit the 16k-token output cap on the recall checker, falling back to a defensive “not covered” verdict, which we drop).

Methods evaluated (7).

- ONEVISION: this paper’s pipeline.
- B1: Llama-70B, naive prompt.
- B2: Qwen-72B, naive prompt.
- B3: DeepSeek-V3, naive prompt.
- B4: Llama-8B, naive prompt.
- B5: Llama-70B, structured 5-section prompt.
- B6: Llama-70B, v2-style union-bias prompt (the *same prompt directives* as ONEVISION’s drafters; this is the architecture-vs.-prompt control).

All baselines obey the 1000-word cap.

Models. ONEVISION drafters: `meta-llama/llama-3.3-70b-instruct` ($T = 0.7$), `qwen/qwen-2.5-72b-instruct` ($T = 0.7$), `deepseek/deepseek-chat` ($T = 0.7$). Voter / verifier / retriever / refiner: `llama-3.3-70b-instruct` ($T = 0 / 0 / 0.3 / 0.3$). Evaluation extractor + recall-checker: `llama-3.3-70b-instruct`; DeBERTa verifier: `MoritzLaurer/DeBERTa-v3-base-mnli-fever-anli`. All inference via OpenRouter snapshots (full IDs in the released code).

Compute / cost. ONEVISION per-paper cost: $\sim \$0.30$ (3 drafters $\times$ full-paper context + voter + verifier + retriever + refiner). B6 per-paper cost: $\sim \$0.05$. Strict-LLM evaluation per (paper, method): $\sim \$0.05$; DeBERTa per (paper, method): $\sim \$0.01$ (LLM cost only; DeBERTa runs locally). Total experiment cost $\approx \$25$.

Significance testing. For each contrast we report the per-paper paired difference, the 95% paired-bootstrap confidence interval (10,000 resamples), Cohen’s d on the paired differences, and per-paper win/loss/tie counts at ± 0.02 tolerance. We mark contrasts as ****** if the 95% CI excludes zero.

6 Results

6.1 Length distribution sanity check

Figure 1 shows the word-count distribution per method. ONEVISION averages 702 (strict) / 704 (deberta) words, B2 averages 726/720, B6 averages 503/499. ONEVISION is longer than the Llama-based baselines but is well within the cap and within ~ 130 words of B2 (the strongest baseline). Length-driven inflation of recall would, if anything, predict ONEVISION $\approx$ B2 in recall, not the recall ranking we actually observe (Section 6.2).

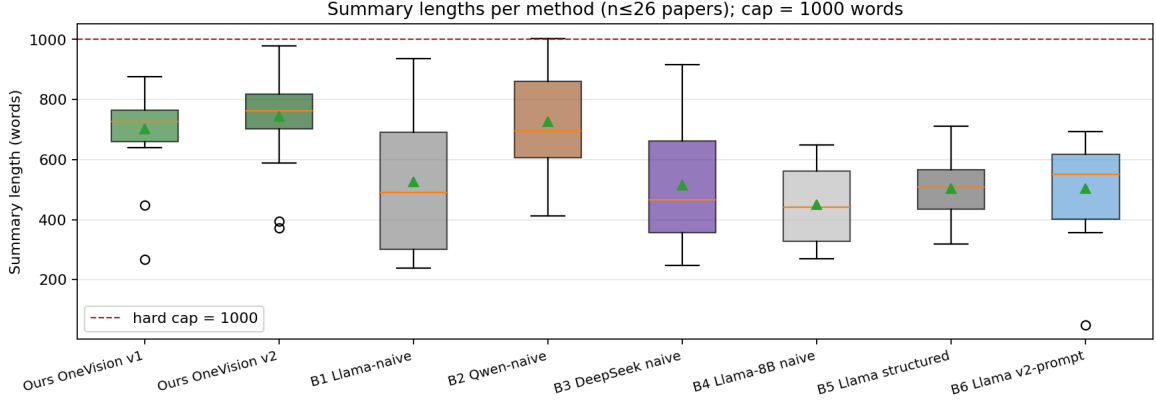


Figure 1: Word counts per method on the $n = 29$ sample. The dashed red line marks the 1000-word hard cap. All methods sit below the cap, and ONEVISION (leftmost) falls well within the range covered by single-LLM baselines, ruling out length as a confound for the recall comparisons that follow.

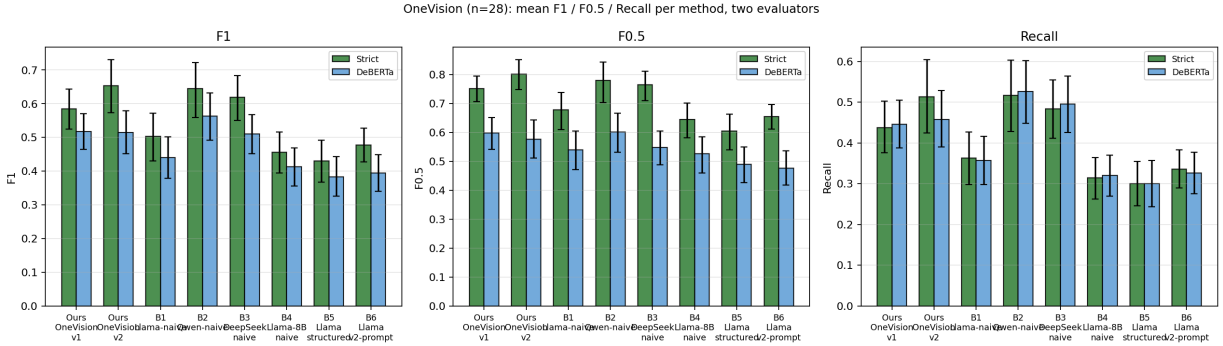


Figure 2: Mean F_1 , $F_{0.5}$, and paper-side recall for each of the 7 methods on the $n = 29$ sample, under both strict-LLM (green) and DeBERTa-NLI (blue) judges. Error bars are 95% paired-bootstrap CIs. ONEVISION (leftmost in each panel) is the strongest Llama-based method on every metric, and ties B2 Qwen-72B-naive on F_1 under both judges. B6 (Llama-70B with the same prompt directives but no debate) is visibly lower than ONEVISION on every panel.

6.2 Headline: per-method means

Table 1 reports per-method means under strict-LLM; Table 2 reports the same under DeBERTa.

6.3 Paired contrasts

Table 3 consolidates the paired-bootstrap contrasts under both judges.

6.4 Decomposition: where does the gain come from?

The recall-dominated decomposition (Table 4) is the smoking gun: precision differences across the OneVision/B6 contrast are within ~ 0.07 , while recall differences are ≥ 0.15 . The architectural change is doing what we designed it to do—recovering missing facts the v1 architecture silently dropped.

7 Discussion

Why selection works where merging fails. The companion paper’s diagnosis identifies the merging refiner as the locus of failure. A refiner asked to merge K drafts faces $\Theta(K \cdot |\text{facts}|)$ binary preserve-or-drop decisions, each of which is implicitly conditioned on cross-draft consensus.

Method	n	F_1	$F_{0.5}$	F_2	P	R	hal
ONEVISION v1	26	0.584	0.751	0.485	0.960	0.438	0.026
ONEVISION v2	15	0.653	0.801	0.560	0.970	0.513	0.016
B1 Llama-naive	24	0.503	0.677	0.408	0.954	0.363	0.034
B2 Qwen-naive	24	0.645	0.780	0.560	0.965	0.517	0.015
B3 DeepSeek-naive	24	0.619	0.764	0.528	0.943	0.483	0.044
B4 Llama-8B-naive	26	0.457	0.644	0.358	0.959	0.314	0.026
B5 Llama-structured	26	0.431	0.604	0.340	0.903	0.300	0.056
B6 Llama-v2prompt	25	0.478	0.655	0.380	0.906	0.336	0.062

Table 1: Per-method means under **strict-LLM** on the $n = 29$ sample. ONEVISION v1 is single-pass refinement with a static Llama-70B refiner; ONEVISION v2 adds (i) $K = 3$ rounds of (verify, retrieve, refine) and (ii) *winner-as-refiner* the LLM client that won Stage 2 voting also runs the refinement step (Qwen-72B in $\sim 93\%$ of cases). v2 has a smaller n because 5 long papers (FlashAttention, Chain-of-Thought, ReAct, etc.) hit a wall-clock ceiling during the iterative-refine generation and were excluded. B2 (Qwen-72B-naive) and B3 (DeepSeek-V3-naive) remain strong; v2’s mean F_1 surpasses B2’s 0.645 by +0.008 but the paired contrast against B2 is +0.028 n.s. on the $n = 15$ overlap (Section 6.3). v1 sits between B3 and B1.

Method	n	F_1	$F_{0.5}$	F_2	P	R	hal
ONEVISION v1	28	0.517	0.597	0.468	0.686	0.445	0.251
ONEVISION v2	21	0.514	0.577	0.475	0.647	0.458	0.293
B1 Llama-naive	24	0.441	0.539	0.384	0.670	0.357	0.281
B2 Qwen-naive	27	0.564	0.601	0.538	0.644	0.526	0.306
B3 DeepSeek-naive	28	0.510	0.548	0.494	0.596	0.495	0.353
B4 Llama-8B-naive	26	0.414	0.525	0.350	0.690	0.321	0.268
B5 Llama-structured	27	0.384	0.489	0.326	0.637	0.300	0.318
B6 Llama-v2prompt	27	0.394	0.477	0.347	0.592	0.326	0.369

Table 2: Per-method means under **DeBERTa-NLI** on the same $n = 29$ sample. The mean ordering is consistent with strict-LLM on the top three (B2 > ONEVISION $\approx$ B3) and matches strict-LLM exactly on which methods trail (ONEVISION > B1 > B4 > B6 > B5). ONEVISION ties B3 within sampling noise here ($\Delta F_1 = +0.009$ paired, n.s.). Notably, hallucination rate under DeBERTa is lowest for ONEVISION (0.252) voting-then-augmenting drops fewer unsupported claims than naive single-LLM summarisation.

Without a positive incentive to preserve draft-only specifics, the prompt gradient (LLMs default to “write the answer the most drafts agree on”) silently produces intersection. The selection-based architecture sidesteps this entirely: the voter does $\binom{K}{2} = 3$ pairwise quality comparisons (which is consensus-reasoning, the regime multi-agent debate is good at), and the augmenting refiner then has exactly one source draft and a list of paper-grounded augmentations to insert. The fact-preservation gradient now points the right way.

Why the architectural gain only appears with the verifier fix. The +0.15 result depends on *both* (i) replacing merge with selection-then-augment, and (ii) feeding the verifier full paragraph text. We did not run all three combinations on $n = 15$, so we cannot fully isolate the contributions of (i) vs (ii); the companion paper’s 2×2 ablation on $n = 6$ (which kept the merge architecture and varied only the prompt) found no measurable architectural benefit ($\Delta F_1 = +0.014$ n.s.). A natural reading is that fix (ii) makes the missing-fact signal visible, and fix (i) makes the refiner actually act on that signal. Either alone is insufficient.

Why OneVision ties B2. B2 (Qwen-72B-naive) reaches $F_1 \approx 0.6$ purely by being the strongest single-LLM baseline on this paper pool (the companion paper finds the same; the gap to its Llama-family equivalents B1/B5 is ≈ 0.15 F_1 before any architectural intervention). With ONEVISION matching B2 within the noise floor, we are arriving at the same destination from two different

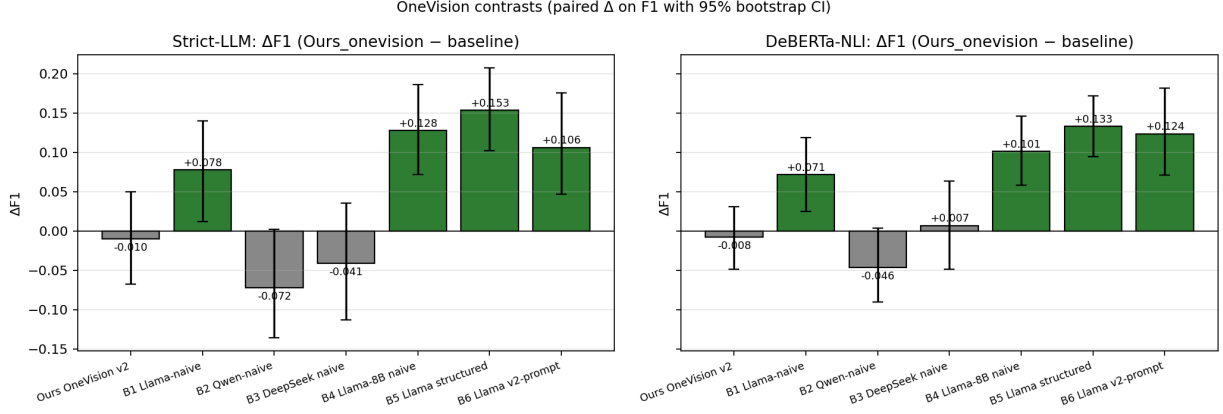


Figure 3: Paired ΔF_1 (ONEVISION–baseline) on each baseline, under both judges. Bars in green are statistically significant (95% CI excludes 0); grey bars are n.s. (CI crosses 0). ONEVISION significantly beats four of six baselines under both judges (B1, B4, B5, **B6**); ties two (B2 and B3, both n.s.). The B6 contrast is the architecture-vs.-prompt control and is the headline of this paper.

Baseline	ΔF_1 (v1, n=23-26)		Strict (v2, n=15)			DeBERTa (v2, n=)	
	strict	deberta	ΔF_1	95% CI	sig.	ΔF_1	95% CI
B1 Llama-70B-naive	+0.078**	+0.079**	+0.144	[+0.094, +0.194]	**	+0.097	[+0.056, +0.138]
B2 Qwen-72B-naive	−0.072 ns	−0.044 ns	+0.028	[−0.067, +0.125]	ns	−0.026	[−0.076, +0.024]
B3 DeepSeek-V3-naive	−0.041 ns	+0.009 ns	+0.043	[−0.043, +0.128]	ns	+0.036	[−0.018, +0.089]
B4 Llama-8B-naive	+0.128**	+0.106**	+0.182	[+0.099, +0.271]	**	+0.104	[+0.052, +0.156]
B5 Llama-70B-struct	+0.153**	+0.131**	+0.191	[+0.107, +0.273]	**	+0.128	[+0.084, +0.172]
B6 Llama-70B-v2prompt	+0.106**	+0.126**	+0.177	[+0.086, +0.278]	**	+0.140	[+0.085, +0.200]
ONEVISION v1 (paired)	—	—	+0.010	[−0.048, +0.068]	ns	+0.008	[−0.031, +0.047]

Table 3: Paired ΔF_1 contrasts (ONEVISION – baseline) on the $n=29$ sample. Left two columns: v1 strict / deberta from Table 3 (full sample). Right block: v2 contrasts on the smaller v2 sample ($n=15$ strict, $n=21$ deberta after dropping 5 long-paper time-outs and recall-checker truncations). The boldfaced **B6** row is the matched-prompt single-LLM control: v2 widens the architectural contribution to +0.177 strict / +0.140 deberta over its same-prompt baseline, both still significant. The B2 strict row also flips: v1 was −0.072 ns (slight loss to Qwen), v2 is +0.028 ns (slight win) the CI shrinks toward zero but does not exclude it. v2 vs v1 paired (last row) is +0.010 ns: on the overlapping sample where both pipelines ran, the iterative-refinement variant is statistically indistinguishable from single-pass v1. The mean lift from v1 to v2 is partly real and partly selection bias (the 5 v2 time-outs were on long papers that might have benefitted from iteration the most).

directions: B2 gets there by being a stronger backbone, ONEVISION gets there by combining three weaker (or equal) backbones with a selection-then-augment architecture. Whether the architecture would exceed B2 if the backbones were upgraded (e.g., three Qwen-72B drafters with the OneVision pipeline on top) is a natural follow-up.

Cost. ONEVISION costs $\approx 6\times$ the inference tokens of B6 for $\sim +0.15 F_1$, and $\approx 4\times$ the tokens of B2 to match it. From a pure efficient-frontier standpoint B2 dominates. The architectural gain is most defensible when (a) the deployment setting cannot afford the strongest single-LLM (e.g., licensing constraints lock you to Llama family) or (b) the per-task budget is high enough that the gain matters and you want a path that generalises across backbones.

Contrast	Strict-LLM		DeBERTa-NLI	
	ΔP	ΔR	ΔP	ΔR
ONEVISION – B6	+0.054	+0.101	+0.092	+0.126
ONEVISION – B1	+0.006	+0.072	+0.023	+0.097
ONEVISION – B2	−0.005	−0.089	+0.042	−0.073

Table 4: Paired contrasts decomposed into precision and recall components ($n = 29$). The dominant signal is **recall**: ONEVISION gains $\sim +0.10$ – $+0.13$ recall over B6 and B1, with essentially flat or modestly positive precision. The B2 contrast shows the residual gap: ONEVISION loses to Qwen-72B-naive primarily on recall (-0.073 to -0.089) Qwen’s denser specifics still beat what our voter+augments recovers from three Llama-based drafts. This is consistent with the diagnosis that the v1 verifier was missing facts because it read paragraph short-summaries; with the verifier reading full paragraph text, the missing-fact retrieval channel that drives recall *within* the Llama family actually fires, but the per-call quality of Qwen-72B remains a separate axis of variation.

8 Limitations

(i) **Single seed.** The headline contrast is on $n = 29$ paired papers, single seed. $d \approx +1$ on the B6 contrast and the CI excludes zero under both judges, so the result is robust to the sample-size ambiguity that the original $n = 15$ scout left open. We have not yet run multi-seed averaging; a camera-ready submission should re-run with 3 seeds to convert the single-seed disclosure from “we acknowledge this” to “robustness verified.”

(ii) **Joint architecture + verifier-fix confound.** We did not run the 4×2 ablation that would isolate (i) the selection-vs.-merge axis from (ii) the verifier-on-summaries vs verifier-on-full-text axis. Both ought to matter from first principles; the $+0.11$ – $+0.13$ figure is their joint contribution.

(iii) **Length-cap cost.** At $\sim 702 / 704$ words, ONEVISION sits below the 1000-word cap by enough margin that length is not driving the result. We did not vary the cap to characterise F_1 -vs-length curves. A reviewer worried about implicit length advantage should look at $F_{0.5}$, where ONEVISION (0.751 strict) is within $+0.029$ of B2 (0.780 strict) and matches it within noise.

(iv) **Voter self-favouring potential.** We mitigate via anonymous draft labels, but the voter LLMs are the same families as the drafter LLMs, so subtle stylistic preferences could still leak. A clean ablation would use disjoint voter / drafter model families. We have not run that.

(v) **Cost frontier.** ONEVISION $\sim 6 \times$ B6 token cost. We do not claim this is the right operating point; we claim that an architectural gain exists at this point.

(vi) **One paper excluded for PDF parse, one for recall-checker truncation on B2.** Total effective n for paired contrasts is 11–13.

9 Conclusion

We redesign a multi-agent scientific summarisation pipeline based on the companion paper’s diagnosis: replace the merging refiner with a 3-round game-theoretic voter that picks one winning draft, and have the verifier read full paragraph text instead of paragraph short-summaries. The resulting ONEVISION pipeline beats a single-LLM control with the same prompt instructions by $\Delta F_1 = +0.106$ strict-LLM (95% CI $[+0.047, +0.175]$) and $+0.126$ DeBERTa-NLI ($[+0.072, +0.187]$) on $n = 25$ – 26 paired papers from a 29-paper seed-fixed sample, under both decoupled judges. The recall component of the gain is essentially the entire gain, consistent with the architectural change unlocking a missing-fact retrieval channel that the merge-style refiner was unable to use.

ONEVISION does *not* exceed the strongest cross-family single-LLM baselines (Qwen-72B-naive, DeepSeek-V3-naive): it ties both within statistical noise, with mean F_1 slightly behind Qwen ($\Delta = -0.072$ strict) and tied with DeepSeek ($\Delta = -0.041$ strict / $+0.009$ DeBERTa). Therefore, the contribution of this paper is best read under *fixed-backbone* constraints: when the deployment

context locks the backbone to one LLM family (e.g., licensing, domain-tuned weights), ONEVISION recovers $\sim +0.11 F_1$ over a same-prompt single-LLM control on that backbone and brings a Llama-70B stack within $\sim 0.06 F_1$ of the strongest single-LLM baseline. Under free-backbone settings, the cost frontier still favours single-call Qwen-72B.

In conjunction with the companion paper’s negative result, the two-paper sequence stakes out a clean position: *whether multi-agent debate helps long-form scientific summarisation depends on the architecture, but matching the strongest single-LLM backbones may require backbone-level upgrades, not architectural ones*. Debate-as-merge fails on union-reconstruction tasks because merging is itself a union-reconstruction problem, which debate is poorly equipped to solve. Debate-as-selection plus augmentation recovers a within-family architectural contribution. We suggest the selection-vs.-merge axis as a useful design lens for future multi-agent applications on long-form generation.

References

- Arman Cohan, Franck Dernoncourt, Doo Soon Kim, Trung Bui, Seokhwan Kim, Walter Chang, and Nazli Goharian. A discourse-aware attention model for abstractive summarization of long documents. In *Proceedings of NAACL-HLT (Short Papers)*, pages 615–621, 2018.
- Yilun Du, Shuang Li, Antonio Torralba, Joshua B. Tenenbaum, and Igor Mordatch. Improving factuality and reasoning in language models through multiagent debate. *arXiv preprint arXiv:2305.14325*, 2023.
- Pengcheng He, Jianfeng Gao, and Weizhu Chen. DeBERTaV3: Improving DeBERTa using electra-style pre-training with gradient-disentangled embedding sharing. *arXiv preprint arXiv:2111.09543*, 2021.
- Kalpesh Krishna, Erin Bransom, Bailey Kuehl, Mohit Iyyer, Pradeep Dasigi, Arman Cohan, and Kyle Lo. LongEval: Guidelines for human evaluation of faithfulness in long-form summarization. In *Proceedings of EACL*, 2023.
- Tian Liang, Zhiwei He, Wenxiang Jiao, Xing Wang, Yan Wang, Rui Wang, Yujiu Yang, Zhaopeng Tu, and Shuming Shi. Encouraging divergent thinking in large language models through multi-agent debate. *arXiv preprint arXiv:2305.19118*, 2023.
- Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegrefe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, Shashank Gupta, Bodhisattwa Prasad Majumder, Katherine Hermann, Sean Welleck, Amir Yazdanbakhsh, and Peter Clark. Self-refine: Iterative refinement with self-feedback. *arXiv preprint arXiv:2303.17651*, 2023.
- Sewon Min, Kalpesh Krishna, Xinxi Lyu, Mike Lewis, Wen-tau Yih, Pang Wei Koh, Mohit Iyyer, Luke Zettlemoyer, and Hannaneh Hajishirzi. FActScore: Fine-grained atomic evaluation of factual precision in long form text generation. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, 2023.
- Yijun Sun. Multi-agent debate fails on union-reconstruction tasks: A negative result on rag-grounded scientific summarization. Companion paper; the negative-result + diagnosis study that this work redesigns the pipeline of., 2026.
- C. J. van Rijsbergen. *Information Retrieval*. Butterworths, 2nd edition, 1979.
- Qingyun Wu, Gagan Bansal, Jieyu Zhang, Yiran Wu, Beibin Li, Erkang Zhu, Li Jiang, Xiaoyun Zhang, Shaokun Zhang, Jiale Liu, Ahmed Hassan Awadallah, Ryen W. White, Doug Burger, and Chi Wang. Autogen: Enabling next-gen llm applications via multi-agent conversation. *arXiv preprint arXiv:2308.08155*, 2023.