## A. Generate held-out features: repeat with five disjoint-group rotations

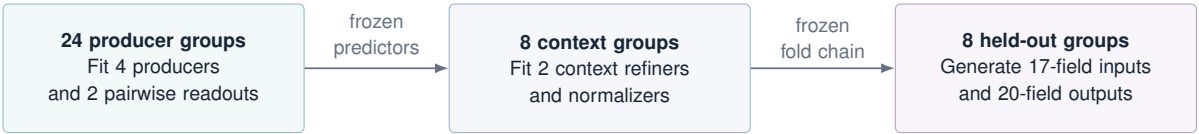


Arrows transfer fitted predictors, not training sequences. Held-out targets enter only after feature generation.

## B. Fit the deployment components from three distinct training inputs

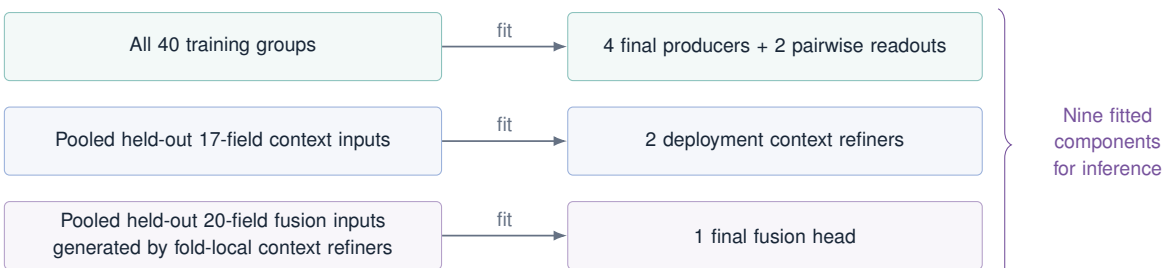


Deployment context refiners do not generate the fusion head's training inputs.