

TASK 1


Git/GitHub Commands

GitHub Repo Link: <https://github.com/Krish-Naik/IncubXperts-Internship.git>

GitHub Commands:

1. `git init`

Used to Initialize git repository and creates a hidden `.git` folder.

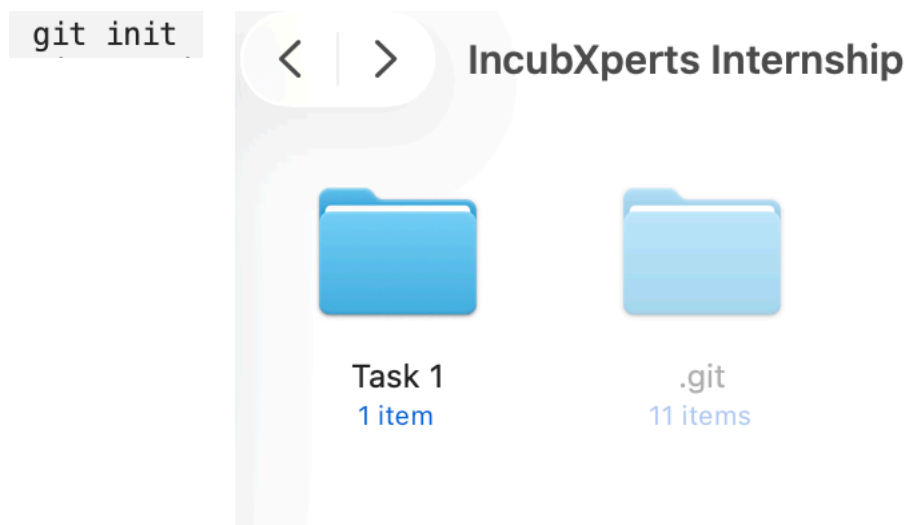

2. `git add .`

Used to add files to staging area before committing.

```
git add .
```

3. `git commit -m "first commit"`

Used to save the staged files in the git history.

```
git commit -m "first commit"
```

4. `git branch -M main`

Used to rename the default branch as main

```
git branch -M main
```

5. git remote add origin <https://github.com/Krish-Naik/IncubXperts-Internship.git>

Used to connect local git repo with remote gitHub repo.

```
git remote add origin https://github.com/Krish-Naik/IncubXperts-Internship.git
```

6. git push -u origin main

Used to upload local git changes to remote GitHub repo.

```
git push -u origin main
```

7. git diff

Used to show difference in modified files compared to the last committed version.

```
krishnaik@Krishs-MacBook-Air IncubXperts Internship % git diff
diff --git a/Task 1/index.html b/Task 1/index.html
index 4a29874..acc732e 100644
--- a/Task 1/index.html
+++ b/Task 1/index.html
@@ -7,5 +7,7 @@
</head>
<body>
  <h1>Hello World</h1>
+  <p>Learning Git Commands</p>
+
</body>
</html>
\ No newline at end of file
krishnaik@Krishs-MacBook-Air IncubXperts Internship %
```

8. git log --oneline

Used to show the commit history.

```
krishnaik@Krishs-MacBook-Air IncubXperts Internship % git log --oneline
81716a8 (HEAD -> main, origin/main) Updated index.html content
7ea568b Remove DS_Store
e75485d first commit
krishnaik@Krishs-MacBook-Air IncubXperts Internship %
```

9. git checkout -b dev

Used to create new branch dev and switches to it.

```
● krishnaik@Krishs-MacBook-Air IncubXperts Internship % git checkout -b dev
  Switched to a new branch 'dev'
○ krishnaik@Krishs-MacBook-Air IncubXperts Internship % █
```

10. git add .

git commit -m "Added Dev Heading"

git push -u origin dev

Updated HTML file then committed and pushed changes in the dev branch.

```
● krishnaik@Krishs-MacBook-Air IncubXperts Internship % git add .
● krishnaik@Krishs-MacBook-Air IncubXperts Internship % git commit -m "Added Dev Heading"
  [dev 606af6f] Added Dev Heading
    1 file changed, 1 insertion(+), 1 deletion(-)
● krishnaik@Krishs-MacBook-Air IncubXperts Internship % git push -u origin dev
  Enumerating objects: 7, done.
  Counting objects: 100% (7/7), done.
  Delta compression using up to 8 threads
  Compressing objects: 100% (3/3), done.
  Writing objects: 100% (4/4), 398 bytes | 398.00 KiB/s, done.
  Total 4 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
  remote: Resolving deltas: 100% (1/1), completed with 1 local object.
  remote:
  remote: Create a pull request for 'dev' on GitHub by visiting:
  remote:   https://github.com/Krish-Naik/IncubXperts-Internship/pull/new/dev
  remote:
  To https://github.com/Krish-Naik/IncubXperts-Internship.git
   * [new branch]      dev -> dev
  branch 'dev' set up to track 'origin/dev'.
● krishnaik@Krishs-MacBook-Air IncubXperts Internship % █
```

11. git checkout main

Used to switch to main branch.

```
● krishnaik@Krishs-MacBook-Air IncubXperts Internship % git checkout main
  Switched to branch 'main'
  Your branch is up to date with 'origin/main'.
○ krishnaik@Krishs-MacBook-Air IncubXperts Internship % █
```

12. git merge dev

Used to merge the changes from dev to main.

```
● krishnaik@Krishs-MacBook-Air IncubXperts Internship % git merge dev
  Updating 81716a8..606af6f
  Fast-forward
   Task 1/index.html | 2 + -
   1 file changed, 1 insertion(+), 1 deletion(-)
○ krishnaik@Krishs-MacBook-Air IncubXperts Internship % █
```

13. git branch

Used to list all the available branches in the repo and highlights the active branch.

```
● krishnaik@Krishs-MacBook-Air IncubXperts Internship % git branch
  dev
* main
○ krishnaik@Krishs-MacBook-Air IncubXperts Internship %
```

14. git push

Used to upload latest commits to the remote GitHub repo.

```
● krishnaik@Krishs-MacBook-Air IncubXperts Internship % git push
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/Krish-Naik/IncubXperts-Internship.git
  81716a8..606af6f  main -> main
○ krishnaik@Krishs-MacBook-Air IncubXperts Internship %
```

15. git log --oneline git checkout 817168a8

Used to go to old commits.

```
● krishnaik@Krishs-MacBook-Air IncubXperts Internship % git log --oneline
606af6f (HEAD -> main, origin/main, origin/dev, dev) Added Dev Heading
81716a8 Updated index.html content
7ea568b Remove DS_Store
e75485d first commit
● krishnaik@Krishs-MacBook-Air IncubXperts Internship % git checkout 81716a8
Note: switching to '81716a8'.

You are in 'detached HEAD' state. You can look around, make experimental
changes and commit them, and you can discard any commits you make in this
state without impacting any branches by switching back to a branch.

If you want to create a new branch to retain commits you create, you may
do so (now or later) by using -c with the switch command. Example:

    git switch -c <new-branch-name>

Or undo this operation with:

    git switch -

Turn off this advice by setting config variable advice.detachedHead to false

HEAD is now at 81716a8 Updated index.html content
○ krishnaik@Krishs-MacBook-Air IncubXperts Internship %
```

16. git checkout main

Used to move head to the latest commit in the main.

```
● krishnaik@Krishs-MacBook-Air IncubXperts Internship % git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
○ krishnaik@Krishs-MacBook-Air IncubXperts Internship %
```

Graph in IDE after running git commands:

