

Session - 3

Q1. Create a SQL table called Restaurants with columns: id (INT, auto-increment), name (VARCHAR), cuisine (VARCHAR), rating (DECIMAL), and city (VARCHAR). Insert 5 sample restaurants into the table, each with a different cuisine and rating.

The screenshot displays the MySQL Workbench interface. The SQL editor contains the following code:

```
53 ('Pasta House', 'Italian', 4.2, 'Mumbai'),
54 ('Sushi World', 'Japanese', 4.7, 'Delhi'),
55 ('Taco Fiesta', 'Mexican', 4.1, 'Bangalore'),
56 ('Burger Hub', 'American', 4.3, 'Pune');
57
58 • SELECT * FROM Restaurants;
```


The 'Result Grid' shows the data inserted into the 'Restaurants' table:

	id	name	cuisine	rating	city
▶	1	Spice Garden	Indian	4.5	Ahmedabad
	2	Pasta House	Italian	4.2	Mumbai
	3	Sushi World	Japanese	4.7	Delhi
	4	Taco Fiesta	Mexican	4.1	Bangalore
	5	Burger Hub	American	4.3	Pune

The 'Output' pane shows the execution log:

#	Time	Action	Message	Duration / Fetch
20	10:44:03	CREATE TABLE Restaurants (id INT AUTO_INCREMENT PRIMARY KEY, n...	0 row(s) affected	0.031 sec
21	10:44:09	INSERT INTO Restaurants (name, cuisine, rating, city)VALUES ('Spice Garden', 'In...	5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0	0.031 sec
22	10:44:25	SELECT * FROM Restaurants LIMIT 0, 1000	5 row(s) returned	0.015 sec / 0.000 sec

Q2. Write a SQL UPDATE statement to change the rating of the restaurant named 'Spice Villa' to 4.7 in the Restaurants table.

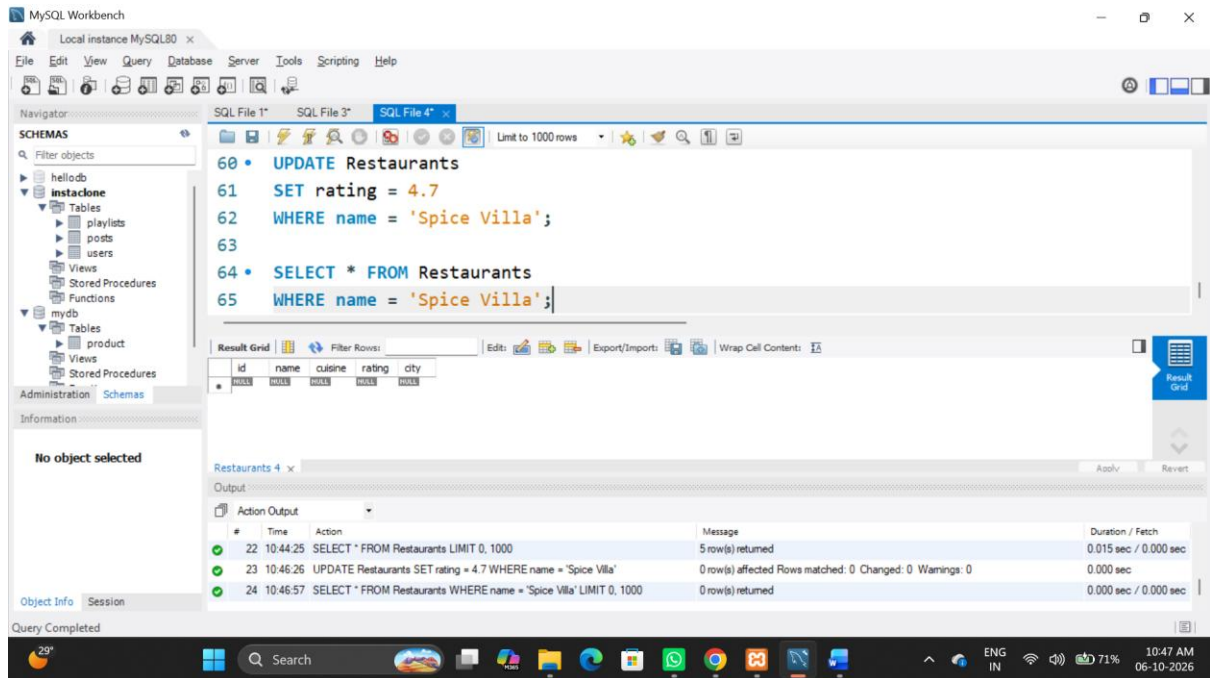

The screenshot shows the MySQL Workbench interface. The SQL editor contains the following code:

```
60 • UPDATE Restaurants
61   SET rating = 4.7
62   WHERE name = 'Spice Villa';
63
64 • SELECT * FROM Restaurants
65   WHERE name = 'Spice Villa';
```

The output pane shows the execution results:

#	Time	Action	Message	Duration / Fetch
22	10:44:25	SELECT * FROM Restaurants LIMIT 0, 1000	5 row(s) returned	0.015 sec / 0.000 sec
23	10:46:26	UPDATE Restaurants SET rating = 4.7 WHERE name = 'Spice Villa'	0 row(s) affected Rows matched: 0 Changed: 0 Warnings: 0	0.000 sec
24	10:46:57	SELECT * FROM Restaurants WHERE name = 'Spice Villa' LIMIT 0, 1000	0 row(s) returned	0.000 sec / 0.000 sec

The output pane also shows a table structure for 'Restaurants' with columns: id, name, cuisine, rating, city.

Q3. Delete all restaurants from the Restaurants table where the rating is less than 3.5 using a SQL DELETE statement.

The screenshot shows the MySQL Workbench interface. The SQL editor contains the following queries:

```
66
67 * DELETE FROM Restaurants
68 WHERE rating < 3.5;
69
70 * SELECT * FROM Restaurants
71 WHERE rating < 3.5;
```

The Results tab shows the execution output for the Restaurants table:


id	name	cuisine	rating	city
1	Spice Villa	Indian	4.5	Hyderabad
2	Spice Villa	Indian	4.5	Hyderabad
3	Spice Villa	Indian	4.5	Hyderabad
4	Spice Villa	Indian	4.5	Hyderabad
5	Spice Villa	Indian	4.5	Hyderabad

The Output tab shows the execution results for the queries:

#	Time	Action	Message	Duration / Fetch
24	10:46:57	SELECT * FROM Restaurants WHERE name = 'Spice Villa' LIMIT 0, 1000	0 row(s) returned	0.000 sec / 0.000 sec
25	10:49:44	DELETE FROM Restaurants WHERE rating < 3.5	0 row(s) affected	0.016 sec
26	10:50:04	SELECT * FROM Restaurants WHERE rating < 3.5 LIMIT 0, 1000	0 row(s) returned	0.000 sec / 0.000 sec

Q4. Use a SELECT query with WHERE and LIMIT to fetch the top 2 restaurants in the city 'Ahmedabad' with a rating above 4.0 from the Restaurants table.

Hint: Combine WHERE for city and rating, and LIMIT to restrict the number of results.

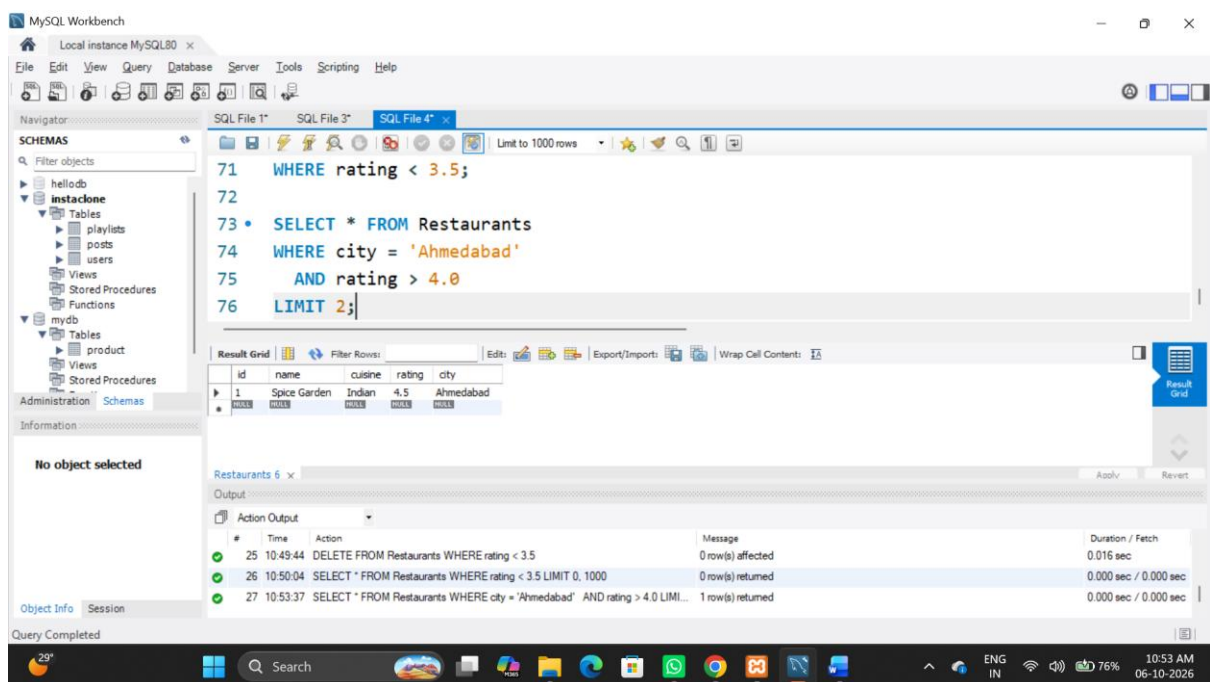

The screenshot shows the MySQL Workbench interface. The SQL editor contains the following query:

```
71 WHERE rating < 3.5;
72
73 * SELECT * FROM Restaurants
74 WHERE city = 'Ahmedabad'
75 AND rating > 4.0
76 LIMIT 2;
```

The Result Grid shows the following data:

id	name	cuisine	rating	city
1	Spice Garden	Indian	4.5	Ahmedabad

The Action Output pane shows the following log:

#	Time	Action	Message	Duration / Fetch
25	10:49:44	DELETE FROM Restaurants WHERE rating < 3.5	0 row(s) affected	0.016 sec
26	10:50:04	SELECT * FROM Restaurants WHERE rating < 3.5 LIMIT 0, 1000	0 row(s) returned	0.000 sec / 0.000 sec
27	10:53:37	SELECT * FROM Restaurants WHERE city = 'Ahmedabad' AND rating > 4.0 LIMIT 2	1 row(s) returned	0.000 sec / 0.000 sec