IT SERVICE MANAGEMENT

ServiceNow Scoped Application

Technical Project Documentation

Project purpose

A portfolio-ready ServiceNow IT Service Management application that centralizes IT requests, automates categorization and assignment, controls access, manages request lifecycle, notifies requesters, and validates automation with Automated Test Framework (ATF).

Prepared By: Sreepada Mohana Krishna

Platform: ServiceNow Personal Developer Instance (PDI)
Application: IT Service Management
Program**:** B.Tech – Information Technology

Document Control

Item	Value
Project	IT Service Management — ServiceNow Scoped Application
Platform	ServiceNow Personal Developer Instance (PDI)
Prepared By	Sreepada Mohana Krishna
Application scope	IT Service Management
Primary tables	IT Request, IT Asset
Primary automation	Client Scripts, Business Rule, Script Include, GlideAjax, Flow Designer
Security	Record-level ACLs
Communication	IT Request Resolved notification
Testing	Automated Test Framework (ATF) + end-to-end manual testing
Deployment artifact	Update Set: IT Service Management - Project
Update Set status	Complete

How to Use This Document

This document is designed for portfolio review, recruiter demonstrations, technical interviews, and project walkthroughs. The screenshot markers identify exactly where evidence from the ServiceNow PDI should be inserted. Screenshots should show configuration and results without exposing credentials, personal information, or sensitive instance details.

1. Executive Summary

The IT Service Management application was developed as a scoped ServiceNow application to provide a structured workflow for internal IT support requests. The solution models the request lifecycle from creation through assignment, investigation, resolution, and closure. It combines client-side form behavior, server-side business logic, asynchronous client-to-server communication, workflow automation, role-based access control, notifications, and automated testing.

The implementation demonstrates practical ServiceNow development rather than a simple CRUD application. The project includes reusable server-side logic through a Script Include, GlideAjax integration, UI Actions for lifecycle transitions, Flow Designer automation, ACLs, and an ATF test that verifies the New-to-Assigned automation.

Portfolio positioning

The strongest story is not the number of components. It is the complete business workflow: an employee creates an IT request, the platform determines the support team, automation moves the request into assignment, the support team resolves it, the requester receives a resolution notification, and the process is validated through ATF.

2. Business Problem

Organizations receive a continuous stream of internal IT issues including hardware failures, software problems, network connectivity, access requests, and email issues. When these requests are handled through informal channels, support teams may need to manually identify the request type, choose the appropriate assignment group, update status, communicate resolution, and maintain a record of the work.

The project addresses the following operational problems:

- Manual classification of IT requests.
- Manual selection of the appropriate support team.
- Inconsistent request status tracking.
- Limited traceability from request creation to closure.
- Manual lifecycle actions for resolving and closing requests.
- Need for controlled access to IT request records.
- Need for requester communication when work is completed.
- Need for repeatable testing of automation.

Business objective
Create a centralized IT request process with predictable routing, controlled lifecycle transitions, clear ownership, requester visibility, and automated validation.

3. Solution Overview

The solution is a scoped ServiceNow application named IT Service Management. The main transactional object is the IT Request table. A separate IT Asset table maintains basic asset information and is referenced from IT Request through the Affected Asset field.

Core request lifecycle:

1. Employee creates an IT Request.
2. Requested By is populated with the current user.
3. Employee selects a Category.
4. The Subcategory choices are dynamically populated.
5. The appropriate Assignment Group is determined automatically.
6. Flow Designer moves a New request with an assignment group to Assigned.
7. Support personnel work the request.
8. Resolve Request changes the request to Resolved.
9. The requester can be notified of resolution.
10. Close Request changes a Resolved request to Closed.

4. Solution Architecture

The application can be understood as four logical layers: user experience, automation and business logic, security and communication, and quality assurance.

Layer	ServiceNow component	Responsibility
User experience	IT Request form	Collects request, category, priority, assignment and resolution information.
Form automation	Client Scripts	Auto-populates Requested By and dynamically controls Subcategory choices.
Server logic	Business Rule	Provides server-side assignment logic based on Category.

Reusable logic	Script Include	Maps Category values to Assignment Group names.
Client/server bridge	GlideAjax	Calls the Script Include asynchronously from the form.
Lifecycle automation	Flow Designer	Moves New requests with an Assignment Group to Assigned.
Lifecycle actions	UI Actions	Provides Resolve Request and Close Request buttons.
Security	ACLs	Controls read, create, write and delete access to IT Request records.
Communication	Notification	Notifies Requested By when a request is resolved.
Quality	ATF	Validates that the request automation produces State = Assigned.
Asset model	IT Asset	Stores asset information and can be referenced by an IT Request.

Architecture flow:

```
Employee
   |
   v
IT Request Form
   |
   +--> Client Scripts --> Category / Subcategory behavior
   |
   +--> GlideAjax --> ITRequestUtils Script Include
   |                    |
   |                    +--> Assignment Group mapping
   |
   +--> Business Rule --> server-side assignment logic
   |
   +--> Flow Designer --> New + Assignment Group -> Assigned
   |
   +--> UI Actions --> Resolved -> Closed
   |
   +--> Notification --> Requester
   |
   +--> ACLs --> access control
   |
   +--> ATF --> automated validation

IT Request ---- Affected Asset ----> IT Asset
```

SCREENSHOT 1

Overall IT Request application / workflow

Capture: Capture the IT Request form showing the major fields and, if possible, the application/table context.
Purpose: Provides visual proof of the primary application object and is the best opening screenshot for a recruiter.

Implementation Evidence — Screenshot 1

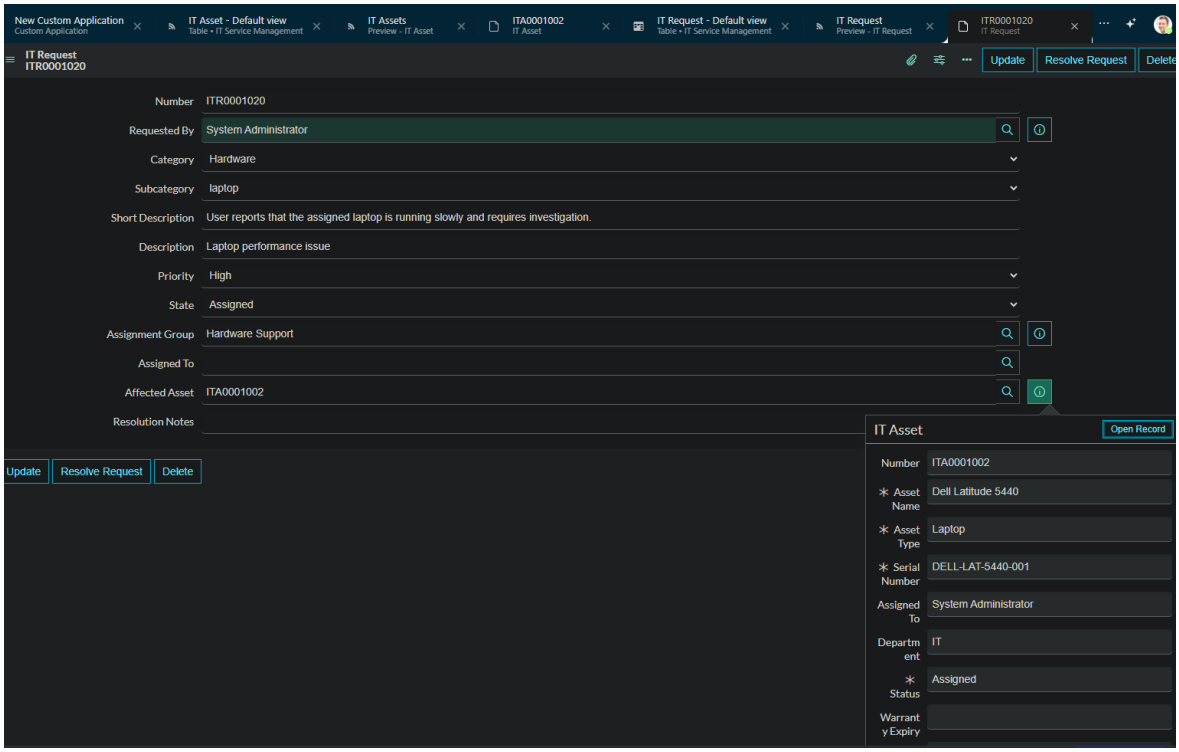


Figure 1. Overall IT Request application / workflow

5. Data Model

5.1 IT Request Table

IT Request is the primary transactional table. Each record represents an employee's IT support request and carries the request through its lifecycle.

Field	Type / role	Purpose
Number	Auto-number	Unique request identifier.
Requested By	Reference → User	Employee who submitted the request.
Category	Choice	High-level request classification.
Subcategory	Choice	Specific issue type under the selected category.
Short Description	String	Concise request summary.
Description	HTML	Detailed problem description.
Priority	Choice	Business/operational priority.
State	Choice	Lifecycle status: New, Assigned, In Progress, Pending, Resolved, Closed, Cancelled.
Assignment Group	Reference → Group	Support team responsible for the request.
Assigned To	Reference → User	Individual technician responsible for the request.
Resolution Notes	HTML	Details of how the request was resolved.
Affected Asset	Reference → IT Asset	Asset associated with the request.

5.2 IT Asset Table

IT Asset is a supporting data table that represents company-owned hardware or software assets. It separates asset inventory information from transactional request information.

Field	Purpose
Number	Unique asset identifier.
Asset Name	Human-readable asset name.
Asset Type	Laptop, Desktop, Monitor, Mobile, Printer, Software License, or Other.
Serial Number	Asset identification value.
Assigned To	User currently associated with the asset.
Department	Department associated with the asset.
Status	Available, Assigned, In Repair, Retired, Lost, or Disposed.
Purchase Date	Asset purchase date.
Warranty Expiry	Warranty end date.
Description	Additional asset information.

The relationship between the tables is implemented through IT Request → Affected Asset → IT Asset. For example, a laptop issue can be linked to the exact laptop involved in the request.

SCREENSHOT 2

IT Asset table fields

Capture: Use the existing screenshot showing the IT Asset table fields and the field definitions.

Purpose: Demonstrates that the project includes a supporting asset data model.

Current source available: Existing PDI screenshot supplied during the project.

Implementation Evidence — Screenshot 2

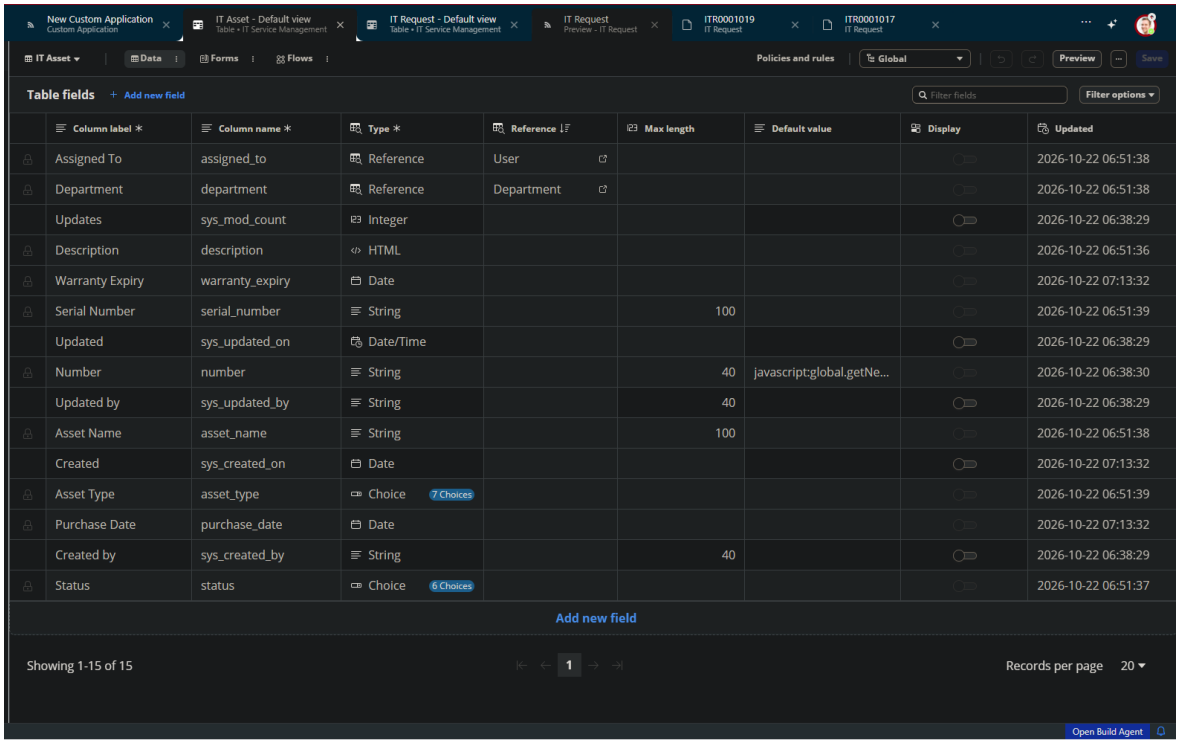


Figure 2. IT Asset table fields

SCREENSHOT 3

Sample IT Asset record

Capture: Capture the completed Dell Latitude 5540 sample asset after submission, including Asset Name, Asset Type, Serial Number and Status.
Purpose: Shows that the IT Asset table is not only defined but also usable as reference data.

Implementation Evidence — Screenshot 3

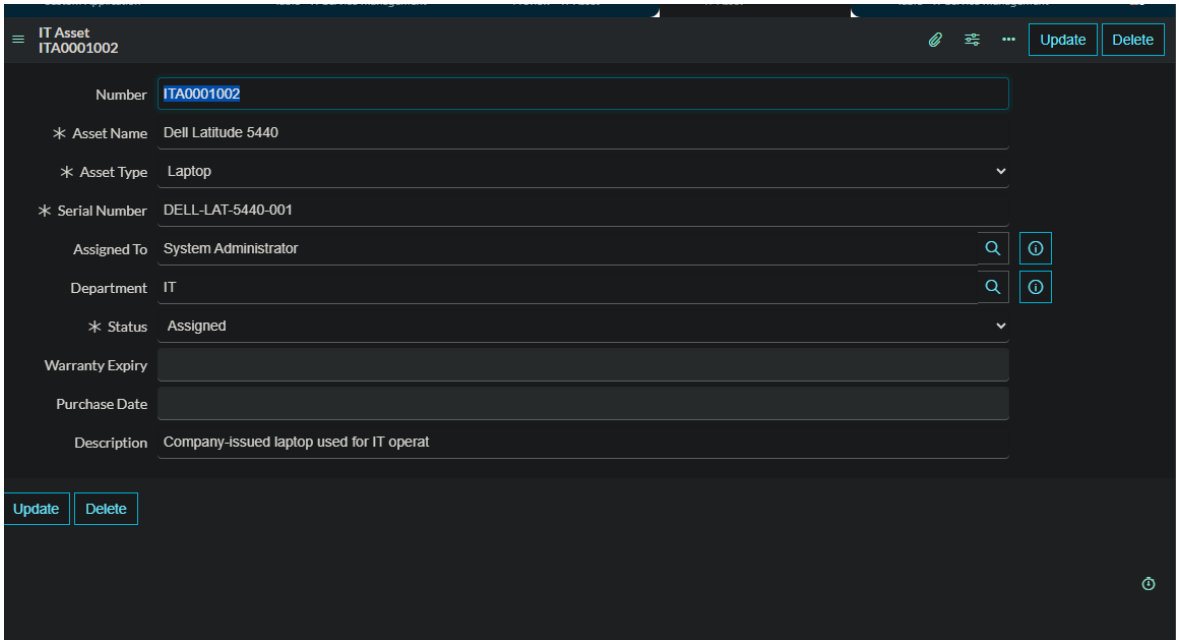


Figure 3. Sample IT Asset record

6. Form and Client-Side Automation

6.1 Requested By Auto-fill

A Client Script runs on form load and populates Requested By with the current logged-in user's sys_id. This reduces manual entry and ensures that a newly created request has a requester.

```
function onLoad() {
    g_form.setValue('requested_by', g_user.userID);
}
```

SCREENSHOT 4

Client Script — Requested By Auto-fill

Capture: Capture the Client Script record showing the name, table, type = onLoad, active status, and script.
Purpose: Documents the first client-side automation.

Implementation Evidence — Screenshot 4

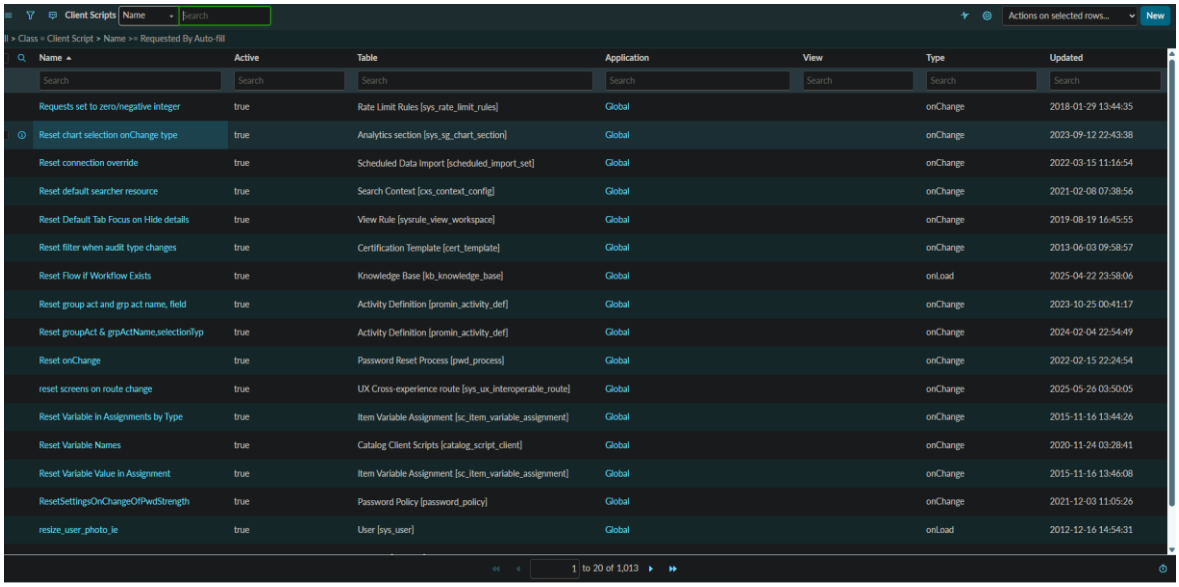


Figure 4. Client Script — Requested By Auto-fill

6.2 Category → Subcategory

A second Client Script runs when Category changes. It clears existing Subcategory options and adds only the values appropriate to the selected category.

Category	Example subcategories
Hardware	Laptop, Desktop, Printer
Software	Application, Installation, License
Network	Wi-Fi, VPN, Internet
Access	Password, Account, Permission
Email	Outlook, Mailbox, Spam
Other	Other

SCREENSHOT 5

Dynamic Subcategory behavior

Capture: Capture the IT Request form with Category = Hardware and the Subcategory list expanded to show Laptop, Desktop and Printer.

Purpose: Provides direct visual evidence that the dynamic form behavior works.

Implementation Evidence — Screenshot 5

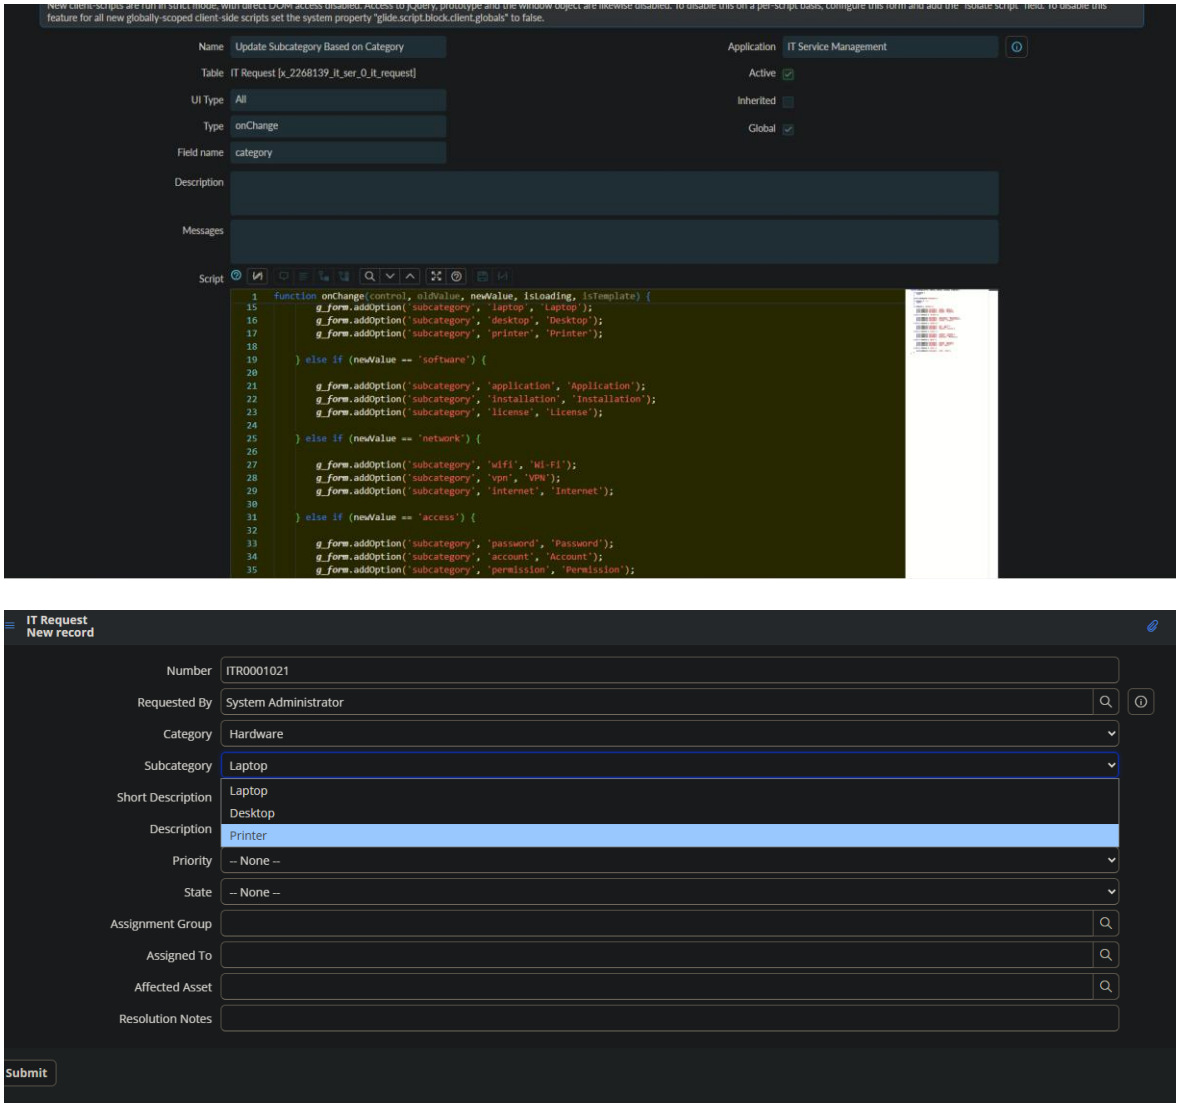


Figure 5. Dynamic Subcategory behavior

6.3 Critical Priority UI Policy

A UI Policy named 'Critical Priority - Resolution Notes Mandatory' makes Resolution Notes mandatory when Priority is Critical. The policy runs on load and reverses when the condition becomes false, so Resolution Notes is not globally mandatory.

SCREENSHOT 6

UI Policy — Critical Priority / Resolution Notes

Capture: Capture the UI Policy configuration and, ideally, a form showing the Resolution Notes field becoming mandatory for Priority = Critical.

Purpose: Demonstrates declarative form control without hard-coding the requirement into the dictionary.

Implementation Evidence — Screenshot 6

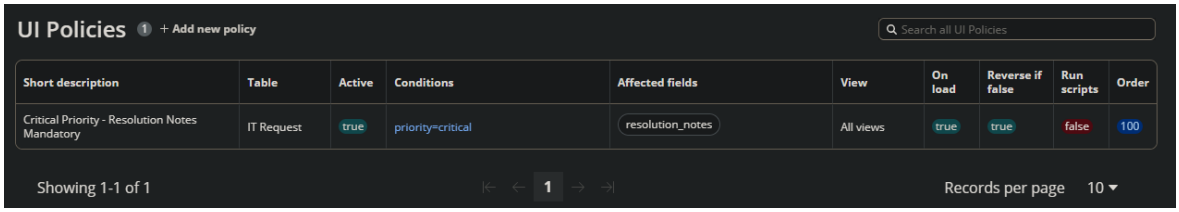


Figure 6. UI Policy — Critical Priority / Resolution Notes

7. Server-Side Automation and Reusable Logic

7.1 Business Rule — Auto Assign IT Request Group

The Business Rule 'Auto Assign IT Request Group' runs before insert/update and maps the request Category to a support group. The intended mapping is:

Category	Assignment Group
Hardware	Hardware Support
Software	Software Support
Network	Network Support
Access	IT Security
Email	Email Support
Other	IT Support

The Business Rule provides a server-side enforcement point for assignment logic. This is important because server-side logic is not dependent on a user's browser behavior.

SCREENSHOT 7

Business Rule — Auto Assign IT Request Group

Capture: Capture the Business Rule configuration showing table, timing, insert/update settings and script.
Purpose: Documents the server-side routing logic.

Implementation Evidence — Screenshot 7

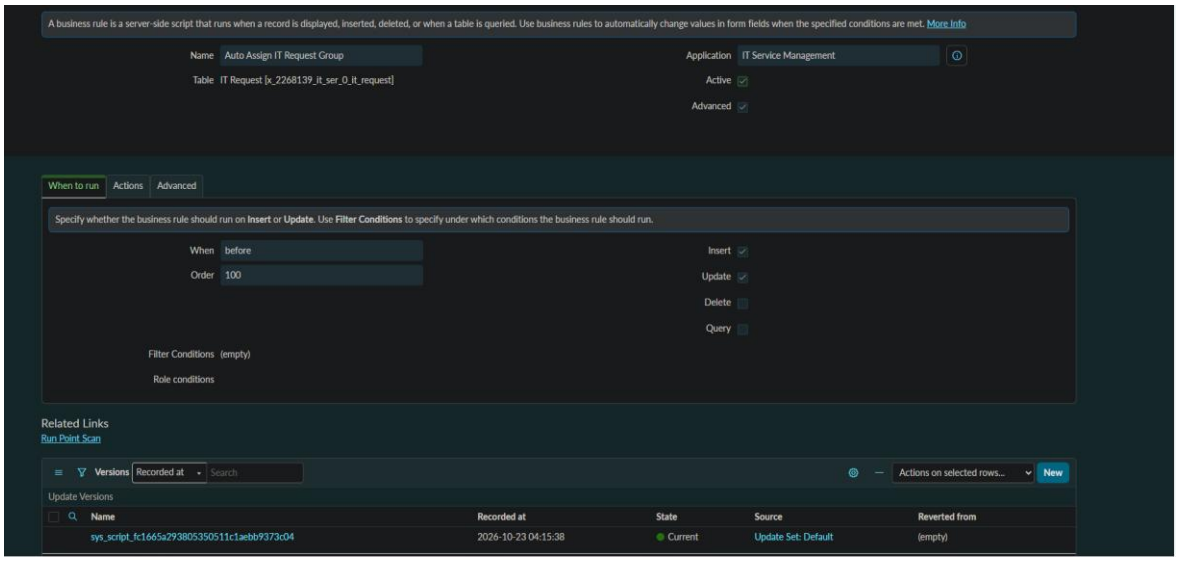


Figure 7. Business Rule — Auto Assign IT Request Group

7.2 Script Include — ITRequestUtils

ITRequestUtils is a reusable server-side utility implemented as an AbstractAjaxProcessor. It exposes getAssignmentGroup(), which reads sysparm_category and returns the appropriate assignment group name.

```
var ITRequestUtils = Class.create();

ITRequestUtils.prototype = Object.extendsObject(global.AbstractAjaxProcessor, {

    getAssignmentGroup: function() {

        var category = this.getParameter('sysparm_category');

        if (category == 'hardware') {
            return 'Hardware Support';
        }

        if (category == 'software') {
            return 'Software Support';
        }

        if (category == 'network') {
            return 'Network Support';
        }

        if (category == 'access') {
            return 'IT Security';
        }

        if (category == 'email') {
            return 'Email Support';
        }

        if (category == 'other') {
            return 'IT Support';
        }

        return 'IT Support';
    },

    type: 'ITRequestUtils'
});
```

The Script Include was configured as application-scoped, active, and Glide AJAX enabled. A background test was used to verify that a hardware category returned 'Hardware Support'.

SCREENSHOT 8
Script Include — ITRequestUtils

Capture: Capture the Script Include form showing Name, application, Active, Glide AJAX enabled and the getAssignmentGroup() code.

Purpose: Demonstrates reusable server-side logic and scoped application development.

Implementation Evidence — Screenshot 8

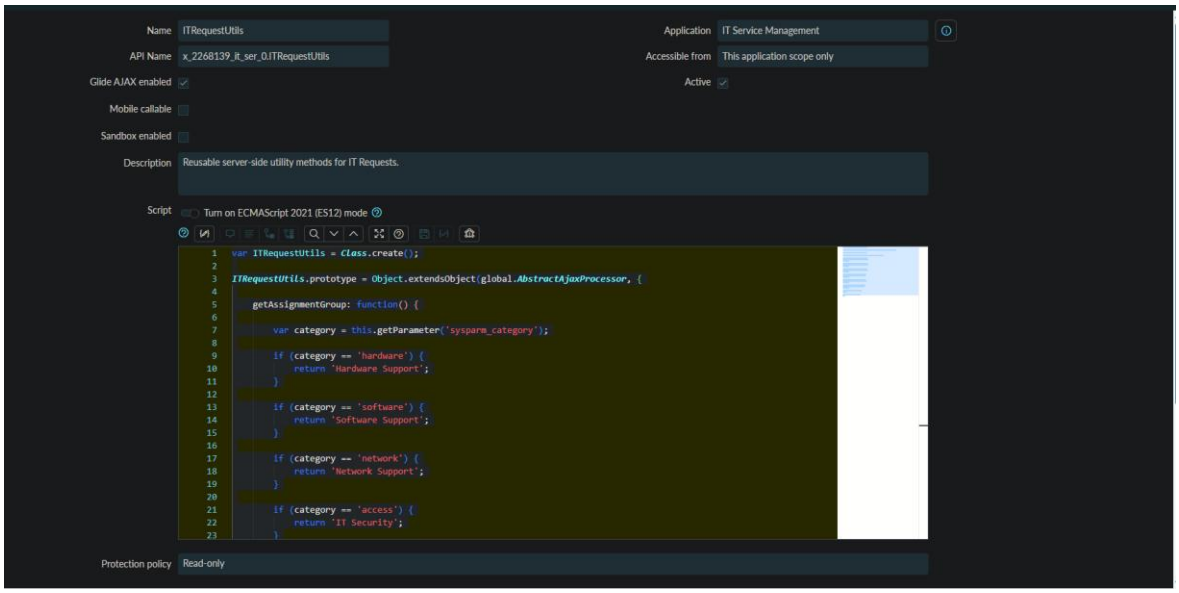


Figure 8. Script Include — ITRequestUtils

7.3 GlideAjax — Set Assignment Group

The Client Script 'Set Assignment Group - GlideAjax' executes on Category change. It sends sysparm_name = getAssignmentGroup and sysparm_category = the selected category to ITRequestUtils, then sets Assignment Group from the returned answer.

```
function onChange(control, oldValue, newValue, isLoading, isTemplate) {

    if (isLoading) {
        return;
    }

    if (newValue == '') {
        g_form.clearValue('assignment_group');
        return;
    }

    var ga = new GlideAjax('ITRequestUtils');

    ga.addParam('sysparm_name', 'getAssignmentGroup');
    ga.addParam('sysparm_category', newValue);

    ga.getXMLAnswer(function(answer) {

        if (answer) {
            g_form.setValue('assignment_group', answer);
        }


    });
}
```

A temporary GlideAjax test Client Script was also used to prove the server call independently. The test returned 'Hardware Support' for a hardware category and was then disabled.

SCREENSHOT 9
GlideAjax assignment automation

Capture: Capture the real 'Set Assignment Group - GlideAjax' Client Script and, if available, a request form showing Category = Hardware and Assignment Group = Hardware Support.
Purpose: Shows the client-to-server integration and its visible business result.

Implementation Evidence — Screenshot 9

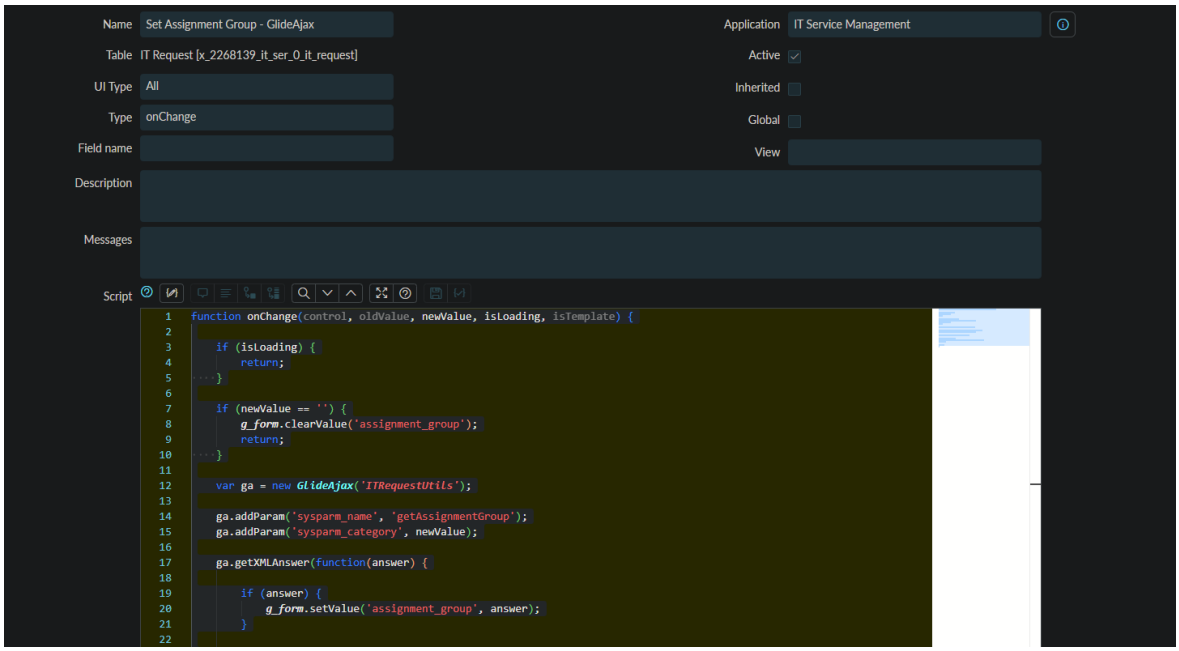

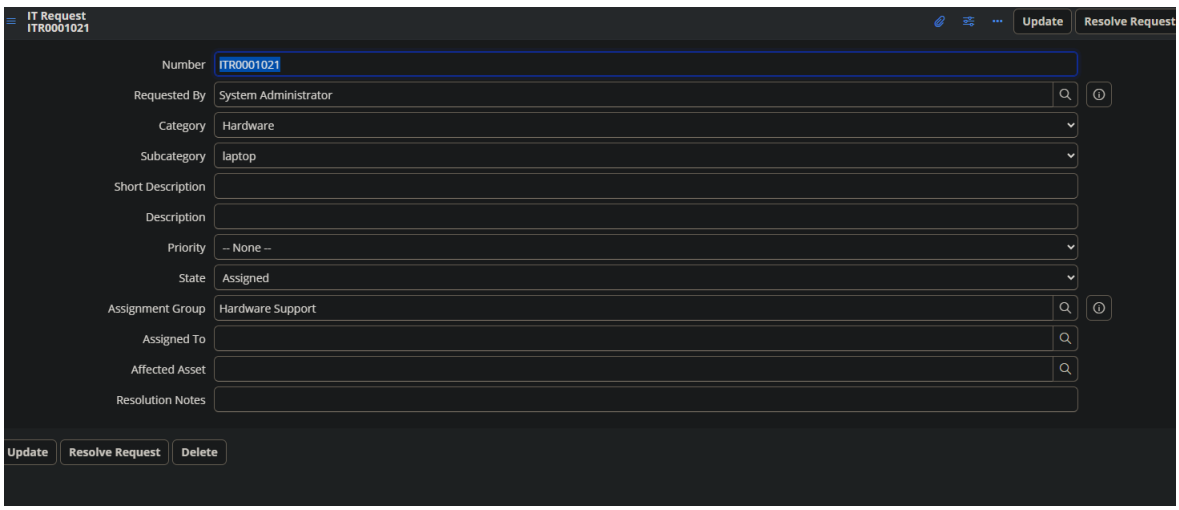


Figure 9. GlideAjax assignment automation

8. Request Lifecycle — UI Actions

Two form buttons were implemented to control the final lifecycle transitions.

UI Action	Condition	Behavior
Resolve Request	current.canWrite()	Sets State to Resolved and redirects to the same record.
Close Request	current.canWrite() && current.state.getDisplayValue() == 'Resolved'	Allows closure only after the request is Resolved.

Resolve Request script:

```
current.state.setDisplayValue('Resolved');
current.update();
action.setRedirectURL(current);
```

Close Request script:

```
current.state.setDisplayValue('Closed');
current.update();
action.setRedirectURL(current);
```


The Close Request condition is particularly important because it prevents a request from being closed before it reaches the Resolved state.

SCREENSHOT 10

UI Actions — Resolve Request and Close Request

Capture: Capture the two UI Action records or a combined view showing their conditions, action names and scripts.
Purpose: Provides evidence of controlled lifecycle transitions.

Implementation Evidence — Screenshot 10

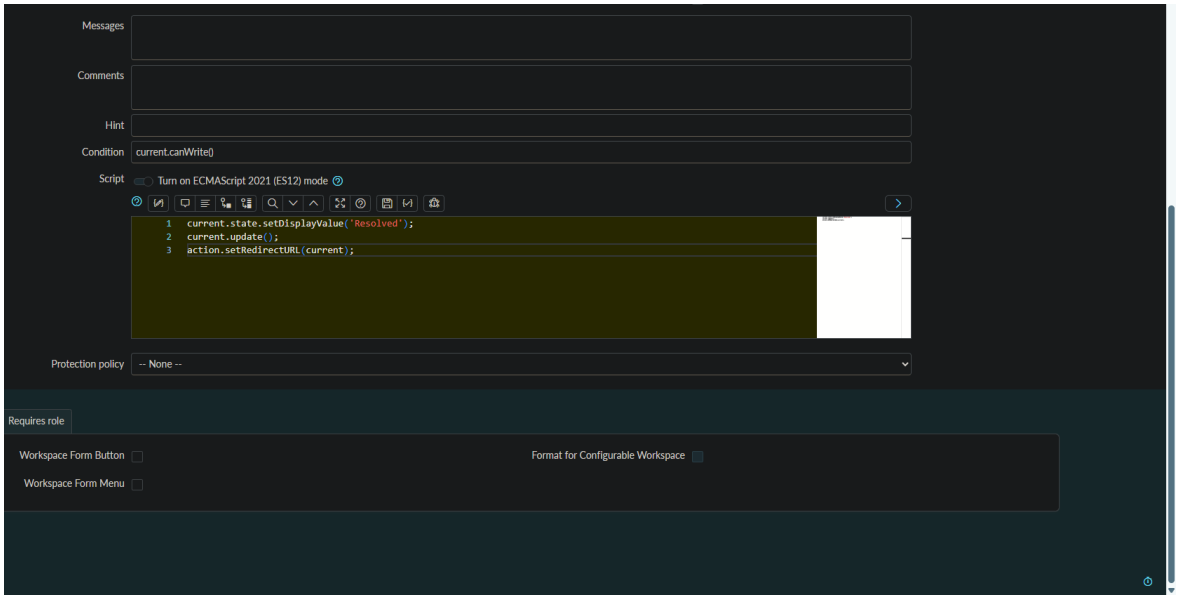

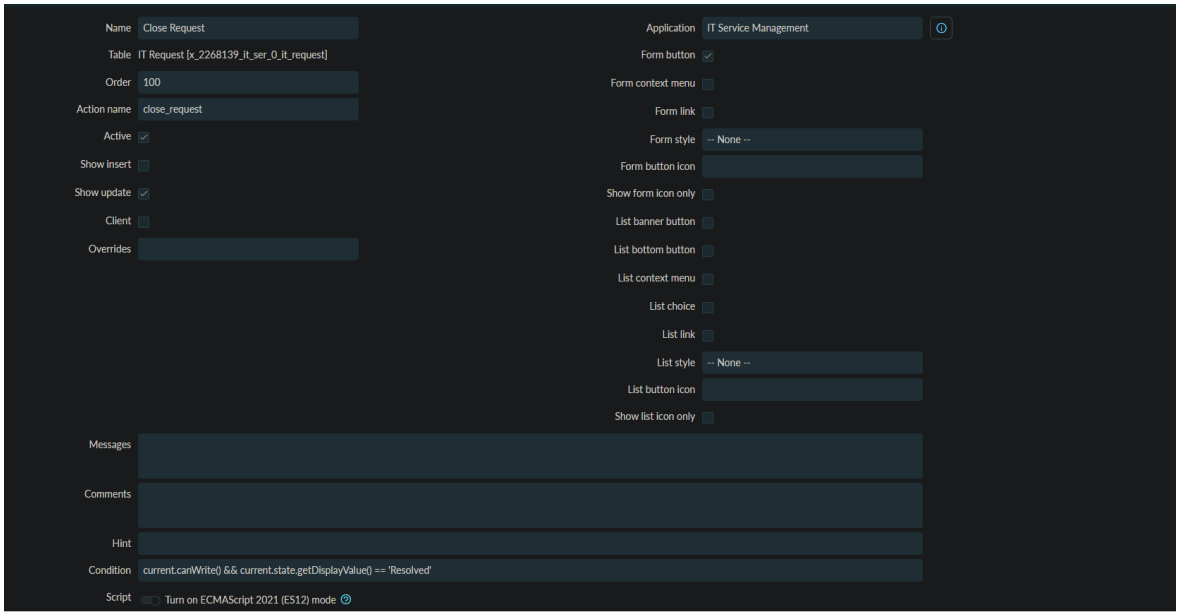


Figure 10. UI Actions — Resolve Request and Close Request

9. Security and Access Control

Record-level ACLs were created for the IT Request table to establish basic role-based access control.


Operation	Role	Purpose
Read	user	Allows users with the user role to read IT Request records.
Create	user	Allows users with the user role to create IT Requests.
Write	user	Allows users with the user role to modify IT Requests.
Delete	admin	Restricts deletion to administrators.

The ACLs were created in the IT Service Management application with Admin overrides enabled. A field-level ACL for Assignment Group was considered but not created because the scoped configuration did not provide a matching field ACL target in the creation flow. The project therefore relies on the implemented record-level controls rather than claiming field-level protection.

SCREENSHOT 11
IT Request ACLs

Capture: Capture the ACL list showing the record-level read, create, write and delete rules for IT Request.
Purpose: Demonstrates the security layer and role-based access model.

Implementation Evidence — Screenshot 11

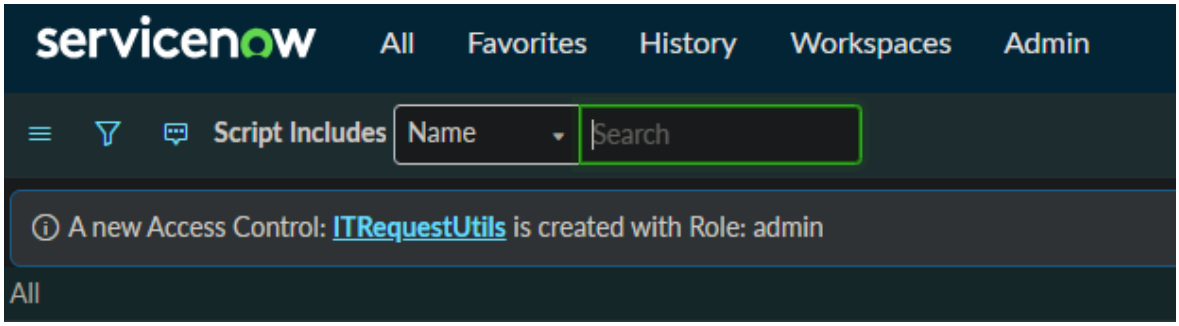

Evidence note: the supplied export includes the access-control creation confirmation for ITRequestUtils; the document text records the implemented IT Request read/create/write/delete ACLs.

Figure 11. IT Request ACLs

10. Notifications

The 'IT Request Resolved' notification is configured on the IT Request table. It sends when an existing record is updated and State is Resolved. The Requested By user is the recipient.

Configuration	Value
Notification	IT Request Resolved
Trigger	Record updated
Condition	State is Resolved
Recipient	Requested By
Subject	IT Request ${number} has been resolved
Content	Requester greeting, request number, short description and resolution notes.

Notification Preview successfully resolved the recipient and template variables. The PDI's external email delivery was not fully configured because no SMTP/email account was defined; therefore the project validates the ServiceNow notification configuration and preview, but should not claim successful external inbox delivery.

SCREENSHOT 12

Notification — IT Request Resolved

Capture: Capture the notification configuration and the Notification Preview showing the resolved subject, requester and message body.

Purpose: Demonstrates the communication design without overstating PDI email-delivery capability.

Implementation Evidence — Screenshot 12

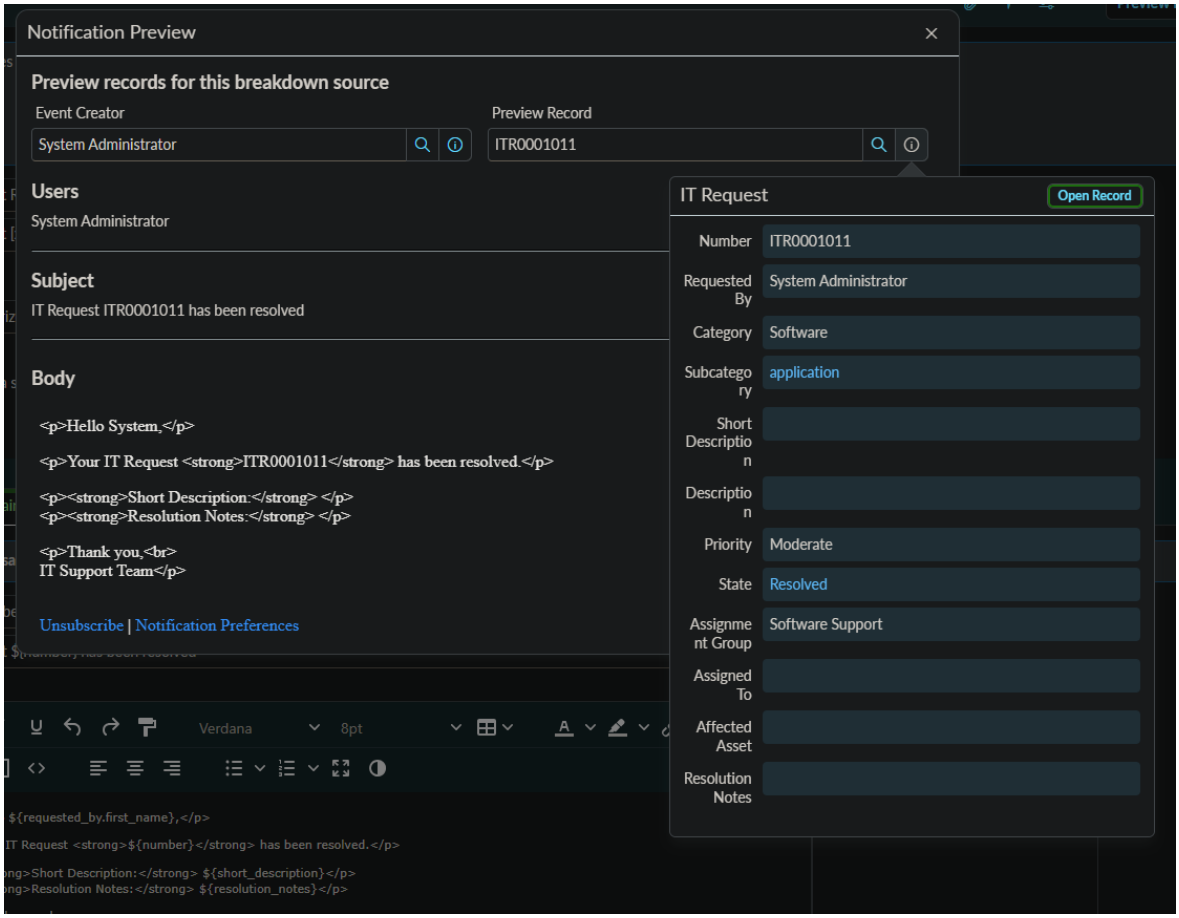


Figure 12. Notification — IT Request Resolved

11. Flow Designer Automation

The flow 'IT Request - Auto Set Assigned State' automatically changes an IT Request from New to Assigned when an Assignment Group is available.

Flow element	Configuration
Trigger	IT Request Created or Updated
Conditions	State is New; Assignment Group is not empty
Run trigger	For every update
Action	Update IT Request Record
Action field	State → Assigned
Status	Active

The flow was tested with an existing request and with a newly created request. The initial test behavior showed why the trigger execution setting matters: the flow was changed from a once-only trigger mode to 'For every update' so the update scenario was evaluated as intended.

SCREENSHOT 13

Flow Designer — Auto Set Assigned State

Capture: Use the existing Flow Designer screenshot showing the trigger and Update IT Request Record action. If the

screenshot still shows an autosave warning, capture the final saved/active state after Force Save has completed.
Purpose: Shows the workflow automation visually.
Current source available: Existing PDI screenshot supplied during the project.

Implementation Evidence — Screenshot 13

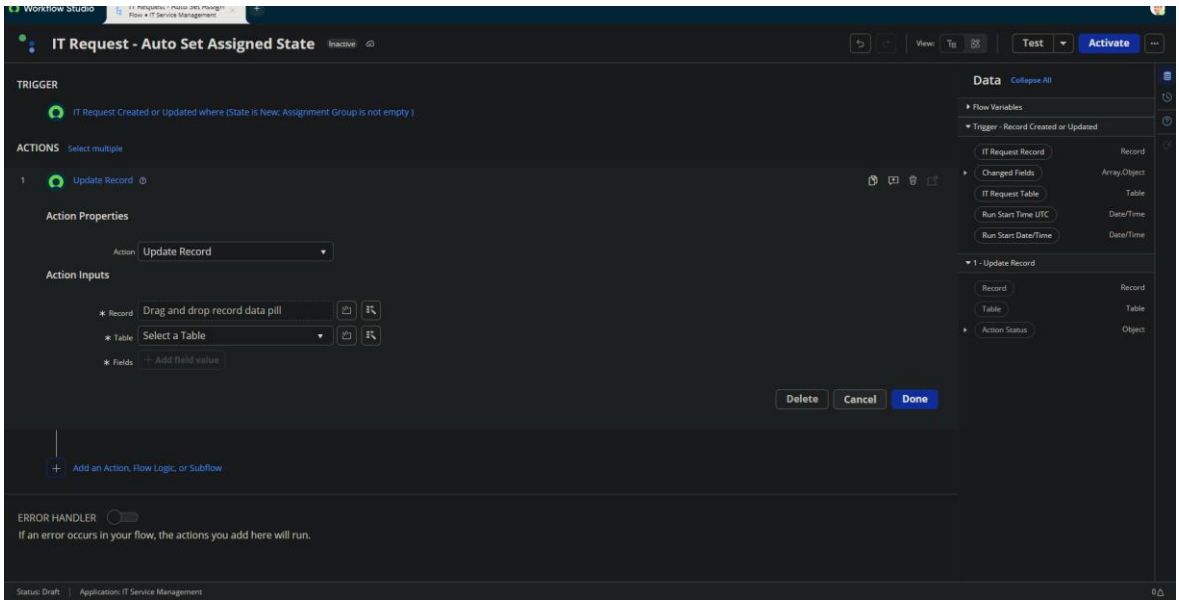


Figure 13. Flow Designer — Auto Set Assigned State

12. Automated Test Framework (ATF)

An ATF test named 'IT Request - Auto Assignment Flow' was created to verify the New-to-Assigned automation.

Step	Configuration	Expected result
1. Record Insert	IT Request; State = New; Assignment Group = Hardware Support; Category = Hardware	Record successfully inserted.
2. Record Validation	Same record; State = Assigned	Record successfully validated.

The test execution completed successfully. The ATF result reported Status = Success and both Record Insert and Record Validation steps returned Success.

SCREENSHOT 14
ATF Test Result — Success

Capture: Use the existing screenshot showing Status = Success, Output = Test passed, and both Record Insert and Record Validation marked Success.
Purpose: Provides strong objective evidence that the automation was tested, not only demonstrated manually.
Current source available: Existing PDI screenshot supplied during the project.

Implementation Evidence — Screenshot 14

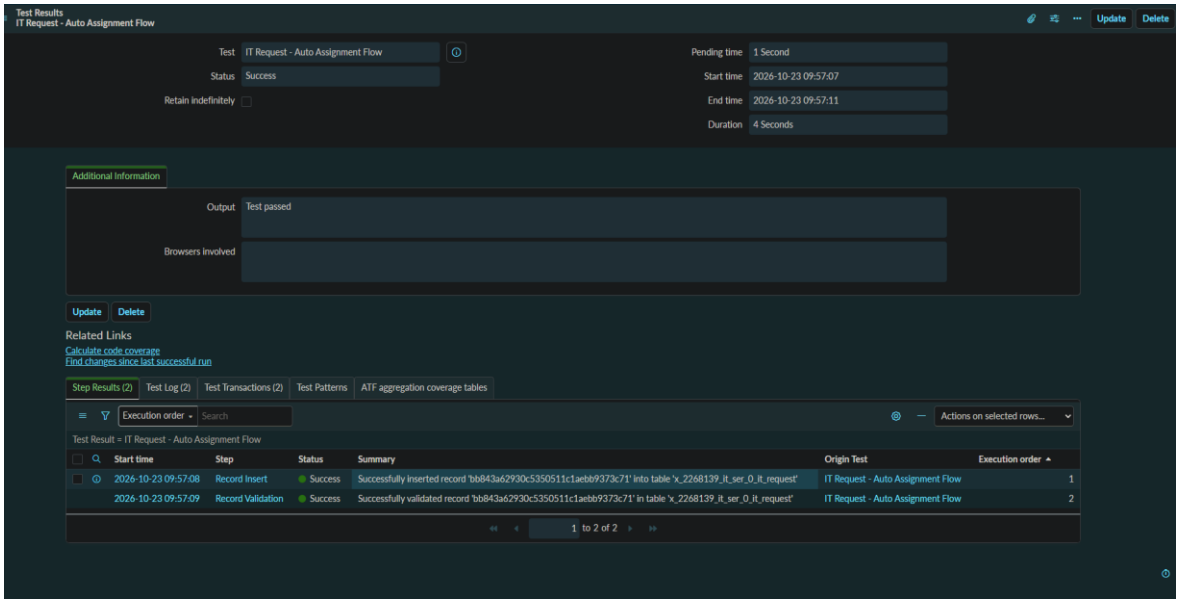


Figure 14. ATF Test Result — Success

13. End-to-End Validation

A fresh IT Request was created after the component-level testing. The complete workflow was validated manually.

Test stage	Observed result
Create IT Request	Successful.
Requested By auto-fill	Successful.
Category / Subcategory behavior	Successful.
Assignment Group	Automatically populated.
State transition	New → Assigned.
Resolve Request	Assigned/working request → Resolved.
Close Request	Resolved → Closed.

Final outcome

The core request lifecycle was demonstrated successfully from creation through assignment, resolution and closure.

SCREENSHOT 15

Final closed IT Request

Capture: Capture the final request showing Number, Category, Assignment Group and State = Closed. If possible, capture the request before and after Resolve/Close as two separate images.
Purpose: Provides the strongest end-to-end proof for a portfolio or recruiter walkthrough.

Implementation Evidence — Screenshot 15

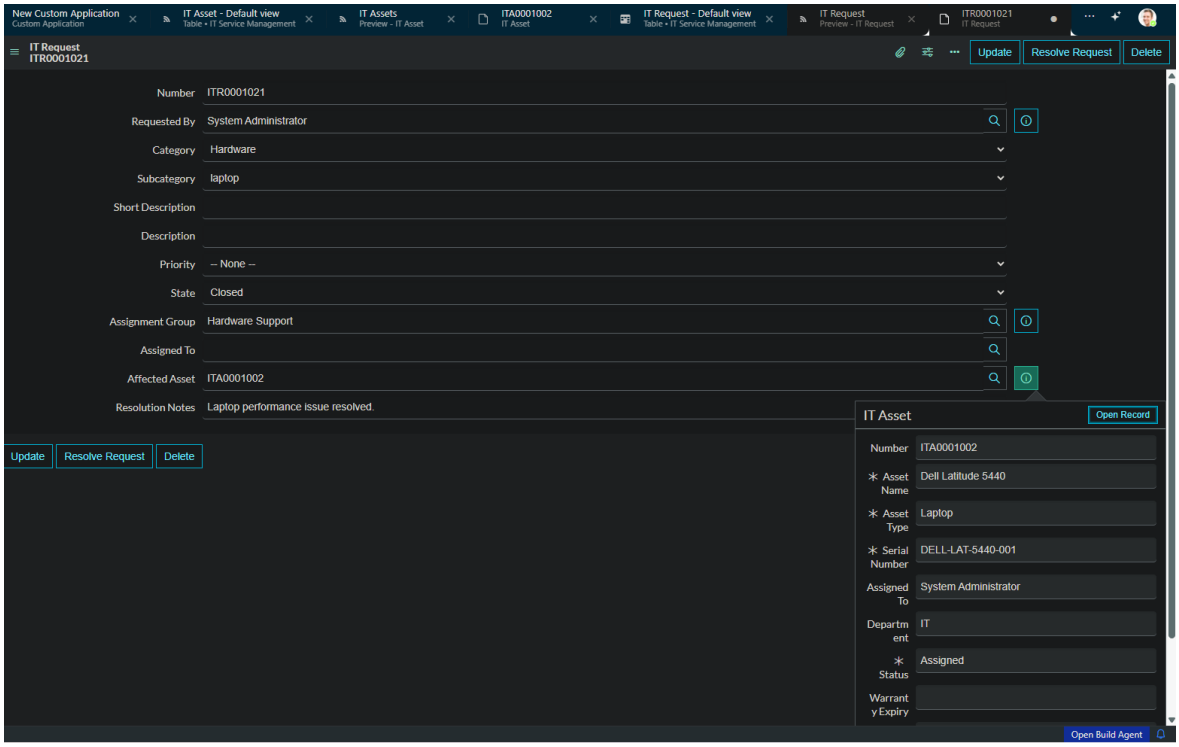


Figure 15. Final closed IT Request

14. Update Set and Deployment Considerations

An Update Set named 'IT Service Management - Project' was created and made current after most of the application configuration had already been completed. Because Update Sets capture configuration changes made while they are current, the earlier work was not retroactively captured in this Update Set.

The Update Set was subsequently kept in progress while the remaining work was completed and was then marked Complete. This document intentionally records that limitation rather than claiming that the completed Update Set contains the entire historical build.

Item	Status
Update Set name	IT Service Management - Project
Application	IT Service Management
Initial state	In progress
Items observed after creation	0
Final state	Complete
Historical configuration before Update Set	Not retroactively captured

Professional note

For a future ServiceNow build intended for migration, create the Update Set first, make it current, and then perform the configuration work. This project deliberately avoids rebuilding working components solely to populate the Update Set.

15. Testing Matrix

Area	Test method	Result
Requested By	Create new IT Request and observe auto-fill	Pass
Category/Subcategory	Change Category and inspect available Subcategory values	Pass
Assignment mapping	Select Category and inspect Assignment Group	Pass
Script Include	Background server-side test	Pass
GlideAjax	Temporary Client Script test	Pass
Resolve Request	Click Resolve Request	Pass
Close Request	Click Close Request after Resolved	Pass
Notification	Notification Preview	Pass for configuration/preview
Flow Designer	Create/update request with assignment group	Pass
ATF	Record Insert + Record Validation	Pass
End-to-end	Fresh request through Closed	Pass

16. Business Value

- Centralizes internal IT support requests in a structured record.
- Reduces manual routing by automatically determining Assignment Group.
- Improves data quality through controlled Category/Subcategory choices.
- Creates a consistent request lifecycle from New through Closed.
- Provides traceability through request numbers, assignments and resolution notes.
- Links support requests to affected IT assets.
- Improves governance through role-based ACLs.
- Provides requester communication through resolution notifications.
- Improves maintainability by separating reusable server-side logic into a Script Include.
- Improves confidence in automation through ATF validation.

17. Interview-Ready Project Explanation

17.1 30-second version

I built a scoped ServiceNow IT Service Management application for handling internal IT requests. Employees can submit hardware, software, network, access and email requests. The application dynamically controls subcategories, automatically determines the assignment group, moves requests from New to Assigned through Flow Designer, provides Resolve and Close actions, secures records with ACLs, sends a resolution notification, and validates the automation with ATF. I also created an IT Asset table and linked assets to requests through a reference field.

17.2 2-minute technical version

The main table is IT Request, supported by an IT Asset table. On the request form, a Client Script automatically populates Requested By and another Client Script dynamically populates Subcategory values based on Category. For assignment, I implemented a reusable Script Include called ITRequestUtils. The client calls it asynchronously using GlideAjax and passes the selected category. The Script Include returns the appropriate support group, which is then set on the form. I also implemented a Business Rule for server-side assignment

logic. Flow Designer listens for new or updated requests where State is New and Assignment Group is not empty, then changes State to Assigned. For lifecycle management, I created Resolve Request and Close Request UI Actions, with Close restricted to records already in Resolved state. For security, I created record-level ACLs for read, create, write and delete operations. I configured an IT Request Resolved notification for the Requested By user. Finally, I created an ATF test that inserts a hardware request with an assignment group and validates that the resulting State is Assigned. The ATF test and a fresh end-to-end workflow both passed.

Final evidence status: implementation screenshots and configuration code have been embedded throughout Figures 1–15. Figure 11 includes the available access-control confirmation image, with the implemented ACL details retained in the security section.

18. Screenshot Capture Checklist

#	Screenshot to capture	Where it appears	Priority
1	IT Request main form / application	Architecture / overview	High
2	IT Asset table fields	Data Model	Medium
3	Sample IT Asset record	Data Model	Medium
4	Requested By Client Script	Client-side automation	High
5	Category → Subcategory on form	Client-side automation	High
6	Critical Priority UI Policy	Client-side automation	Medium
7	Assignment Business Rule	Server-side automation	High
8	ITRequestUtils Script Include	Server-side automation	High
9	Set Assignment Group - GlideAjax	Server-side/client bridge	High
10	Resolve/Close UI Actions	Lifecycle	High
11	IT Request ACL list	Security	High
12	Resolved notification + preview	Notifications	High
13	Flow Designer	Automation	High
14	ATF Success result	Testing	Very High
15	Final Closed IT Request	End-to-end testing	Very High

19. Recruiter / Interview Demo Sequence

Recommended live demonstration sequence:

11. Open the IT Service Management application.
12. Open IT Request and click New.
13. Show Requested By automatically populated.
14. Select Hardware and show the dynamic Subcategory choices.
15. Show Assignment Group automatically populated as Hardware Support.
16. Show State = Assigned after automation runs.
17. Explain that GlideAjax calls ITRequestUtils to determine the group.
18. Click Resolve Request and show State = Resolved.
19. Explain the resolution notification configuration.
20. Click Close Request and show State = Closed.
21. Open Flow Designer and show the New + Assignment Group trigger and Update Record action.
22. Open the ATF result and show Status = Success.
23. Optionally show the IT Asset table and Affected Asset relationship.

Demo rule
Lead with the working business outcome. Do not start by opening code. Show the request lifecycle first, then open the technical components only when explaining how the behavior was implemented.

20. Future Enhancements

- Add a more granular Assigned To auto-assignment based on group membership and workload.
- Add SLA definitions and response/resolution targets by Priority.
- Add richer asset lifecycle automation.
- Add dashboards for request volume, priority, assignment group and resolution trends.
- Add additional ATF coverage for priority, UI policy and lifecycle actions.
- Configure a proper SMTP/email account in an appropriate non-PDI environment for real external delivery testing.
- Create the Update Set before future configuration work when migration/export is a requirement.

21. ServiceNow Concepts Demonstrated

Concept	How it is demonstrated in this project
Scoped Application	IT Service Management application isolates the project configuration.
Custom Table	IT Request and IT Asset.
Reference Field	Requested By, Assignment Group, Assigned To, Affected Asset.
Client Script	Requested By and dynamic Subcategory.
UI Policy	Critical Priority makes Resolution Notes mandatory.
Business Rule	Server-side assignment logic.
Script Include	Reusable ITRequestUtils assignment utility.
GlideAjax	Asynchronous client-to-server call to Script Include.
UI Action	Resolve Request and Close Request.
ACL	Record-level access control.
Notification	IT Request Resolved.
Flow Designer	New + assigned request → Assigned.
ATF	Automated validation of assignment flow.
Update Set	Deployment artifact created and completed.

Appendix A — Configuration Inventory

Component	Name
Application	IT Service Management
Main table	IT Request
Supporting table	IT Asset
Client Script	Requested By Auto-fill
Client Script	Category → Subcategory
Client Script	Set Assignment Group - GlideAjax
Client Script	Test ITRequestUtils GlideAjax — temporary test, disabled after validation
UI Policy	Critical Priority - Resolution Notes Mandatory
Business Rule	Auto Assign IT Request Group
Script Include	ITRequestUtils
UI Action	Resolve Request

UI Action	Close Request
Notification	IT Request Resolved
Flow	IT Request - Auto Set Assigned State
ATF Test	IT Request - Auto Assignment Flow
Update Set	IT Service Management - Project

Appendix B — Evidence Standard

When preparing this document for a recruiter or interviewer, replace the screenshot placeholders with clean PDI screenshots. Crop out unnecessary browser chrome where possible, but keep the ServiceNow application/table context visible. Do not include passwords, API keys, personal email addresses, instance credentials, or other sensitive information.