

**A MINOR PROJECT REPORT ON**

**EVENT REGISTRATION &  
VERIFICATION USING QR CODE**

*Submitted in partial fulfilment of the requirements  
for the award of the degree of*

**BACHELOR OF COMPUTER APPLICATIONS**

*To*

**Guru Gobind Singh Indraprastha University, Delhi**



***Under the Guidance of:***  
Dr. Brahampal Singh

***Submitted by:***  
N. Krishna Khanth  
BCA-V Sem  
02220602018



**Session 2018 – 2021**

**TRINITY INSTITUTE OF PROFESSIONAL STUDIES**

(Affiliated to Guru Gobind Singh Indraprastha University, Delhi)

Ranked "A+" Institution by SFRC, Govt. of NCT of India

Recognized under section 2(f) of the UGC Act, 1956

NAAC Accredited "B++" Grade Institution



## TRINITY INSTITUTE OF PROFESSIONAL STUDIES

(Affiliated to Guru Gobind Singh Indraprastha University, Delhi)

Ranked "A+" Institution by SFRC, Govt. of NCT of India

Recognized under section 2(f) of the UGC Act, 1956

NAAC Accredited "B++" Grade Institution

### To Whom It May Concern

I **N. Krishna Khanth**, Enrolment No. **02220602018** from BCA-V Sem of the Trinity Institute of Professional Studies, Delhi hereby declare that the Minor Project Report entitled "**Event Registration & Verification Using QR Code**" at **Trinity Institute Of Professional Studies** is an original work and the same has not been submitted to any other Institute for the award of any other degree.

Date:

Signature of the Student

Certified that the Project Report submitted in partial fulfilment of Bachelor of Computer Applications (BCA) to be awarded by G.G.S.I.P. University, Delhi by **N. Krishna Khanth**, Enrolment No. **02220602018** has been completed under my guidance and is Satisfactory.

Date:

Signature of the Guide

Name of the Guide:

Dr. Brahampal Singh

Designation: Associate Professor

## **Acknowledgement**

We would like to take this opportunity to thank The Guru Gobind Singh Indraprastha University (GGSIPU) for having projects as a part of the BCA curriculum. Many people at the university have influenced the shape and content of this project and supported us through it.

We express our sincere gratitude to Dr. Brahampal Singh for mentoring us in this project. He has been an inspiration and role model for this topic. His guidance and active support have made it possible for us to work on the assignment.

We would like to extend our thanks to the members involved in making this project successful and without whom this project would not have been possible. Also, we would like to express sincere gratitude to our parents and a load of thanks to our friends for helping us throughout the course of the project.

**N. Krishna Khanth (02220602018)**

## **Abstract**

Every institution organizes events and meetings. It is a major task to organize participants, manage reports, registrations, messages, make groups, collect fees etc. There are multiple societies and clubs in every institution and all of them organize a variety of events throughout the year, sometimes at the same time. Their publicity messages and posts are often ignored or lost in the sea. Further, the hassle of making groups or participants, arranging meetings to get payment, circulating messages for any changes, reminding participants etc., often leads to chaos and confusion.

We offer a solution which would prevent the struggle of managing participants and reducing the work force required, making it possible to focus their attention on other matters.

The purpose of this application is to automate existing manual system with the help of computerized equipment and full-fledged software.

This report discusses the project developed and implemented by us along with the challenges we faced during the development period of the project.

# Table of Contents

Acknowledgement	iii
Abstract	iv
Table of Figures	vii
List of Tables	x
List of Abbreviations	x
1. Introduction	1
1.1 Idea and Purpose	1
1.2 Problem Definition	2
1.3 Existing Methods	2
1.4 Motivation	3
1.5 Suggested Solutions	3
2. System Requirement Analysis	4
2.1 Project Plan	4
2.2 Software Requirement Specifications	6
2.3 Tools and Technologies	8
2.4 Hardware Requirements	12
2.5 Software Requirements	12
3. System Feasibility Study	13
3.1 Feasibility Study	13
4. System Design	14
4.1 Use Case	14
4.2 Flow Chart	24
4.3 Entity Relationship Diagram:	27
4.4 Database Tables Diagram:	29
4.5 Data Flow Diagram (DFD):	34
5. System Development	43
5.1 Frontend	43
5.2 Backend	98
5.3 Database	132
6. System Implementation	136
6.1 Login	136
6.2 Login Success	139
6.3 User Registration	140
6.4 Main Window	144

6.5 Event Management Window _____	145
6.6 Participant Registration Window _____	150
6.7 Report Generation _____	156
6.8 Participant Entry _____	157
6.9 Server _____	162
6.10 Database _____	163
7. System Testing _____	168
7.1 System Testing _____	169
7.2 Module Testing _____	170
7.3 User Testing _____	171
7.4 Functionality Testing _____	171
7.5 Interface Testing _____	172
8. Conclusion and Future Scope _____	173
8.1 Applications _____	173
8.2 Future Work _____	173
References _____	175

## Table of Figures

Figure 1: Use Case Diagram	15
Figure 2: Flow Chart Diagram	26
Figure 3: Entity Relationship Diagram	28
Figure 4: Entity Relationship Table Diagram	33
Figure 5: DFD Level 0 Diagram	35
Figure 6: DFD Level 1 Diagram	37
Figure 7: DFD Level 2 User Account Information Management	38
Figure 8: DFD Level 2 Login	39
Figure 9: DFD Level 2 Participant Details Management	40
Figure 10: DFD Level 2 Event Details Management	41
Figure 11: DFD Level 2 Event Participation Information Management	42
Figure 12: Login Screen	136
Figure 13: Login Server Error	136
Figure 14: Login Username Field Incomplete	137
Figure 15: Login Password Field Incomplete	137
Figure 16: Login Invalid Credentials	138
Figure 17: Admin Login Success	139
Figure 18: User Login Success	139
Figure 19: Add User	140
Figure 20: Add User Invalid E-mail	140
Figure 21: Add User Invalid Phone Number	141
Figure 22: Add User Fields Incomplete	141
Figure 23: Add User Invalid Password	142
Figure 24: Add User Error-User Exists	142
Figure 25: Add User Successful	143
Figure 26: Main Window	144
Figure 27: Event Management Window	145
Figure 28: Wrong Date Format	145
Figure 29: Wrong Time Format	146
Figure 30: Event Added Successfully	146
Figure 31: Error Event Already Exists	147
Figure 32: Event Removed Successfully	147

Figure 33: Error Event does not exist _____	148
Figure 34: Error-Event cannot be removed _____	148
Figure 35: Cleared Event Fields _____	149
Figure 36: Participant Registration Window _____	150
Figure 37: Invalid Participant Phone Number _____	150
Figure 38: Invalid Participant E-mail ID _____	151
Figure 39: Participant Added Successfully _____	151
Figure 40: Cleared Participant fields 1 _____	152
Figure 41: Cleared Participant fields 2 _____	152
Figure 42: Error-Participant Already Registered in this Event _____	153
Figure 43: Participant Registered in one of the provided events _____	153
Figure 44: Scanning Existing participant QR code _____	154
Figure 45: Display QR code value _____	154
Figure 46: Participant Registration Successful _____	155
Figure 47: Report Generated Successfully _____	156
Figure 48: Report Excel File _____	156
Figure 49: Participant Entry Management _____	157
Figure 50: Participant Entry Fields Incomplete _____	157
Figure 51: QR Scanned & Saved _____	158
Figure 52: No QR Detected _____	158
Figure 53: QR code read successfully _____	159
Figure 54: Invalid QR code _____	159
Figure 55: Participant Entry Successful _____	160
Figure 56: Error-QR code being reused _____	160
Figure 57: After granting entry _____	161
Figure 58: Network Error _____	162
Figure 59: Server Log _____	162
Figure 60: Database and Tables _____	163
Figure 61: User Table Description _____	164
Figure 62: User Table Data _____	164
Figure 63: Event Table Description _____	165
Figure 64: Event Table Data _____	165
Figure 65: Participants Table Description _____	166
Figure 66: Participants Table Data _____	166



Figure 67: Registration Table Description	167
Figure 68: Registration Table Data	167
Figure 69: Testing Phases	168

## List of Tables

Table 1: List of Libraries .....	11
Table 2: Module Testing .....	170

## List of Abbreviations

S. No.	Abbreviated Name	Full Name
1.	ERVQR	Event Registration and Verification using QR (Project Title)
2.	QR	Quick Response
3.	TIPS	Trinity Institute of Professional Studies
4.	SRS	Software Requirement Specification
5.	ID	Identification
6.	DFD	Data Flow Diagram
7.	ER	Entity Relationship
8.	TCs	Test Cases
9.	Regex	Regular expression

# **1. Introduction**

Every organization, big or small, organizes events and has challenges to overcome, people, and operations to manage smoothly. From attendees to the location to the ambiance, there are many different areas in need of careful management. This application is being developed to override the problems prevailing the present manual systems. This system is being designed, keeping in mind the event requirements. This will reduce the struggle of maintaining groups, records of participants and payments, etc. Moreover, it will provide all the features with a user-friendly interface. The collection will be understandable and straightforward.

We offer a solution which would prevent the struggle of managing participants and reducing the work force required, making it possible to focus their attention on other matters. The purpose of this application is to automate existing manual system with the help of computerized equipment and full-fledged software.

This report discusses the project developed and implemented by us along with the challenges we faced during the development period of the project.

## **1.1 Idea and Purpose**

We suggest an event particular app which will act as a common platform for serving different societies and clubs of an organization for easy and effective event management. This application will bridge the gap between the organizers and the attendees. The application will reduce the manual work significantly and allow easy management of participation.

## **1.2 Problem Definition**

During our fest, workshop, seminars, society events it was observed that there were lot of coordination problems and everything was being handled manually. There was no proper system to handle the incoming participation, event information management and report management.

Also, the manual handling of events led to a lot of disturbance in the classrooms as the students would request to leave the class for organising events, making announcements, designing posters, attending meetings etc. This would also disturb the faculty and thus they would not support the missing of the classes. Even the society coordinators would find it difficult to manage multiple events, participation.

## **1.3 Existing Methods**

Presently, the following methods are used to manage publicity and participations:

1. Flooding messages on WhatsApp and making groups of participants on WhatsApp to circulate messages require recording contact numbers of everyone and making sure that they read the previous messages.
2. Repetitive announcements in classrooms – often not possible to make in all classes.
3. Posters on notice boards – cluttering noticeboards with multiple posters, important notices go unnoticed.
4. Arranging meetings with the organizers to give payments – unreliable and causes confusion as people are often in different places.

## **1.4 Motivation**

This system application's motivation arose due to the current manual system problems, some of which are:

1. Very narrow span of attention towards long messages on WhatsApp.
2. Infrequent announcements disturb the environment of classes.
3. Wastage of resources in the form of paper and personnel.
4. Very time-consuming.
5. Difficulty in steady coordination and scheduling of different activities.

As participants and organizers, we feel that these problems cause confusion and a bad reputation.

## **1.5 Suggested Solutions**

We suggest the following solutions to the above-discussed problems:

1. A common platform for organizers to handle records of the event.
2. Auto-ticket generation (QR).
3. A central database for storage of records.

## **2. System Requirement Analysis**

### **2.1 Project Plan**

The project management plan has been broken down in the following parts:

#### **2.1.1. Stakeholders and Expectations:**

Technical Team: Have ready access to individuals with the authority to make decisions regarding events.

Project Manager: Have an application in the form of a desktop application.

Client: Gain an application which event organizers can use easily and enhance their customer's experience.

#### **2.1.2. Project Priorities and Degrees of Freedom:**

The main focus of the project is to develop an event management system on time and within budget. Further we aim to conduct a comprehensive testing of the system to detect bugs and defects. Another priority area is proper allocation of resources and team members to the various roles and responsibilities that arise during the software development.

#### **2.1.3. Approach**

We will be following an Incremental approach for this project. The first iteration will focus on basic functionality of the application and subsequent iterations will depend upon that and incorporate more features as time allows based on their priority and importance to the whole application.

#### **2.1.4. Assumptions**

- Server terminals are available and functional when needed.
- Feasibility of interfacing the ERVQR application with the other applications.
- The professional societies and clubs will adopt this desktop application meant for smooth running of their events.

#### 2.1.5. Success Criteria

The project will be considered a success if the team delivers an operational prototype at the end of the semester with the earlier mentioned features.

#### 2.1.6. Risks and Obstacles to Success

The risks and hurdles that might occur during the development of the portal and operations of the application include-net speed, network connectivity issues (because our system depends on a reliable and fast connected network to operate), a secure and trusted medium of communication between users and societies and other risks including improper use of the server, power failures etc.

#### 2.1.7. Scope

This project will consist of creating an application of event management based upon the cultural, technical societies and student chapters of different college/universities. The project will:

- Allow students to register for events and societies.
- Allow societies to create and manage events and their registrations.
- Allow students to enter an event with just the use of QR code.
- Allow administrator to manage societies.

## **2.2 Software Requirement Specifications**

Software Requirement Specification (SRS) is a description of a software system to be developed. It lays out functional and non-functional requirements and may include a set of use cases that describe user interactions that the software must provide. It establishes the basis for an agreement between customers and the software providers on what the software product is to do and what it is not expected to do so that there is no room for confusion in the future. If used appropriately, SRS can help prevent software project failure.

### **2.2.1. Functional Requirements**

Our proposed system has the following requirements:

1. The system requires storing the information about a new participant being registered and, most notably, the event and its organizers.
2. The system needs to help the internal staff manage the entries of the database and keep information on activities.
3. The system needs to update, delete, and modify the records.
4. The system needs to maintain quality and quantity records.
5. The system requires the verification and authentication process of users.
6. The system needs to provide a QR code as identification to each participant at the time of registration.
7. The system should be able to provide as easy to read record of all participants and events.
8. Every participant should be able to enter an event just by showing the QR code that was provided at the time of registration.
9. System needs to maintain security to prevent unauthorized modification of data.



### **2.2.2. Non-Functional Requirements**

#### Performance Requirements

- The system needs to be reliable.
- If unable to process the request then appropriate error message.
- Windows are loaded within few seconds.

#### Security Requirements

- After entering the password and user-id the user can access his profile.
- The details of user must be safe and secure.
- Sharing of details.
- Unauthorized modification of records must be prevented.

#### Safety Requirements

- The details need to be maintained properly.
- Users must be authenticated.

## **2.3 Tools and Technologies**

The following tools and technologies are expected to be used in development. Further may be added as the operations are implemented.

### **2.3.1. Development Language**

#### *2.3.1.1. Python 3.8*

Python is a general-purpose programming language that can be used on any modern computer operating system. It can be used for processing text, numbers, images, scientific data and just about anything else you might save on a computer. It is used daily in the operations of the Google search engine, the video-sharing website YouTube, NASA and the New York Stock Exchange. These are but a few of the places where Python plays important roles in the success of the business, government, and non-profit organizations; there are many others.

#### *2.3.1.2. Pip 20.2.4*

pip is a de facto standard package-management system used to install and manage software packages written in Python. Many packages can be found in the default source for packages and their dependencies — Python Package Index. Most distributions of Python come with pip preinstalled.

### **2.3.2. Development Platforms**

#### *2.3.2.1. PyCharm 2020.20*

PyCharm is an Integrated Development Environment (IDE) used for programming in Python. It provides code analysis, a graphical debugger, an integrated unit tester, integration with version control systems (VCSes), and supports web development with Django.

#### *2.3.2.2. Atom 1.52.0 x64*

Atom is a free and open-source text and source code editor for macOS, Linux, and Microsoft Windows with support for plug-ins written in Node.js, and embedded Git Control, developed by GitHub. Atom is a desktop application built using web technologies. Most of the extending packages have free software licenses and are community-built and maintained. Atom is based on Electron (formerly known as Atom Shell), a framework that enables cross-platform desktop applications using Chromium and Node.js. It is written in CoffeeScript and Less.

#### *2.3.2.3. MySQL Workbench 8 CE*

MySQL Workbench is a unified visual tool for database architects, developers, and DBAs. MySQL Workbench provides data modelling, SQL development, and comprehensive administration tools for server configuration, user administration, backup, and much more. MySQL Workbench is available on Windows, Linux and Mac OS X.

### **2.3.3. Database**

#### *2.3.3.1. MySQL 8.0.19*

MySQL is a freely available open source Relational Database Management System (RDBMS) that uses Structured Query Language (SQL). SQL is the most popular language for adding, accessing and managing content in a database. It is most noted for its quick processing, proven reliability, ease and flexibility of use. MySQL is an essential part of almost every open source PHP application. Good examples for PHP & MySQL-based scripts are WordPress, Joomla! and Drupal.

#### *2.3.3.2. Excel*

Microsoft Excel is a spreadsheet developed by Microsoft for Windows, macOS, Android and iOS. It features calculation, graphing tools, pivot tables, and a macro programming language called Visual Basic for Applications. It has been a very widely applied spreadsheet for these platforms, especially since version 5 in 1993, and it has replaced Lotus 1-2-3 as the industry standard for spreadsheets. Excel forms part of the Microsoft Office suite of software.

### **2.3.4. Hosting Service**

#### *2.3.4.1. PythonAnywhere*

PythonAnywhere is an online integrated development environment (IDE) and web hosting service based on the Python programming language. It provides in-browser access to server-based Python and Bash command-line interfaces, along with a code editor with syntax highlighting. Program files can be transferred to and from the service using the user's browser. Web applications hosted by the service can be written using any WSGI-based application framework.

### 2.3.5. Libraries

Library	Version
certifi	2020.11.8
chardet	3.0.4
click	7.1.2
et-xmlfile	1.0.1
Flask	1.1.2
Flask-Cors	3.0.9
idna	2.10
itsdangerous	1.1.0
jdcal	1.4.1
Jinja2	2.11.2
MarkupSafe	1.1.1
mysql-connector-python	8.0.22
numpy	1.19.3
opencv-contrib-python	4.4.0.46
opencv-python	4.4.0.46
openpyxl	3.0.5
Pillow	8.0.1
protobuf	3.13.0
PyQRCode	1.2.1
pyzbar	0.1.8
requests	2.24.0
six	1.15.0
urllib3	1.25.11
Werkzeug	1.0.1
Tkinter	8.6
re	2.2.1
hashlib	20081119
datetime	4.3

*Table 1: List of Libraries*

## **2.4 Hardware Requirements**

The following hardware requirements are recommended to be fulfilled in order to run this software.

1. CPU: Intel core i3 3<sup>rd</sup> Generation / AMD FX-6100
2. RAM: 2 GB
3. GPU: Integrated Graphics
4. Storage: 1 GB
5. Camera: Any 3MP camera

## **2.5 Software Requirements**

The following software requirements are recommended to be fulfilled in order to run this software.

1. OS: Any Operating System
2. Database: MySQL
3. Programming Language: Python

### **3. System Feasibility Study**

#### **3.1 Feasibility Study**

An Assessment of the feasibility of the project.

##### **3.1.1. Economic Feasibility**

The project is economically feasible as it works with functions with low-cost services such as laptops and desktops.

##### **3.1.2. Technical Feasibility**

The current project is technically feasible as the application requires:

1. Any python supported IDE
2. Server-Side Services
3. GUI development tools

All these are readily available and can be successfully deployed on any available computer.

##### **3.1.3. Behavioural Feasibility**

The application is behaviourally feasible since it requires no technical guidance; all the modules are user friendly.

##### **3.1.4. Operational Feasibility**

The application is operationally feasible as:

1. Complete GUI-Base, which is user friendly.
2. Inputs to be taken are self-explanatory.
3. The system cuts down the load and cost of clients by high margins.

## **4. System Design**

### **4.1 Use Case**

#### Use Case Model

The Use Case Model describes the proposed functionality of our system. The diagram represents a discrete unit of interaction between the user (society or a new member) and the application. This interaction is a single unit of meaningful work, such as Create Event or View Event Details.

The project's use case model consists of the following type of actors:


- Main Actors – Participant
- Supporting Actors – Admin and User

The primary modules (different functions) are:

- User Registration
- Admin / User Login
- Add Participant
- Register Participant in Events
- Add / Remove Events
- Mark Entry of Participant
- Report Generation
- Quick Response (QR) Code



The model is given below:

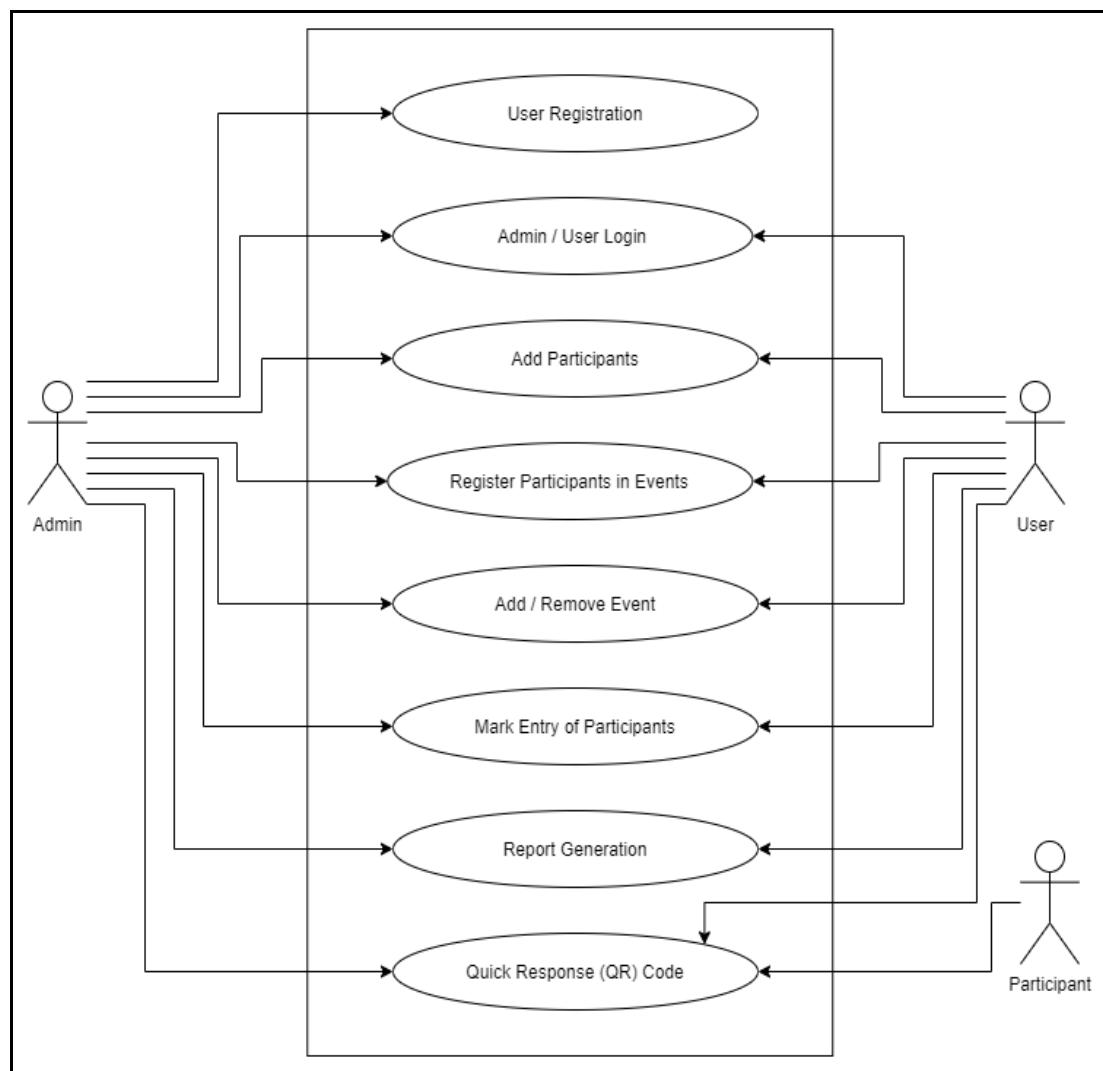

*Figure 1: Use Case Diagram*

The project has the following use case specifications:

#### **4.1.1. Use Case: User Registration**

**Description:** This use case takes care of registration of users (Organizers) in the MySQL database and gives them access to the application by signing in using their user id (email) and password.

Note: Only Administrator is allowed to add new users.

##### **Primary Flow:**

1. User information is entered by an administrator.
2. The information is sent to the database to register the user.
3. The user provides his email and password.
4. The user is authenticated.
5. The new user can access the application.

**Alternate Flow at:** The user is already registered.

1. The administrator is warned that the email is already registered.
2. The administrator may register another user or retry with another email id.

**Error Flow E1:** The user credentials are wrong.

1. The administrator is told to recheck the credentials.
2. The administrator may try again.

**Error Flow E2:** The server or internet is not working.

1. The administrator is told to recheck internet connection.
2. The administrator may try again.

#### **4.1.2. Use Case: Admin / User Login**

**Description:** This use case takes care of login of users (Organizers), check their credentials in MySQL database and gives them access to the application by signing in using their user id (email) and password.

##### **Primary Flow:**

1. User enters their email id and password.
2. The information is sent to the database.
3. The database returns the permission level.
4. The user is authenticated.
5. The user has access to the application.

**Error Flow E1:** The user credentials are wrong.

1. The user is told to recheck the credentials.
2. The user may try again.

**Error Flow E2:** The server or internet is not working.

1. The user is told to recheck internet connection.
2. The user may try again.

#### **4.1.3. Use Case: Add Participants**

**Description:** This use case takes care of registration of participants (customers/clients of user) in the MySQL database and gives them a unique QR code as participant ID.

##### **Primary Flow:**

1. Participant provides his/her information and events.
2. Participant information is entered by user.
3. The information is sent to the database to register the participant.
4. The participant is given a QR code.
5. The participant is registered.

**Alternate Flow 1:** The Participant is already registered in all given events.

1. The user is warned that the participant is already registered.
2. The user informs the participant.

**Alternate Flow 2:** The Participant is already registered in any 1 of 2 given events.

1. The user is warned that the participant is already registered in one of the events and registration is complete for the other event.
2. The user informs the participant.

**Error Flow E1:** The participant information is wrong.

1. The user is told to recheck the information.
2. The user may try again.

**Error Flow E2:** The server or internet is not working.

1. The user is told to recheck internet connection.
2. The user may try again.

#### **4.1.4. Use Case: Register Participant in Events**

**Description:** This use case takes care of registration of already registered participants (customers/clients of user) in events in the MySQL database.

##### **Primary Flow:**

1. Participant provides QR code and events.
2. Participant information is entered by user.
3. The information is sent to the database.
4. The participant is registered in events provided.

**Alternate Flow 1:** The Participant is already registered in all given events.

1. The user is warned that the participant is already registered.
2. The user informs the participant.

**Alternate Flow 2:** The Participant is already registered in any 1 of 2 given events.

1. The user is warned that the participant is already registered in one of the events and registration is complete for the other event.
2. The user informs the participant.

**Error Flow E1:** The participant QR code is wrong.

1. The user is told to recheck the QR code.
2. The user may try again.

**Error Flow E2:** The server or internet is not working.

1. The user is told to recheck internet connection.
2. The user may try again.

#### **4.1.5. Use Case: Add / Remove Events**

**Description:** This use case takes care of adding and removing events from the MySQL database.

##### **Primary Flow:**

1. User enters event information.
2. The information is sent to the database.
3. Event is added in database.

**Alternate Flow 1:** The event is already registered.

1. The user is warned that the event is already registered.
2. The user may try again.

**Error Flow E1:** The event information is wrong.

1. The user is told to recheck the event information.
2. The user may try again.

**Error Flow E2:** The server or internet is not working.

1. The user is told to recheck internet connection.
2. The user may try again.

#### **4.1.6. Use Case: Mark Entry of Participants**

**Description:** This use case takes care of marking entry participants (customers/clients of user) in events in the MySQL database. Participant are only provided entry once in an event.

##### **Primary Flow:**

1. Participant provides QR cod.
2. Participant QR code is entered by user.
3. The information is sent to the database.
4. The participant is provided entry in the event.

**Alternate Flow 1:** The Participant is already registered provided entry on that QR code.

1. The user is warned that the participant has already Entered.
2. Entry is denied to the participant.

**Error Flow E1:** The participant QR code is wrong.

1. The user is told to recheck the QR code.
2. The user may try again.

**Error Flow E2:** The server or internet is not working.

1. The user is told to recheck internet connection.
2. The user may try again.

#### **4.1.7. Use Case: Report Generation**

**Description:** This use case takes care of generation of report from the data in MySQL database. Report is generated for all participants along with events they are participating in.

##### **Primary Flow:**

1. User requests to make a report.
2. The request is sent to the database.
3. A report is generated and user is informed.

**Error Flow E1:** The server or internet is not working.

1. The user is told to recheck internet connection.
2. The user may try again.



#### **4.1.8. Use Case: Quick Response (QR) Code**

**Description:** This use case takes care of generation of QR code for participants (customers/clients of user) identification.

##### **Primary Flow:**

1. Participant is registered.
2. A QR code is generated for the user.
3. QR code is provided to participant.

##### **Alternate Flow 1:** Unable to register participant.

1. The user is warned that the participant is not registered.
2. No QR code is generated
3. The user informs the participant.

##### **Error Flow E1:** The server or internet is not working.

1. The user is told to recheck internet connection.
2. The user may try again.

## 4.2 Flow Chart

A flowchart is a picture of the separate steps of a process in sequential order. It is a generic tool that can be adapted for a wide variety of purposes, and can be used to describe various processes, such as a manufacturing process, an administrative or service process, or a project plan.


### Flow Chart Components:

1. Process



Rectangle - One step in the process. The step is written inside the box. Usually, only one arrow goes out of the box.

2. Flowline (Arrowhead)



Arrow - Direction of flow from one step or decision to another.

3. Decision



Diamond - Decision based on a question. The question is written in the diamond. More than one arrow goes out of the diamond, each one showing the direction the process takes for a given answer to the question. (Often the answers are "yes" and "no.")

#### 4. Terminal




Circle or oval - Indicates the beginning and ending of a program or sub-process. Represented as a stadium, oval or rounded (fillet) rectangle. They usually contain the word "Start" or "End", or another phrase signalling the start or end of a process, such as "submit inquiry" or "receive product".

#### 5. Input / Output



Shows a conditional operation that determines which one of the two paths the program will take. The operation is commonly a yes/no question or true/false test. Represented as a diamond.

#### 6. Data File or Database



Data represented by a cylinder (disk drive).

#### 7. Internal Storage



File represents storage of a file in internal storage.

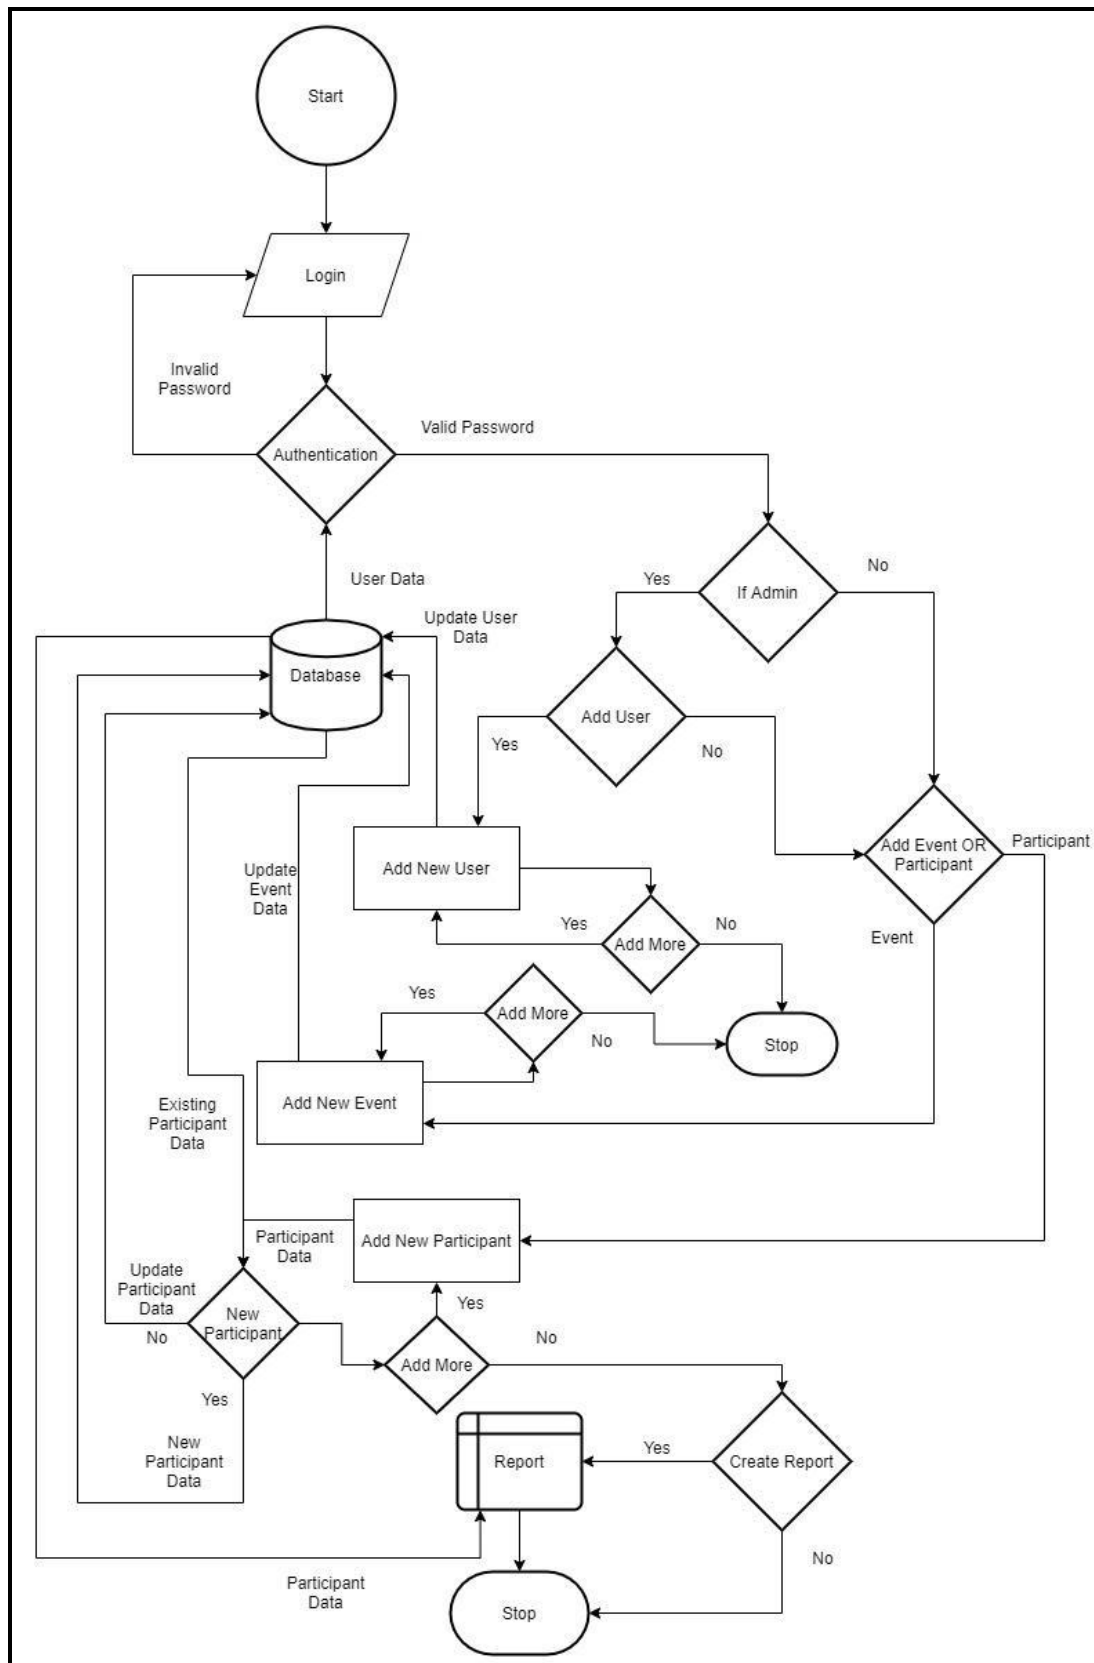


Figure 2: Flow Chart Diagram

### 4.3 Entity Relationship Diagram:

An ER diagram shows the relationship among entity sets. An entity set is a group of similar entities and these entities can have attributes. In terms of DBMS, an entity is a table or attribute of a table in database, so by showing relationship among tables and their attributes, ER diagram shows the complete logical structure of a database. Let's have a look at a simple ER diagram to understand this concept.


#### ER Diagram Components:

##### 1. Entity




Rectangle: An entity is an object or component of data. An entity is represented as rectangle in an ER diagram.

##### 2. Key Attribute



Oval: An attribute describes the property of an entity. An attribute is represented as Oval in an ER diagram.

##### 3. Relationship



Diamond: A relationship is represented by diamond shape in ER diagram, it shows the relationship among entities.

##### 4. Flowline (Arrowhead)



Arrow - Direction of relational flow between objects.

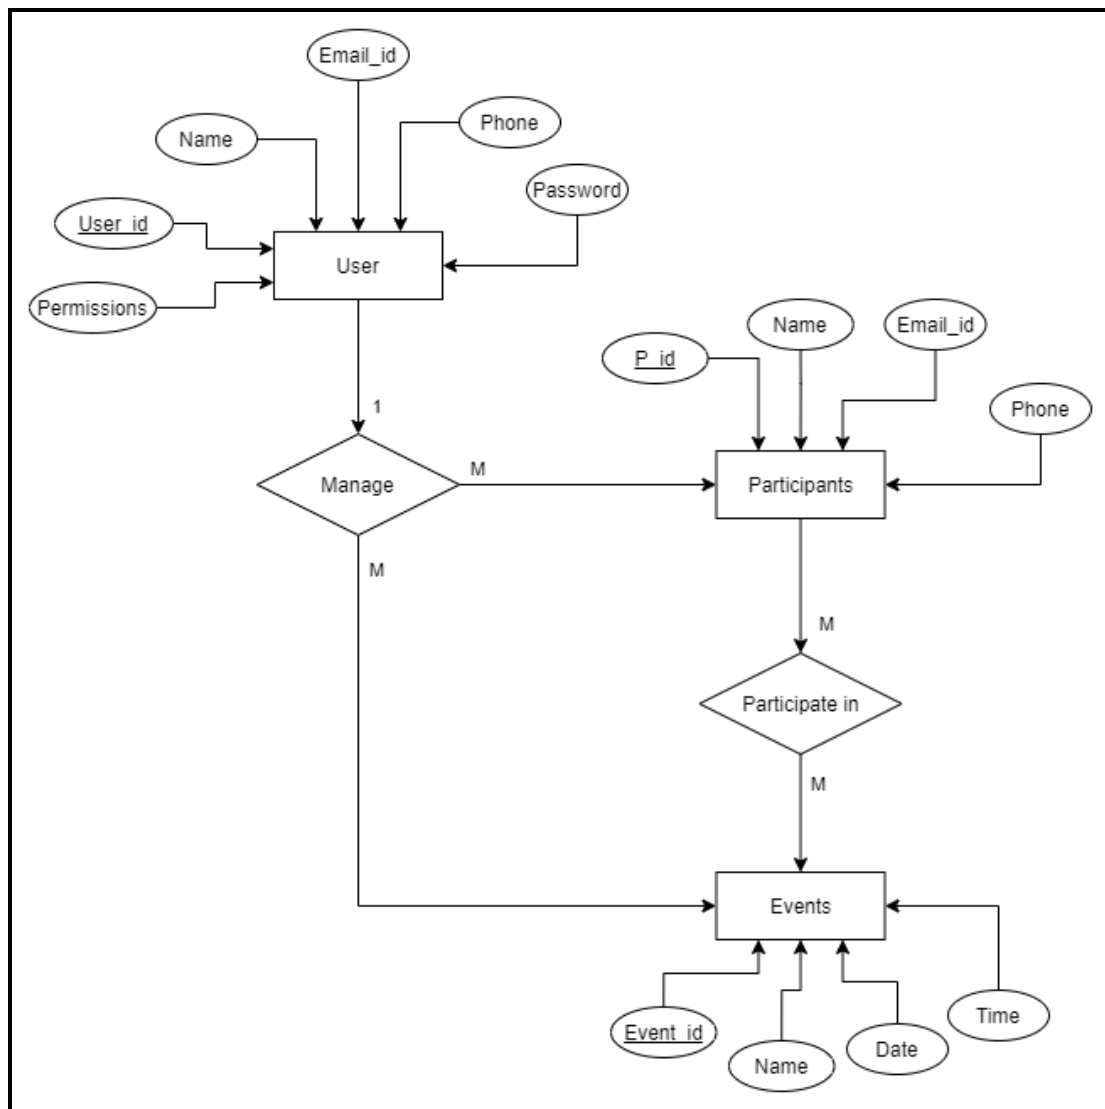


Figure 3: Entity Relationship Diagram

#### **4.4 Database Tables Diagram:**

##### **1. User table:**

This table stores data of user (Admins & Organizers) login credentials.

It contains attributes like:

- The user ID attribute  
It is the primary key of type int which cannot be left empty and hence it auto increments which contains ID of users.
- The username attribute  
It is of type varchar which cannot be left empty and can contain complex usernames of users up to a length of 50 alphanumeric values.
- The email ID attribute  
It is of type varchar which cannot be left empty and contains email ID of user to be used for verification/authentication during login.
- The phone attribute  
It is of type varchar which cannot be left empty and can contain phone number of users from any region up to 15 digits.
- The password attribute  
It is of type varchar which cannot be left empty and contains password of users in an encrypted format.
- The permission attribute  
It is of type int which cannot be left empty and contains the rights of the user to check if they are admin or normal user.

## 2. Participants table:

This table stores data of participants who have registered for various events.

It contains attributes like:

- The participant ID attribute  
It is the primary key of type int which cannot be left empty and hence it auto increments which contains ID of participants.
- The name attribute  
It is of type varchar which cannot be left empty and can contain names of participants up to a length of 50 alphanumeric values.
- The email ID attribute  
It is of type varchar which cannot be left empty and contains email ID of participant for later use.
- The phone number attribute  
It is of type varchar which cannot be left empty and can contain phone number of participants from any region up to 15 digits.



### 3. Events table:

This table stores information regarding events that will be organized in which participants can register.

It contains attributes like:

- The event ID attribute  
It is the primary key of type int which cannot be left empty and hence it auto increments which contains ID of events being organized.
- The name attribute  
It is of type varchar which cannot be left empty contains names of events being organized.
- The date attribute  
It is of type date which cannot be left empty contains the date of the event to be organized.
- The time attribute  
It is of type time which cannot be left empty contains the time of the event to be organized.

#### 4. Registration table:

This table stores information of participant's registration in one or more events and whether they have entered in that event or not.

It contains attributes like:

- The registration ID attribute  
It is the primary key of type int which cannot be left empty and hence it auto increments which contains registration ID of relation between events and participants.
- The participant ID attribute  
It is the first foreign key obtained from participant table to link participants to their registered events.
- The event ID attribute  
It is the second foreign key obtained from events table to link participants to their registered events.
- The present attribute

It is of type int which cannot be left empty and contains the status of participant's entry into registered events.

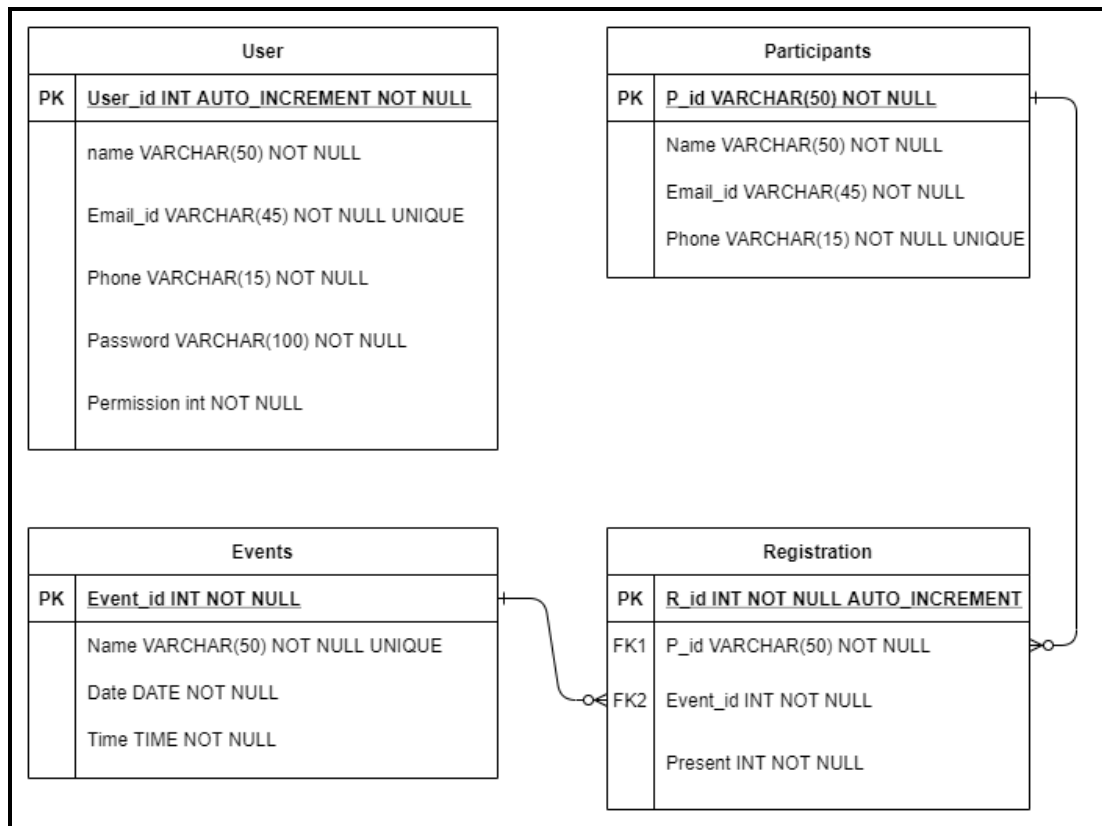


Figure 4: Entity Relationship Table Diagram

## **4.5 Data Flow Diagram (DFD):**


### **4.5.1 Level 0:**

#### **Inputs:**

1. User login  
Credentials entered by user to login & access the software.
2. User data  
Data provided by individuals to Admin to get login credentials.
3. Event data  
Data added by user about events being organized.
4. Participant data  
Data provided by participants to register themselves in various events.

#### **Outputs:**

1. Events  
Information about the event being organized and participants registered in it.
2. Participants  
Information about participant and the event they are registered in.
3. Entry  
Information to & after validating a participant to enter an event.

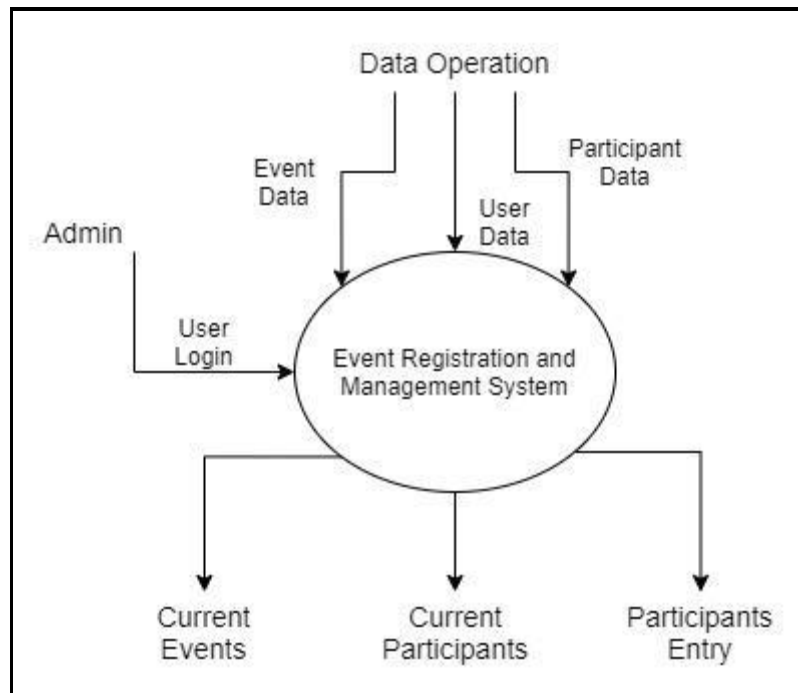

*Figure 5: DFD Level 0 Diagram*

#### **4.5.2 Level 1:**

##### **1. Login**

Takes user input and verifies, validates & authenticates and logs them in as Admin or regular user.

##### **2. Event registration / QR Generation**

The user enters the data provided by a participant to register them in any event of their choice and provides them QR code.

##### **3. Event verification / QR Verification**

The user validates and admits a participant by the QR code provided by them during the event day.

##### **4. Event management**

The user adds details of events to be organized during the first use so that participants can register in them.

##### **5. Registry management**

The data of participant is linked to the event in which they have been registered to create their entrance records.

##### **6. Report**

The user can generate a report of participant registry at any point of use which is in excel format.

##### **7. Login as admin**

If the credentials provided by user is that of an admin, they have access to all the above abilities and to add more users of the software.

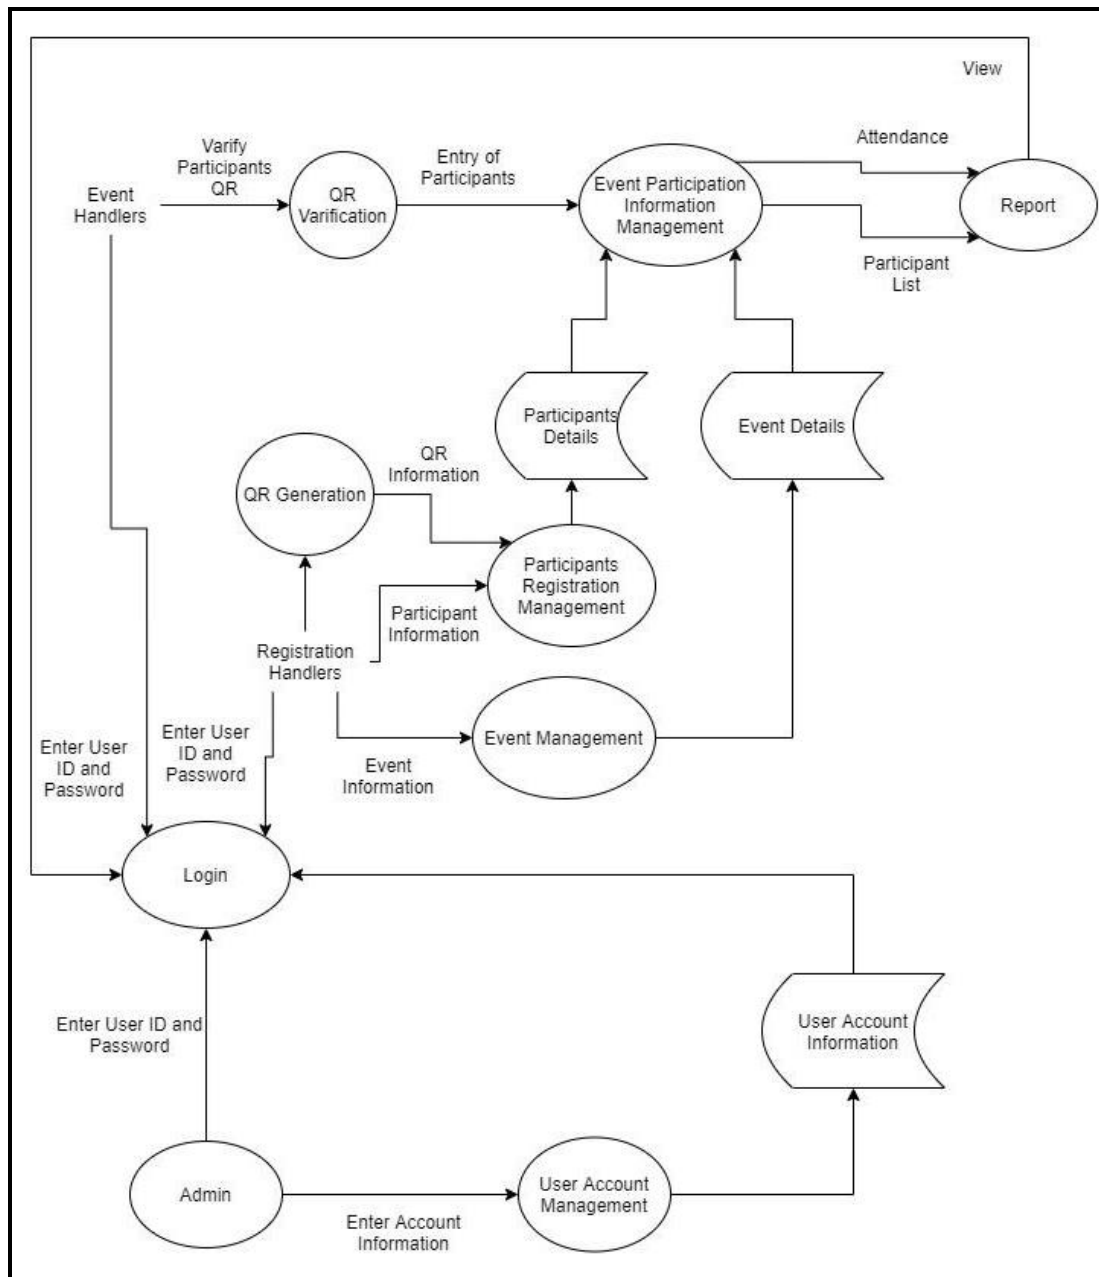



Figure 6: DFD Level 1 Diagram

### 4.5.3 Level 2:

#### 4.5.3.1 User Account Information Management:

The admin manages:

- User account information.
- They can add more users, it can be more admins or handlers.
- They can update details of existing users.
- They can also remove existing users.

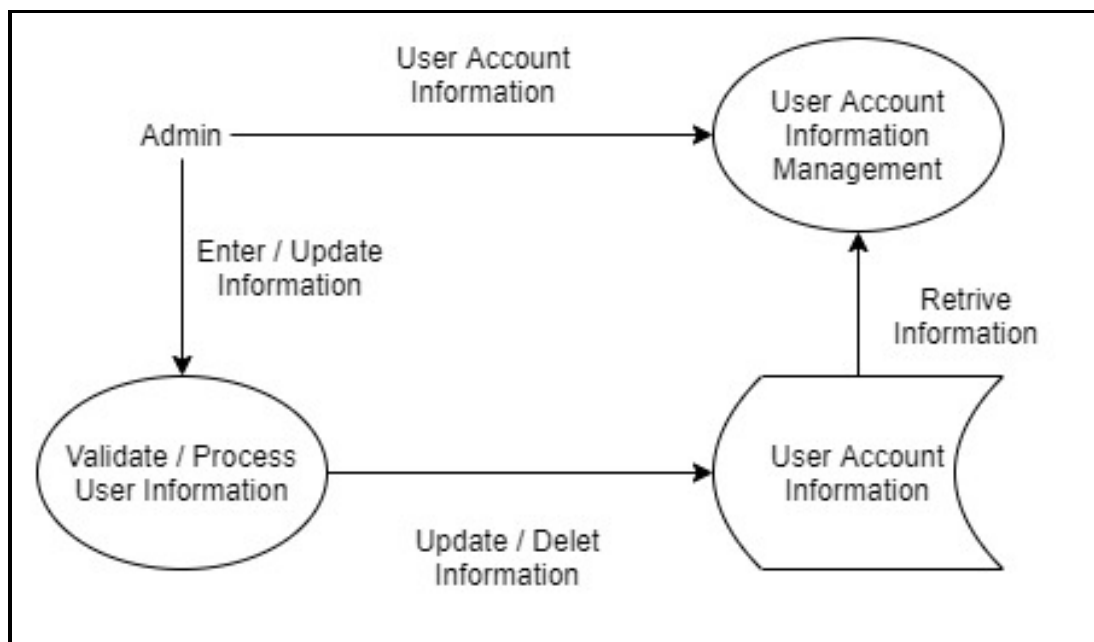


*Figure 7: DFD Level 2 User Account Information Management*



#### 4.5.3.2 Login:

It validates user data against the data store to log in a user as:

- Admin.
- Event handler.
- Registration handler.

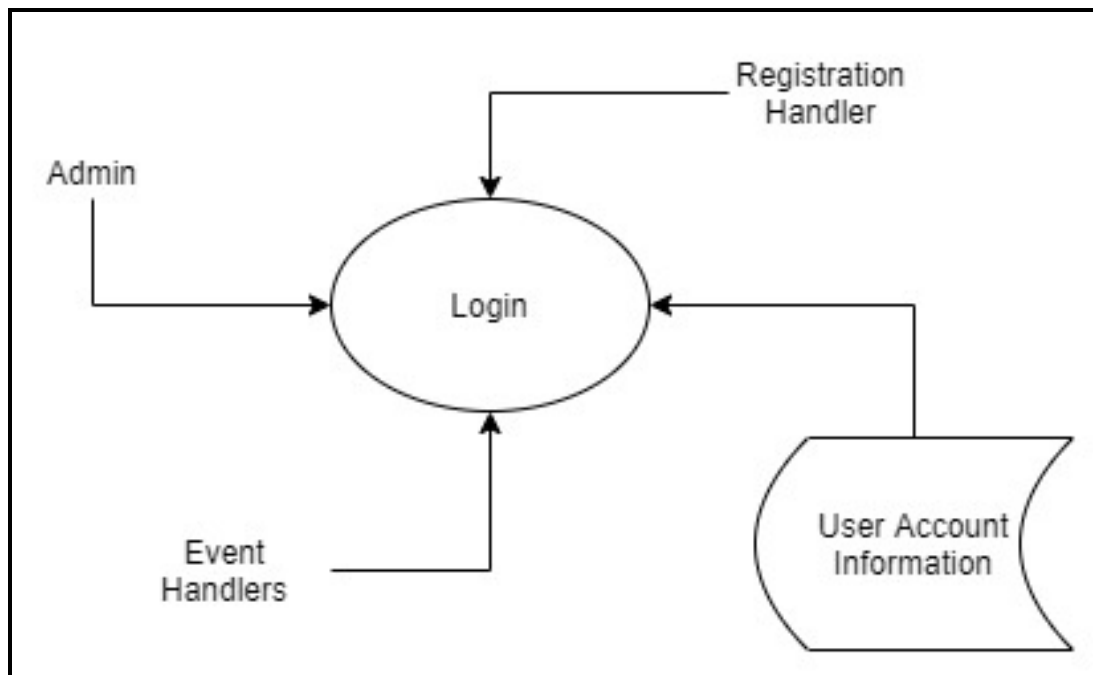


*Figure 8: DFD Level 2 Login*

#### 4.5.3.3 Participant Details Management:

The registration handler manages:

- Participant data store.
- Registering participants to events.
- Providing QR code for participants.
- Re-register existing participants to more events.

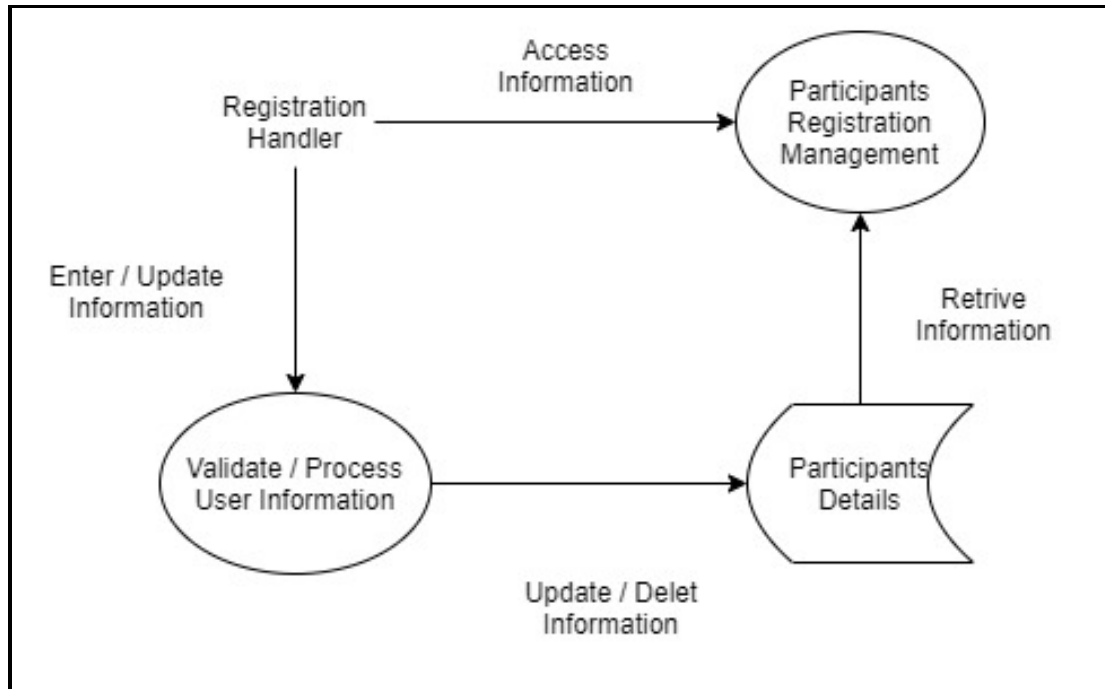


*Figure 9: DFD Level 2 Participant Details Management*

#### 4.5.3.4 Event Details Management:

The registration handler manages:

- Event data store.
- Marking participant entry in an event.

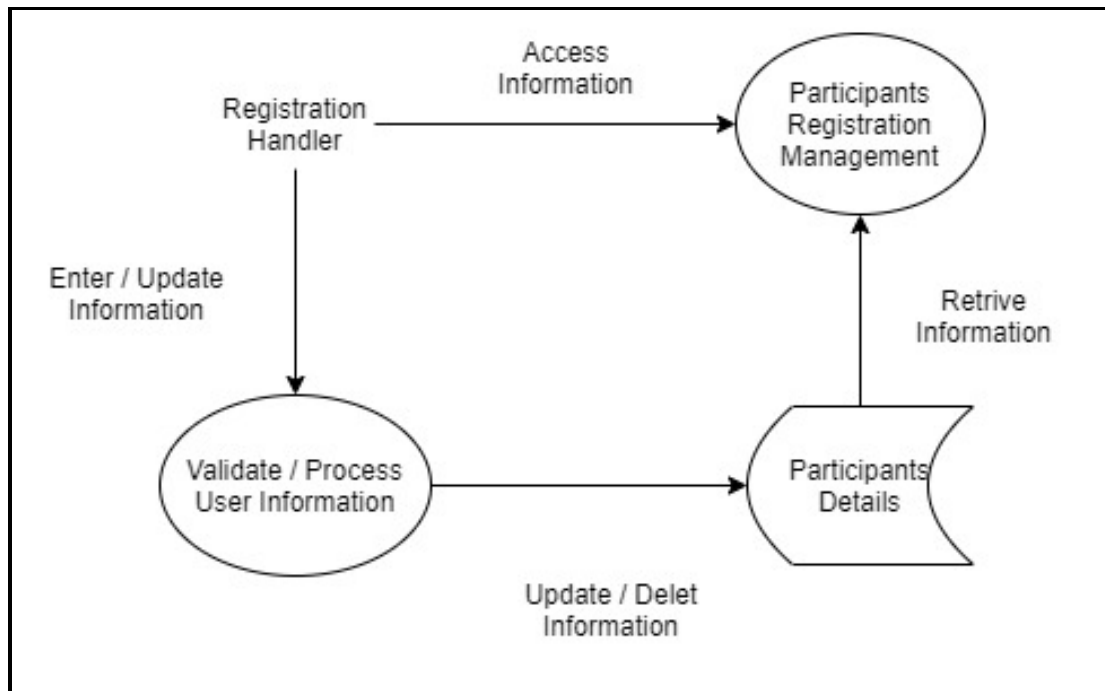

*Figure 10: DFD Level 2 Event Details Management*

#### 4.5.3.5 Event Participation Information Management:

The event handler manages:

- Participant data store.
- Registering participants to events.
- Providing QR code for participants.
- Re-register existing participants to more events.
- Marking entry of participants.
- Generate Report of whole event.

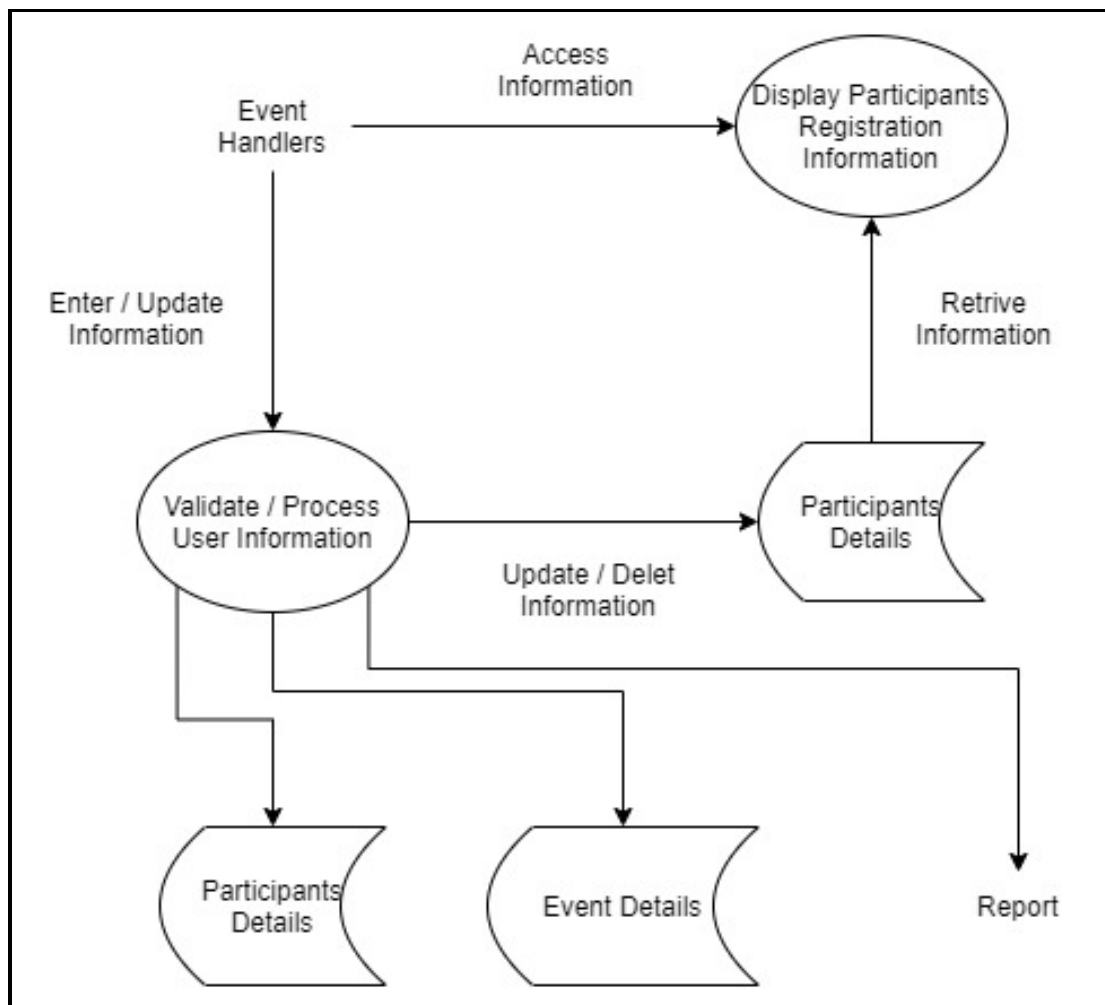


Figure 11: DFD Level 2 Event Participation Information Management

## 5. System Development

### 5.1 Frontend

#### 5.1.1 Script “config.py”

```
screen1 = "none"
screen1_5 = "none"
screen2 = "none"
screen3 = "none"
screen4 = "none"
screen5 = "none"

screen1geo = 0
screen1_5geo = 0
screen2geo = 0
screen3geo = 0
screen4geo = 0
screen5geo = 0
screen6geo = 0
screen7geo = 0

perm_entry = "none"
```

### 5.1.2 Script “ERVQR.py”

```
# importing libraries & modules
import os
import re
import cv2
import time
import config
import random
import platform
import pyqrcode
import numpy as np
import tkinter as tk
import frontend_api as fi
import pyzbar.pyzbar as pyzbar
from tkinter import *
from tkinter import ttk
from tkinter import messagebox
from PIL import ImageTk, Image
from openpyxl import Workbook, load_workbook

# check OS to set GUI size
def chkos():
    """
    This function identifies the Operating system being used
    To set the geometry of the Windows in this app.
    """
    oname = platform.system()
```

```
if oname == "Windows":
    config.screen1geo = "430x300"
    config.screen1_5geo = "490x145"
    config.screen2geo = "500x310"
    config.screen3geo = "360x125"
    config.screen4geo = "585x458"
    config.screen5geo = "690x470"
    config.screen6geo = "420x190"
    config.screen7geo = "300x250"

elif oname == "Linux":
    config.screen1geo = "375x300"
    config.screen1_5geo = "390x145"
    config.screen2geo = "520x310"
    config.screen3geo = "320x125"
    config.screen4geo = "680x458"
    config.screen5geo = "770x460"
    config.screen6geo = "495x190"
    config.screen7geo = "360x270"

else:
    config.screen1geo = "375x300"
    config.screen1_5geo = "390x145"
    config.screen2geo = "520x310"
    config.screen3geo = "320x125"
    config.screen4geo = "250x258"
    config.screen5geo = "760x460"
    config.screen6geo = "455x190"
    config.screen7geo = "300x300"
```

```

# code for QR scanner
def scanner():
    """
    This function is a module that manages the aspects of a QR
    Scanner using various sub modules.

    :return: it returns the data obtained from the QR Code.
    """

    # start device camera
    cap = cv2.VideoCapture(0)
    cap.set(3, 640)
    cap.set(4, 480)
    time.sleep(2)

    # find content of QR
    def decode(im: object) -> object:
        """
        This function decodes image given by camera to isolate
        QR code present in it.

        :param im: it is the image obtained from the device
        camera.
        :return: it returns the data obtained by decoding the
        image.
        """

        decodedObjects = pyzbar.decode(im)
        return decodedObjects

    # font for hull
    font = cv2.FONT_HERSHEY_SIMPLEX

```



```

# scan the QR
def app():
    """
    This function uses the device camera to scan the QR
    shown to it &
    helps save the QR if user wants to.

    :return: it returns the data obtained by the scanner.
    """

    decodedObject = ""
    while cap.isOpened():
        ret, frame = cap.read()
        im = cv2.cvtColor(frame, cv2.COLOR_BGR2GRAY)
        decodedObjects = decode(im)
        for decodedObject in decodedObjects:
            points = decodedObject.polygon
            if len(points) > 4:
                hull = cv2.convexHull(np.array(
                    [point for point in points],
                    dtype=np.float32))
                hull = list(map(tuple, np.squeeze(hull)))
            else:
                hull = points

            n = len(hull)

```

```

        for j in range(0, n):
            # while scanning
            cv2.line(frame, hull[j], hull[(j+1) % n],
                      (255, 0, 0), 3)
            x = decodedObject.rect.left
            y = decodedObject.rect.top
            cv2.putText(frame, str(decodedObject.data)
                        , (x, y), font, 1, (0, 255, 255), 2,
                        cv2.LINE_AA)

    try:
        barCode = str(decodedObject.data)
        bar = barCode
    except:
        bar = ""

    cv2.imshow('frame', frame)
    key = cv2.waitKey(1)
    # binding q key as shortcut to close camera
    if key & 0xFF == ord('q') or key == 27:
        cap.release()
        cv2.destroyAllWindows()
        break

    # binding s key as shortcut to save image in front
    # of camera
    elif key & 0xFF == ord('s'):
        if (bar != "") or (len(bar) != 0):
            iname = "./scan/" + bar + ".png"
        else:
            iname = "./scan/" + str(random.randint(1,
            101)) + ".png"

```

```

        cv2.imwrite(iname, frame)
        messagebox.showinfo("INFO", "QR Saved")

    # check if any QR detected
    try:
        barCode = str(decodedObject.data)
        bar = barCode
        return bar
    except:
        messagebox.showerror("ALERT", "No QR Detected")
        return 0

# start scanner
bar = app()
# close camera
cap.release()
cv2.destroyAllWindows()
return bar

# QR Scanner code
def QRScan():
    """
    This function is a module that manages aspects of
    participant entry
    using serveral sub modules.
    """

```

```

# call scanner
def callscan():
    """
    This function calls the QR Scanner to scan the QR of
    participants.
    """

    resp = scanner()
    if resp == 0:
        screen7.focus_force()
    else:
        qrp_id.set(resp)
        screen7.focus_force()

# entry marker
def marker():
    """
    This function validates the QR provided by a
    participant and marks their entry
    by matching it against data in the server.
    """

    try:
        if (qrp_id.get() != "") and (qreve.get() != ""):
            uid = qrp_id.get()[2:-1]
            eve = qreve.get()
            resp = fi.mark_entry(p_id=uid, event=eve)

```

```

        if resp == 0:
            messagebox.showerror("ALERT", "No
                participant registered with this QR
                ID in this event")
        elif resp == 1:
            messagebox.showinfo("Success",
                "Participant entry marked.
                \nEntry Granted")
        else:
            messagebox.showerror("ALERT", "Participant
                already entered. \nEntry Denied")
            screen7.focus_force()
            qrpId.set("")
    elif qrpId.get() != "":
        messagebox.showerror("ALERT", "No Event
            selected")
    elif qreve.get() != "":
        messagebox.showerror("ALERT", "No QR ID found")
    else:
        messagebox.showerror("ALERT",
            "Fields Incomplete")
except:
    messagebox.showerror("ALERT", "Unable to connect
        to the server")
finally:
    screen7.focus_force()

```

```

# GUI of entry marker
screen7 = Toplevel(config.screen4)
screen7.title("Event Entry Management")
screen7.geometry(config.screen7geo)
screen7.resizable(False, False)
screen7.config(background=colr)
screen7.focus_force()
icon = PhotoImage(file="./resc/qr-code-scan.png")
screen7.iconphoto(False, icon)

try:
    evts = fi.get_events()
    qrp_id = StringVar()
    qre = StringVar()
    label = Label(screen7, text="Participant Entry",
                  bg=colr, font=("Times New Roman", 20, 'bold'))
    label.configure(foreground="white", anchor="center")
    label.grid(row=1, column=1, padx=20, pady=(20, 15),
              colspan=3)
    label = Label(screen7, width=15, text="Select Event : ",
                  bg=colr)
    label.configure(foreground="white")
    label.grid(row=3, column=1, padx=5, pady=10)
    screen7.entry1 = ttk.Combobox(screen7, width=17,
                                   textvariable=qre, state="readonly")
    screen7.entry1.grid(row=3, column=2, padx=5, pady=10,
                       colspan=1)
    screen7.entry1['values'] = evts
    screen7.entry1.current()
    label = Label(screen7, width=15, text="QR ID : ",
                  bg=colr)
    label.configure(foreground="white")
    label.grid(row=4, column=1, padx=5, pady=10)

```

```

screen7.entryname = Entry(screen7, width=20,
    textvariable=qrpid)
screen7.entryname.grid(row=4, column=2, padx=5,
    pady=10, columnspan=2)
buton = Button(screen7, width=15, text="Scan(ctrl+s)",
    command=callscan)
buton.grid(row=5, column=1, padx=15, pady=(20, 0),
    columnspan=1)

# binding Ctrl + s key as shortcut to open scanner
screen7.bind("<Control-s>",
    lambda event=None: buton.invoke())
button = Button(screen7, width=15, text="Mark (↵)",
    command=marker)
button.grid(row=5, column=2, padx=15, pady=(20, 0),
    columnspan=1)

# binding Enter key as shortcut to mark the entry
screen7.bind('<Return>', lambda event=None:
    button.invoke())
label = Label(screen7, width=35, text="Press 'Esc' or
    'q' to close camera \nPress 's' to save image.",
    bg=colr)
label.configure(foreground="#767777")
label.grid(row=6, column=1, padx=5, pady=10,
    columnspan=2)
except:
    messagebox.showerror("ALERT", "Unable to connect to
        the server")
finally:
    screen7.focus_force()

```

```

# set focus to management window on closing
config.screen4.focus_force()

# code to register & generate QR for participant
def QRP():
    """
    This function is a module that manages aspects of
    participant registration
    using serveral sub modules.
    """

    # call scanner
    def callscan():
        """
        This function calls the QR Scanner to register
        existing participant in another event.
        """

        resp = scanner()
        if resp == 0:
            config.screen5.focus_force()
        else:
            qrID.set(resp)
            config.screen5.focus_force()

    # code for GUI of QR generator
    def QRGen():
        """
        This function loads the GUI of participant
        registration window.
        """

```



```

gcolor = "#161a2d"
config.screen5 = Toplevel(config.screen4)
config.screen5.title("QR Generator")
config.screen5.geometry(config.screen5geo)
config.screen5.resizable(False, False)
config.screen5.config(background=gcolor)
icon = PhotoImage(file="./resc/laptop.png")
config.screen5.iconphoto(False, icon)
try:
    evts = fi.get_events()
    label = Label(config.screen5, text="Event
        Registration", bg=gcolor,
        font=("Times New Roman", 20, 'bold'))
    label.configure(foreground="white",
        anchor="center")
    label.grid(row=0, column=2, padx=5, pady=5,
        columnspan=4)
    label = Label(config.screen5, text="Enter all
        details or QR-ID of participant", bg=gcolor)
    label.configure(foreground="white")
    label.grid(row=1, column=1, padx=5, pady=10,
        columnspan=3)
    label = Label(config.screen5, text="Enter Name : "
        , bg=gcolor)
    label.configure(foreground="white")
    label.grid(row=2, column=1, padx=5, pady=10)
    config.screen5.entryname = Entry(config.screen5,
        width=30, textvariable=qrName)
    config.screen5.entryname.grid(row=2, column=2,
        padx=5, pady=10, columnspan=2)
    config.screen5.entryname.focus_set()
    label = Label(config.screen5, text="Enter Phno : "
        , bg=gcolor)

```

```

label.configure(foreground="white")
label.grid(row=3, column=1, padx=5, pady=10)
config.screen5.entryphno = Entry(config.screen5,
    width=30, textvariable=qrphno)
config.screen5.entryphno.grid(row=3, column=2,
    padx=5, pady=10, columnspan=2)
label = Label(config.screen5, text="Enter Email :",
    , bg=gcolor)
label.configure(foreground="white")
label.grid(row=4, column=1, padx=5, pady=10)
config.screen5.entrymail = Entry(config.screen5,
    width=30, textvariable=qrmail)
config.screen5.entrymail.grid(row=4, column=2,
    padx=5, pady=10, columnspan=2)
label = Label(config.screen5, text="QR ID : ",
    bg=gcolor)
label.configure(foreground="white")
label.grid(row=5, column=1, padx=5, pady=10)
config.screen5.entry = Entry(config.screen5,
    width=15, textvariable=qrID)
config.screen5.entry.grid(row=5, column=2, padx=10
    , pady=10, columnspan=1, sticky='w')
sbtn = Button(config.screen5, width=10, text="Scan
    (ctrl + s)", command=callscan)
sbtn.grid(row=5, column=3, padx=5, pady=10,
    sticky='e')

# binding Ctrl + s key as shortcut to open scanner
config.screen5.bind("<Control-s>",
    lambda event=None: sbtn.invoke())
ttk.Separator(config.screen5,
    orient=HORIZONTAL).grid(column=1, row=6,
    columnspan=3, sticky='ew')

```

```

label = Label(config.screen5, text="1st Event
        Name : ", bg=gcolor)
label.configure(foreground="white")
label.grid(row=7, column=1, padx=5, pady=10)
label = Label(config.screen5, text="2nd Event
        Name : ", bg=gcolor)
label.configure(foreground="white")
label.grid(row=8, column=1, padx=5, pady=10)
config.screen5.entry1 = ttk.Combobox(
        config.screen5, width=27, textvariable=qrevent1
        , state="readonly")
config.screen5.entry1.grid(row=7, column=2,
        padx=5, pady=10, columnspan=2)
config.screen5.entry1['values'] = evts
config.screen5.entry1.current()
config.screen5.entry2 = ttk.Combobox(
        config.screen5, width=27,
        textvariable=qrevent2, state="readonly")
config.screen5.entry2.grid(row=8, column=2,
        padx=5, pady=10, columnspan=2)
config.screen5.entry2['values'] = evts
config.screen5.entry2.current()
label = Label(config.screen5, text="QR Code : ",
        bg=gcolor)
label.configure(foreground="white")
label.grid(row=9, column=1, padx=5, pady=10)
button = Button(config.screen5, width=10,
        text="Generate (↵)", command=QRCodeGenerate)
button.grid(row=9, column=2, padx=5, pady=10,
        columnspan=1)
# binding Enter key as shortcut to generate QR
config.screen5.bind('<Return>', lambda event=None:
        button.invoke())

```

```

        buton = Button(config.screen5, width=10,
            text="Clear (ctrl + r)", command=QRClear)
        buton.grid(row=9, column=3, padx=5, pady=10,
            columnspan=1)
        # binding Ctrl + r key as shortcut to clear fields
        config.screen5.bind("<Control-r>",
            lambda event=None: buton.invoke())
        config.screen5.imageLabel = Label(config.screen5,
            background=gcolor)
        config.screen5.imageLabel.grid(row=2, column=4,
            rowspan=9, columnspan=3, padx=(10, 5), pady=10
        )
        image = Image.open("./resc/wait.png")
        image = image.resize((350, 350), Image.ANTIALIAS)
        image = ImageTk.PhotoImage(image)
        config.screen5.imageLabel.config(image=image)
        config.screen5.imageLabel.photo = image

    except:
        messagebox.showerror("ALERT", "Unable to connect
            to the server")

    finally:
        config.screen5.focus_force()

```

```

# reload wait image
def ld():
    """
    This function loads the waiting screen image after
    fields are cleared.
    """

    image = Image.open("./resc/wait.png")
    image = image.resize((350, 350), Image.ANTIALIAS)
    image = ImageTk.PhotoImage(image)
    config.screen5.imageLabel.config(image=image)
    config.screen5.imageLabel.photo = image

# code for clearing values of GUI fields
def QRClear():
    """
    This function clears the fields in participant
    registration window.
    """

    config.screen5.entryname.focus_set()
    qrName.set("")
    qrphno.set("")
    qrmail.set("")
    qrevent1.set("")
    qrevent2.set("")
    qrID.set("")
    image = Image.open("./resc/done.png")
    image = image.resize((350, 350), Image.ANTIALIAS)
    image = ImageTk.PhotoImage(image)
    config.screen5.imageLabel.config(image=image)
    config.screen5.imageLabel.photo = image
    config.screen5.after(500, ld)

```

```

# code to generate QR with participant data
def QRCodeGenerate():
    """
    This function generates QR Code for participant after
    validating the information provided by them.
    """
    if (qrName.get() != '') and (qrphno.get() != '') and
        (qrmail.get() != '') and (qrevent1.get() != ''):
        if len(qrphno.get()) == 10:
            try:
                rege = '^[a-z0-9]+[\.\_]?[a-z0-9]+[@]\w+[.]\w{2,3}$'
                if re.search(rege, qrmail.get()):
                    content = qrName.get().lower() +
                        "-" + qrphno.get()
                    i = QRdatamgSQL(content)
                    if i == 0:
                        messagebox.showerror("ALERT",
                            "Internal error in
                            registration")
                    elif i == 2:
                        messagebox.showinfo("Pay Attention
                            ", "Participant already
                            registered in event 1.
                            \nRegistration for event 2
                            complete")
                    elif i == 3:
                        messagebox.showinfo("Pay Attention
                            ", "Participant already
                            registered in event 2.
                            \nRegistration for event 1
                            complete")

```

```

elif i == 4:
    messagebox.showerror("ALERT",
        "Participant already
        registered in provided events
        \nRegistration Aborted")
elif i == 1:
    qrGenerate = pyqrcode.create(
        content)
    qrCodePath = './data/'
    qrCodeName = qrCodePath +
        qrphno.get() + ".png"
    qrGenerate.png(qrCodeName,
        scale=10)
    image = Image.open(qrCodeName)
    image = image.resize((350, 350),
        Image.ANTIALIAS)
    image = ImageTk.PhotoImage(image)
    config.screen5.imageLabel.config(
        image=image)
    config.screen5.imageLabel.photo =
        image
    QRdatamgXL()
    config.screen5.focus_force()
else:
    messagebox.showerror("ALERT", "Invalid
        Email ID")
    config.screen5.focus_force()
    config.screen5.entrymail.focus_set()
except:
    messagebox.showerror("ALERT", "Error in
        Generating QR or Phone NaN")
    config.screen5.focus_force()
    config.screen5.entryphno.focus_set()

```

```

        else:
            messagebox.showerror("ALERT", "Invalid Phone
                                   Number")
            config.screen5.focus_force()
            config.screen5.entryphno.focus_set()
    elif (qrID.get() != '') and (qrevent1.get() != '):
        autofil()
    else:
        messagebox.showerror("ALERT", "Fields Incomplete")
        config.screen5.focus_force()

# code for autofill
def autofil():
    """
    This function registers an existing participant in
    another event.
    """

    uid = qrID.get()[2:-1]
    eve = [qrevent1.get(), qrevent2.get()]
    if qrevent2.get() == "":
        eve = [qrevent1.get()]
    try:
        resp = fi.add_part(p_id=uid, name="", email_id="",
phone="", events=eve)
        if resp == 0:
            messagebox.showerror("ALERT", "No Registration
                                   found on this QR ID \nRegistration Aborted
                                   ")
        elif resp == 2:
            messagebox.showinfo("Pay Attention",
                                   "Participant already registered in event 1
                                   \nRegistration for event 2 complete")

```





```

except PermissionError:
    messagebox.showerror("Alert", "File access denied.
        \nClose the excel sheet to fix this issue.")
wb = load_workbook(path)
sheet = wb.active
row = (qrName.get(), qrphno.get(), qrmail.get(),
        qrevent1.get(), qrevent2.get())
sheet.append(row)
wb.save(path)

# code to add participant data to SQL
def QRdatamgSQL(content: str) -> int:
    """
    This function contacts the server to add participant
    data in the database.

    :param content: it contains the data to be used as
    participant ID from the QR Code.
    :return: it returns the response provided by the
    server, to check if data has been stored.
    """

    eve = [qrevent1.get(), qrevent2.get()]
    if qrevent2.get() == "":
        eve = [qrevent1.get()]
    try:
        resp = fi.add_part(p_id=content, name=qrName.get(),
            email_id=qrmail.get(), phone=qrphno.get(),
            events=eve)
        return resp
    except:
        messagebox.showerror("ALERT", "Unable to connect
            to the server")

```

```

        finally:
            config.screen5.focus_force()

qrName = StringVar()
qrphno = StringVar()
qrmail = StringVar()
workbook = Workbook()
qrevent1 = StringVar()
qrevent2 = StringVar()
qrID = StringVar()
QRGen()

# code to maintain event list
def eventmgm():
    """
    This function is a module that loads the GUI of event
    management window &
    contains sub modules to manage aspects of events.
    """

    # clear fields
    def clrevent():
        """
        This function clears all the fields in the event
        management window.
        """

        adevent.focus_set()
        evename.set("")
        evedate.set("")
        evetime.set("")

```

```

# clear placeholder of date field
def clrdt(event: object):
    """
    This function is used to monitor widget selection to
    clear the placeholder value.

    :param event: checks mouse interrupt.
    """

    evedate.set("")

# clear placeholder of time field
def clrtime(event: object):
    """
    This function is used to monitor widget selection to
    clear the placeholder value.

    :param event: checks mouse interrupt.
    """

    evetime.set("")

# add events to database
def addevent():
    """
    This function contacts the server to add an event data
    & performs validation
    on the data provided & stops if event already exists.
    """

    if (evename.get() != "") and (evedate.get() != "") and
        (evetime.get() != ""):
        try:

```

```

        resp = fi.add_event(name=evename.get(),
                            date=evedate.get(), time=evetime.get())
    if resp == 0:
        messagebox.showerror("ALERT", "Another
                                event entry with same name already
                                exists")
        adevent.focus_set()
    elif resp == 2:
        messagebox.showerror("ALERT", "Wrong date
                                format: \nCorrect format: YYYY-MM-DD")
        adevedt.focus_set()
    elif resp == 3:
        messagebox.showerror("ALERT", "Wrong Time
                                format: \nCorrect format: HH:MM")
        adeveti.focus_set()
    else:
        messagebox.showinfo("Success", "Event
                                added successfully")
except:
    messagebox.showerror("ALERT", "Unable to
                            connect to the server")
finally:
    screen6.focus_force()
else:
    messagebox.showerror("ALERT", "Fields Incomplete")
    screen6.focus_force()

```

```

# remove events from database
def remevent():
    """
    This function contacts the server to remove an event
    from the database by
    validating the information & stops the process if
    information is invalid
    or if any participant is registered to the event.
    """

    if (evename.get() != "") and (evedate.get() != "") and
        (evetime.get() != ""):
        try:
            resp = fi.remove_event(name=evename.get(),
                                   date=evedate.get(), time=evetime.get())
            if resp == 0:
                messagebox.showerror("ALERT", "Someone is
                    registered in this event")
                adevent.focus_set()
            elif resp == 1:
                messagebox.showinfo("Success", "Event
                    removed successfully")
            elif resp == 2:
                messagebox.showerror("ALERT", "Wrong date
                    format: \nCorrect format: YYYY-MM-DD")
                adevedt.focus_set()
            elif resp == 3:
                messagebox.showerror("ALERT", "Wrong Time
                    format: \nCorrect format: HH:MM")
                adeveti.focus_set()
            elif resp == 4:
                messagebox.showerror("ALERT", "Invalid
                    event details")

```

```

        except:
            messagebox.showerror("ALERT", "Unable to
                                   connect to the server")
        finally:
            screen6.focus_force()
    else:
        messagebox.showerror("ALERT", "Fields Incomplete")
        screen6.focus_force()

# GUI code for event manager
screen6 = Toplevel(config.screen4)
screen6.title("Event Manager")
screen6.geometry(config.screen6geo)
screen6.resizable(False, False)
screen6.config(background="green")
icon = PhotoImage(file="./resc/team-management.png")
screen6.iconphoto(False, icon)
screen6.focus_force()
evename = StringVar()
evetime = StringVar()
evedate = StringVar()
label = Label(screen6, text="Event Management",
               bg="green", font=("Times New Roman", 20, 'bold'))
label.configure(foreground="white", anchor="center")
label.grid(row=0, column=1, padx=(17, 0), pady=(10, 15),
           columnspan=4)
lbl = Label(screen6, text="Event Name", bg="green")
lbl.configure(foreground="white")
lbl.grid(row=1, column=1, padx=(40, 5), pady=5,
         columnspan=1)
adevent = Entry(screen6, width='17', textvariable=evename)
adevent.grid(row=1, column=2, padx=5, pady=5, columnspan=1
)

```

```

lbl = Label(screen6, text="Event Date", bg="green")
lbl.configure(foreground="white")
lbl.grid(row=2, column=1, padx=(40, 5), pady=5,
        columnspan=1)
adevedt = Entry(screen6, width='17', textvariable=evedate)
adevedt.insert(0, 'YYYY-MM-DD')
adevedt.bind("<FocusIn>", clrdt)
adevedt.grid(row=2, column=2, padx=5, pady=5, columnspan=1
)
lbl = Label(screen6, text="Event Time", bg="green")
lbl.configure(foreground="white")
lbl.grid(row=3, column=1, padx=(40, 5), pady=5,
        columnspan=1)
adeveti = Entry(screen6, width='17', textvariable=evetime)
adeveti.insert(0, 'HH:MM')
adeveti.bind("<FocusIn>", clrti)
adeveti.grid(row=3, column=2, padx=5, pady=5, columnspan=1
)
bnt = Button(screen6, text="Clear (ctrl + r)",
        command=clrevent, width=18)
bnt.grid(row=1, column=3, padx=5, pady=5, columnspan=2)
nbt = Button(screen6, text="Add Event (ctrl + a)",
        command=addevent, width=18)
nbt.grid(row=2, column=3, padx=5, pady=5, columnspan=2)
tnb = Button(screen6, text="Remove Event (ctrl + d)",
        command=remevent, width=18)
tnb.grid(row=3, column=3, padx=5, pady=5, columnspan=2)
adevent.focus_set()

# binding Ctrl + a key as shortcut to add event
screen6.bind("<Control-a>",
        lambda event=None: nbt.invoke())

```



```

# binding Ctrl + d key as shortcut to remove event
screen6.bind("<Control-d>",
            lambda event=None: tnb.invoke())
# binding Ctrl + r key as shortcut to clear fields
screen6.bind("<Control-r>",
            lambda event=None: bnt.invoke())

# code to monitor event management window close event
def on_closing():
    """
    This function monitors event management window close
    event &
    reopens tasks window.
    """

    config.screen4.deiconify()
    screen6.destroy()
    screen6.protocol("WM_DELETE_WINDOW", on_closing)

# code to generate report
def report_gen():
    """
    This function is a module that contacts the server to
    generate report of
    participants & their attendance in various events.
    """

    try:
        rep = fi.get_report()
        # path to report excel file
        p = "./data/report.xlsx"

```

```

try:
    wb = load_workbook(p)
except FileNotFoundError:
    wb = Workbook(p)
    wb.save(p)
try:
    wb = load_workbook(p)
    sheet = wb.active
    sheet.delete_cols(1, 20)
    sheet.delete_rows(1, 1000)
    row = ("S.No.", "QR ID", "Name",
          "E-mail", "Phone no.")
    sheet.append(row)
    wb.save(p)
    count = 1
    for i in rep:
        row = (count, i[0], i[1], i[2], i[3])
        col = 6
        e_count = 1
        count += 1
        sheet.append(row)
        for x in i[4].split(","):
            sheet.cell(row=1, column=col).value =
                "Event " + str(e_count)
            sheet.cell(row=count, column=col).value =
                x[:-1]
            sheet.cell(row=1, column=col + 1).value =
                "E-" + str(e_count) + " Entry"
            sheet.cell(row=count, column=col+1).value
                = x[-1].replace("1", "Not Entered")
                ).replace("2", "Entered")
            col += 2
            e_count += 1

```

```

        wb.save(p)
        messagebox.showinfo("Success", "Report Generated
            successfully \nPath: " + p)
    except PermissionError:
        messagebox.showerror("Alert", "File access denied.
            \nClose the excel sheet OR Run program as
            Administrator to fix this issue.")
except:
    messagebox.showerror("ALERT", "Unable to connect to
        the server")
finally:
    # set focus to management window on closing
    config.screen4.focus_force()

# code to manage user tasks
def mgm_page():
    """
    This function loads the GUI of main tasks window of the
    app & guides its users of its purpose,
    It contains the participant registration, participant
    entry, event management & report generation modules.
    """

    # GUI for organizer management
    config.screen3.withdraw()
    config.screen4 = config.screen4
    config.screen4 = Toplevel(config.screen3)
    config.screen4.title("Select")
    config.screen4.geometry(config.screen4geo)
    config.screen4.resizable(False, False)
    config.screen4.config(background=colr)
    icon = PhotoImage(file="./resc/process.png")

```

```

config.screen4.iconphoto(False, icon)
config.screen4.focus_force()
label = Label(config.screen4, text="Event Registration &
Verification Using QR", bg=colr, fg="white",
font=("Times New Roman", 20, 'bold'))
label.grid(row=1, column=1, padx=5, pady=(20, 30),
columnspan=3)
label = Label(config.screen4, text="Participant
Registration", bg=colr, fg="white",
font=("Times New Roman", 12, 'bold'))
label.grid(row=2, column=1, padx=(30, 40), pady=15,
columnspan=1)
btn = Button(config.screen4, width=15, borderwidth=0,
text="Registry (ctrl + g)", command=QRP)
btn.grid(row=3, column=1, padx=(30, 40), pady=10,
columnspan=1)
label = Label(config.screen4, text="Register participants
in one or more \nevents & Generate QR code,
\nunique for everyone", bg=colr, fg="white")
label.grid(row=4, column=1, padx=(30, 40), pady=10,
columnspan=1)
label = Label(config.screen4, text="Participant
Verification", bg=colr, fg="white",
font=("Times New Roman", 12, 'bold'))
label.grid(row=2, column=3, padx=50, pady=15, columnspan=1
)
bnt = Button(config.screen4, width=15, borderwidth=0,
text="Entry (ctrl + s)", command=QRScan)
bnt.grid(row=3, column=3, padx=50, pady=10, columnspan=1)
label = Label(config.screen4, text="Verify and mark
participant's entry, \nusing the QR code provided,
\nfor each event", bg=colr, fg="white")

```

```

label.grid(row=4, column=3, padx=50, pady=10, columnspan=1
)
ttk.Separator(config.screen4, orient=HORIZONTAL).grid(
    column=1, row=5, columnspan=3, sticky='ew')
ttk.Separator(config.screen4, orient=HORIZONTAL).grid(
    column=2, row=2, rowspan=9, sticky='ns')
label = Label(config.screen4, text="Event Management",
    bg=colr, fg="white", font=("Times New Roman", 12,
    'bold'))
label.grid(row=6, column=1, padx=(30, 40), pady=15,
    columnspan=1)
tbn = Button(config.screen4, width=15, borderwidth=0,
    text="Manage (ctrl + e)", command=eventmgm)
tbn.grid(row=7, column=1, padx=(30, 40), pady=10,
    columnspan=1)
label = Label(config.screen4, text="Add and remove events
    to be organized, \nalong with their date and time",
    bg=colr, fg="white")
label.grid(row=8, column=1, padx=(30, 40), pady=10,
    columnspan=1)
label = Label(config.screen4, text="Report Generator",
    bg=colr, fg="white", font=("Times New Roman", 12,
    'bold'))
label.grid(row=6, column=3, padx=50, pady=15, columnspan=1
)
ttbn = Button(config.screen4, width=15, borderwidth=0,
    text="Report (ctrl + r)", command=report_gen)
ttbn.grid(row=7, column=3, padx=5, pady=10, columnspan=1)
label = Label(config.screen4, text="Generate report for
    all events and \nparticipants along with their
    details", bg=colr, fg="white")
label.grid(row=8, column=3, padx=50, pady=10, columnspan=1
)

```

```

# binding Ctrl + g key as shortcut to open participant
# adding window
config.screen4.bind("<Control-g>",
    lambda event=None: btn.invoke())

# binding Ctrl + s key as shortcut to open participant
# entry window
config.screen4.bind("<Control-s>",
    lambda event=None: bnt.invoke())

# binding Ctrl + e key as shortcut to open event
# management window
config.screen4.bind("<Control-e>",
    lambda event=None: tbn.invoke())

# binding Ctrl + r key as shortcut to generate report
config.screen4.bind("<Control-r>",
    lambda event=None: ttbn.invoke())

# code to monitor main tasks window / app close event
def on_closing():
    """
    This function monitors the close event main tasks
    window of the app.
    it also terminates the entire app.
    """

    config.screen1.destroy()
config.screen4.protocol("WM_DELETE_WINDOW", on_closing)

```

```

# GUI & code for login & signup
def main_page():
    """
    This function is a module that loads the GUI of login
    window and contains
    user login & registration modules, which are managed by
    sub modules.
    """

    # code to clear login data fields after successful login
    def clrlogin():
        """
        This function clears the fields of login window
        """

        username_verify.set("")
        password_verify.set("")
        mgm_page()

    # code to organizer management
    def register_user():
        """
        This function manages user registration success
        window.
        """

    # code to monitor screen1 close event
    def on_closing():
        """
        This function monitors the Registration window
        close event.
        """

```

```

        config.screen2.destroy()
        config.screen1.deiconify()
    config.screen2.protocol("WM_DELETE_WINDOW", on_closing
    )

# GUI for user add success
def disab():
    """
    This function sets the GUI of user registration
    success window.
    """

    config.screen1_5 = Toplevel(config.screen1)
    config.screen1_5.title("Success")
    config.screen1_5.geometry(config.screen1_5geo)
    config.screen1_5.resizable(False, False)
    config.screen1_5.config(background="green")
    config.screen1_5.focus_force()

# code to call login success screen
def calllog():
    """
    This function monitors the user Registration
    window close event & clears the fields
    present in it & reopens the admin login
    window.
    """

    username.set("")
    emailid.set("")
    phno.set("")
    password.set("")
    config.screen3.deiconify()

```



```

        config.screen1_5.destroy()
        config.screen2.destroy()
        adminlogin()

label = Label(config.screen1_5, text="",
              bg="green")
label.grid(row=1, column=1)
label = Label(config.screen1_5,
              text="Registration Success", width='30',
              bg="green", font=("Times New Roman", 20,
              'bold'))
label.configure(foreground="white")
label.grid(pady=5, row=2, column=1, columnspan=1)
btnn = Button(config.screen1_5, text="OK (↵)",
              width="15", command=calllog)
btnn.grid(pady=5, row=3, column=1, columnspan=1)
# binding Enter key as shortcut to proceed
config.screen1_5.bind('<Return>',
                    lambda event=None: btnn.invoke())

disab()

```

```

# registry data validation
def valinp():
    """
    This function validates the data provided by admin to
    add more users,
    and sends the validated data to the server.
    """

    if (username.get() != "") and (emailid.get() != "")
    and (phno.get() != "") and (password.get() != "")
    and (config.perm_entry.get() != "Select"):
        if len(phno.get()) == 10:
            rege = '^([a-z0-9]+[\.\_]?[a-z0-9]+[@]\w+[.]
            \w{2,3})$'
            if re.search(rege, emailid.get()):
                if re.fullmatch(r'[A-Za-z0-9@#$$%^&+=]
                {8,}', password.get()):
                    perm = config.perm_entry.get()
                    perm = 2 if perm == "Admin" else 1
                    try:
                        resp = fi.add_user(
                            name=username.get(),
                            email_id=emailid.get(),
                            password=password.get(),
                            phone=int(phno.get()),
                            perm=perm)
                    if resp == 0:
                        messagebox.showerror("ALERT",
                            "User email already
                            exists")
                        config.screen2.focus_force()
                    else:
                        register_user()

```

```

        except:
            messagebox.showerror("ALERT",
                                "Unable to connect to the
                                server")

        finally:
            config.screen2.focus_force()

    else:
        messagebox.showerror("ALERT",
                              "Password not Strong")
        config.screen2.focus_force()

    else:
        messagebox.showerror("ALERT", "Invalid
                              Email")
        config.screen2.focus_force()

    else:
        messagebox.showerror("ALERT", "Invalid Phone
                              Number")
        config.screen2.focus_force()

    else:
        messagebox.showerror("ALERT", "Fields Incomplete")
        config.screen2.focus_force()

# GUI code for adding user
def register():
    """
    This function sets the GUI of user registration
    window.
    """

    config.screen3.withdraw()
    config.screen2 = Toplevel(config.screen1)
    config.screen2.title("Register")
    config.screen2.geometry(config.screen2geo)

```

```

config.screen2.resizable(False, False)
config.screen2.config(background=colr)
icon = PhotoImage(file="./resc/add.png")
config.screen2.iconphoto(False, icon)
config.screen2.focus_force()
labl = Label(config.screen2, text="Please enter user
            information", width="30", bg=colr)
labl.configure(foreground="white", font=("Times New
            Roman", 20, 'bold'))
labl.grid(row=1, column=1, padx=5, pady=5,
            columnspan=2)
labl = Label(config.screen2, text="User Name",
            width='30', bg=colr)
labl.configure(foreground="white")
labl.grid(row=2, column=1, padx=5, pady=5,
            columnspan=1)
username_entry = Entry(config.screen2,
            textvariable=username)
username_entry.grid(row=3, column=1, padx=5, pady=5,
            columnspan=1)
username_entry.focus_set()
labl = Label(config.screen2, text="Email ID",
            width='30', bg=colr)
labl.configure(foreground="white")
labl.grid(row=2, column=2, padx=5, pady=5,
            columnspan=1)
emailid_entry = Entry(config.screen2,
            textvariable=emailid)
emailid_entry.grid(row=3, column=2, padx=5, pady=5,
            columnspan=1)
labl = Label(config.screen2, text="Phone Number",
            width='30', bg=colr)
labl.configure(foreground="white")

```

```

labl.grid(row=4, column=1, padx=5, pady=5,
          columnspan=1)
phno_entry = Entry(config.screen2, textvariable=phno)
phno_entry.grid(row=5, column=1, padx=5, pady=5,
                columnspan=1)
labl = Label(config.screen2, text="Password",
              width='30', bg=colr)
labl.configure(foreground="white")
labl.grid(row=4, column=2, padx=5, pady=5,
          columnspan=1)
password_entry = Entry(config.screen2, show="*",
                        textvariable=password)
password_entry.grid(row=5, column=2, padx=5, pady=5,
                    columnspan=1)
labl = Label(config.screen2, text="", width="30",
              bg=colr)
labl.grid(row=6, column=1, padx=5, pady=5,
          columnspan=2)
labl = Label(config.screen2, text="Permission : ",
              width='30', bg=colr)
labl.configure(foreground="white")
labl.grid(row=7, column=1, padx=5, pady=5,
          columnspan=1)
config.perm_entry = ttk.Combobox(config.screen2,
                                  textvariable=rights, width="17",
                                  values=["Select", "Admin", "User"],
                                  state="readonly")
config.perm_entry.current(0)
config.perm_entry.grid(row=7, column=2, columnspan=1,
                       pady=5)
labl = Label(config.screen2, text="", bg=colr)
labl.grid(row=8, column=1, columnspan=2)

```

```

regbtn = Button(config.screen2, text="Sumbit (↵)",
                width='18', command=valinp)
regbtn.grid(row=9, column=1, padx=5, pady=5,
            columnspan=2)

# binding Enter key as shortcut to proceed
config.screen2.bind('<Return>', lambda event=None:
                    regbtn.invoke())

# code to monitor screen2 close event
def on_closing():
    """
    This function monitors the user registration
    window close event &
    it reopens the admin login success window.
    """

    config.screen3.deiconify()
    config.screen2.destroy()
    config.screen2.protocol("WM_DELETE_WINDOW", on_closing
    )

# GUI if user is admin
def adminlogin():
    """
    This functions sets the GUI if user is an admin.
    """

    config.screen3.geometry(config.screen3geo)
    label = Label(config.screen3, text="Login Success",
                  width='30', bg="green")
    label.configure(foreground="white", font=("Times New
            Roman", 16, 'bold'))

```

```

label.grid(row=1, column=1, pady=5, columnspan=1)
bttnn = Button(config.screen3, text="OK (↵)",
               width="15", command=clrlogin)
bttnn.grid(row=2, column=1, pady=5, columnspan=1)
btttn = Button(config.screen3, text="Add User(ctrl+a)",
               width="15", command=register)
btttn.grid(row=3, column=1, pady=5, columnspan=1)

# binding Enter key as shortcut to proceed
config.screen3.bind('<Return>', lambda event=None:
                    bttnn.invoke())

# binding Ctrl + a key as shortcut to access user
# adding screen
config.screen3.bind("<Control-a>",
                    lambda event=None: btttn.invoke())

# GUI if user is user
def userlogin():
    """
    This function sets the GUI if the user is an
    organizer.
    """

    config.screen3.geometry(config.screen3geo)
    label = Label(config.screen3, text="", bg="green")
    label.grid(row=1, column=1, pady=5)
    label = Label(config.screen3, text="Login Success",
                  width='30', bg="green")
    label.configure(foreground="white", font=("Times New
          Roman", 16, 'bold'))
    label.grid(row=2, column=1, pady=5)

```

```

btttn = Button(config.screen3, text="OK (↵)",
               width="10", command=clrlogin)
btttn.grid(row=3, column=1, pady=5)
# binding Enter key as shortcut to proceed
config.screen3.bind('<Return>', lambda event=None:
                   btttn.invoke())

# code for GUI & user details verification
def login_verify():
    """
    This function sets the GUI for login success screen &
    it sends the login credentials to be verified &
    authenticated to the server.
    """

    config.screen1.withdraw()
    config.screen3 = Toplevel(config.screen1)
    config.screen3.title("Info")
    config.screen3.geometry(config.screen3geo)
    config.screen3.resizable(False, False)
    config.screen3.config(background="green")
    config.screen3.focus_force()
    icon = PhotoImage(file="./resc/check.png")
    config.screen3.iconphoto(False, icon)

```



```

# code to monitor screen3 close event
def on_closing():
    """
    This function monitors login success screen close
    event, and reopens login window.
    It is the equivalent of logging out.
    """

    clrlogin()
    config.screen1.deiconify()
    config.screen3.destroy()
    config.screen3.protocol("WM_DELETE_WINDOW", on_closing
    )

try:
    resp = fi.login(uid=username_verify.get(),
                    password=password_verify.get())
    if resp == 2:
        adminlogin()
    elif resp == 1:
        userlogin()
    elif resp == 0:
        on_closing()
        messagebox.showerror("ALERT", "Invalid
                               User/password")
        username_entry1.focus_set()
    else:
        on_closing()
        messagebox.showerror("ALERT", "Invalid User")
        username_entry1.focus_set()
except:
    on_closing()
    messagebox.showerror("ALERT", "No Internet")

```

```

        username_entry1.focus_set()

# check if fields are complete
def chk_login_verify():
    """
    This function ensures that the fields in login
    screen are completed.
    """

    if (username_verify.get() != "") and (
        password_verify.get() != ""):
        login_verify()
    elif username_verify.get() == "":
        messagebox.showerror("ALERT", "Username Field
                               Incomplete")
        username_entry1.focus_set()
    elif password_verify.get() == "":
        messagebox.showerror("ALERT", "Password Field
                               Incomplete")
        password_entry1.focus_set()
    else:
        messagebox.showerror("ALERT", "Fields Incomplete")
        username_entry1.focus_set()

# code for login GUI
config.screen1 = Tk()
config.screen1.title("Login")
config.screen1.geometry(config.screen1geo)
config.screen1.config(background=colr)
config.screen1.resizable(False, False)
icon = PhotoImage(file="./resc/login.png")
config.screen1.iconphoto(False, icon)
username = StringVar()

```

```

password = StringVar()
emailid = StringVar()
phno = StringVar()
rights = StringVar()
username_verify = StringVar()
password_verify = StringVar()
label = Label(text="", bg=colr)
label.grid(row=1, column=1)
label = Label(text="Please Enter your Login \nInformation"
, width='30', bg=colr)
label.configure(foreground="white", font=("Times New Roman"
, 18, 'bold'))
label.grid(row=2, column=1, padx=5, pady=5, colspan=1)
label = Label(text="User Email ID : ", width='30', bg=colr
)
label.configure(foreground="white")
label.grid(row=4, column=1, padx=25, pady=5, colspan=1)
username_entry1 = Entry(width="21",
textvariable=username_verify)
username_entry1.grid(row=5, column=1, padx=5, pady=5,
columnspan=1)
username_entry1.focus_set()
label = Label(text="Password : ", width='30', bg=colr)
label.configure(foreground="white")
label.grid(row=6, column=1, padx=5, pady=5, colspan=1)
password_entry1 = Entry(width='21', show="*",
textvariable=password_verify)
password_entry1.grid(row=7, column=1, padx=5, pady=5,
columnspan=1)
label = Label(text="", bg=colr)
label.grid(row=8, column=1)
btnn = Button(text="Login (↵)", width="18",
command=chk_login_verify)

```

```

btnn.grid(row=9, column=1, padx=5, pady=5, columnspan=1)
# binding Enter key as shortcut to login
config.screen1.bind('<Return>', lambda event=None:
    btnn.invoke())

# monitor app close
def on_closing(event: object):
    """
    This function is used to monitor app close event,
    it binds the escape to it.

    :param event: checks keyboard interrupt.
    """

    sys.exit()
# binding Escape key as shortcut to close app
config.screen1.bind('<Escape>', on_closing)
config.screen1.mainloop()

# securing code from import exploits
if __name__ == "__main__":
    # setting a main color theme
    colr = "#1c44a5"

    # checking OS to set GUI geometry
    chkos()

    # start program by calling login module
    main_page()

```

### 5.1.3 Script “frontend\_api.py”

```
import datetime
import requests
import hashlib
# SHA hash algorithms.

# LIST OF FUNCTIONS
# security(password)
# login (uid, passw)
# add_user (name, email_id, password, phone, perm)
# add_part (p_id, name, e_id, phone, events)
# add_event (name, date, time)
# get_events ()
# mark_entry (p_id, event)
# remove_event (name, date, time)
# get_report ()

url = " https://KKSJmp.pythonanywhere.com "
user_id = ""
upassw = ""
timeout = 5

def login(uid: str, password: str) -> int:
    """
    This function is used to verify user login credentials by
    communicating with the server.

    :param uid: User ID used to login.
    :param password: Password of the user.
    :return:"1"/"2" Password match, "0" Wrong password,
    "-1" User dose not exists.
    """
```

```

global upassw, user_id
password = security(password)
r = requests.post(url + "/login", json={"id": uid,
    "password": password}, timeout=timeout)
if r.json()["body"]["permission"] >= 1:
    upassw = password
    user_id = uid
return r.json()["body"]["permission"]

def add_user(name: str, email_id: str, password: str,
phone: str, perm: int) -> int:
    """
    Send request to add a new user to the server.

    :param name: Name of the user.
    :param email_id: E-mail ID of user.
    :param password: Password of user.
    :param phone: Phone number of user.
    :param perm: Level of access provided to the user
    ("2" for admin, "1" for user).
    :return: "1" Added, "0" Error (Already exists).
    """

    password = security(password)
    r = requests.post(url + "/add_user", json={"name": name,
        "email_id": email_id, "password": password, "phone":
        phone, "permission": perm, "uid": user_id,
        "upassw": upassw}, timeout=timeout)
    return r.json()["body"]["response"]

```

```

def add_part(p_id: str, name: str, email_id: str, phone: str,
events: [str]) -> int:
    """
    Send request to add a new participant to the server.

    :param p_id: ID of participant.
    :param name: Name of participant.
    :param email_id: E-mail ID of participant.
    :param phone: Phone number of participant.
    :param events: List of events.
    :return: "0" some error OR no registration for this
    participant, "1" success, ("2"/"3"/"4") event (1/2/both)
    registered for this participant.
    """

    r = requests.post(url + "/add_part", json={"p_id": p_id,
        "name": name, "email_id": email_id, "phone": phone,
        "events": events, "uid": user_id, "upassw": upassw},
        timeout=timeout)
    return r.json()["body"]["response"]

```

```

def add_event(name: str, date: str, time: str) -> int:
    """
    Send request to add a event to server.

    :param name: Name of event.
    :param date: Date of event (Format: YYYY-MM-DD).
    :param time: Time of event (Format: HH:MM).
    :return: "1" success, "0" event name exists.
    """

    try:
        datetime.datetime.strptime(date, '%Y-%m-%d')
    except ValueError:
        return 2
    try:
        datetime.datetime.strptime(time, '%H:%M')
    except ValueError:
        return 3
    time = time + ":00"
    r = requests.post(url + "/add_event", json={"name": name,
        "date": date, "time": time, "uid": user_id,
        "upassw": upassw}, timeout=timeout)
    return r.json()["body"]["response"]

```



```

def get_events():
    """
    Send request to server for list of events.

    :return: List of events.
    """

    r = requests.get(url + "/get_events", timeout=timeout)
    return r.json()["body"]["response"]

def mark_entry(p_id, event):
    """
    Send request to server to mark participant with "p_id" as
    present in specified event "event".

    :param p_id: Participant ID.
    :param event: Event in which entry will be marked.
    :return: "0" Not Registered, "1" Registered, "2" Already
    entered.
    """

    r = requests.post(url + "/mark_entry", json={"p_id": p_id,
        "event": event, "uid": user_id, "upassw": upassw},
        timeout=timeout)
    return r.json()["body"]["response"]

```

```

def remove_event(name, date, time):
    """
    Sends request to remove an event to the server.

    :param name: Name of the event.
    :param date: Date of the event (Format: YYYY-MM-DD).
    :param time: Time of the event (Format: HH:SS).
    :return: "1" success, "0" event participant registered,
    "4" wrong event details.
    """

    try:
        datetime.datetime.strptime(date, '%Y-%m-%d')
    except ValueError:
        return 2
    try:
        datetime.datetime.strptime(time, '%H:%M')
    except ValueError:
        return 3
    time = time + ":00"
    r = requests.post(url + "/remove_event", json={"name":
        name, "date": date, "time": time, "uid": user_id,
        "upassw": upassw}, timeout=timeout)
    return r.json()["body"]["response"]

```

```

def get_report():
    """
    Send request to get the report of all the participants
    along with events they are registered in.

    :return: List of tuple containing registry of each
    participant.
    """

    r = requests.get(url + "/get_report", timeout=timeout)
    return r.json()["body"]["response"]

def security(password: str) -> str:
    """
    This function will hash the "password" and return the
    hash.

    :param password: String which will be hashed.
    :return: Hash of the string.
    """

    password = password[::-1]
    password = hashlib.sha224(password.encode()).hexdigest()
    password = password[::-1]
    password = hashlib.sha256(password.encode()).hexdigest()
    password = password[::-1]
    return password

```

## 5.2 Backend

### 5.2.1 Script “backend\_api.py”

```
from flask import Flask, request, jsonify, abort
from flask_cors import CORS
import manage_op as op

app = Flask(__name__)
CORS(app)

# LIST OF FUNCTIONS
# login
# add_user
# add_part
# add_event
# get_events
# mark_entry
# remove_event
# get_report

@app.route('/')
def hello_world():
    """
    It is demo function to test weather server is working or
    not.

    :return: A static string.
    """

    return 'Hello from Flask! This is a test site'
```

```

@app.route('/login', methods=["Post"])
def login():
    """
    This function will verify credentials.
    It requires user id and hashed password.

    :return: "1"/"2" Password match, "0" Wrong password,
    "-1" User dose not exists in JSON format.
    """

    req_data = request.get_json()
    id = req_data["id"]
    passw = req_data["password"]

    # "1"/"2" Password match, "0" Wrong password,
    # "-1" User dose not exists
    permission = op.login(uid=id, passw=passw)

    return jsonify({
        "method": "POST",
        "headers": {
            "content-type": "application/json"
        },
        "body": {
            "permission": permission
        }
    })

```

```

@app.route('/add_user', methods=["Post"])
def add_user():
    """
    Handles the request to add a user.
    It requires user details, their login credentials and
    operator authentication.

    :return: "1" if added, "0" Error (User already exists) in
    JSON format.
    """

    req_data = request.get_json()
    response = "Custom Response"

    e_id = req_data["email_id"]
    passw = req_data["password"]
    phone = req_data["phone"]
    name = req_data["name"]
    perm = req_data["permission"]
    uid = req_data["uid"]
    upassw = req_data["upassw"]

    if op.login(uid=uid, passw=upassw) == 2:
        # "1" if added, "0" if exists
        response = op.add_user(name=name, email_id=e_id,
                               phone=phone, perm=perm,
                               password=passw)
    else:
        abort(404)

```

```

return jsonify({
    "method": "POST",
    "headers": {
        "content-type": "application/json"
    },
    "body": {
        "response": response
    }
})

@app.route('/add_part', methods=["Post"])
def add_part():
    """
    Handles the request to add a participant.
    It requires participant details, events list and operator
    authentication.

    :return: "0" some error / no registration for this
    participant, "1" success, ("2"/"3"/"4") event (1/2/both)
    registered for this participant in JSON format.
    """

    req_data = request.get_json()
    response = "Custom Response"
    e_id = req_data["email_id"]
    events = req_data["events"]
    p_id = req_data["p_id"]
    phone = req_data["phone"]
    name = req_data["name"]
    uid = req_data["uid"]
    upassw = req_data["upassw"]

```

```

if op.login(uid=uid, passw=upassw) >= 1:
    # "0" some error / no registration for this
    # participant, "1" success,
    # ("2"/"3"/"4") event (1/2/both) registered for
    # this participant
    response = op.add_part(p_id=p_id, name=name,
                           email=e_id, phone=phone,
                           events=events)

else:
    abort(404)

return jsonify({
    "method": "POST",
    "headers": {
        "content-type": "application/json"
    },
    "body": {
        "response": response
    }
})

@app.route('/add_event', methods=["Post"])
def add_event():
    """
    Handles the request to add an event.
    It requires event details and operator authentication.

    :return: "1" success, "0" event name exists in JSON
    format.
    """

```



```

req_data = request.get_json()
response = "Custom Response"

date = req_data["date"]
time = req_data["time"]
name = req_data["name"]
uid = req_data["uid"]
upassw = req_data["upassw"]

if op.login(uid=uid, passw=upassw) >= 1:
    # "1" success, "0" event name exists
    response = op.add_event(name=name, date=date,
                           time=time)
else:
    abort(404)

return jsonify({
    "method": "POST",
    "headers": {
        "content-type": "application/json"
    },
    "body": {
        "response": response
    }
})

```

```

@app.route('/get_events')
def get_events():
    """
    Handles the request for list of events.

    :return: List of events in JSON format.
    """

    # list of tuple(event_id and name)
    response = op.get_events()

    return jsonify({
        "method": "POST",
        "headers": {
            "content-type": "application/json"
        },
        "body": {
            "response": response
        }
    })

@app.route('/mark_entry', methods=["Post"])
def mark_entry():
    """
    Handles the request to mark entry of a participant in a
    event.

    It requires participant ID, event name and operator
    authentication.

    :return: "0" Not Registered, "1" Registered, "2"
    Participant already entered in JSON format.
    """

```

```
req_data = request.get_json()
response = "Custom Response"

p_id = req_data["p_id"]
event = req_data["event"]
uid = req_data["uid"]
upassw = req_data["upassw"]

if op.login(uid=uid, passw=upassw) >= 1:
    # "0" Not Registered, "1" Registered, "2" Entered
    response = op.mark_entry(p_id=p_id, event=event)
else:
    abort(404)

return jsonify({
    "method": "POST",
    "headers": {
        "content-type": "application/json"
    },
    "body": {
        "response": response
    }
})
```

```

@app.route('/remove_event', methods=["Post"])
def remove_event():
    """
    Handles the request to remove an event.
    It requires event name and operator authentication.
    :return: "1" success, "0" event participant registered,
    "4" wrong event details in JSON format.
    """
    req_data = request.get_json()
    response = "Custom Response"
    date = req_data["date"]
    time = req_data["time"]
    name = req_data["name"]
    uid = req_data["uid"]
    upassw = req_data["upassw"]

    if op.login(uid=uid, passw=upassw) >= 1:
        # "1" success, "0" event participant registered,
        # "4" wrong event details
        response = op.remove_event(name=name, date=date,
                                   time=time)
    else:
        abort(404)

    return jsonify({
        "method": "POST",
        "headers": {
            "content-type": "application/json"
        },
        "body": {
            "response": response
        }
    })

```

```

@app.route('/get_report')
def get_report():
    """
    Handles the request to remove an event.
    It requires event name and operator authentication.

    :return: List of participant and registered events in JSON
    format.
    """

    # list of tuple(event_id and name)
    response = op.get_report()

    return jsonify({
        "method": "POST",
        "headers": {
            "content-type": "application/json"
        },
        "body": {
            "response": response
        }
    })

if __name__ == "__main__":
    app.run()

```

### 5.2.2 Script “manage\_op.py”

```
import database as db_init
import db_operations as db

# LIST OF FUNCTIONS
# login (uid, passw)
# add_user (name, email_id, password, phone, perm)
# add_part (p_id, name, e_id, phone, events)
# event_registry (p_id, events)
# add_event (name, date, time)
# get_events ()
# mark_entry (p_id, event_id)
# remove_event (name, date, time)
# get_report ()

def login(uid: str, passw: str) -> int:
    """
    Process the login data for database operation.

    :param uid: User ID.
    :param passw: Hash of password of user.
    :return: "1"/"2" Password match, "0" Wrong password,
    "-1" User dose not exists.
    """

    try:
        users = db.get_user()
    except:
        db_init.db_init()
        users = db.get_user()
```

```

    for i in users:
        if i[0] == uid:
            # User email exists
            if passw == i[1]:
                # "1"/"2" Password match
                return i[2]
            # "0" Wrong password
            return 0
    # "-1" User dose not exists
    return -1

def add_user(name: str, email_id: str, password: str,
phone: str, perm: int) -> int:
    """
    Request database to add new user data.

    :param name: Name of user.
    :param email_id: E-mail ID of user.
    :param password: Hash of password of new user.
    :param phone: Phone number of new user.
    :param perm: Permission level provided to user.
    :return: "1" if added, "0" Error (user already exists).
    """

    success = db.add_user(name=name, email=email_id,
                           phone=phone, passw=password,
                           perm=perm)

    # "1" if added, "0" if exists
    return success

```

```

def add_part(p_id: str, name: str, email: str, phone: str, events: str) -> int:
    """
    Process participant data to add into database.

    :param p_id: Participant ID.
    :param name: Participant name.
    :param email: Participant E-mail ID.
    :param phone: Participant phone number.
    :param events: List of events in which participant needs
    to register.
    :return: "0" some error, "1" success, ("2"/"3"/"4") event
    (1/2/both) registered for this participant.
    """

    if name == "":
        resp = db.check_part(p_id)
        if resp == 0:
            # No registration for this participant
            return 0
        else:
            # Registering participant
            status = db.add_participant(
                p_id=p_id, name=name, email=email, phone=phone)
            if status == 0:
                # User exists
                p_id = db.get_pid(phone)

            # "0" some error, "1" success, ("2"/"3"/"4") event
            # (1/2/both) registered for this participant
            return event_registry(p_id=p_id, events=events)

```



```

def event_registry(p_id: str, events: str) -> int:
    """
    Process data to register participant in each event.

    :param p_id: Participant ID.
    :param events: List of events in which participant needs
    to register.
    :return: "0" some error, "1" success, ("2"/"3"/"4") event
    (1/2/both) registered for this participant.
    """

    ex_event = []
    for i in events:
        # Registering participant in selected events
        e_id = db.get_event_id(i)
        resp = db.get_reg(p_id=p_id, event_id=e_id[0][0])
        if resp == 0:
            resp = db.add_reg(p_id=p_id, event_id=e_id[0][0])
            if resp == 0:
                return 0
            ex_event.append(0)
        else:
            ex_event.append(1)

    # "0" some error, "1" success, ("2"/"3"/"4") event
    # (1/2/both) registered for this participant
    if len(ex_event) == 2:
        if ex_event[0] == 1 and ex_event[1] == 1:
            return 4
        elif ex_event[0] == 1:
            return 2
        elif ex_event[1] == 1:
            return 3

```

```

        elif ex_event[0] == 1:
            return 4
        return 1

def add_event(name: str, date: str, time: str) -> int:
    """
    Request database to add new event.

    :param name: Name of event.
    :param date: Date of event.
    :param time: Time of event.
    :return: "1" success, "0" event name exists.
    """

    resp = db.add_event(name=name, date=date, time=time)
    # "1" success, "0" event name exists
    return resp

def get_events() -> [str]:
    """
    Request database for list of events.

    :return: List of events.
    """

    events = db.get_events()
    # list of tuple(name)
    return events

```

```

def mark_entry(p_id: str, event: str) -> int:
    """
    Mark entry of a participant into to the event.

    :param p_id: Participant ID.
    :param event: Event name.
    :return: "0" Not Registered, "1" Registered, "2" Entered.
    """

    event_id = db.get_event_id(event)

    resp = db.get_reg(p_id=p_id, event_id=event_id[0][0])
    if resp == 1:
        db.mark_entry(p_id=p_id, event_id=event_id[0][0])
    # "0" Not Registered, "1" Registered, "2" Entered
    return resp


def remove_event(name: str, date: str, time: str) -> int:
    """
    Remove an event from database.

    :param name: Name of event.
    :param date: Date of event.
    :param time: Time of event.
    :return: "1" success, "0" event participant registered,
    "4" wrong event details.
    """

    resp = db.remove_event(name=name, date=date, time=time)
    # "1" success, "0" event participant registered, "4" wrong
    # event details
    return resp

```

```
def get_report() -> [[str]]:
    """
    Return the list of participant data and events they are
    registered in.

    :return: List of participant data.
    """

    return db.get_report()
```

### 5.2.3 Script “db\_operations.py”

```
import mysql.connector

# LIST OF FUNCTIONS
# sql_connect ()
# add_event (name, date, time)
# add_participant (p_id, name, email, phone)
# add_user (name, email, phone, passw, perm)
# add_reg (p_id, event_id)
# get_event_id (name)
# get_events ()
# get_user ()
# get_reg (p_id, event_id)
# get_pid (phone)
# remove_event (name, date, time)
# get_report ()
# mark_entry (p_id, event_id)
# check_part (p_id)

def sql_connect():
    """
    Make a connection to the database.

    :return: database name, Cursor object of database,
    connector of database.
    """

    mydb = mysql.connector.connect(

        host="KKSJmp.mysql.pythonanywhere-services.com",
        user="KKSJmp",
        password="*****"

    )
```

```

mycursor = mydb.cursor()
db_name = "minor_db"
return db_name, mycursor, mydb

def add_event(name: str, date: str, time: str) -> int:
    """
    Command database to add an event.

    :param name: Name of event.
    :param date: Date of event.
    :param time: Time of event.
    :return: "1" success, "0" event name exists.
    """

    db_name, mycursor, mydb = sql_connect()
    mycursor.execute("USE " + db_name)

    # Date "yyyy-mm-dd" Time "hh:mm:ss"
    try:
        sql = "INSERT INTO events (name, date, time)
              VALUES (%s, %s, %s)"
        val = (name, date, time)
        mycursor.execute(sql, val)

        mydb.commit()
        return 1
    except:
        # Name already exists
        return 0

```

```

def add_participant(p_id: str, name: str, email: str,
phone: str) -> int:
    """
    Command database to add a new participant.

    :param p_id: Participant ID.
    :param name: Participant name.
    :param email: Participant E-mail ID.
    :param phone: Participant phone number.
    :return: "0" some error, "1" success.
    """

    db_name, mycursor, mydb = sql_connect()
    mycursor.execute("USE " + db_name)

    try:
        sql = "INSERT INTO participants (p_id, name, email_id,
            phone) VALUES (%s, %s, %s, %s)"
        val = (p_id, name, email, phone)
        mycursor.execute(sql, val)

        mydb.commit()
        return 1
    except:
        # Participant already exists
        return 0

```

```

def add_user(name: str, email: str, phone: str, passw: str,
perm: int) -> int:
    """
    Command database to add a new user.

    :param name: Name of user.
    :param email: E-mail ID of user.
    :param passw: Hash of password of new user.
    :param phone: Phone number of new user.
    :param perm: Permission level provided to user.
    :return: "1" if added, "0" Error (user already exists).
    """

    db_name, mycursor, mydb = sql_connect()
    mycursor.execute("USE " + db_name)
    phone = str(phone)
    passw = str(passw)

    try:
        sql = "INSERT INTO user (name, email_id, phone,
            password, permission) VALUES (%s, %s, %s, %s, %s)"
        val = (name, email, phone, passw, perm)
        mycursor.execute(sql, val)

        mydb.commit()
        return 1
    except:
        # E-mail already exists
        return 0

```



```

def add_reg(p_id: str, event_id: str) -> int:
    """
    Command database to register a participant in an event.

    :param p_id: Participant ID.
    :param event_id: Event ID.
    :return: "0" some error, "1" success.
    """

    db_name, mycursor, mydb = sql_connect()
    mycursor.execute("USE " + db_name)

    try:
        sql = "INSERT INTO registration (p_id, event_id,
            present) VALUES (%s, %s, %s)"
        val = (p_id, event_id, 1)
        mycursor.execute(sql, val)
        mydb.commit()
        return 1
    except:
        # p_id or event_id incorrect
        return 0

```

```

def get_event_id(name: str) -> int:
    """
    Retrieve event ID from database using the event name.

    :param name: Event name.
    :return: Event ID.
    """

    db_name, mycursor, mydb = sql_connect()
    mycursor.execute("USE " + db_name)

    sql = "SELECT event_id FROM events WHERE name = \"\"
        + name + "\""
    mycursor.execute(sql)
    myresult = mycursor.fetchall()
    return myresult

def get_events() -> [str]:
    """
    Retrieve List of events from database.

    :return: List of events.
    """

    db_name, mycursor, mydb = sql_connect()
    mycursor.execute("USE " + db_name)

    mycursor.execute("SELECT name FROM events")
    myresult = mycursor.fetchall()
    return myresult

```

```

def get_user() -> [[str]]:
    """
    Retrieve e-mail id, password and permission level of user
    from database.

    :return: List of e-mail id, password and permission level
    of all users.
    """

    db_name, mycursor, mydb = sql_connect()
    mycursor.execute("USE " + db_name)

    mycursor.execute("SELECT email_id, password, permission
    FROM user")
    myresult = mycursor.fetchall()
    return myresult

def get_reg(p_id: str, event_id: str) -> int:
    """
    Retrieve entry detail of a participant in a particular
    event.

    :param p_id: Participant ID.
    :param event_id: Event ID.
    :return: "1" Not Entered, "2" Entered, "0" Dose not exist.
    """

    db_name, mycursor, mydb = sql_connect()
    mycursor.execute("USE " + db_name)
    event_id = str(event_id)

```

```

try:
    sql = "SELECT present FROM registration WHERE p_id =
           %s AND event_id = %s"
    val = (p_id, event_id)
    mycursor.execute(sql, val)
    myresult = mycursor.fetchall()
    return myresult[0][0]
except:
    # Dose not exist
    return 0

def get_pid(phone: str) -> str:
    """
    Retrieve participant id of a participant from phone number

    :param phone: Phone number of participant.
    :return: Participant ID.
    """

    db_name, mycursor, mydb = sql_connect()
    mycursor.execute("USE " + db_name)
    phone = str(phone)

    mycursor.execute("SELECT p_id FROM participants WHERE
    phone = " + phone)
    myresult = mycursor.fetchall()
    return myresult[0][0]

```

```

def remove_event(name: str, date: str, time: str) -> int:
    """
    Command database to delete an event.

    :param name: Name of event.
    :param date: Date of event.
    :param time: Time of event.
    :return: "1" success, "0" event participant registered,
    "4" wrong event details.
    """

    db_name, mycursor, mydb = sql_connect()
    mycursor.execute("USE " + db_name)

    # Date "yyyy-mm-dd" Time "hh:mm:ss"
    try:
        sql = "DELETE FROM events WHERE name = %s AND date = %s AND time = %s"
        val = (name, date, time)
        mycursor.execute(sql, val)
        mydb.commit()

        if mycursor.rowcount == 0:
            # no change
            return 4
        return 1
    except:
        # Someone is registered
        return 0

```

```

def get_report() -> [[str]]:
    """
    Retrieve participant details and events they registered in
    from database.

    :return: List of participant details.
    """

    db_name, mycursor, mydb = sql_connect()
    mycursor.execute("USE " + db_name)

    sql = "SELECT `" + db_name + "`.`participants`.*,
        GROUP_CONCAT(`" + db_name + "`.`events`.name, `" +
        db_name + "`.`registration`.present) as \"events\"
    FROM ((`" + db_name + "`.`participants` INNER JOIN `"
    + db_name + "`.`registration` ON `" + db_name +
    "`.`participants`.p_id = `" + db_name +
    "`.`registration`.p_id) INNER JOIN `" + db_name +
    "`.`events` ON `" + db_name + "`.`events`.event_id
    = `" + db_name + "`.`registration`.event_id)
    group by p_id;"
    mycursor.execute(sql)
    myresult = mycursor.fetchall()
    return myresult

def mark_entry(p_id: str, event_id: str):
    """
    Command database to mark a participant entry in a event.

    :param p_id: Participant ID.
    :param event_id: Event ID.
    """

```

```

db_name, mycursor, mydb = sql_connect()
mycursor.execute("USE " + db_name)

sql = "UPDATE `" + db_name + "`.`registration` SET
      `present` = '2' WHERE p_id = %s AND event_id = %s"
val = (p_id, event_id)
mycursor.execute(sql, val)
mydb.commit()

def check_part(p_id: str) -> int:
    """
    Retrieve all details of participant from database.

    :param p_id: Participant ID.
    :return: List of details of participant.
    """

    db_name, mycursor, mydb = sql_connect()
    mycursor.execute("USE " + db_name)

    sql = "SELECT * FROM participants WHERE p_id = \"\" +
          p_id + "\""
    mycursor.execute(sql)
    mycursor.fetchall()

    return mycursor.rowcount

```

#### 5.2.4 Script “database.py”

```
import mysql.connector
import hashlib
# SHA hash algorithms.

def db_init():
    """
    This function initializes the database and all the tables
    required in it.
    First Administrator is automatically added.
    Tables: User, Participant, Events, Registration.
    """

    mydb = mysql.connector.connect(
        host="KKSJmp.mysql.pythonanywhere-services.com",
        user="KKSJmp",
        password="*****"
    )

    db_name = 'minor_db'

    mycursor = mydb.cursor()

    mycursor.execute("SHOW DATABASES")

    # Creating Database
    ls = []
    for x in mycursor:
        ls.append(x[0])
```



```

if db_name in ls:
    # DB present
    mycursor.execute("USE " + db_name)
else:
    # new db
    mycursor.execute("CREATE DATABASE " + db_name)
    # DB created
    mycursor.execute("USE " + db_name)

# Creating User Table
mycursor.execute("SHOW TABLES")
user_table = "user"

ls = []
for x in mycursor:
    ls.append(x[0])

if user_table not in ls:
    # User not present
    mycursor.execute("CREATE TABLE `" + db_name +
        "`.`user` (`User_id` INT AUTO_INCREMENT NOT NULL,
        `name` VARCHAR(50) NOT NULL, `Email_id` VARCHAR(45)
        NOT NULL, `Phone` VARCHAR(15) NOT NULL,
        `Password` VARCHAR(100) NOT NULL,
        `Permission` INT NOT NULL, PRIMARY KEY (`User_id`),
        UNIQUE INDEX `Email_id_UNIQUE` (`Email_id` ASC),
        UNIQUE INDEX `User_id_UNIQUE` (`User_id` ASC));"
    )

    sql = "INSERT INTO user (User_id, name, Email_id,
    Phone, Password, Permission)
    VALUES (%s, %s, %s, %s, %s, %s)"

```

```

password = "*****"
password = password[::-1]
password=hashlib.sha224(password.encode()).hexdigest()
password = password[::-1]
password=hashlib.sha256(password.encode()).hexdigest()
password = password[::-1]
val = (1, "Admin", "admin@*****.com", 1234567890,
password, 2)
mycursor.execute(sql, val)
mydb.commit()

# Creating Participant Table
mycursor.execute("SHOW TABLES")
part_table = "participants"

ls = []
for x in mycursor:
    ls.append(x[0])

if part_table not in ls:
    # part not present
    mycursor.execute("CREATE TABLE `" + db_name +
        "`.`participants` (`p_id` VARCHAR(50) NOT NULL,
        `name` VARCHAR(50) NOT NULL,`Email_id` VARCHAR(45)
        NOT NULL,`Phone` VARCHAR(15) NOT NULL,
        PRIMARY KEY (`p_id`), UNIQUE INDEX `phone_UNIQUE`
        (`phone` ASC),UNIQUE INDEX `idparticipants_UNIQUE`
        (`p_id` ASC));"
    )

```

```

# Creating Events Table
mycursor.execute("SHOW TABLES")
event_table = "events"

ls = []
for x in mycursor:
    ls.append(x[0])

if event_table not in ls:
    # event not present
    mycursor.execute("CREATE TABLE `" + db_name +
        "`.`events` (`event_id` INT NOT NULL AUTO_INCREMENT,
        `name` VARCHAR(50) NOT NULL, `date` DATE NOT NULL,
        `time` TIME NOT NULL, PRIMARY KEY (`event_id`),
        UNIQUE INDEX `name_UNIQUE` (`name` ASC),
        UNIQUE INDEX `event_id_UNIQUE` (`event_id` ASC));"
    )

# Creating Registration Table
mycursor.execute("SHOW TABLES")
reg_table = "registration"

ls = []
for x in mycursor:
    ls.append(x[0])

```

```

if reg_table not in ls:
    # reg not present
    mycursor.execute("CREATE TABLE `" + db_name +
        "`.`registration` (`r_id` INT NOT NULL AUTO_INCREMENT,
        `p_id` VARCHAR(50) NOT NULL, `event_id` INT NOT NULL,
        `present` INT NOT NULL, PRIMARY KEY (`r_id`),
        UNIQUE INDEX `r_id_UNIQUE` (`r_id` ASC),
        INDEX `p_id_idx` (`p_id` ASC),
        INDEX `event_id_idx` (`event_id` ASC),
        CONSTRAINT `p_id` FOREIGN KEY (`p_id`) REFERENCES
        `" + db_name + "`.`participants` (`p_id`)
        ON DELETE NO ACTION ON UPDATE NO ACTION,
        CONSTRAINT `event_id` FOREIGN KEY (`event_id`)
        REFERENCES `" + db_name + "`.`events` (`event_id`)
        ON DELETE NO ACTION ON UPDATE NO ACTION);"
    )

```

### 5.2.5 WSGI configuration file: kksjminorproject\_pythonanywhere\_com\_wsgi.py

```
# This file contains the WSGI configuration required
# to serve up your web application at
# http://<your-username>.pythonanywhere.com/
# It works by setting the variable 'application' to a
# WSGI handler of some description.
#
# The below has been auto-generated for your Flask project

import sys

# add your project directory to the sys.path
project_home = '/home/KKSJmp/mysite'
if project_home not in sys.path:
    sys.path = [project_home] + sys.path

# import flask app but need to call it "application" for
# WSGI to work
from backend_api import app as application # noqa
```

## 5.3 Database

### 5.3.1 Database Script

```
-- Show version of mysql components
SHOW VARIABLES LIKE "%version%";

-- DEVELOPMENT COMPONENTS
-- +-----+-----+
-- | Variable_name | Value |
-- +-----+-----+
-- | immediate_server_version | 999999 |
-- | innodb_version | 8.0.19 |
-- | original_server_version | 999999 |
-- | protocol_version | 10 |
-- | slave_type_conversions | |
-- | tls_version | TLSv1,TLSv1.1,TLSv1.2,TLSv1.3 |
-- | version | 8.0.19 |
-- | version_comment | MySQL Community Server - GPL |
-- | version_compile_machine | x86_64 |
-- | version_compile_os | Win64 |
-- | version_compile_zlib | 1.2.11 |
-- +-----+-----+

-- PRODUCTION COMPONENTS
-- +-----+-----+
-- | Variable_name | Value |
-- +-----+-----+
-- | innodb_version | 5.6.48 |
-- | protocol_version | 10 |
-- | slave_type_conversions | |
-- | version | 5.6.48-log |
-- | version_comment | Source distribution |
-- | version_compile_machine | x86_64 |
-- | version_compile_os | Linux |
-- +-----+-----+

-- Create a database.
CREATE DATABASE minor_DB;

-- Show all databases.
SHOW DATABASES;
```

```

-- Use "minor_db" database.
USE minor_DB;

-- Create user table
-- It is used to store user details.
CREATE TABLE `user` (
    `User_id` INT AUTO_INCREMENT NOT NULL,
    `name` VARCHAR(50) NOT NULL,
    `Email_id` VARCHAR(45) NOT NULL,
    `Phone` VARCHAR(15) NOT NULL,
    `Password` VARCHAR(100) NOT NULL,
    `Permission` INT NOT NULL,
    PRIMARY KEY (`User_id`),
    UNIQUE INDEX `Email_id_UNIQUE` (`Email_id` ASC),
    UNIQUE INDEX `User_id_UNIQUE` (`User_id` ASC)
);

-- Display list of tables.
SHOW TABLES;

-- Display data of all tables.
SELECT * FROM user;
SELECT * FROM participants;
SELECT * FROM events;
SELECT * FROM registration;

-- Display login credentials of all users.
SELECT email_id, password, permission FROM user;

```

```

-- Display details of participants and events they are
registered in.
SELECT `participants`.*, GROUP_CONCAT(`events`.name,
`registration`.present) as "events" FROM ((`participants`
INNER JOIN `registration` ON
`participants`.p_id = `registration`.p_id)
INNER JOIN `events` ON
`events`.event_id = `registration`.event_id)
group by p_id;

-- Create participants table
-- It is used to store participants details.
CREATE TABLE `participants` (
    `p_id` VARCHAR(50) NOT NULL,
    `name` VARCHAR(50) NOT NULL,
    `Email_id` VARCHAR(45) NOT NULL,
    `Phone` VARCHAR(15) NOT NULL,
    PRIMARY KEY (`p_id`),
    UNIQUE INDEX `phone_UNIQUE` (`phone` ASC),
    UNIQUE INDEX `idparticipants_UNIQUE` (`p_id` ASC)
);

-- Create events table
-- It is used to store event details.
CREATE TABLE `events` (
    `event_id` INT NOT NULL AUTO_INCREMENT,
    `name` VARCHAR(50) NOT NULL,
    `date` DATE NOT NULL,
    `time` TIME NOT NULL,
    PRIMARY KEY (`event_id`),
    UNIQUE INDEX `name_UNIQUE` (`name` ASC),
    UNIQUE INDEX `event_id_UNIQUE` (`event_id` ASC)
);

```



```


-- Create registration table
-- It is used to store participant ID and event ID for each
registration along with entry of participants.
CREATE TABLE `registration` (
    `r_id` INT NOT NULL AUTO_INCREMENT,
    `p_id` VARCHAR(50) NOT NULL,
    `event_id` INT NOT NULL,
    `present` INT NOT NULL,
    PRIMARY KEY (`r_id`),
    UNIQUE INDEX `r_id_UNIQUE` (`r_id` ASC),
    INDEX `p_id_idx` (`p_id` ASC),
    INDEX `event_id_idx` (`event_id` ASC),
    CONSTRAINT `p_id`
        FOREIGN KEY (`p_id`)
        REFERENCES `minor_db`.`participants` (`p_id`)
        ON DELETE NO ACTION
        ON UPDATE NO ACTION,
    CONSTRAINT `event_id`
        FOREIGN KEY (`event_id`)
        REFERENCES `minor_db`.`events` (`event_id`)
        ON DELETE NO ACTION
        ON UPDATE NO ACTION
);

```

## 6. System Implementation


### 6.1 Login

- Opening/starting screen of login

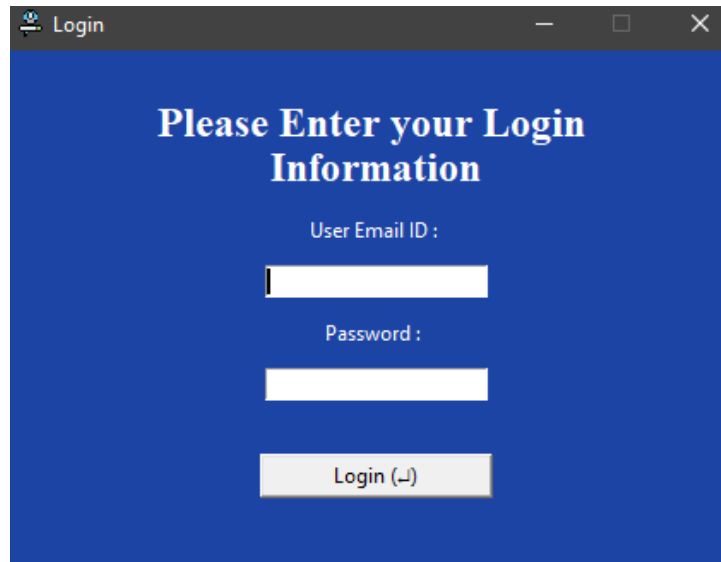


*Figure 12: Login Screen*

- Login attempt without internet

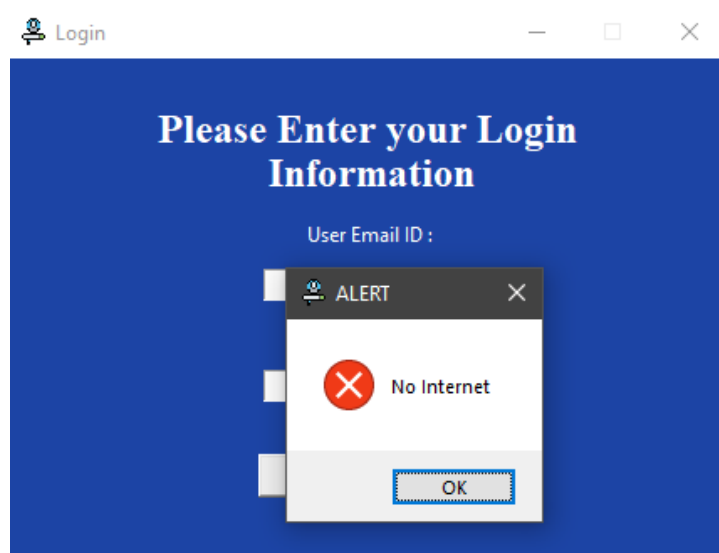


*Figure 13: Login Server Error*

- Login attempt with fields incomplete

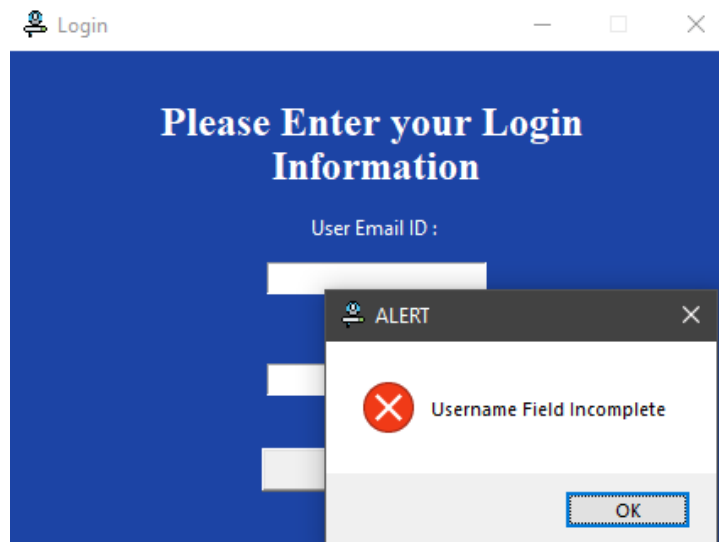


*Figure 14: Login Username Field Incomplete*

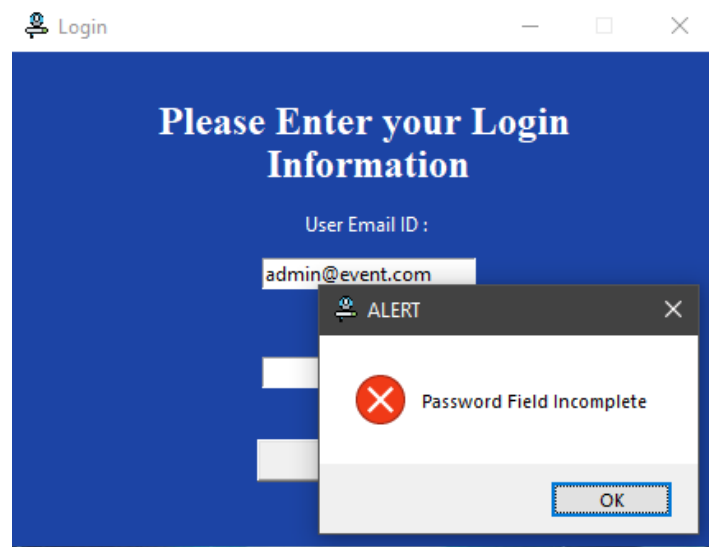

*Figure 15: Login Password Field Incomplete*


- Login attempt with invalid credentials

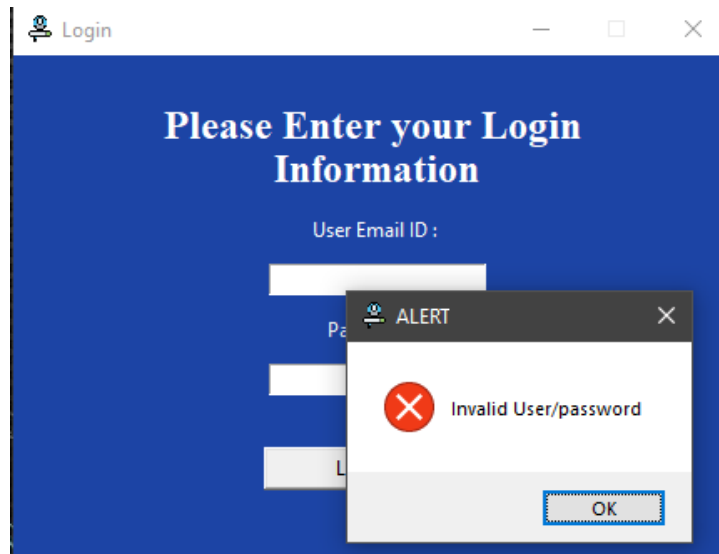

*Figure 16: Login Invalid Credentials*


## 6.2 Login Success

- Admin login success

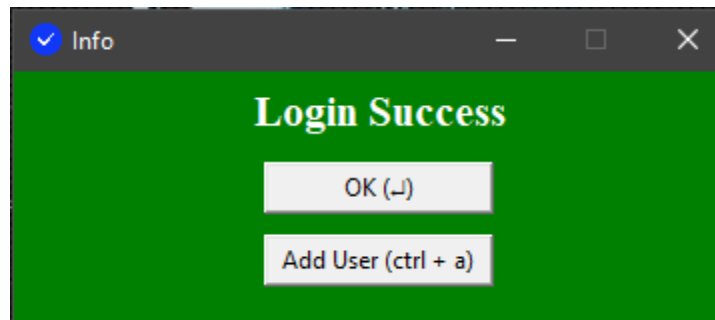

*Figure 17: Admin Login Success*


- User login success

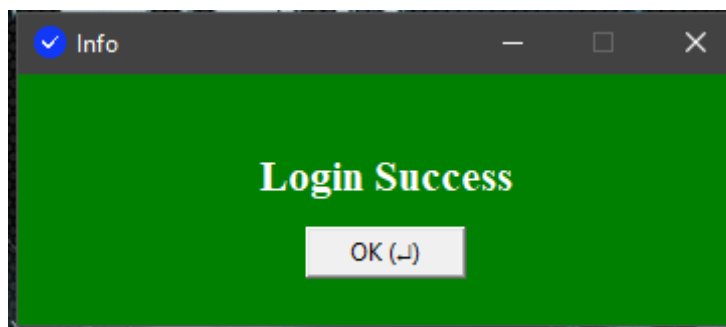

*Figure 18: User Login Success*

### 6.3 User Registration


- Add user (admin feature)

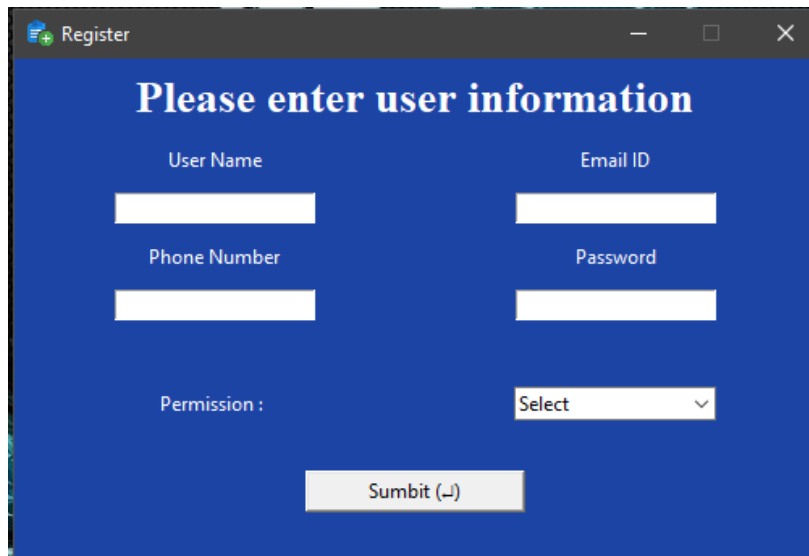

The screenshot shows a window titled "Register" with a blue background. The title bar includes a small icon and the text "Register". The main heading is "Please enter user information". Below this, there are four input fields: "User Name", "Email ID", "Phone Number", and "Password". At the bottom left, there is a "Permission :" label followed by a dropdown menu currently showing "Select". A "Sumbit (-)" button is located at the bottom center.

*Figure 19: Add User*


- Attempt to adding user with invalid email ID

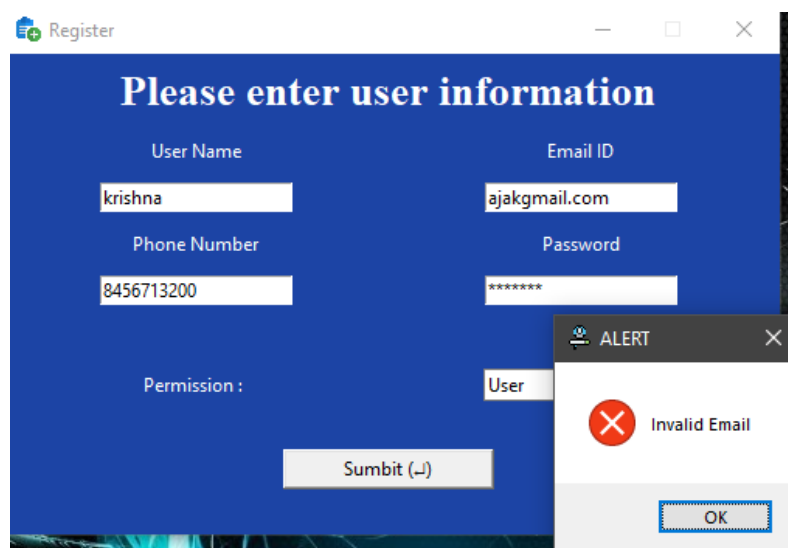

This screenshot shows the same "Register" window as Figure 19, but with data entered in the fields: "User Name" is "krishna", "Email ID" is "ajakgmail.com", "Phone Number" is "8456713200", and "Password" is masked with "\*\*\*\*\*". An "ALERT" dialog box is overlaid on the bottom right, featuring a red "X" icon and the text "Invalid Email". The dialog has an "OK" button at the bottom. The "Sumbit (-)" button is visible on the main form.


*Figure 20: Add User Invalid E-mail*

- Attempt to adding user with invalid phone number

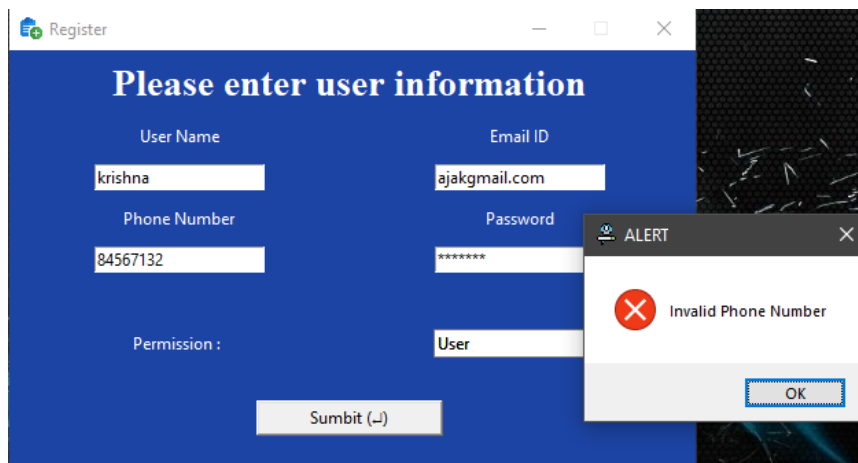


*Figure 21: Add User Invalid Phone Number*

- Attempt to adding user without selecting rights

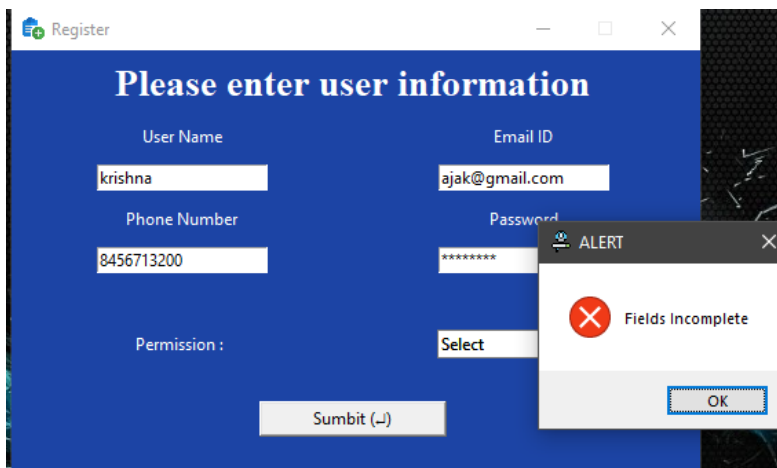


*Figure 22: Add User Fields Incomplete*

- Attempt to adding user without strong password

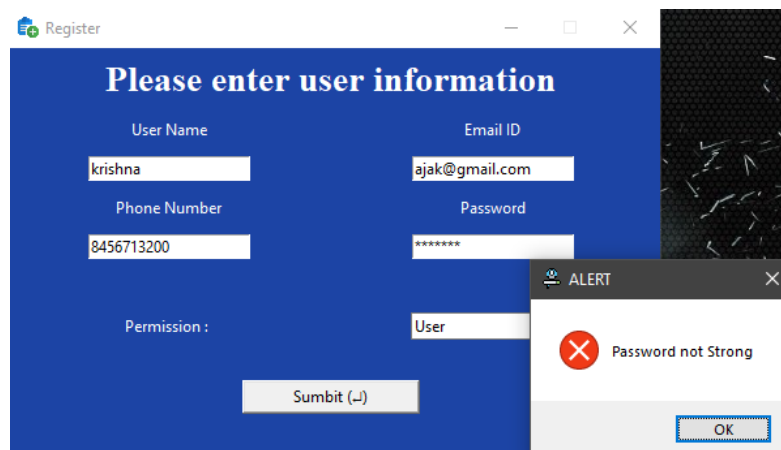

*Figure 23: Add User Invalid Password*


- Attempt to re-add existing user

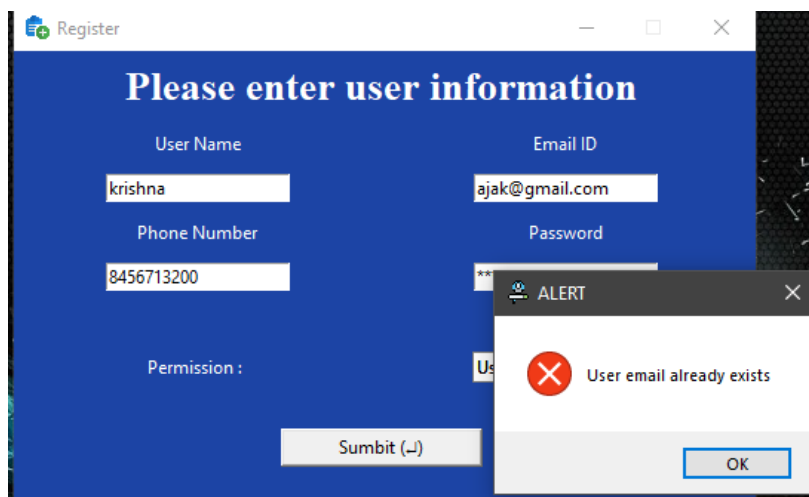

*Figure 24: Add User Error-User Exists*




- User added successful

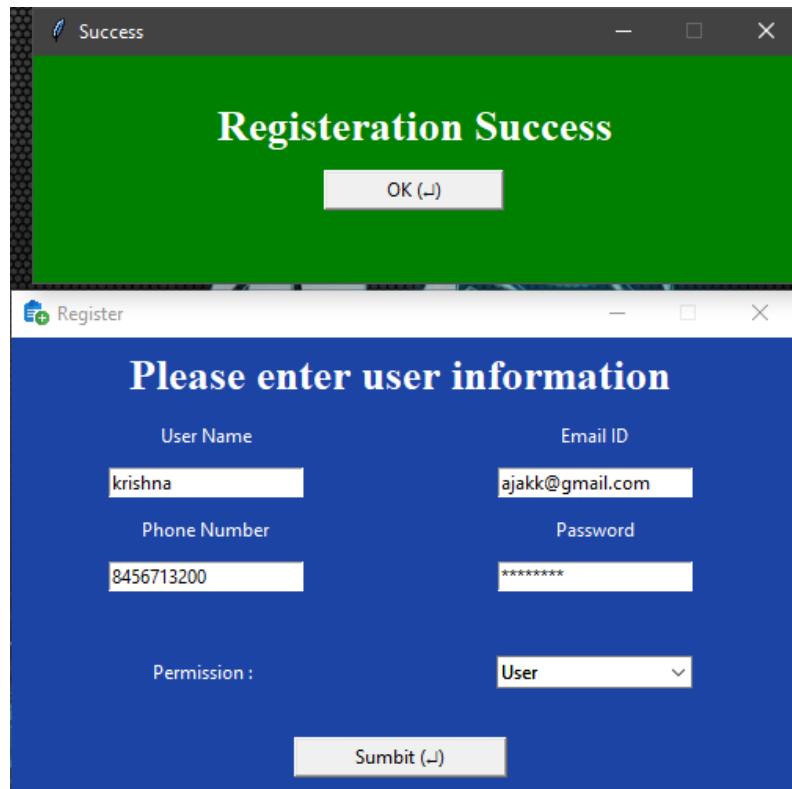

*Figure 25: Add User Successful*

## 6.4 Main Window

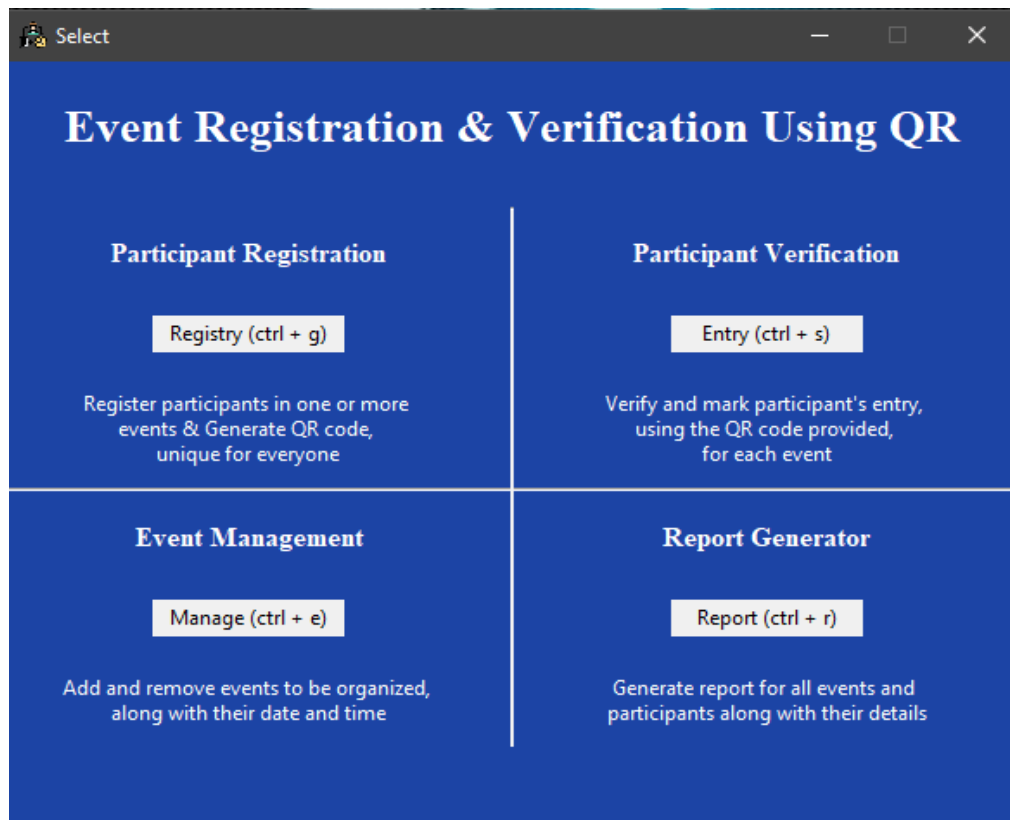

*Figure 26: Main Window*

## 6.5 Event Management Window

- Event management window

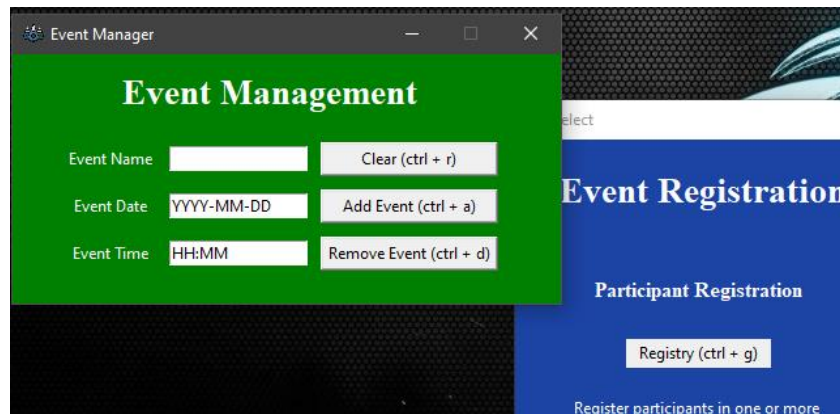


Figure 27: Event Management Window

- Attempt to adding event with incorrect date format


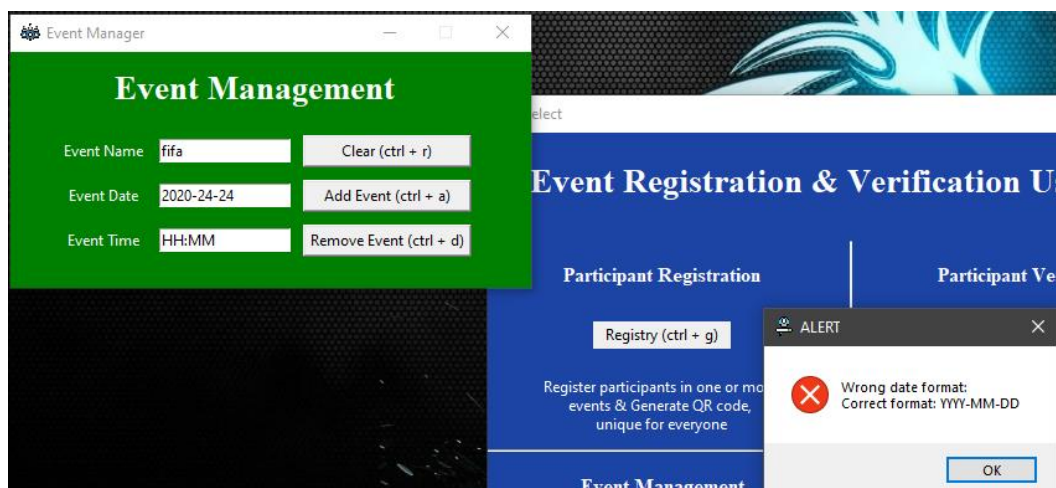



Figure 28: Wrong Date Format

- Attempt to adding event with incorrect time format

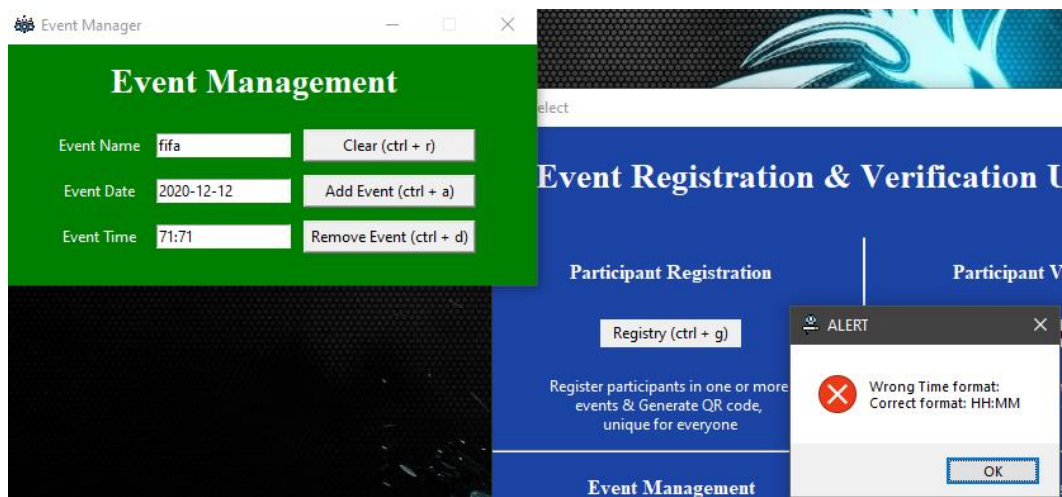


*Figure 29: Wrong Time Format*

- Event Added Successfully

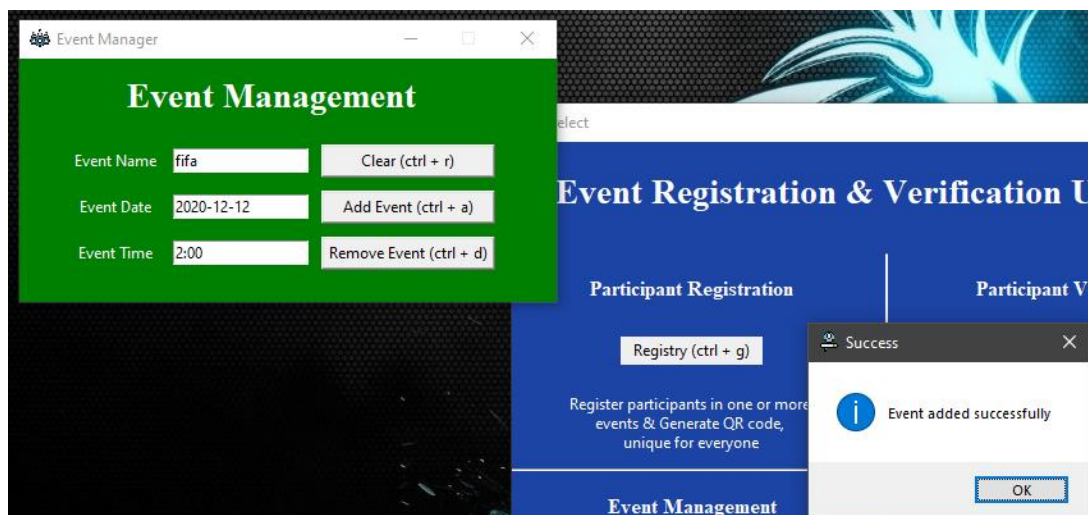


*Figure 30: Event Added Successfully*

- Attempt to re-add existing event

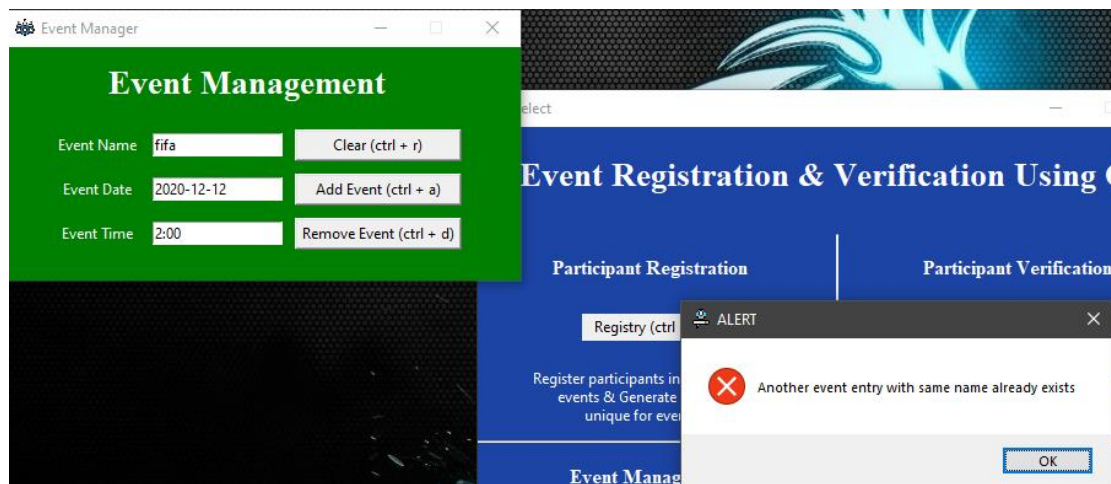


*Figure 31: Error Event Already Exists*

- Removing existing event

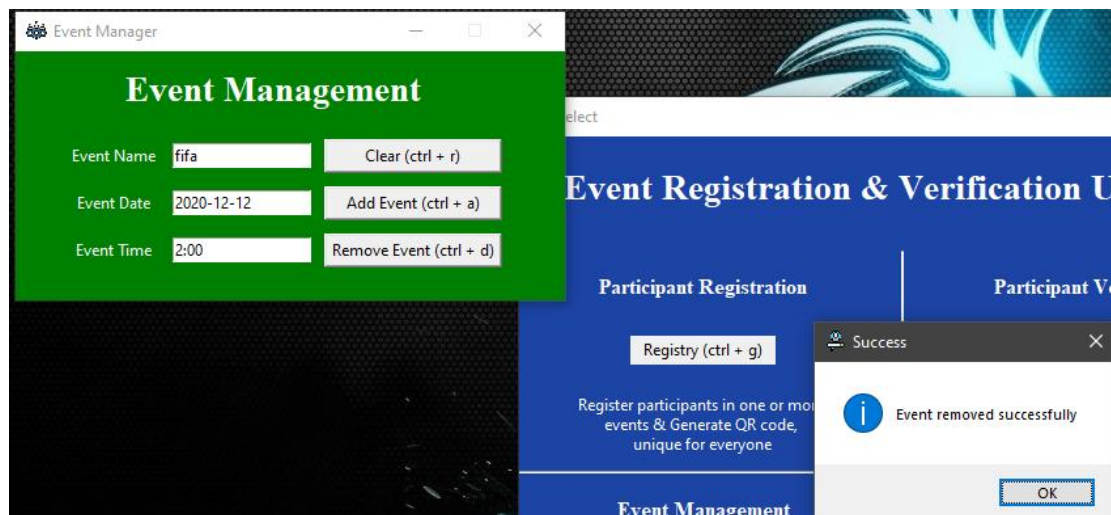


*Figure 32: Event Removed Successfully*

- Attempt to remove non-existing event

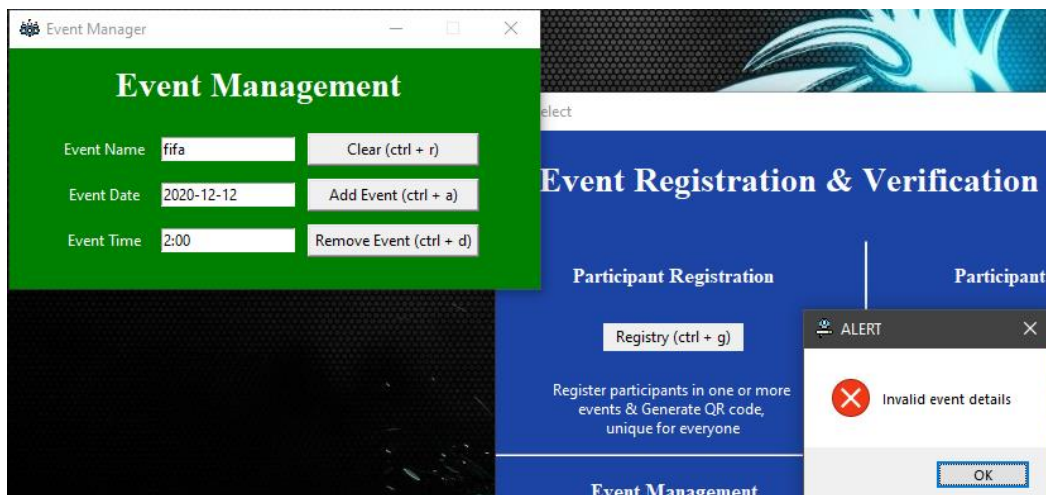


*Figure 33: Error Event does not exist*

- Attempt to remove event with participants registered in it

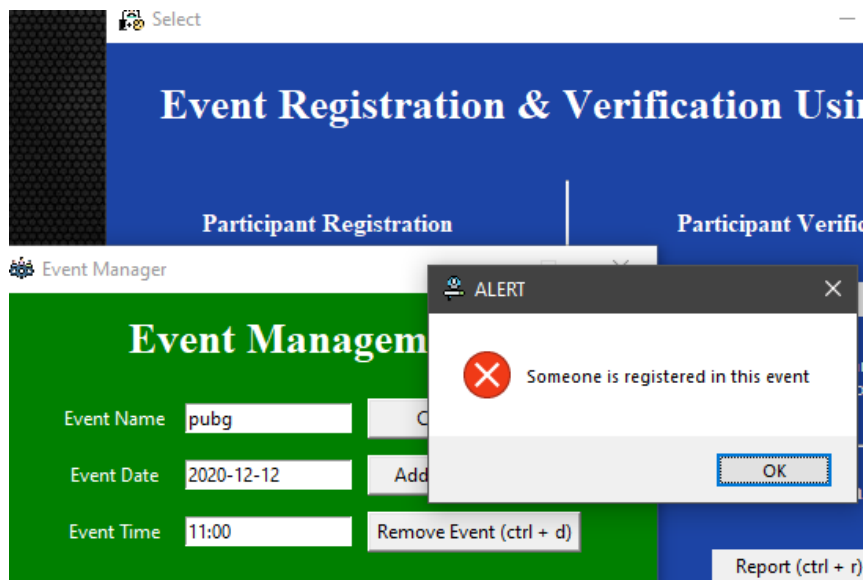

*Figure 34: Error-Event cannot be removed*


- Clear fields

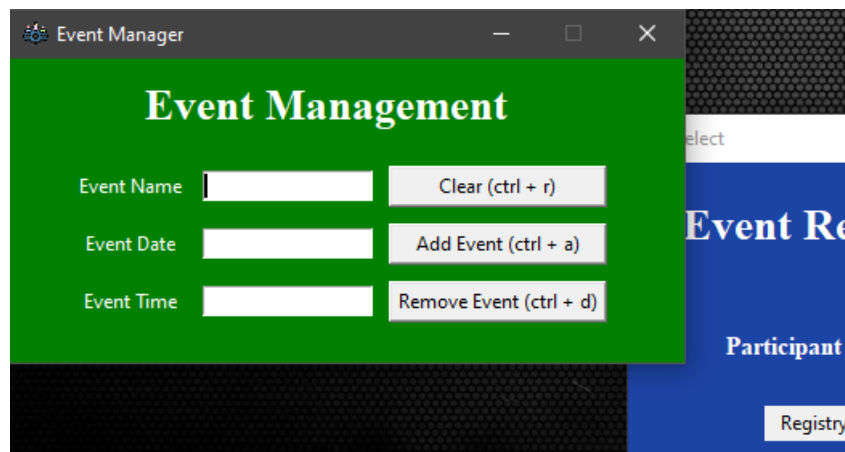

*Figure 35: Cleared Event Fields*

## 6.6 Participant Registration Window


- Registration / QR Generation window

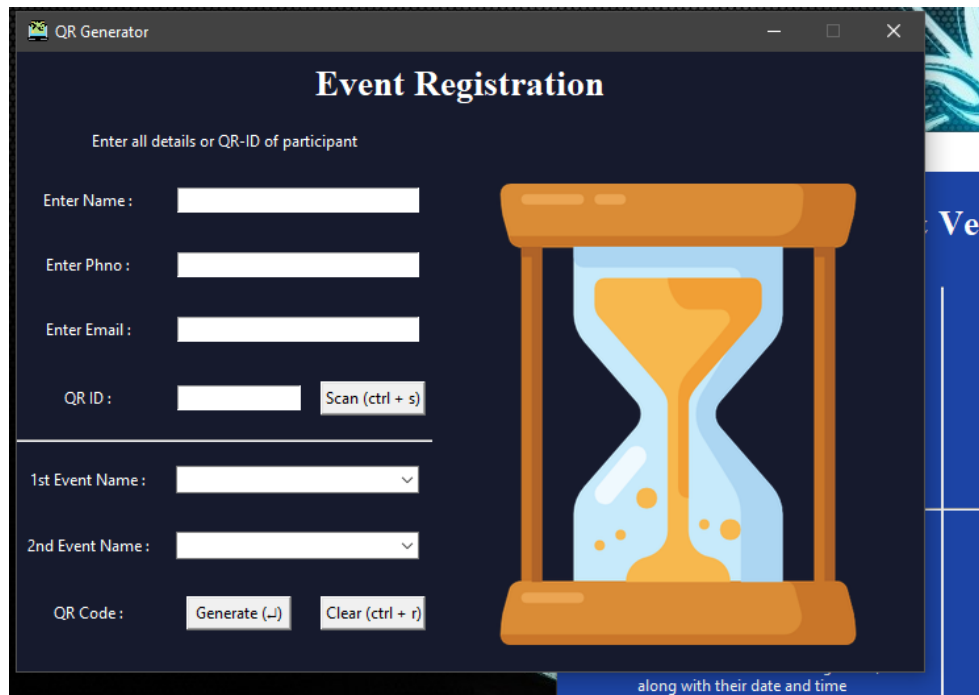

The screenshot shows the 'Event Registration' window of the 'QR Generator' application. The window has a dark blue background with a large orange hourglass graphic on the right. The title bar says 'QR Generator'. The main title is 'Event Registration'. Below the title, it says 'Enter all details or QR-ID of participant'. There are several input fields: 'Enter Name :', 'Enter Phno :', 'Enter Email :', 'QR ID :', '1st Event Name :', and '2nd Event Name :'. The 'QR ID' field has a 'Scan (ctrl + s)' button next to it. At the bottom, there are 'Generate (-)' and 'Clear (ctrl + r)' buttons. A partial view of another window with the word 'Ver' is visible on the right.

Figure 36: Participant Registration Window

- Attempt to adding participant with invalid phone number

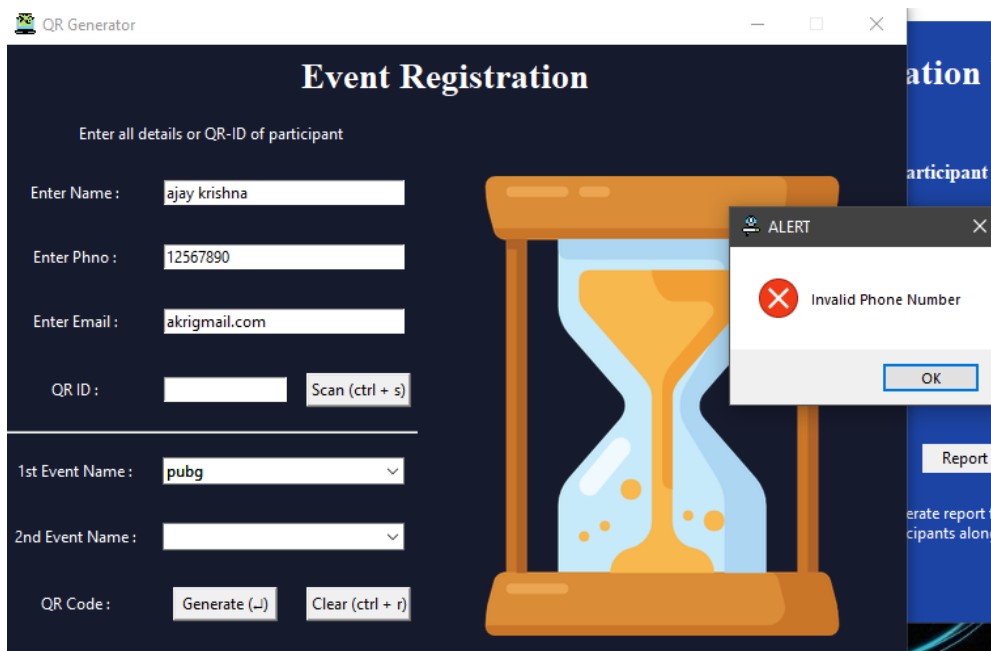


This screenshot shows the same 'Event Registration' window as Figure 36, but with an error message. The input fields are filled with: 'ajay krishna' for Name, '12567890' for Phone Number, and 'akrigmail.com' for Email. The '1st Event Name' dropdown is set to 'pubg'. An 'ALERT' dialog box is overlaid on the window, displaying a red 'X' icon and the text 'Invalid Phone Number'. The dialog has an 'OK' button. The background window shows the same hourglass graphic and buttons as before.

Figure 37: Invalid Participant Phone Number




- Attempt to adding participant with invalid email ID

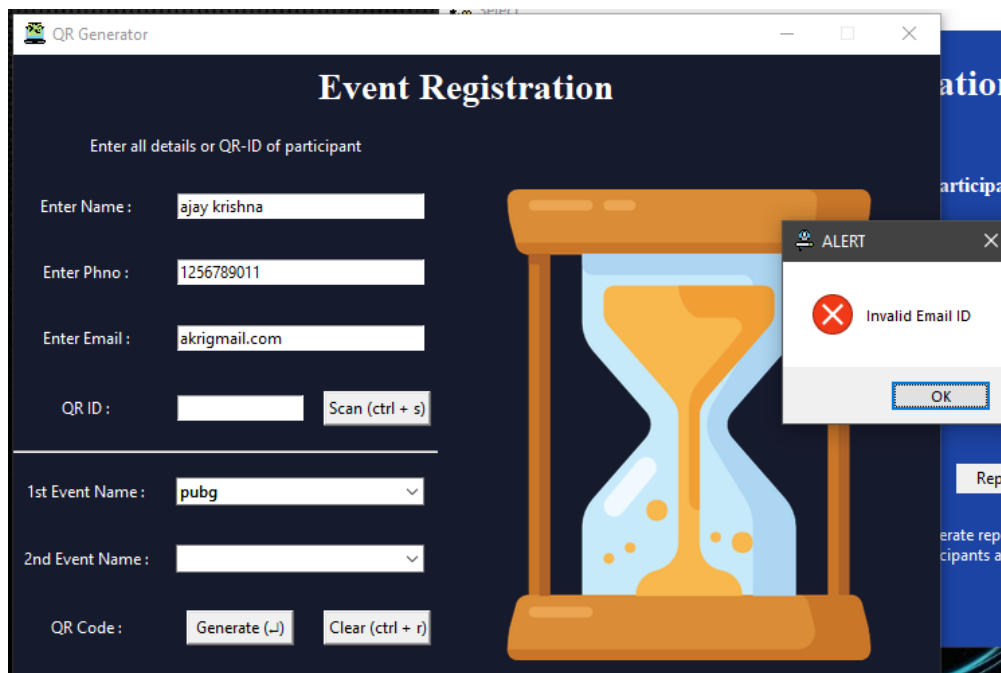


*Figure 38: Invalid Participant E-mail ID*

- Adding participants

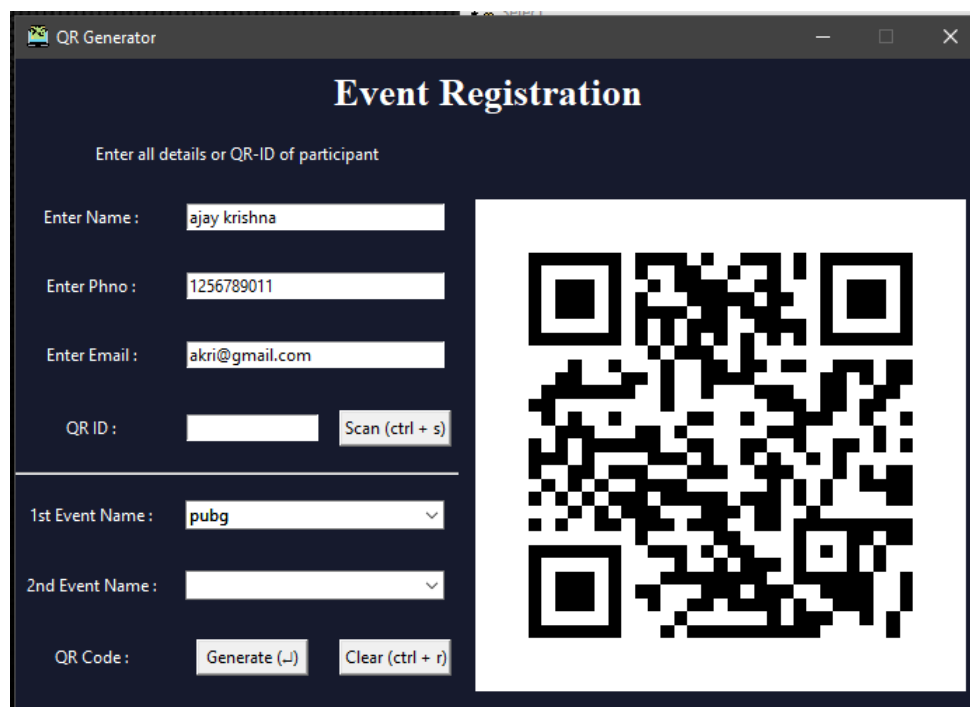

*Figure 39: Participant Added Successfully*

- Clear fields

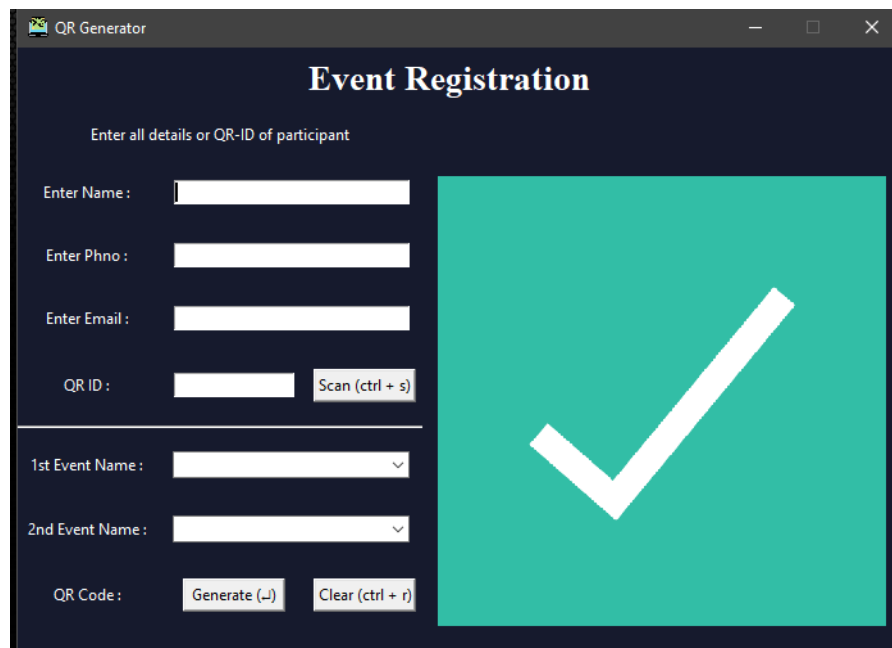

QR Generator

## Event Registration

Enter all details or QR-ID of participant

Enter Name :

Enter Phno :

Enter Email :

QR ID :

---


1st Event Name :

2nd Event Name :

QR Code :

A large green square with a white checkmark is positioned on the right side of the form.

*Figure 40: Cleared Participant fields 1*

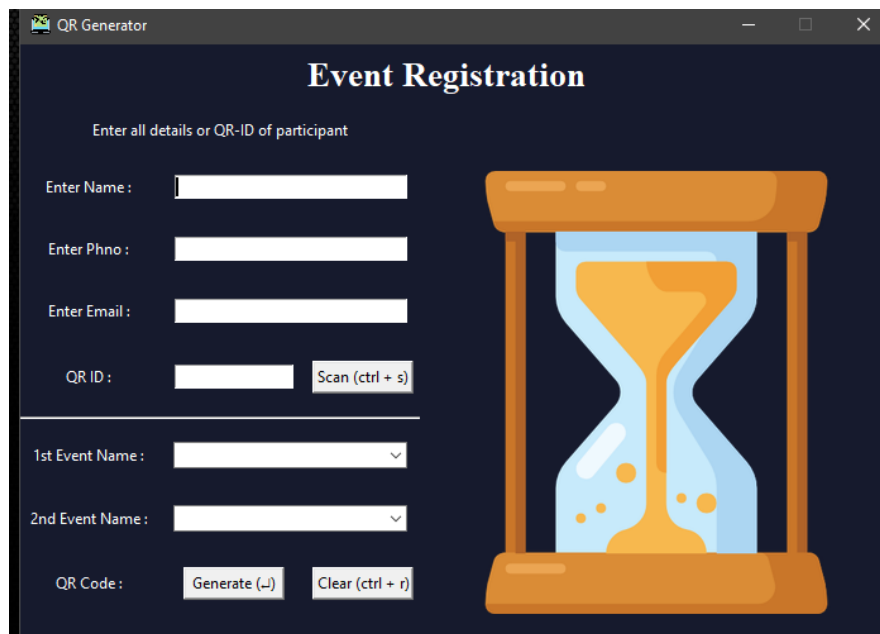

QR Generator

## Event Registration

Enter all details or QR-ID of participant

Enter Name :

Enter Phno :

Enter Email :

QR ID :

---

1st Event Name :

2nd Event Name :

QR Code :

An orange hourglass icon is positioned on the right side of the form.

*Figure 41: Cleared Participant fields 2*

- Attempt to re-add participant without new data

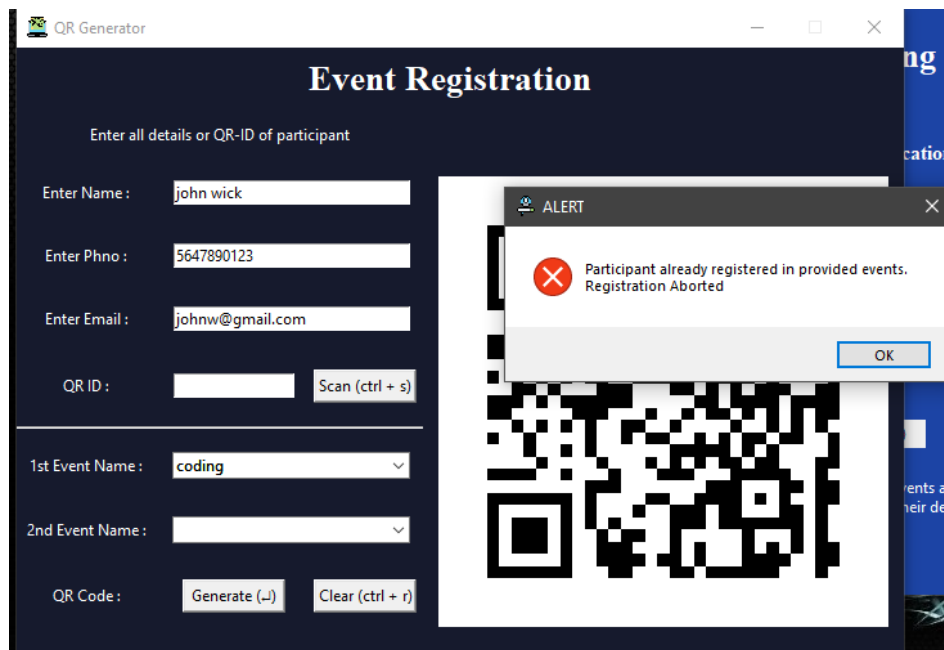


Figure 42: Error-Participant Already Registered in this Event

- Re-adding existing participants to new events

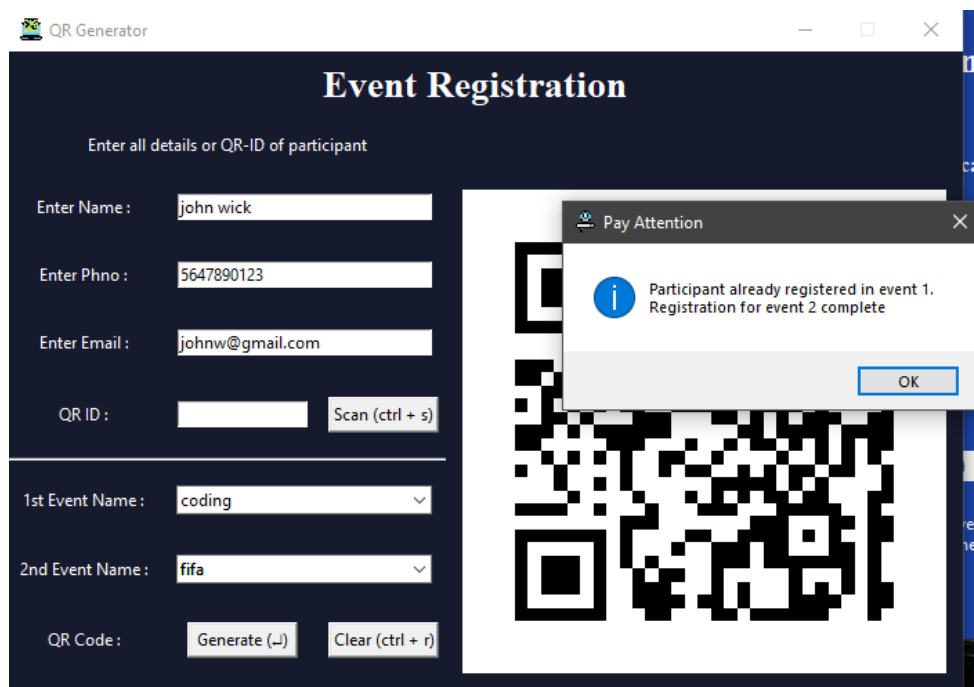


Figure 43: Participant Registered in one of the provided events

- Re-adding existing participants to new events using QR

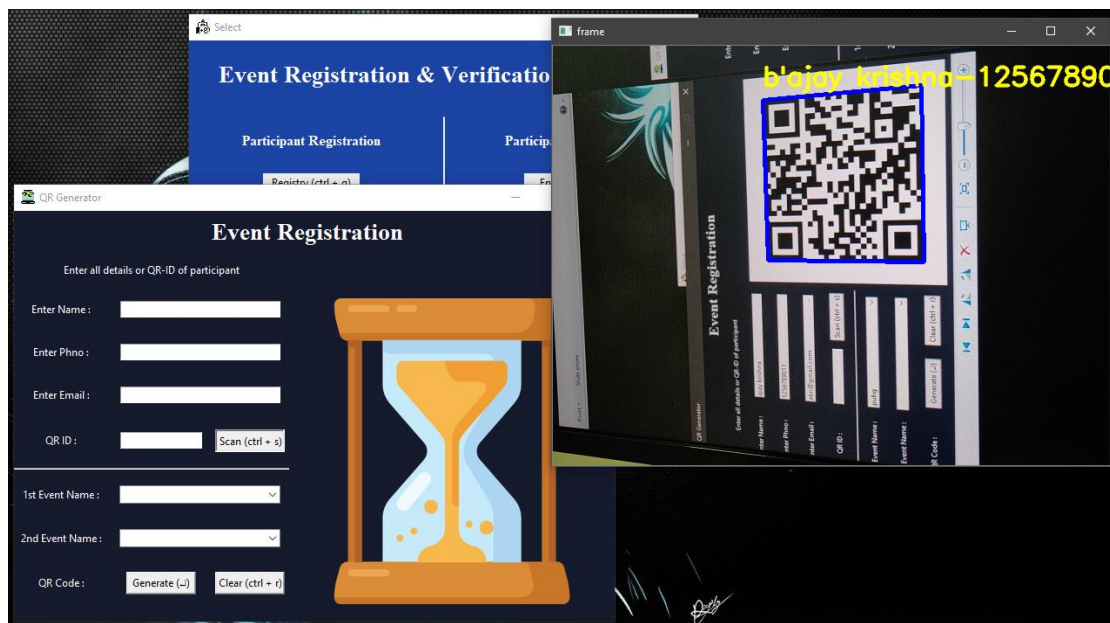


Figure 44: Scanning Existing participant QR code


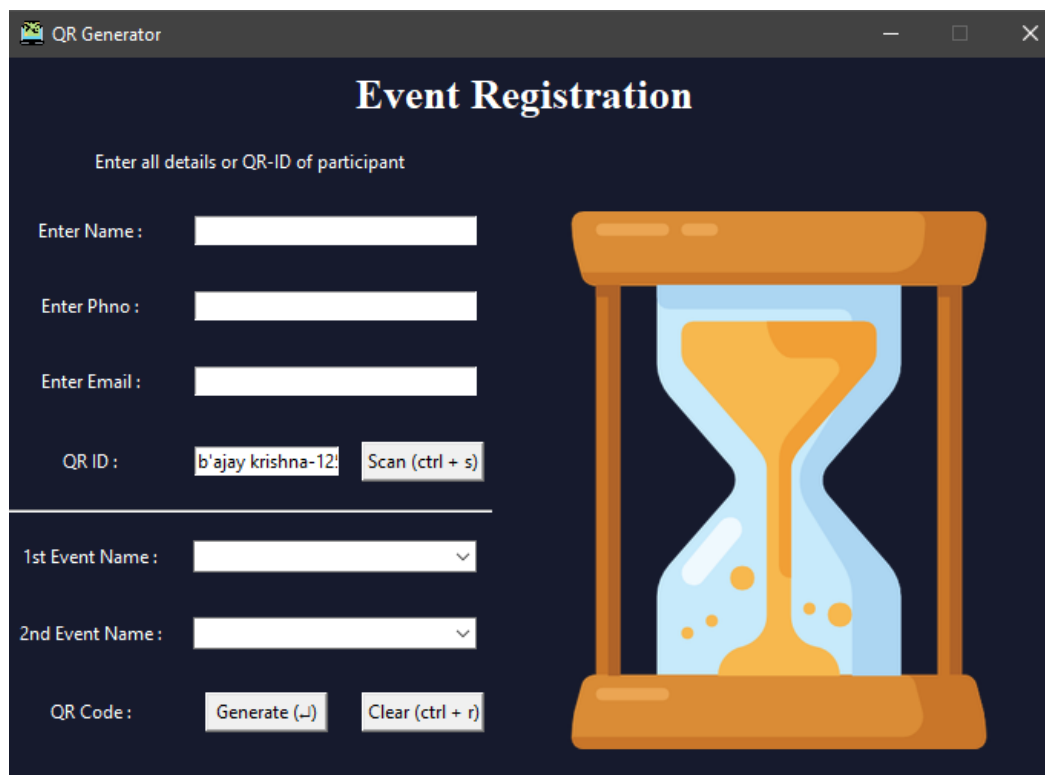


Figure 45: Display QR code value

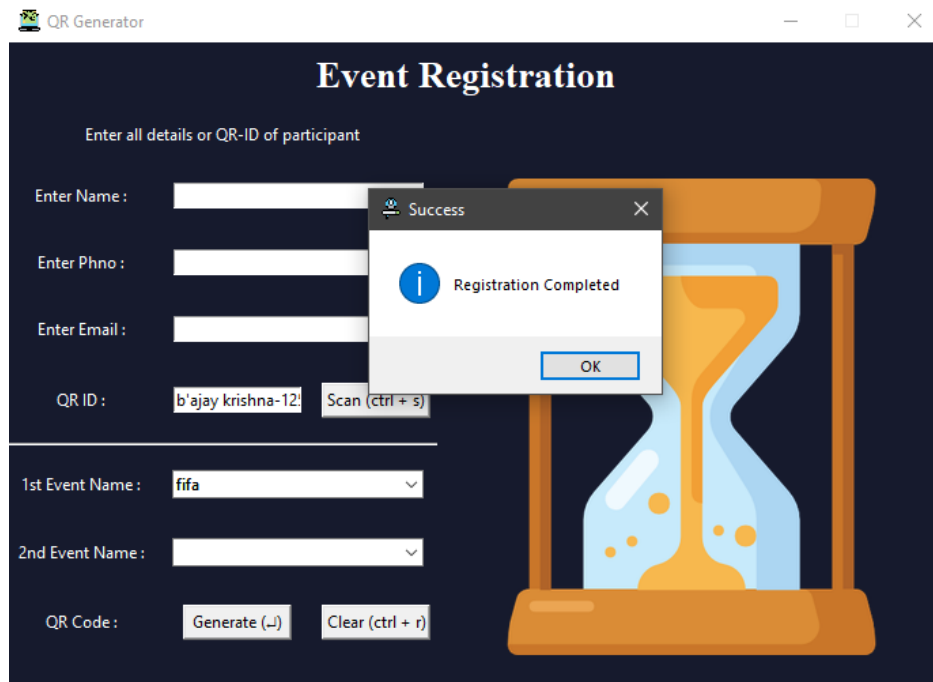

*Figure 46: Participant Registration Successful*

## 6.7 Report Generation

- Report generation

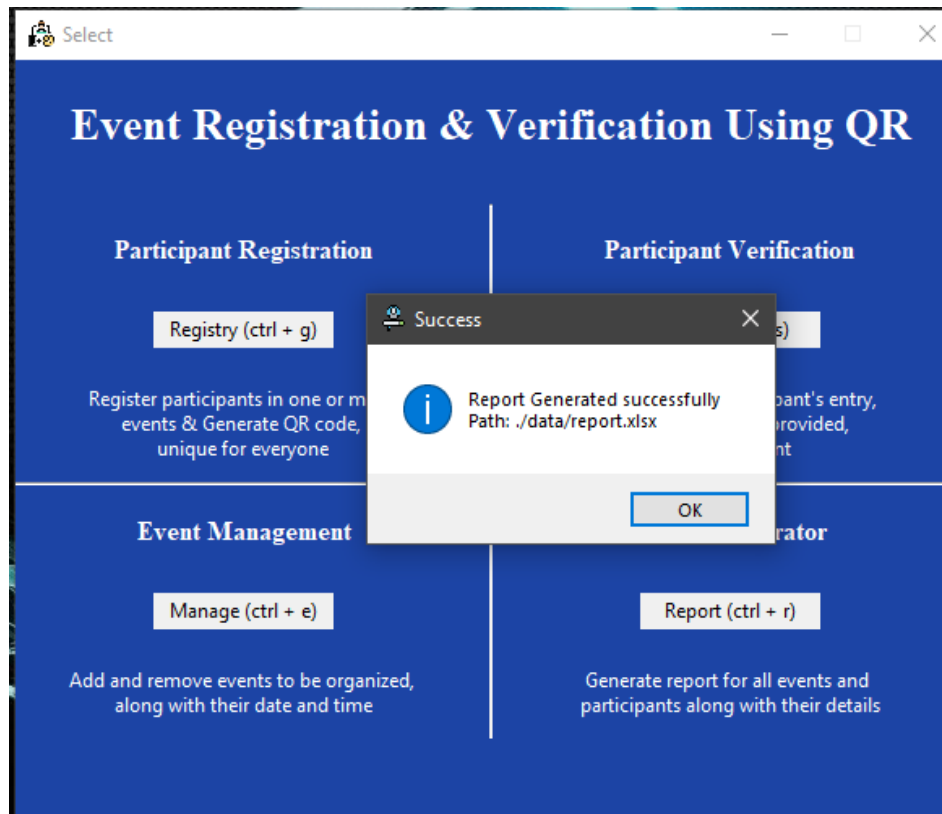


Figure 47: Report Generated Successfully

- Report

report.xlsx - Excel

S.No.	QR ID	Name	E-mail	Phone no.	Event 1	E-1 Entry	Event 2	E-2 Entry	Event 3	E-3 Entry
1	1	ajay krishna-125678901	ajay krishna@gmail.com	1256789011	pubg	Not Entered				
2	2	dummy14-1411111111	dummy14@gmail.com	1411111111	pubg	Entered				
3	3	dumx-5648970321	dasf@gmail.com	5648970321	pubg	Entered				
4	4	fkdlhgwuihdf-5647893	fkdlhgwusdjhfg@cndj.com	5647893210	coding	Not Entered				
5	5	jhklsdf-7896542130	hduis@lknd.com	7896542130	pubg	Not Entered				
6	6	jhsdbfjshdfb-23154678	jhsdbfjshdsfdfsdf@gmail.com	2315467890	coding	Entered	coding	Entered	pubg	Not Entered
7	7	jkdfghkdfjg-512345678	jkdfghkdfjhsdj@mkglf.com	5123456789	coding	Not Entered				
8	8	john wick-5647890123	john wick@gmail.com	5647890123	coding	Not Entered	fifa	Not Entered		

Figure 48: Report Excel File

## 6.8 Participant Entry

- Participant verification & entry window

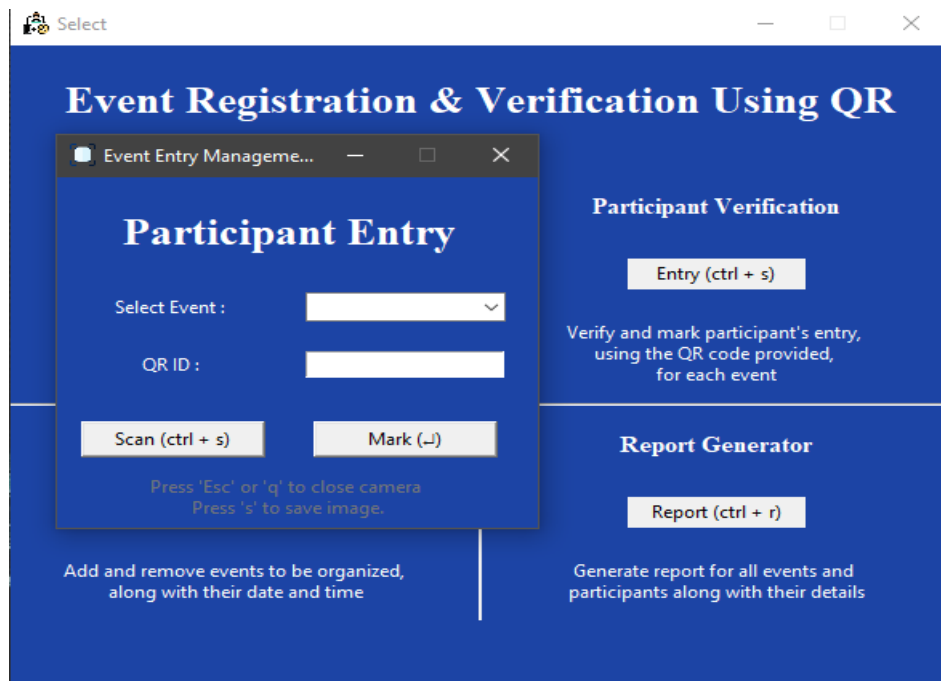


Figure 49: Participant Entry Management

- Attempt to enter with incomplete fields

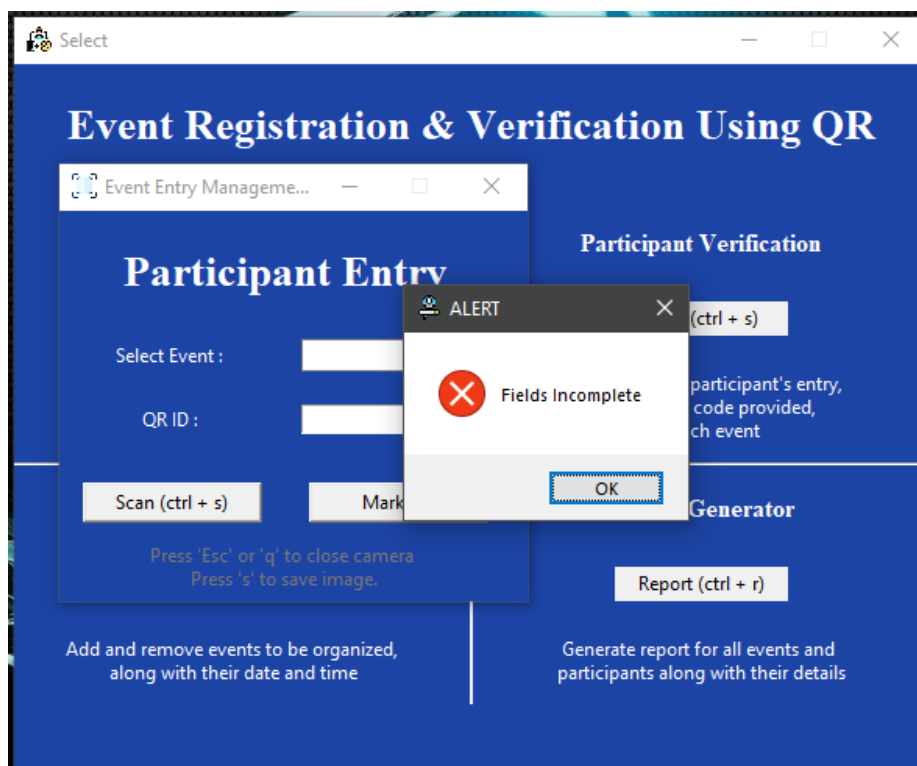


Figure 50: Participant Entry Fields Incomplete

- Scanning & saving a QR

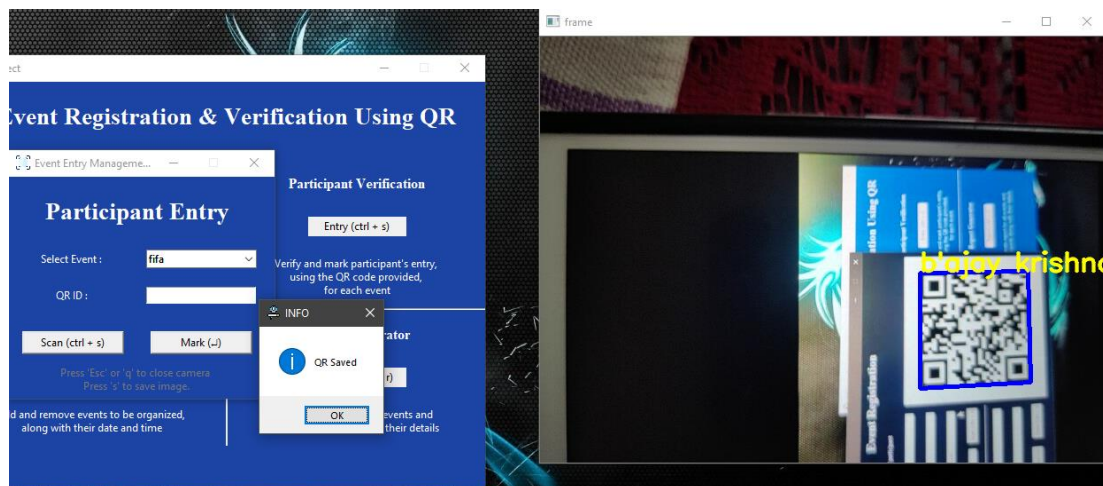


Figure 51: QR Scanned & Saved

- If no QR is found

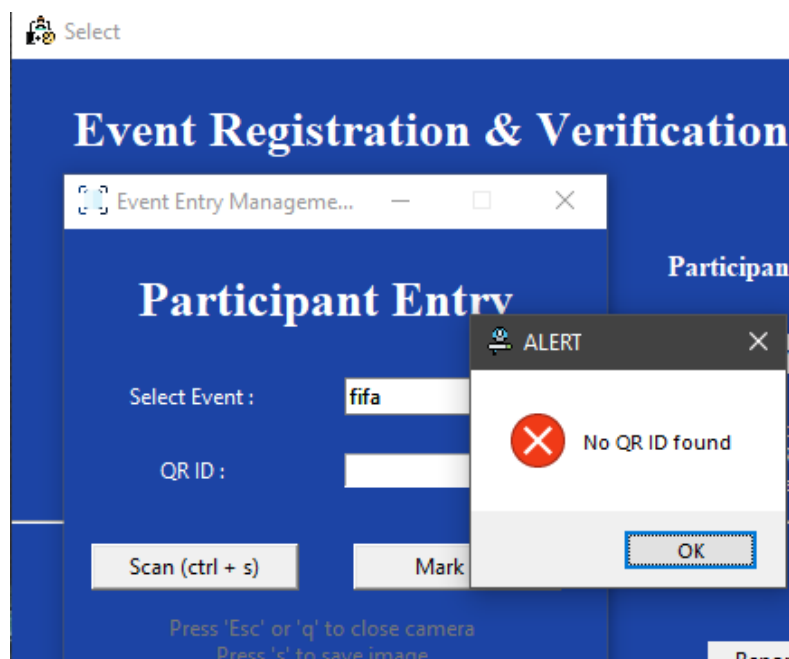


Figure 52: No QR Detected



- If QR is found

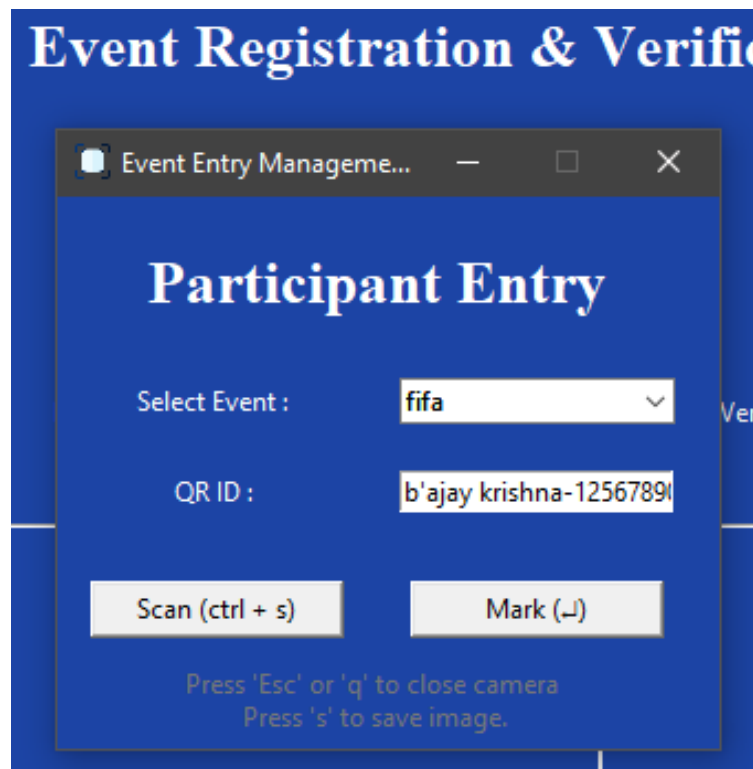


Figure 53: QR code read successfully

- If QR is invalid or not for selected event

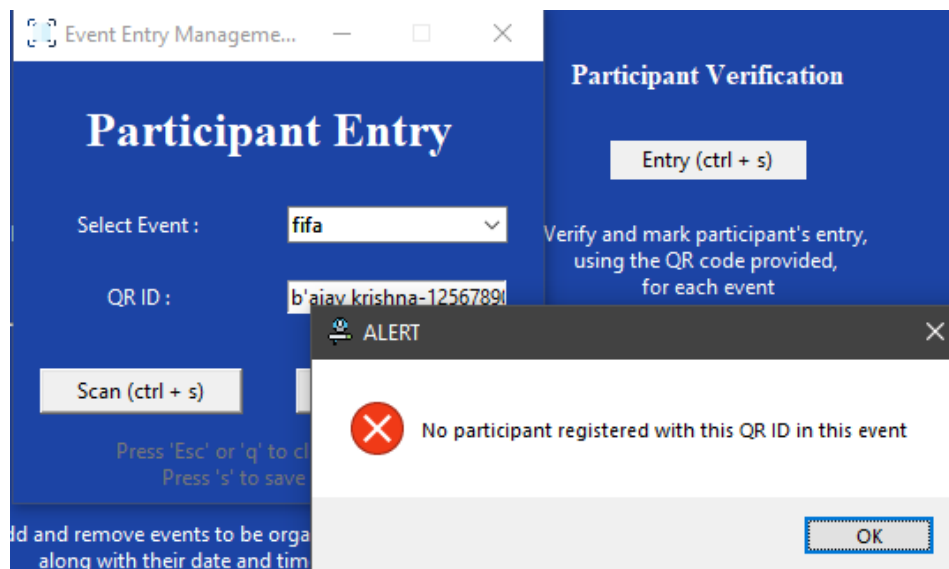


Figure 54: Invalid QR code

- Successful entry

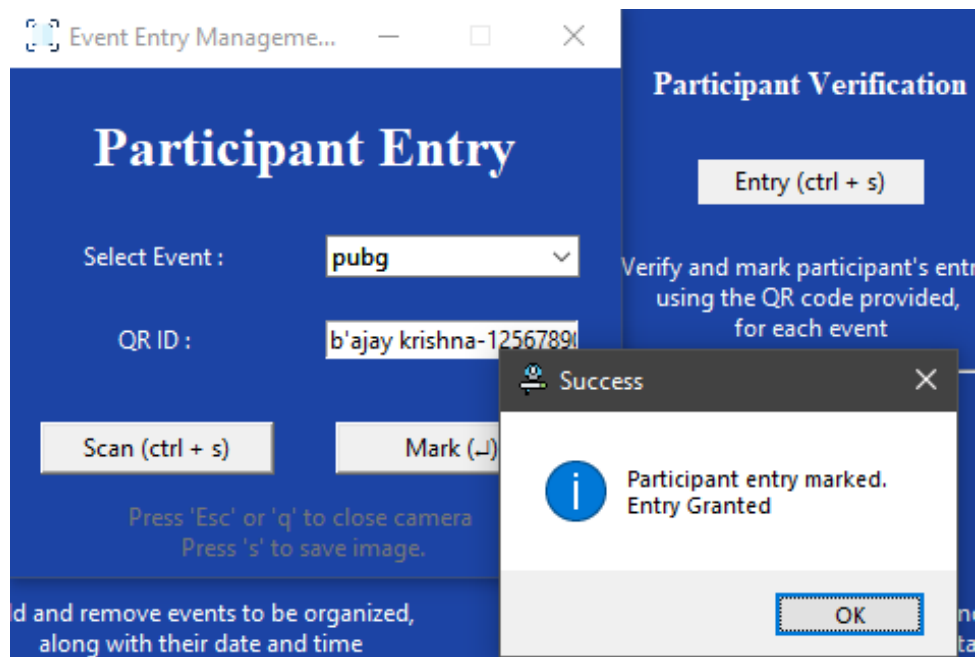


Figure 55: Participant Entry Successful

- Attempt to reuse QR maliciously


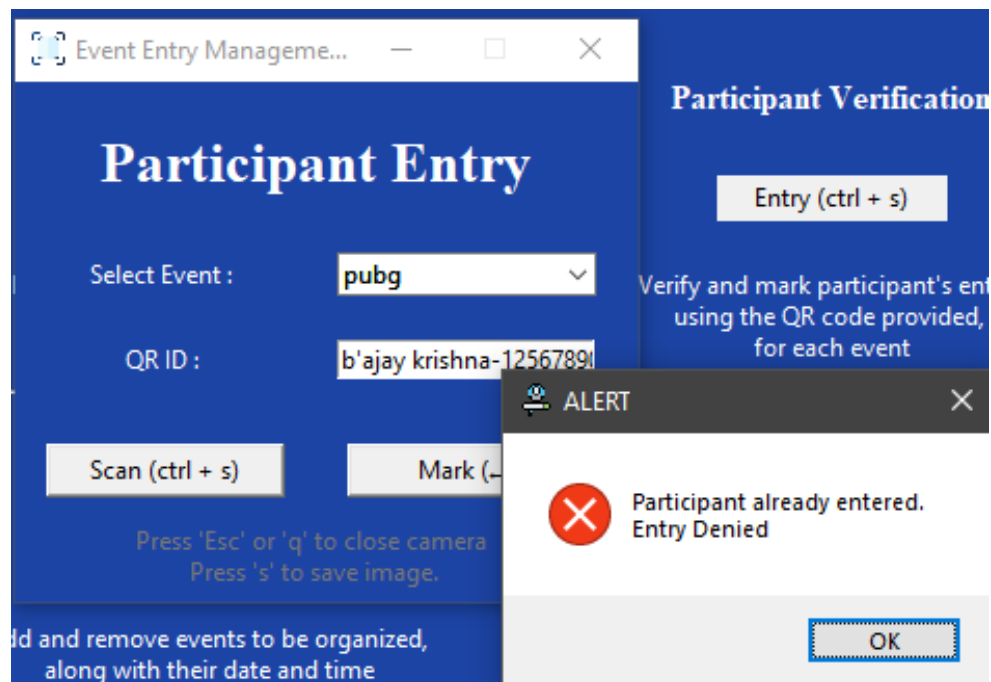


Figure 56: Error-QR code being reused

- After entry has been granted

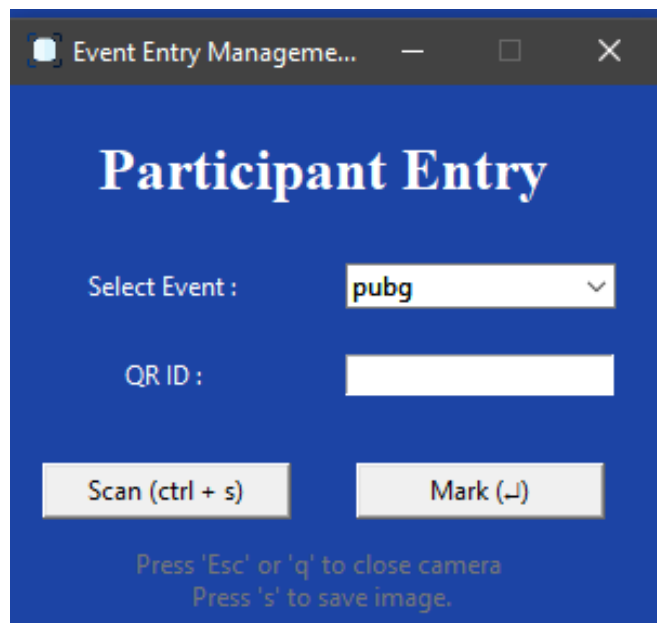

*Figure 57: After granting entry*

## 6.9 Server

- Error in communication with server at any point

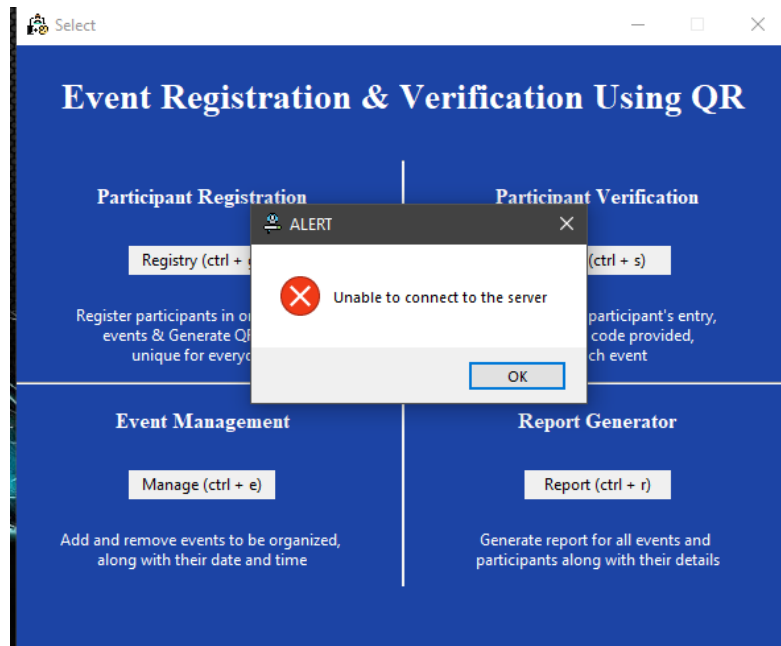


Figure 58: Network Error


- Server handling during any process

```
CA\WINDOWS\system32\cmd.exe
* Serving Flask app "backend_api" (lazy loading)
* Environment: production
  WARNING: This is a development server. Do not use it in a production deployment.
  Use a production WSGI server instead.
* Debug mode: off
* Running on http://127.0.0.1:5000/ (Press CTRL+C to quit)
127.0.0.1 - - [22/Nov/2020 19:47:54] "POST /login HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:48:15] "POST /login HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:50:40] "POST /add_user HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:50:53] "POST /add_user HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:51:17] "GET /get_events HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:53:14] "POST /add_event HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:53:19] "POST /add_event HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:53:36] "POST /remove_event HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:53:48] "POST /remove_event HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:53:54] "POST /add_event HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:55:02] "GET /get_events HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:56:08] "POST /add_part HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:56:13] "POST /add_part HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:56:25] "POST /add_part HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:57:08] "GET /get_events HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 19:58:35] "POST /add_part HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 20:00:27] "POST /add_event HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 20:00:33] "POST /remove_event HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 20:00:44] "GET /get_report HTTP/1.1" 200 -
127.0.0.1 - - [22/Nov/2020 20:00:57] "GET /get_events HTTP/1.1" 200 -
```

Figure 59: Server Log

## 6.10 Database

- Database

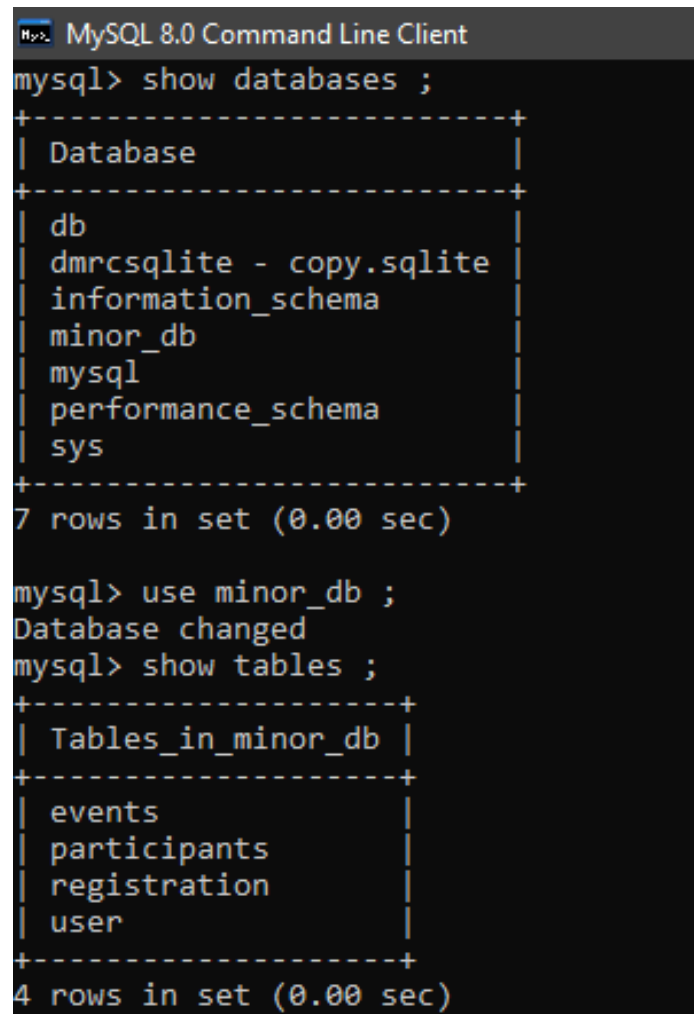

```
MySQL 8.0 Command Line Client
mysql> show databases ;
+-----+
| Database |
+-----+
| db       |
| dmrcsqlite - copy.sqlite |
| information_schema |
| minor_db |
| mysql    |
| performance_schema |
| sys      |
+-----+
7 rows in set (0.00 sec)

mysql> use minor_db ;
Database changed
mysql> show tables ;
+-----+
| Tables_in_minor_db |
+-----+
| events              |
| participants        |
| registration        |
| user                |
+-----+
4 rows in set (0.00 sec)
```

*Figure 60: Database and Tables*

- User table

```
mysql> desc user ;
```

Field	Type	Null	Key	Default	Extra
User_id	int(11)	NO	PRI	NULL	auto_increment
name	varchar(50)	NO		NULL	
Email_id	varchar(45)	NO	UNI	NULL	
Phone	varchar(15)	NO		NULL	
Password	varchar(100)	NO		NULL	
Permission	int(11)	NO		NULL	

6 rows in set (0.00 sec)

Figure 61: User Table Description

```
mysql> select * from user ;
```

User_id	name	Email_id	Phone	Password	Permission
1	Admin	admin@event.com	1234567890	a7407199ac8a922f4bb65f10edb9c43a9c0b1f8b0059b620b0134e41f4c2e98c	2
2	krishnak	ajak@gmail.com	2137896540	a4d62484bb227d18ed9b6829ee52a0db66da84409e97a25cab83f6043bffaef9	1
3	kljhsdnu	jksdf@gmfx.com	6547893201	0cc854506a10053d22ab379a2aad519a36316db8260bf33f83f14031af2680ee	1
4	sdfsdfsdf	sdfsdfsdf@gmail.com	8523164790	55a9587315d16d021607fd36656615747ae714a1e994ef3ead95857888ad3	1
5	hiudrhg	sdhfhj@kbs.com	6578943210	c0df7ee436916fd19c6bd44c7824fa60dc4a7c7067c8e8fec8fccd51c9926743	2
6	fghjgffghj	gfdh@ert.com	9876540123	796c3e228cf2695654f2561f836731263d3e6e2fc266946d21c7f72b2a101655	2
7	yuildfhg	jhksdf@jksdf.com	3210456789	fc955ad92ce787987f1d71f8c8b301bed24bfe28bb666023d82e8a1d4cc3fd11	1
10	yuildfhg	jhkgfhsdf@jhksdf.com	3210456789	fc955ad92ce787987f1d71f8c8b301bed24bfe28bb666023d82e8a1d4cc3fd11	1
12	dfhtyrh	sdf@dfg.com	6541230789	fc955ad92ce787987f1d71f8c8b301bed24bfe28bb666023d82e8a1d4cc3fd11	2
13	dfhygyhkhg	dfiosg@msgol.com	4560321789	fc955ad92ce787987f1d71f8c8b301bed24bfe28bb666023d82e8a1d4cc3fd11	1
14	fhj1hj1	gfghf@ghf.com	3201456789	c92b59641625649bb279c1755b648c10a0cd33bf804b498689529845a38fbabf	2
15	gfhhgjbvbn	nmdfh@jshdfb.com	4560321798	9385cfb09ec90931019477bfec9d8227e2ec1b259dd83a772b1a376a43a532f5	1
16	jkohjk	tduhvb@dfg.com	7890321456	e1ca7d8e9e5a10e3ce74731895d8d0c768cbca5a536a9d6254b407a3afd02ecb	1
17	fgdhjg	diof@jkljsdf.com	3214567980	b7a6071c754a88e60393d77ba5f698ca428a6823f4d610c9be7262dbbe648c6b	1
18	auidfng	jksndf@jkljsd.com	7893245011	46a8fb1ceb42ab9066a850ac7b127aeec2260c6862acfe33b8c1b60f07797019	1
19	njkdrfgjkdf	jhsdf@sndjff.com	7893210604	99851bdf5ae744a3826cd832002409aee4d4c0b72491387632b5ec0015cd3f8d	1
20	ngdrfk	gdff@esd.com	3204569071	30e78ce3a80682ab4c08b09c470325dc09c30812f0b6bf8e8acd991ae73134d	2
22	jkdfhgdfg	jksdf@dsf.com	6540987123	0380c96b78c08037ac60a60d8c27e276d92b2b03ef19cf1251ef7611451d54e5	1
23	hdkfjhg	uisdhf@hkajsd.com	4563210897	77c8d34378ffdb7da8cb91fcc3fbc94fa40908acca0db4d06cc8b53755dc082	2
24	kalsfn	isudhf@jdkfn.com	4560213789	dfa8af382e8e0aa22856fc6bc8d17bb77b31ccab1386ae1c7b62f6dbba4ac0e0d	1
25	john wick	wick99@gmail.com	5647890321	0380c96b78c08037ac60a60d8c27e276d92b2b03ef19cf1251ef7611451d54e5	2
26	johnny	jj@gmail.com	4560231789	e42e61d3de4a1fc09d29a45476c0df0315578c55a71f444745725ba94fe2f432	2
27	hfdkjh	jkas@gmail.com	8795420111	dfd5562bcd058419e2c1f1ce3c548139d90548d73f198a78ea28bd1c9729f8c	1
29	krishna	ajak@gmail.com	8456713200	b11bdefe35782c39102404dfacbdaf854edab18ead2462c49cc03d945d981558	1
30	krishnak	kkrishna@gmail.com	1234567890	0380c96b78c08037ac60a60d8c27e276d92b2b03ef19cf1251ef7611451d54e5	1

25 rows in set (0.00 sec)

Figure 62: User Table Data

- Events table

```
mysql> desc events ;
```

Field	Type	Null	Key	Default	Extra
event_id	int(11)	NO	PRI	NULL	auto_increment
name	varchar(50)	NO	UNI	NULL	
date	date	NO		NULL	
time	time	NO		NULL	

```
4 rows in set (0.00 sec)
```

*Figure 63: Event Table Description*

```
mysql> select * from events ;
```

event_id	name	date	time
3	coding	2020-12-12	02:00:00
6	pubg	2020-12-12	11:00:00
17	fifa	2020-12-12	02:00:00

```
3 rows in set (0.00 sec)
```

*Figure 64: Event Table Data*

- Participants table

```
mysql> desc participants ;
```

Field	Type	Null	Key	Default	Extra
p_id	varchar(50)	NO	PRI	NULL	
name	varchar(50)	NO		NULL	
Email_id	varchar(45)	NO		NULL	
Phone	varchar(15)	NO	UNI	NULL	

```
4 rows in set (0.00 sec)
```

Figure 65: Participants Table Description

```
mysql> select * from participants ;
```

p_id	name	Email_id	Phone
ajay krishna-1256789011	ajay krishna	akri@gmail.com	1256789011
dummy14-1411111111	dummy14	dum14@gmail.com	1411111111
dumx-5648970321	dumx	dasf@gmailc.om	5648970321
fkdjhlhwuihdf-5647893210	fkdjhlhwuihdf	sdjhfg@cndj.com	5647893210
jhklsdf-7896542130	jhklsdf	hduis@lknd.com	7896542130
jhsdbfjshdfb-2315467890	jhsdbfjshdfb	sdfsdfsdf@gmail.com	2315467890
jkdfghkdfjg-5123456789	jkdfghkdfjg	fhsdj@mkglf.com	5123456789
john wick-5647890123	john wick	johnw@gmail.com	5647890123

```
8 rows in set (0.00 sec)
```

Figure 66: Participants Table Data



- Registration table

```
mysql> desc registration ;
```

Field	Type	Null	Key	Default	Extra
r_id	int(11)	NO	PRI	NULL	auto_increment
p_id	varchar(50)	NO	MUL	NULL	
event_id	int(11)	NO	MUL	NULL	
present	int(11)	NO		NULL	

```
4 rows in set (0.00 sec)
```

Figure 67: Registration Table Description

```
mysql> select * from registration ;
```

r_id	p_id	event_id	present
1	fkdlhgwuihdf-5647893210	3	1
2	jhsdbfjshdfb-2315467890	3	2
3	jhsdbfjshdfb-2315467890	3	2
4	jkdfghkdfjg-5123456789	3	1
5	dummy14-1411111111	6	2
6	jhklsdf-7896542130	6	1
7	dumx-5648970321	6	2
8	jhsdbfjshdfb-2315467890	6	1
9	john wick-5647890123	3	1
10	john wick-5647890123	17	1
11	ajay krishna-1256789011	6	2
12	ajay krishna-1256789011	17	1

```
12 rows in set (0.00 sec)
```

Figure 68: Registration Table Data

## 7. System Testing

Testing is the final stage of the application development which plays a vital role in the process of creating high-quality software. Desktop Application testing is a type of software testing that focuses on desktop applications. It involves complete testing of a desktop-based system before going live which helps address issues before the system is revealed to the public.

The aspects taken into consideration while carrying out testing involve functional and non-functional areas (the basic functionality of the application), security of the application, usability and performance monitoring, ability to adapt to the multitude of desktops, devices, and operating systems.



*Figure 69: Testing Phases*

The following different types of testing have been performed to check the functionality, performance and overall efficiency of our application:

## **7.1 System Testing**

We performed system (compatibility) testing to test our application with the supported software and hardware configurations.

We performed the following:

- OS Configuration
- Server Configuration

### **7.1.1. Cross-platform testing:**

It allows evaluating the work of the application in different OS:

- Windows
- iOS/Mac OS
- Linux

### **7.1.2. Server testing:**

We verified that our application worked equally well and efficiently when receives request from several sources simultaneously.

## 7.2 Module Testing

We checked each module in our application separately to test its functionality, connection and inter-dependence on other modules.

<b>Modules</b>	<b>Description</b>	<b>%TCs Executed</b>	<b>%TCs Passed</b>	<b>TCs Pending</b>	<b>Priority</b>
User Registration	Register admin or user of software.	100%	100%	0	MEDIUM
Admin / User Login	Login of user or admin.	100%	100%	0	HIGH
Add Participant	Add participant.	100%	100%	0	HIGH
Register Participant in Events	Register participant in events.	100%	100%	0	HIGH
Add / Remove Events	Add or remove events from database.	100%	100%	0	HIGH
Mark Entry of Participant	Mark entry of a participant in an event.	100%	100%	0	HIGH
Report Generation	Generate report of all participants with details.	100%	100%	0	MEDIUM
QR Code Generation	Generate QR code for participants.	100%	100%	0	HIGH
Scan QR code	Scan QR code for participant verification.	100%	100%	0	MEDIUM

*Table 2: Module Testing*

### **7.3 User Testing**

We have tested our system with some students and people unfamiliar with software.

### **7.4 Functionality Testing**

We performed functional testing to ensure that each function of our application operated in conformance with the requirement specification. Basically, functionality testing is a quality assurance (QA) process and a type of black-box testing that bases its test cases on the specifications of the software component under test. Functions are tested by feeding them input and examining the output, and internal program structure is rarely considered (unlike white-box testing).

1. Buttons and Textboxes Testing, where we verified
  - Correctness of buttons.
  - Checking buttons lead to the desired windows.
  - If there are windows that are not referenced.
  - There are no broken buttons.
  - Inputs are being read correctly from textboxes.
2. Testing for all windows, where we verified
  - The input data validity.
  - Allowed values for the data field.
  - Invalid input values for the data field.
  - Options for forms in which deletion or any other modification of data is possible.
3. Code Validation, where we verified
  - Code syntax errors.

## **7.5 Interface Testing**

We performed interface testing to verify that the graphical user interface of our application meets the specifications. Basically, Interface testing ensures that all interactions between the web server and application interfaces are running smoothly.

This includes checking the communication processes as well as making sure that error messages are displayed correctly. Further, interruptions by the user as well as the server also needs to be tested for correct handling. Some of the verifications we performed are:

- Compliance with the standards of graphical interfaces.
- Design elements evaluation: layout, colors, fonts, font sizes, labels, text boxes, text formatting, captions, buttons, lists, icons, links.
- Testing with different screen resolutions.
- Testing the graphical user interface on target devices i.e. desktops.

## **8. Conclusion and Future Scope**

Our project is an initiative to satisfy the problems faced in manual event management system. It includes problems in managing the entries, payments, attendee tickets, managing and coordinating the services provided by the event, venue details and time etc. The application would provide an automatic, user friendly and time saving system to organise event and manage participations.

### **8.1 Applications**

- **Can be used in any institution to manage the events effectively.**

This application provides an easy and efficient solution for managing events with least human intervention. This would provide an ease of managing the events and provide a common and uniform platform for the same for the entire university.

- **Can be used in schools as well for management of events that require no attending fees.**

Apart from use in a university, this system also finds utility in schools where multiple academic, extra-curricular and traditional events happen requiring attendance of large number of students at once. This application would help the concerned school authorities to organise events effectively.

### **8.2 Future Work**

- **Chat-Group Module**

A chat-group can be created that would help in society group discussion instead of using different Chat Application like WhatsApp.

- **Implementing Security Techniques**

Further multiple security and testing techniques can be applied to improve the functionality and security of the application.

- **SMS Facility**

SMS facility of upcoming events and reminders can also be provided along with the email service.

- **Website Integration**

As of now, this project is a desktop application. The participants have to reach out to the registration desk to register themselves. In the near future, this application could be redesigned as a web-based application to make online registrations possible. This will reduce the waiting time of participants standing in line to register. This will make the registration process easier for the participant and encourage more people to participate.



## References

- [1] Scanning QR code-OpenCV with python  
<https://pysource.com/2019/02/28/scanning-qr-code-opencv-with-python/>
- [2] Create and read QR code with Python in 3 minutes (OpenCV and qrcode)  
<https://medium.com/@stasinskipawel/create-and-read-qr-code-with-python-in-3-minutes-opencv-and-qrcode-38ecc3a6258a>
- [3] Openpyxl  
<https://pypi.org/project/openpyxl/>
- [4] Python Regex  
[https://www.w3schools.com/python/python\\_regex.asp](https://www.w3schools.com/python/python_regex.asp)
- [5] Iconphoto () method in Tkinter | Python  
<https://www.geeksforgeeks.org/iconphoto-method-in-tkinter-python/>
- [6] How do I share global variables across modules?  
<http://effbot.org/pyfaq/how-do-i-share-global-variables-across-modules.htm>
- [7] Tkinter: Catching Window Deletion  
<https://effbot.org/zone/tkinter-window-destroy.htm>
- [8] Responses  
<https://www.flaskapi.org/#responses>
- [9] Requests  
<https://www.flaskapi.org/#requests>
- [10] MySQL GROUP\_CONCAT () function  
[https://www.w3resource.com/mysql/aggregate-functions-and-grouping/aggregate-functions-and-grouping-group\\_concat.php](https://www.w3resource.com/mysql/aggregate-functions-and-grouping/aggregate-functions-and-grouping-group_concat.php)

- [11] Python - GUI Programming (Tkinter)  
[https://www.tutorialspoint.com/python/python\\_gui\\_programming.htm](https://www.tutorialspoint.com/python/python_gui_programming.htm)
  
- [12] MySQL Tutorial  
<https://www.javatpoint.com/mysql-tutorial>
  
- [13] OpenCV Tutorials  
[https://docs.opencv.org/master/d9/df8/tutorial\\_root.html](https://docs.opencv.org/master/d9/df8/tutorial_root.html)
  
- [14] Python OpenCV | cv2.putText() method  
<https://www.geeksforgeeks.org/python-opencv-cv2-puttext-method/>
  
- [15] Resizing window doesn't resize contents in tkinter  
<https://stackoverflow.com/questions/17598475/resizing-window-doesnt-resize-contents-in-tkinter>