Krishna Dalvi
D20C/10

Blockchain : Experiment - 5

Aim:

Hands on Solidity Programming Assignments for creating Smart Contracts.

Theory:

1. **Primitive Data Types, Variables, Functions – pure, view**
   In Solidity, primitive data types form the foundation of smart contract development. Commonly used types include:
   - **uint / int:** unsigned and signed integers of different sizes (e.g., uint256, int128).
   - **bool:** represents logical values (true or false).
   - **address:** holds a 20-byte Ethereum account address, often used for storing user accounts or contract addresses.
   - **bytes / string:** store binary data or textual data.


   Variables in Solidity can be state variables (stored on the blockchain permanently), local variables (temporary, created during function execution), or global variables (special predefined variables such as msg.sender, msg.value, and block.timestamp).
   Functions allow execution of contract logic. Special types of functions include:
   - **pure:** cannot read or modify blockchain state; they work only with inputs and internal computations.
   - **view:** can read state variables but cannot alter them.This classification helps optimize gas usage and enforces function integrity.
2. **Inputs and Outputs to Functions**
   Functions in Solidity can accept input arguments and return one or more output values. Inputs enable users or other contracts to pass data into the contract, while outputs make it possible to return results after computation. For example, a function can accept an amount in Ether and return whether the transfer was successful. Solidity also allows named return variables, which improve readability and debugging.
3. **Visibility, Modifiers and Constructors**
   a. Function Visibility defines who can access a function:
      - public: available both inside and outside the contract.
      - private: only accessible within the same contract.
      - internal: accessible within the contract and its child contracts.
      - external: can be called only by external accounts or other contracts.


   b. Modifiers are reusable code blocks that change the behavior of functions. They are often used for access control, such as restricting sensitive functions to the contract owner (onlyOwner).
   c. Constructors are special functions executed only once during contract deployment. They initialize important values, such as setting the deploying account as the owner of the contract.
4. **Control Flow: if-else, loops**
   Control flow in Solidity is similar to traditional programming languages:
   - **if-else** allows conditional decision-making in contract logic, e.g., checking if a balance is sufficient before transferring funds.
   - **Loops** (for, while, do-while) enable repeated execution of code. For example, iterating through an array of users. However, loops must be used carefully, as excessive iterations increase gas consumption, potentially making the contract expensive to execute.


5. **Data Structures: Arrays, Mappings, Structs, Enums**
    - **Arrays:** Can be fixed or dynamic and are used to store ordered lists of elements. Example: an array of addresses for registered users.
    - **Mappings:** Key-value pairs that allow quick lookups. Example: mapping(address => uint) for storing balances. Unlike arrays, mappings do not support iteration.
    - **Structs:** Allow grouping of related properties into a single data type, such as creating a struct Player {string name; uint score;}.
    - **Enums:** Used to define a set of predefined constants, making code more readable. Example: enum Status { Pending, Active, Closed }.
6. **Data Locations**
   Solidity uses three primary data locations for storing variables:
    - **storage:** Data stored permanently on the blockchain. Examples: state variables.
    - **memory:** Temporary data storage that exists only while a function is executing. Used for local variables and function inputs.
    - **calldata:** A non-modifiable and non-persistent location used for external function parameters. It is gas-efficient compared to memory. Understanding data locations is essential, as they directly impact gas costs and performance.
7. **Transactions: Ether and Wei, Gas and Gas Price, Sending Transactions**
    - **Ether and Wei:** Ether is the main currency in Ethereum. All values are measured in Wei, the smallest unit (1 Ether = 10^{18} Wei). This ensures high precision in financial transactions.
    - **Gas and Gas Price:** Every transaction consumes gas, which represents computational effort. The gas price determines how much Ether is paid per unit of gas. A higher gas price incentivizes miners to prioritize the transaction.
    - **Sending Transactions:** Transactions are used for transferring Ether or interacting with contracts. Functions like transfer() and send() are commonly used, while call() provides more flexibility. Each transaction requires gas, making efficiency in contract design very important.


Output:


Tutorial No. 1:

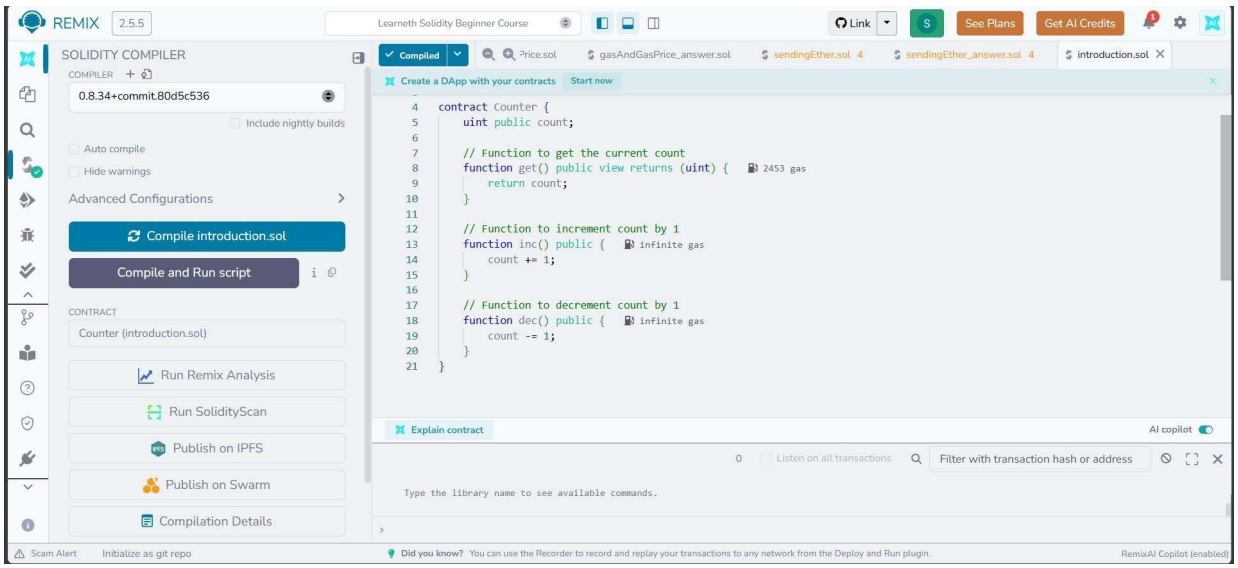


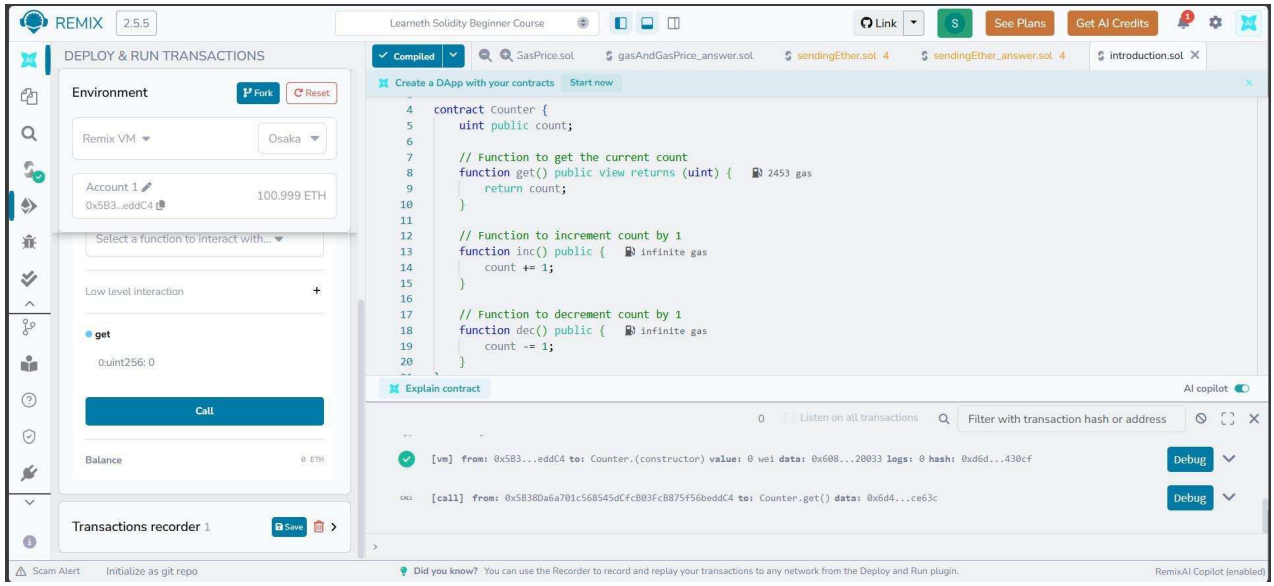
REMIX 2.5.5
Learneth Solidity Beginner Course
Link
See Plans
Get AI Credits
DEPLOY & RUN TRANSACTIONS
Environment
Fork
Reset
Remix VM
Osaka
Account 1
0x5B3...eddC4
100.999 ETH
Select a function to interact with...
Low level interaction
get
0:uint256: 0
Call
Balance
0 ETH
Transactions recorder 1
Save
Compiled
GasPrice.sol
gasAndGasPrice_answer.sol
sendingEther.sol 4
sendingEther_answer.sol 4
introduction.sol
Create a DApp with your contracts
Start now
contract Counter {
uint public count;
// Function to get the current count
function get() public view returns (uint) { 2453 gas
return count;
}
// Function to increment count by 1
function inc() public { infinite gas
count += 1;
}
// Function to decrement count by 1
function dec() public { infinite gas
count -= 1;
}
Explain contract
AI copilot
0
Listen on all transactions
Filter with transaction hash or address
[vm] from: 0x5B3...eddC4 to: Counter.(constructor) value: 0 wei data: 0x608...20033 logs: 0 hash: 0xd6d...430cf
Debug
[call] from: 0x5B38Da6a701c568545dCfcB03FcB875f56beddC4 to: Counter.get() data: 0x6d4...ce63c
Debug
Scam Alert
Initialize as git repo
Did you know? You can use the Recorder to record and replay your transactions to any network from the Deploy and Run plugin.
RemixAI Copilot (enabled)

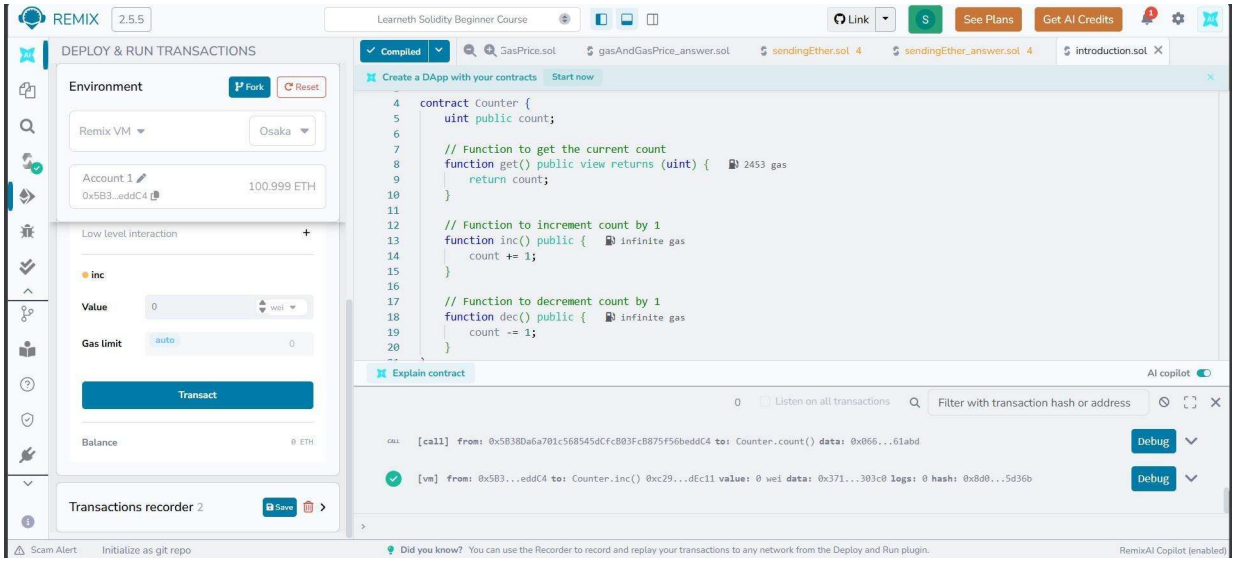

REMIX 2.5.5
Learneth Solidity Beginner Course
Link
See Plans
Get AI Credits
DEPLOY & RUN TRANSACTIONS
Environment
Fork
Reset
Remix VM
Osaka
Account 1
0x5B3...eddC4
100.999 ETH
Low level interaction
inc
Value
0
wei
Gas limit
auto
0
Transact
Balance
0 ETH
Transactions recorder 2
Save
Compiled
GasPrice.sol
gasAndGasPrice_answer.sol
sendingEther.sol 4
sendingEther_answer.sol 4
introduction.sol
Create a DApp with your contracts
Start now
contract Counter {
uint public count;
// Function to get the current count
function get() public view returns (uint) { 2453 gas
return count;
}
// Function to increment count by 1
function inc() public { infinite gas
count += 1;
}
// Function to decrement count by 1
function dec() public { infinite gas
count -= 1;
}
Explain contract
AI copilot
0
Listen on all transactions
Filter with transaction hash or address
[call] from: 0x5B38Da6a701c568545dCfcB03FcB875f56beddC4 to: Counter.count() data: 0x066...61abd
Debug
[vm] from: 0x5B3...eddC4 to: Counter.inc() 0xc29...dEc11 value: 0 wei data: 0x371...303c0 logs: 0 hash: 0x8d0...5d36b
Debug
Scam Alert
Initialize as git repo
Did you know? You can use the Recorder to record and replay your transactions to any network from the Deploy and Run plugin.
RemixAI Copilot (enabled)

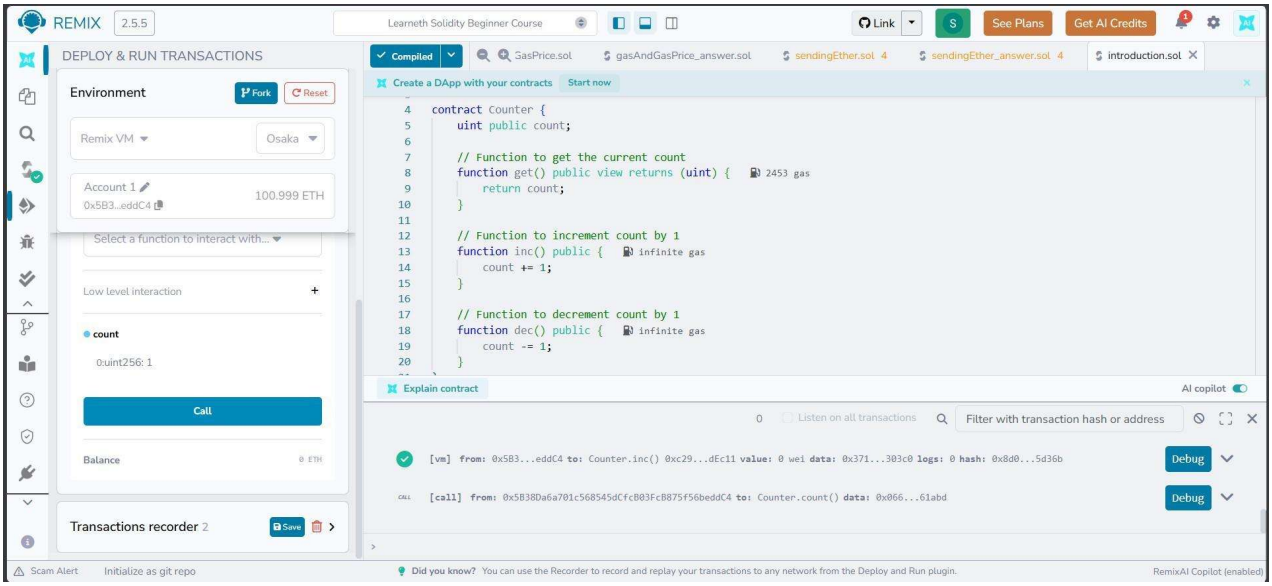
REMIX 2.5.5
Learneth Solidity Beginner Course
Link
See Plans
Get AI Credits
DEPLOY & RUN TRANSACTIONS
Environment
Fork
Reset
Remix VM
Osaka
Account 1
0x5B3...eddC4
100.999 ETH
Select a function to interact with...
Low level interaction
count
0:uint256: 1
Call
Balance
0 ETH
Transactions recorder 2
Save
Compiled
GasPrice.sol
gasAndGasPrice_answer.sol
sendingEther.sol 4
sendingEther_answer.sol 4
introduction.sol
Create a DApp with your contracts
Start now
contract Counter {
uint public count;
// Function to get the current count
function get() public view returns (uint) {
2453 gas
return count;
}
// Function to increment count by 1
function inc() public {
infinite gas
count += 1;
}
// Function to decrement count by 1
function dec() public {
infinite gas
count -= 1;
}
Explain contract
AI copilot
0
Listen on all transactions
Filter with transaction hash or address
[vm] from: 0x5B3...eddC4 to: Counter.inc() 0xc29...dEc11 value: 0 wei data: 0x371...303c0 logs: 0 hash: 0x8d0...5d36b
Debug
[call] from: 0x5B38Da6a701c568545dCfcB03FcB875f56beddC4 to: Counter.count() data: 0x066...61abd
Debug
Scam Alert
Initialize as git repo
Did you know? You can use the Recorder to record and replay your transactions to any network from the Deploy and Run plugin.
RemixAI Copilot (enabled)

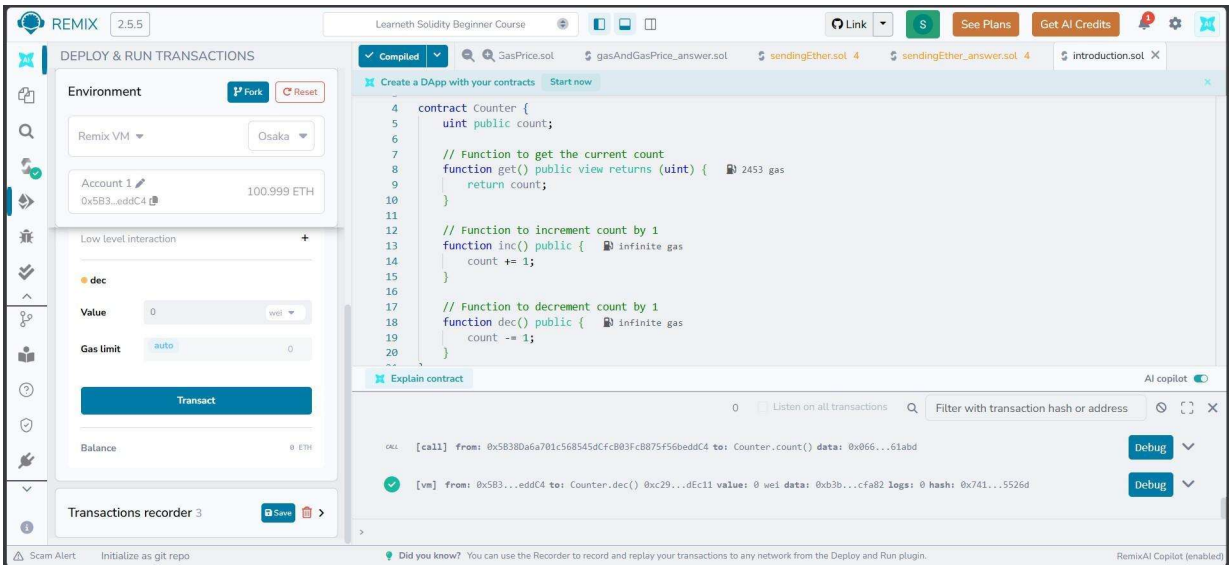

REMIX 2.5.5
Learneth Solidity Beginner Course
Link
See Plans
Get AI Credits
DEPLOY & RUN TRANSACTIONS
Environment
Fork
Reset
Remix VM
Osaka
Account 1
0x5B3...eddC4
100.999 ETH
Low level interaction
dec
Value
0
wei
Gas limit
auto
0
Transact
Balance
0 ETH
Transactions recorder 3
Save
Compiled
GasPrice.sol
gasAndGasPrice_answer.sol
sendingEther.sol 4
sendingEther_answer.sol 4
introduction.sol
Create a DApp with your contracts
Start now
contract Counter {
uint public count;
// Function to get the current count
function get() public view returns (uint) {
2453 gas
return count;
}
// Function to increment count by 1
function inc() public {
infinite gas
count += 1;
}
// Function to decrement count by 1
function dec() public {
infinite gas
count -= 1;
}
Explain contract
AI copilot
0
Listen on all transactions
Filter with transaction hash or address
[call] from: 0x5B38Da6a701c568545dCfcB03FcB875f56beddC4 to: Counter.count() data: 0x066...61abd
Debug
[vm] from: 0x5B3...eddC4 to: Counter.dec() 0xc29...dEc11 value: 0 wei data: 0xb3b...cfa82 logs: 0 hash: 0x741...5526d
Debug
Scam Alert
Initialize as git repo
Did you know? You can use the Recorder to record and replay your transactions to any network from the Deploy and Run plugin.
RemixAI Copilot (enabled)

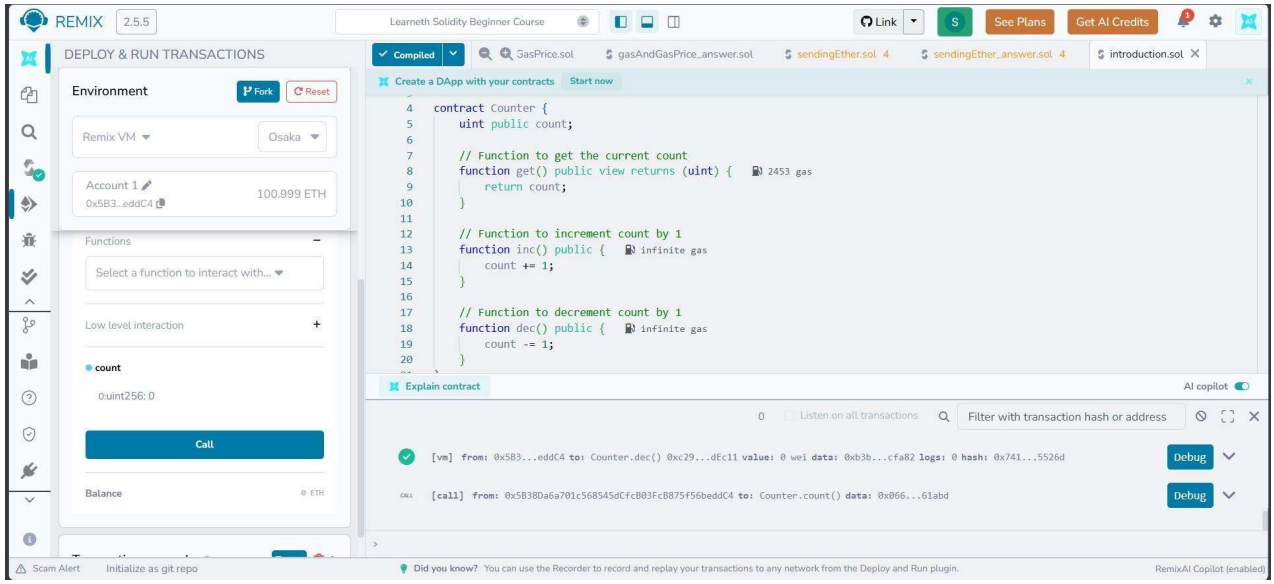


Tutorial No. 2:

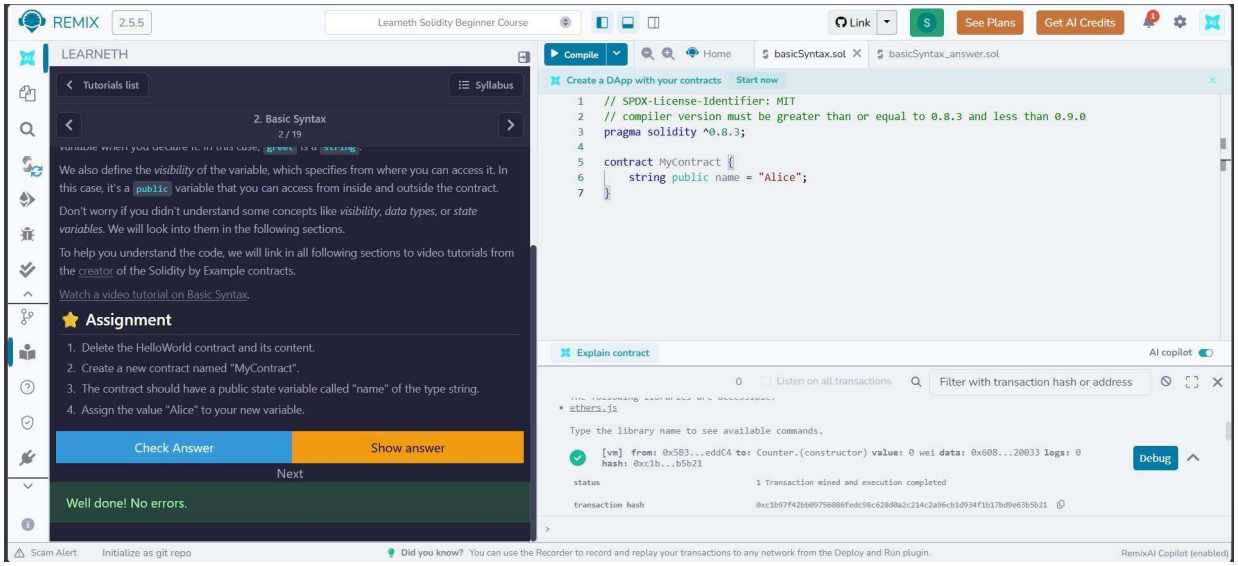


Tutorial No. 3:

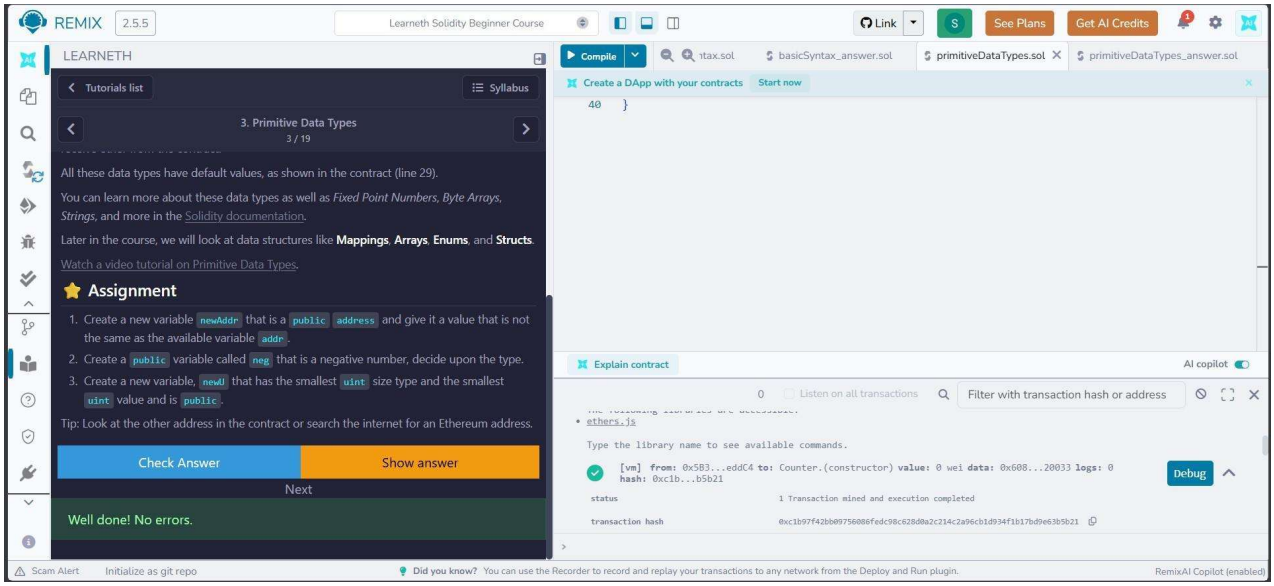


Tutorial No. 4:

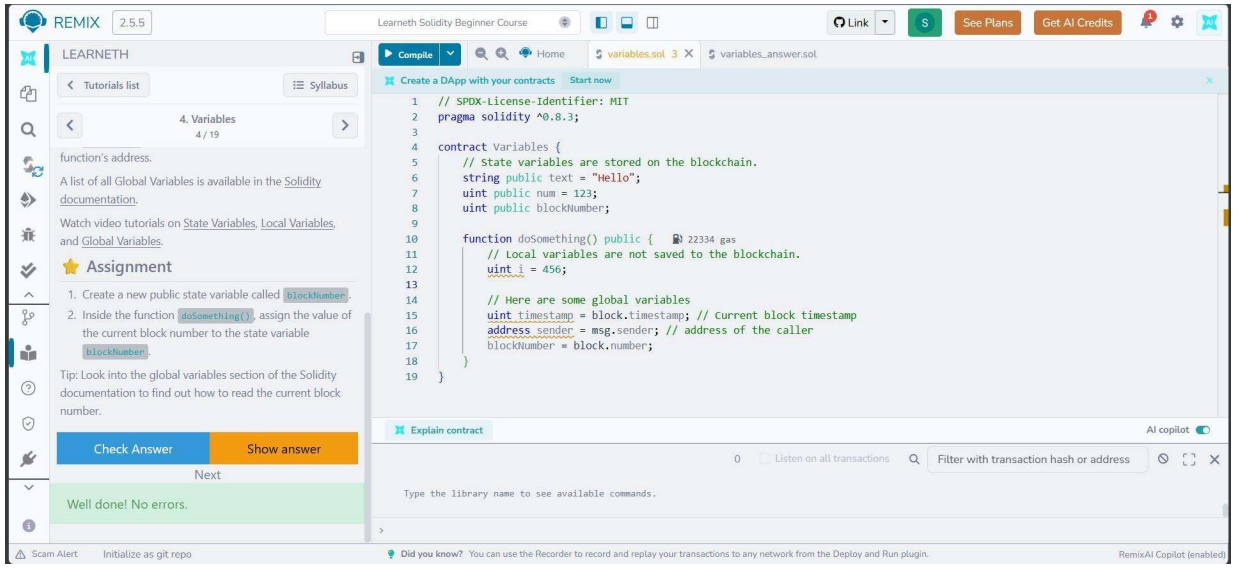


Tutorial No. 5:

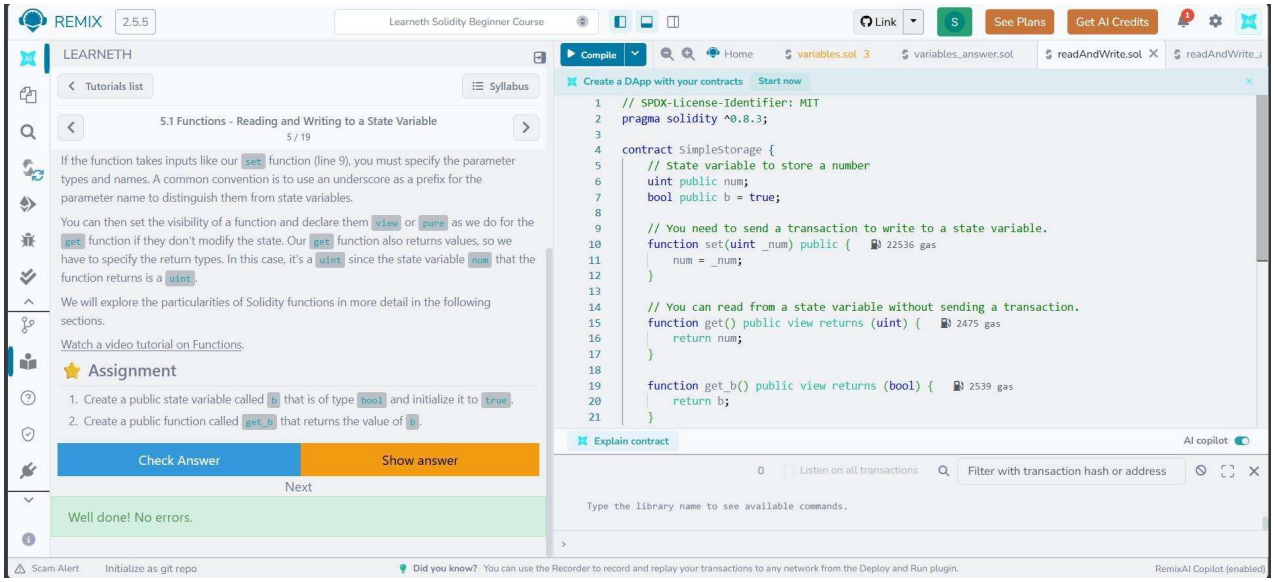


Tutorial No. 6:

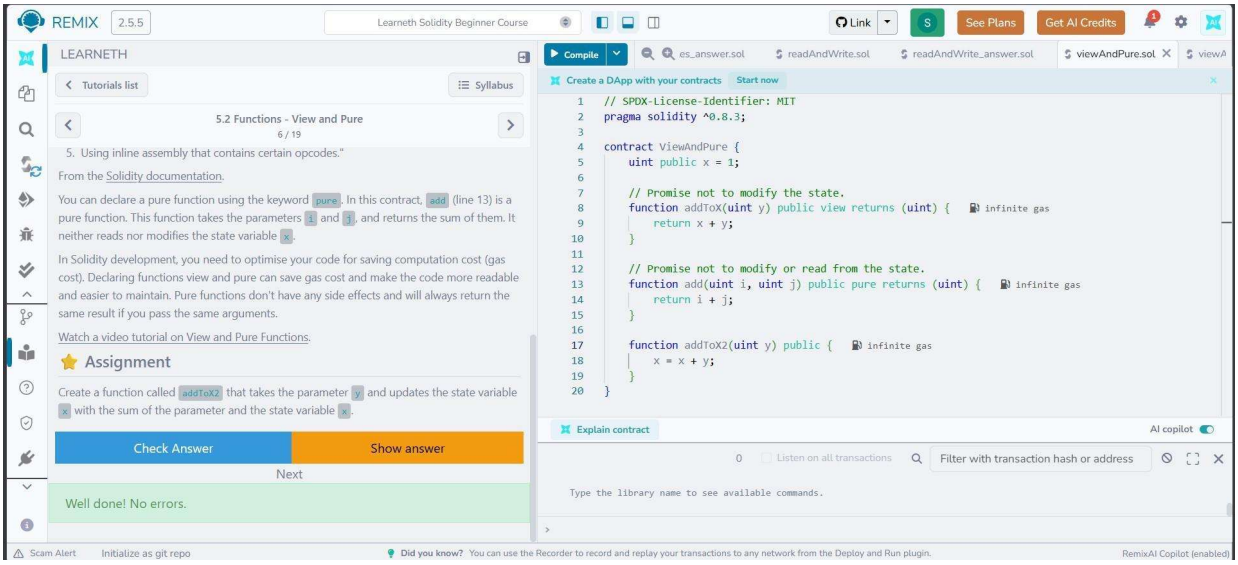


Tutorial No. 7:

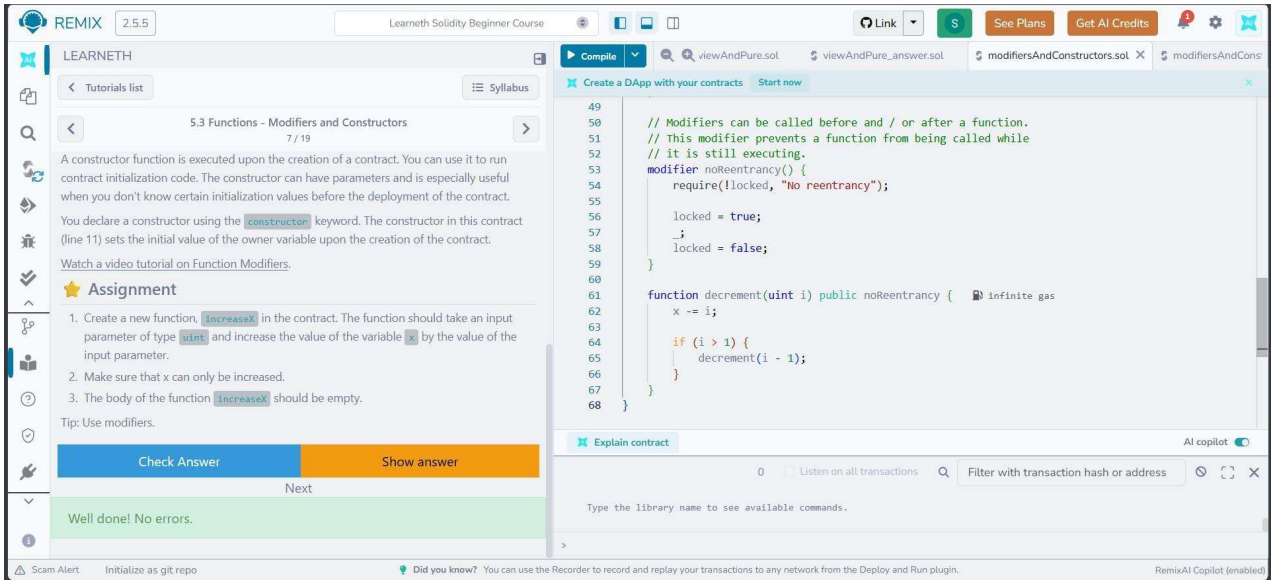


Tutorial No. 8:

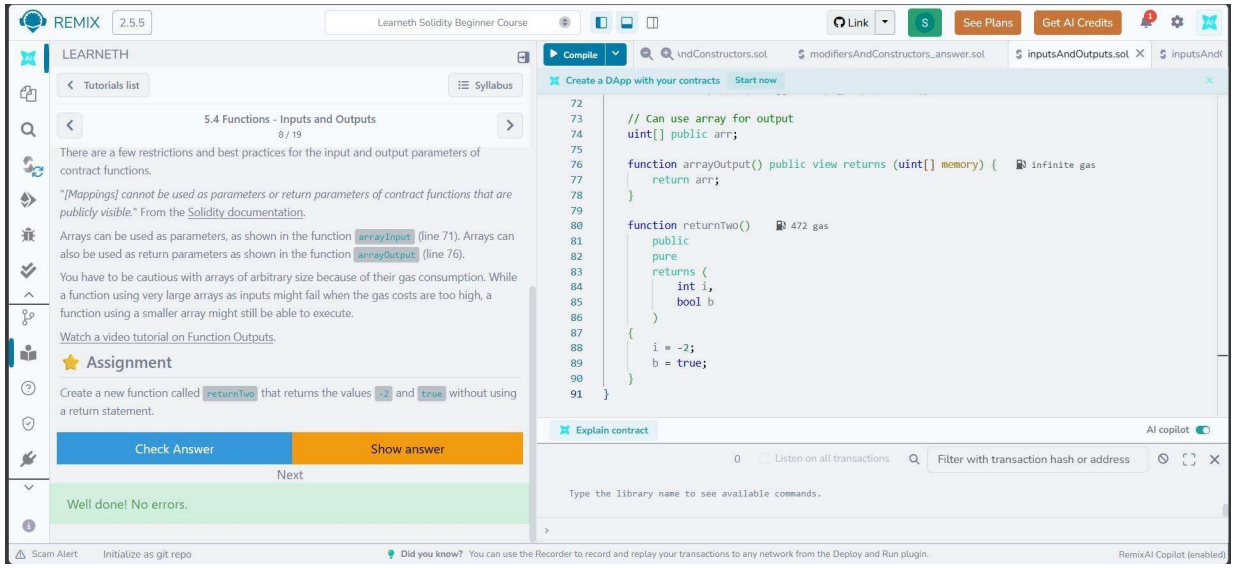


Tutorial No. 9:

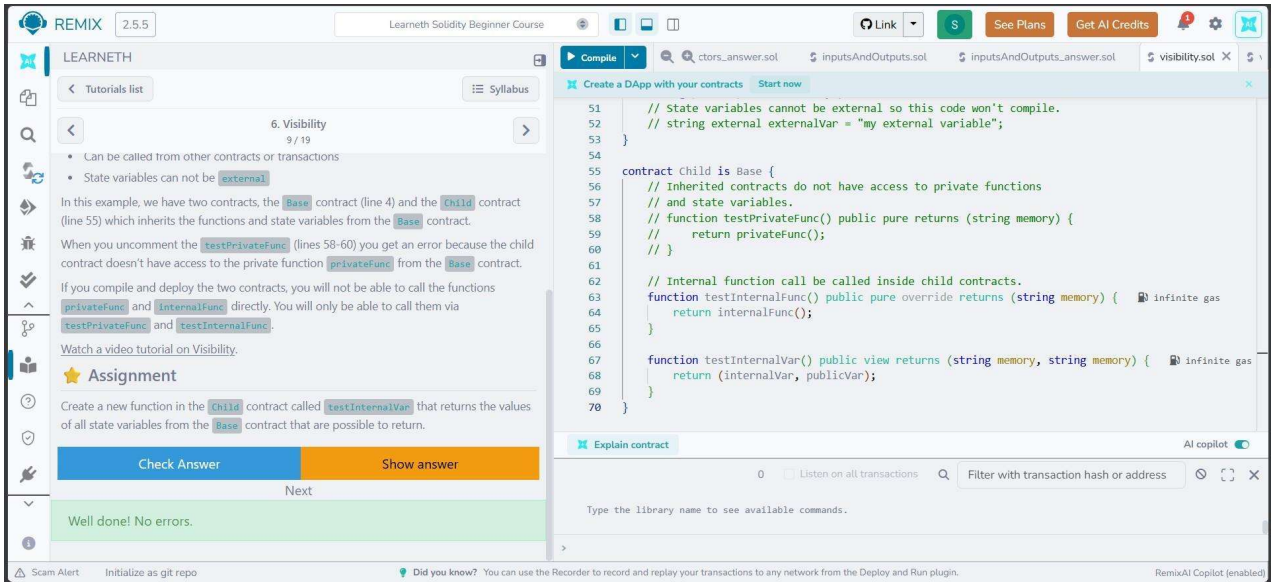


Tutorial No. 10:

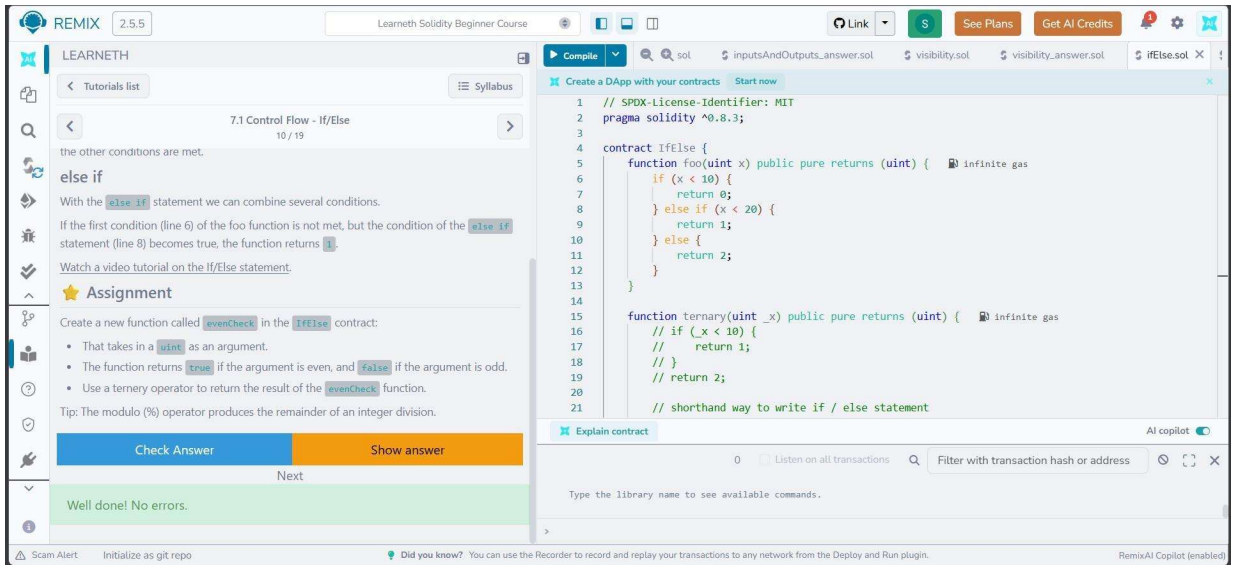


Tutorial No. 11:

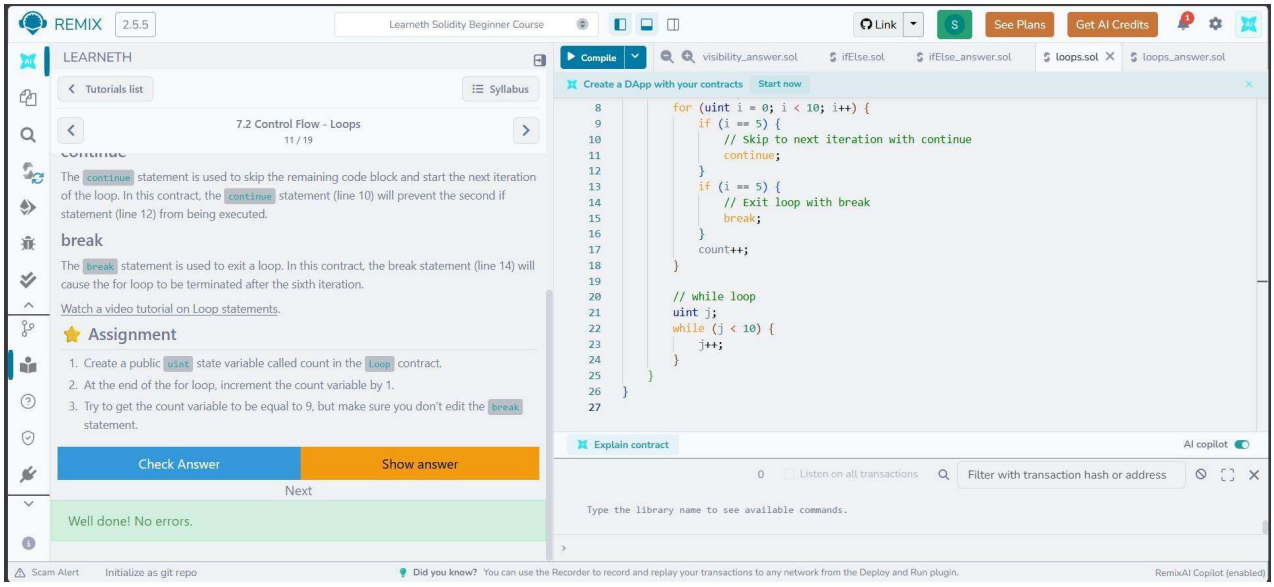


Tutorial No. 12:

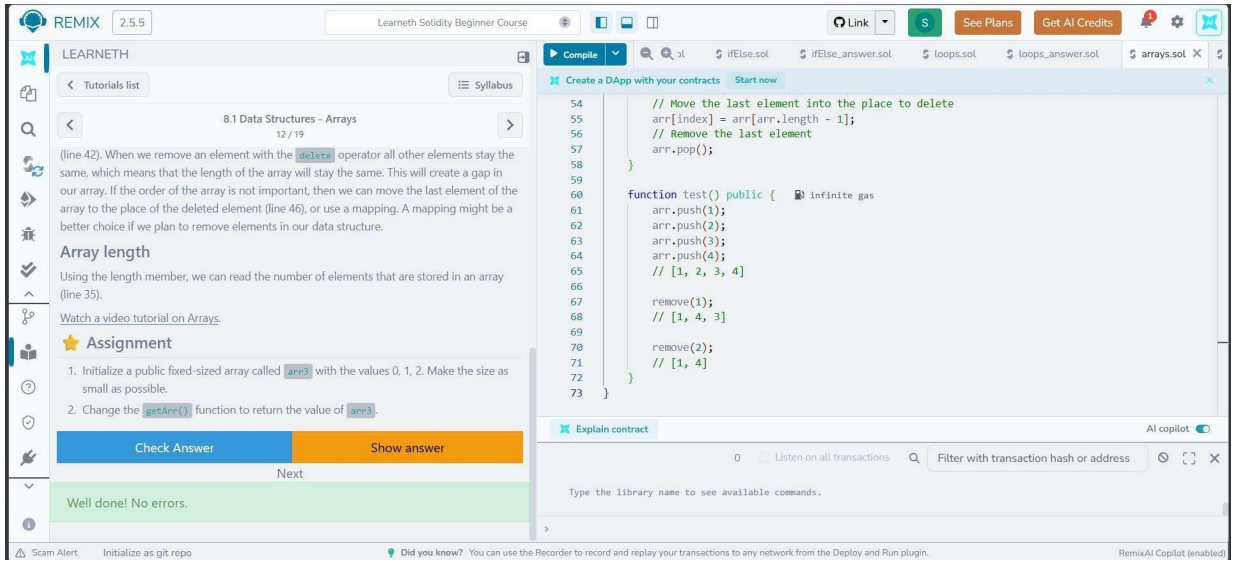


Tutorial No. 13:

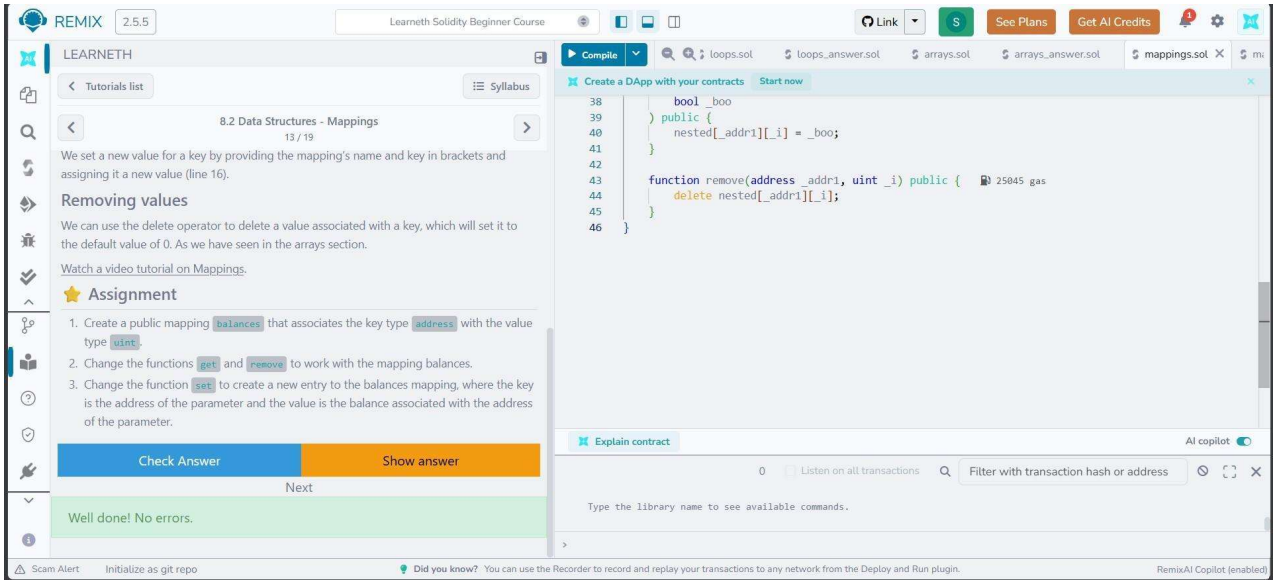


Tutorial No. 14:

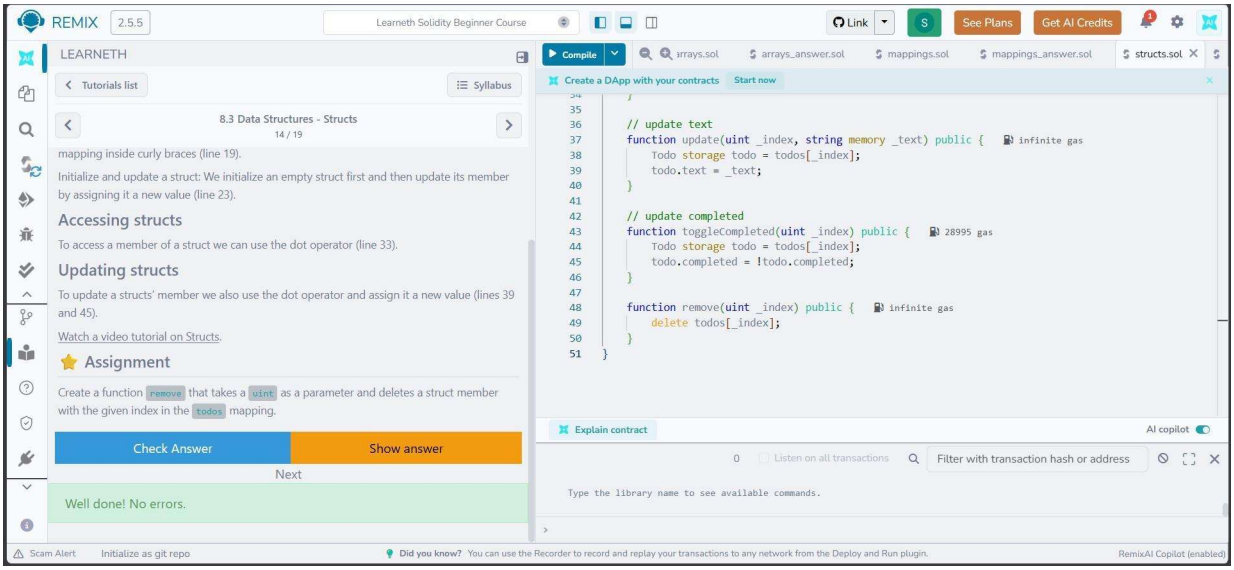


Tutorial No. 15:

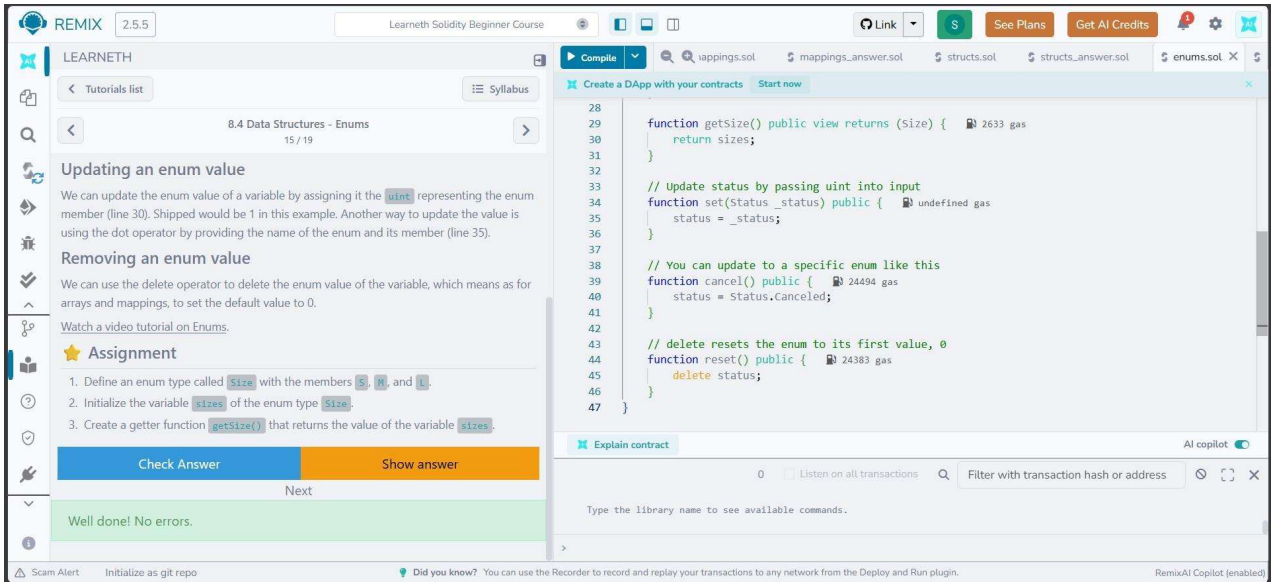


Tutorial No. 16:

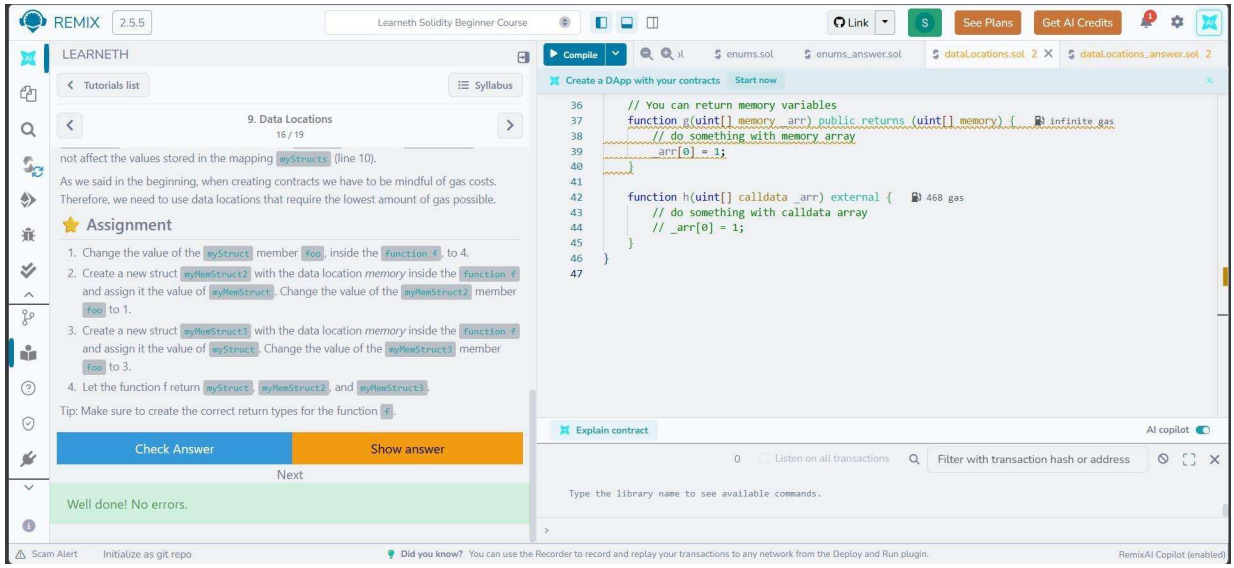


Tutorial No. 17:

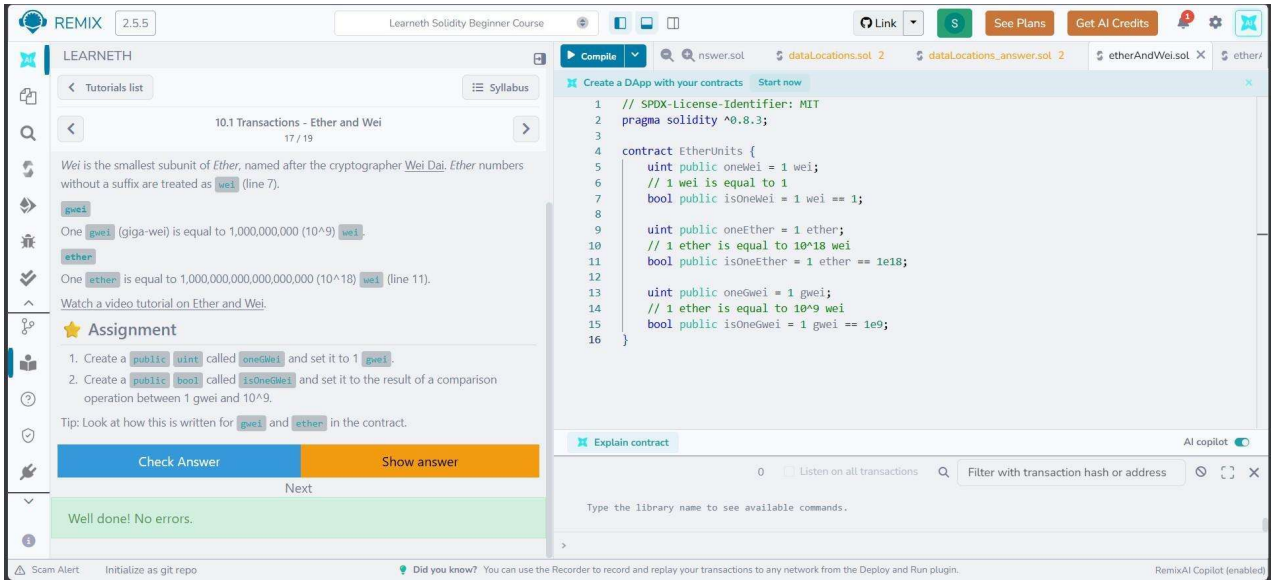

Tutorial No. 18:

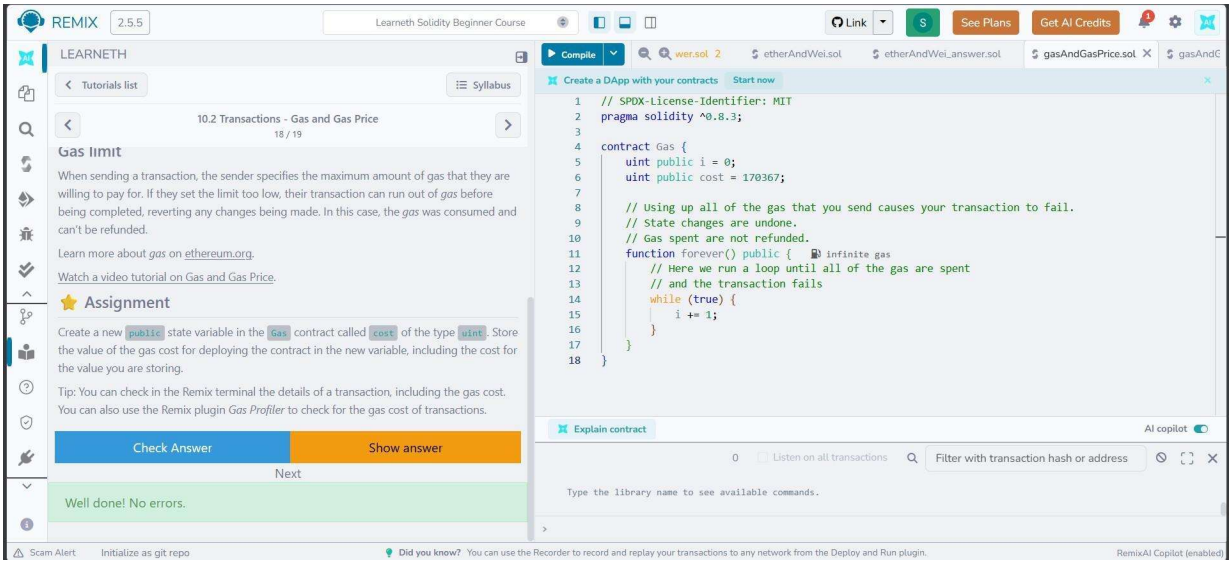

Tutorial No. 19:

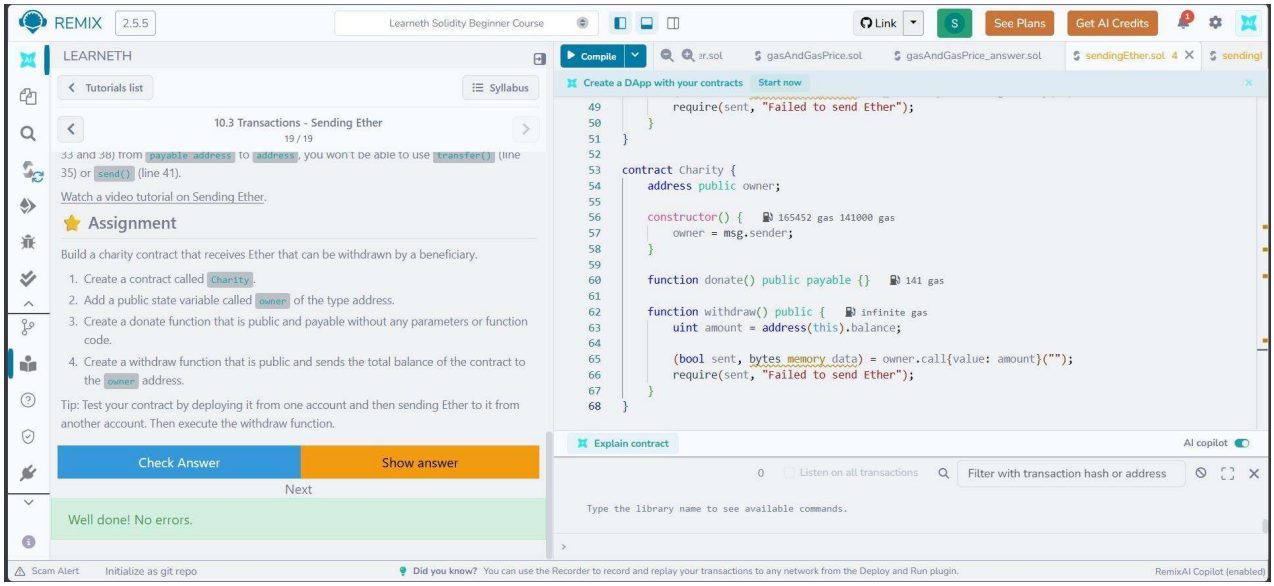

Conclusion:

Through this experiment, the fundamentals of Solidity programming were explored by completing practical assignments in the Remix IDE. Concepts such as data types, variables, functions, visibility, modifiers, constructors, control flow, data structures, and transactions were implemented and understood. The hands-on practice helped in designing, compiling, and deploying smart contracts on the Remix VM, thereby strengthening the understanding of blockchain concepts. This experiment provided a strong foundation for developing and managing smart contracts efficiently.