

**Manav Rachna International Institute of Research and
Studies (MRIIRS)**

School of Computer Applications

Data Structures using C (Practical)

Name: Krishna Chauhan

Roll No: 24/SCA/BCA/069

Semester: 2nd

Section: B

Course: Bachelor's in Computer Applications (BCA)

ARRAY

// 1. Program to demonstrate insertion and output in an array:

```
#include <stdio.h>

int main(){

    int arr[5];

    //Array Insertion.

    printf("Enter the elements in array: \n");

    for(int i = 0; i<5; i++){

        scanf("%d", &arr[i]);

    }

    //Output from an array.

    printf("\n The elements that you have entered are: ");

    for(int i = 0; i<5; i++){

        printf("%d ", arr[i]);

    }

    return 0;

}
```

Output:

```
Enter the elements in array:
```

```
1  
2  
3  
4  
5
```

```
The elements that you have entered are: 1 2 3 4 5
```

// 2. Program to demonstrate searching in an array:

```
#include <stdio.h>
```

```
int main() {
```

```
    int arr[] = {10, 20, 30, 40, 50};
```

```
    int size = sizeof(arr) / sizeof(arr[0]);
```

```
    int key, found = 0;
```

```
    printf("Enter the element to search: ");
```

```
    scanf("%d", &key);
```

```
    for (int i = 0; i < size; i++) {
```

```
        if (arr[i] == key) {
```

```
            printf("Element %d found at index %d.\n", key, i);
```

```
            found = 1;
```

```
        break;

    }

}

if (found == 0) {


    printf("Element %d not found in the array.\n", key);

}

return 0;

}
```

Output:

A screenshot of a terminal window with a black background and white text. The text shows the user input '30' in response to the prompt 'Enter the element to search:', followed by the program output 'Element 30 found at index 2.'

```
Enter the element to search: 30
Element 30 found at index 2.
```

// 3. Program to demonstrate sorting in an array:

```
#include <stdio.h>

int main(){
```

```
int arr[5] = {1,7,3,6,4};

int temp;

for(int i = 0; i<5; i++){

    for(int j = 0; j<4; j++){

        if(arr[j] > arr[j + 1]){

            temp = arr[j];

            arr[j] = arr[j + 1];

            arr[j + 1] = temp;

        }

    }

}

printf("Ascending order: \n");

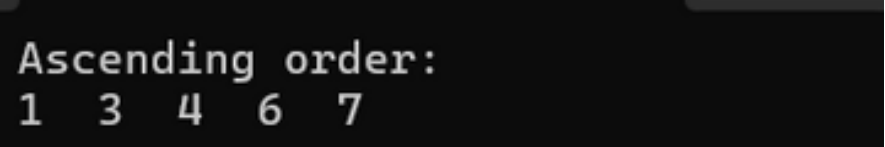
for(int i = 0; i<5; i++){

    printf("%d ", arr[i]);

}

}
```

Output:

A screenshot of a terminal window with a black background and white text. The text displays the output of the program: "Ascending order:" followed by a new line and the numbers "1 3 4 6 7" spaced out.

```
Ascending order:
1 3 4 6 7
```

Stacks

// 1. Program to demonstrate PUSH() and POP() operations in the stack:

```
#include<stdio.h>
```

```
#define Max 5 //Max size of the stack.
```

//Structure of the stack

```
struct Stack{
```

```
int data[Max];
```

```
int top;
```

```
};
```

```
struct Stack s; //Initializing the stack.
```

//Declaring Functions

```
void PUSH(int n);
```

```
void POP();
```

```
void PRINT();
```

//Program execution starts from here.

```
int main(){
```

```
s.top = -1;
```

```
POP();
```

```
PUSH(10);  
PUSH(20);  
PUSH(30);  
PUSH(40);  
PUSH(50);  
PUSH(60);  
POP();  
PRINT();  
return 0;  
}
```

// 1.1. Function to insert an element into the stack.

```
void PUSH(int n){  
    if(s.top == Max-1){  
        printf("Stack is full.\n\n");  
        return;  
    }  
    s.data[++s.top] = n;  
    printf("%d pushed into the stack\n\n", n);  
}
```

// 1.2. Function to remove an element from the stack.

```
void POP(){  
    if(s.top == -1){  
        printf("Stack is empty\n\n");  
        return;  
    }  
    int value = s.data[s.top--];  
    printf("%d removed from the stack\n\n", value);  
}
```

```
}
```

// 1.3. Function to traverse and print all the elements in the stack.

```
void PRINT(){  
    if(s.top == -1){  
        printf("Stack is empty\n\n");  
        return;  
    }  
    printf("Elements in the stack:\n");  
    for(int i=0; i<=s.top; i++){  
        printf("%d\t", s.data[i]);  
        if(i==s.top){  
            printf("\n\n");  
        }  
    }  
}
```

Output:

Stack is empty

10 pushed into the stack

20 pushed into the stack

30 pushed into the stack

40 pushed into the stack

50 pushed into the stack

Stack is full.

50 removed from the stack

Elements in the stack:

10	20	30	40
----	----	----	----

Queue

// 1. Program to demonstrate ENQUEUE () and DEQUEUE () operations in a queue:

```
#include<stdio.h>
```

```
#define Max 5
```

//Structure of a queue.

```
struct Queue{
```

```
int data[Max];
```

```
int front;
```

```
int rear;
```

```
};
```

```
struct Queue q; //Initializing a queue.
```

//Declaring functions.

```
void ENQUEUE(int n);
```

```
void DEQUEUE();
```

```
void PRINT();
```

//Program execution starts from here.

```
int main(){
```

```
q.front = -1;
```

```
q.rear = -1;
```

```
DEQUEUE();
```

```
ENQUEUE(10);
```

```
ENQUEUE(20);
```

```
ENQUEUE(30);  
ENQUEUE(40);  
ENQUEUE(50);  
ENQUEUE(60);  
DEQUEUE();  
PRINT();  
return 0;  
}
```

// 1.1 Function to insert an element in the queue.

```
void ENQUEUE(int n){  
    if(q.rear == Max-1){  
        printf("Queue is full\n\n");  
        return;  
    }  
    q.data[++q.rear] = n;  
    printf("%d inserted in the queue\n\n", n);  
}
```

// 1.2. Function to remove an element from a queue.

```
void DEQUEUE(){  
    if(q.rear == q.front){  
        printf("Queue is empty\n\n");  
        q.front = -1;  
        q.rear = -1;  
        return;  
    }  
    int value = q.data[++q.front];  
    printf("%d removed from the queue\n\n", value);  
}
```

```
}
```

// 1.3. Function to traverse and display all the elements in the queue.

```
void PRINT(){  
  
    if(q.front == q.rear){  
  
        printf("Queue is empty\n\n");  
  
        return;  
  
    }  
  
    for(int i=q.front+1; i<=q.rear; i++){  
  
        printf("%d\t", q.data[i]);  
  
        if(i==q.rear){  
  
            printf("\n\n");  
  
        }  
  
    }  
  
}
```

Output:

Stack is empty

10 pushed into the stack

20 pushed into the stack

30 pushed into the stack

40 pushed into the stack

50 pushed into the stack

Stack is full.

50 removed from the stack

Elements in the stack:

10	20	30	40
----	----	----	----

Circular Queue

// 1. Program to implement circular queue and operations on it.

```
#include <stdio.h>
```

```
#define MAX 5
```

```
struct Queue {  
    int data[MAX];  
    int front;  
    int rear;  
};
```

```
struct Queue q = {.front = -1, .rear = -1};
```

// 1.1. Function to insert element into the circular queue

```
void ENQUEUE(int value) {  
    if ((q.rear + 1) % MAX == q.front) {  
        printf("Queue is full\n");  
        return;  
    }  
  
    if (q.front == -1) {  
        q.front = 0;  
    }  
  
    q.rear = (q.rear + 1) % MAX;  
    q.data[q.rear] = value;
```

```
    printf("%d inserted into the queue\n", value);  
}
```

// 1.2. Function to remove element from the circular queue

```
void DEQUEUE() {  
    if (q.front == -1) {  
        printf("Queue is empty\n");  
        return;  
    }  
  
    int value = q.data[q.front];  
  
    if (q.front == q.rear) {  
        // Only one element in queue  
        q.front = -1;  
        q.rear = -1;  
    } else {  
        q.front = (q.front + 1) % MAX;  
    }  
  
    printf("%d removed from the queue\n", value);  
}
```

// 1.3. Function to display the elements of the queue

```
void DISPLAY() {  
    if (q.front == -1) {  
        printf("Queue is empty\n");  
        return;  
    }  
}
```

```
printf("Queue elements: ");  
  
int i = q.front;  
  
while (1) {  
  
    printf("%d ", q.data[i]);  
  
    if (i == q.rear) break;  
  
    i = (i + 1) % MAX;  
  
}  
  
printf("\n");  
  
}
```

// Main function to test the queue

```
int main() {  
  
    ENQUEUE(10);  
  
    ENQUEUE(20);  
  
    ENQUEUE(30);  
  
    ENQUEUE(40);  
  
    ENQUEUE(50); // Will say "Queue is full" because one slot is always kept empty.  
  
    DISPLAY();  
  
    DEQUEUE();  
  
    DEQUEUE();  
  
    DISPLAY();  
  
    ENQUEUE(60);  
  
    ENQUEUE(70);  
  
    DISPLAY();  
  
    return 0;  
  
}
```


Output:

```
10 inserted into the queue
20 inserted into the queue
30 inserted into the queue
40 inserted into the queue
50 inserted into the queue
Queue elements: 10 20 30 40 50
10 removed from the queue
20 removed from the queue
Queue elements: 30 40 50
60 inserted into the queue
70 inserted into the queue
Queue elements: 30 40 50 60 70
```

Linked List

// 1. Program to show the implementation of a linked list and its operations.

```
#include<stdio.h>
```

```
#include<stdlib.h>
```

//Structure of a Node.

```
struct Node{  
  
    int data;  
  
    struct Node* next;  
  
};
```

//Declaring functions.

```
void insertAtBeginning(Node** pointerToHead, int x);  
  
void insertAtEnd(Node** pointerToHead, int x);  
  
void insertAt(Node** pointerToHead, int pos, int x);  
  
void deleteFromFirst(Node** pointerToHead);  
  
void deleteFromEnd(Node** pointerToHead);  
  
void deleteFrom(Node** pointerToHead, int pos);  
  
void Print(Node* head);
```

//Execution of program starts from here.

```
int main(){  
  
    struct Node* head = NULL;  
  
    insertAtEnd(&head, 20);
```

```
insertAtBeginning(&head, 10);

insertAtBeginning(&head, 30);

insertAt(&head, 1, 70);

insertAt(&head, 4, 80);

insertAt(&head, 5, 90);

insertAtEnd(&head, 100);

deleteFrom(&head, 1);

deleteFrom(&head, 4);

deleteFrom(&head, 5);

deleteFromFirst(&head);

deleteFromEnd(&head);

Reverse(&head);

Print(head);

}
```

// 1.1. Insert a node at the beginning.

```
void insertAtBeginning(Node** pointerToHead, int x){

    struct Node* newNode = (struct Node*)malloc(sizeof(struct Node));

    newNode -> data = x;

    newNode -> next = *pointerToHead;

    *pointerToHead = newNode;

}
```

// 1.2. Insert a node at the end.

```
void insertAtEnd(Node** pointerToHead, int x){

    struct Node* newNode = (struct Node*) malloc(sizeof(struct Node));

    newNode -> data = x;

    newNode -> next = NULL;
```

```

if(*pointerToHead == NULL){
    *pointerToHead = newNode;
}
else{
    struct Node* endNode = *pointerToHead;
    while(endNode -> next != NULL){
        endNode = endNode -> next;
    }
    endNode -> next = newNode;
}
}

```

// 1.3. Insert a node at nth position.

```

void insertAt(Node** pointerToHead, int pos, int x){

    if(pos<1){
        printf("Invalid Position\n");
        return;
    }

    struct Node* newNode = (struct Node*)malloc(sizeof(struct Node));
    newNode -> data = x;

    if(pos == 1){
        newNode -> next = *pointerToHead;
        *pointerToHead = newNode;
        return;
    }

```

```
}
```

```
struct Node* current = *pointerToHead;
```

```
for(int i=1; i<pos-1 && current!=NULL; i++){
```

```
    current = current -> next;
```

```
}
```

```
if(current == NULL){
```

```
    printf("Invalid position\n");
```

```
    free(newNode);
```

```
    return;
```

```
}
```

```
newNode -> next = current -> next;
```

```
current -> next = newNode;
```

```
}
```

// 1.4. Delete a node from nth position.

```
void deleteFrom(Node** pointerToHead, int pos){
```

```
    if(*pointerToHead == NULL || pos<1){
```

```
        printf("Invalid position or empty list\n");
```

```
        return;
```

```
}
```

```
if(pos == 1){
```

```
    Node* temp = *pointerToHead;
```

```
    *pointerToHead = (*pointerToHead)-> next;
```

```
    free(temp);
```

```
    return;
```

```
}
```

```
Node* current = *pointerToHead;
```

```
for(int i=1; i<pos-1 && current != NULL; i++){
```

```
    current = current -> next;
```

```
}
```

```
if(current == NULL || current -> next == NULL){
```

```
    printf("Invalid position\n");
```

```
    return;
```

```
}
```

```
Node* temp = current -> next;
```

```
current -> next = current -> next -> next;
```

```
free(temp);
```

```
}
```

// 1.5. Delete a node from first position.

```
void deleteFromFirst(Node** pointerToHead){
```

```
    if(*pointerToHead == NULL){
```

```
        printf("List is empty\n");
```

```
        return;
```

```
}
```

```
Node* temp = *pointerToHead;
```

```
*pointerToHead = (*pointerToHead) -> next;
```

```
free(temp);
```

```
}
```

// 1.6. Delete a node from the end.

```
void deleteFromEnd(Node** pointerToHead){
```

```
    if(*pointerToHead == NULL){
```

```
        printf("List is empty\n");
```

```
        return;
```

```
    }
```

```
    if((*pointerToHead)-> next == NULL){
```

```
        *pointerToHead = NULL;
```

```
        return;
```

```
    }
```

```
    Node* endNode = *pointerToHead;
```

```
    while(endNode -> next -> next != NULL){
```

```
        endNode = endNode -> next;
```

```
    }
```

```
    Node* temp = endNode -> next;
```

```
    endNode -> next = NULL;
```

```
    free(temp);
```

```
}
```

// 1.7. Print the list.

```
void Print(Node* head){
```

```
    while(head != NULL){
```

```
        printf("%d\t", head -> data);
```

```
        head = head -> next;
```

```
}  
  
printf("\n");  
  
}
```

Output:

```
20 inserted at the end of the list  
10 inserted into the beginning of the list  
30 inserted into the beginning of the list  
80 inserted at 4 position in the list  
90 inserted at 5 position in the list  
100 inserted at the end of the list  
90 removed from the 4 position of the list  
100 removed from the 5 position of the list  
30 removed from the beginning of the list  
20 removed from the end of the list  
  
Elements in the list:  
10      80
```