

Session 2: SQL Basics & Commands
Trainer Coverage: SQL syntax rules.
DDL commands: CREATE, ALTER, DROP.
Creating basic users and expenses tables.
Demo: Execute commands in MySQL CLI / Workbench.

TASKS:

Q-1. Open MySQL Workbench or CLI and write a CREATE TABLE statement to create a table called 'restaurants' with columns: id (INT, primary key, auto-increment), name (VARCHAR(100)), location (VARCHAR(100)), and rating (DECIMAL(2,1)).

ANS.

```
CREATE TABLE restaurants (  
    id INT PRIMARY KEY AUTO_INCREMENT,  
    name VARCHAR(100),  
    location VARCHAR(100),  
    rating DECIMAL(2,1)  
);
```

Show query box

✓ MySQL returned an empty result set (i.e. zero rows). (Query took 0.1070 seconds.)

```
CREATE TABLE restaurants ( id INT PRIMARY KEY AUTO_INCREMENT, name VARCHAR(100), location VARCHAR(100), rating DECIMAL(2,1) );
```

[Edit inline] [Edit] [Create PHP code]

Table structure **Relation view**


#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
☐ 1	id	int(11)			No	None		AUTO_INCREMENT	Change Drop More
☐ 2	name	varchar(100)	utf8mb4_general_ci		Yes	NULL			Change Drop More
☐ 3	location	varchar(100)	utf8mb4_general_ci		Yes	NULL			Change Drop More
☐ 4	rating	decimal(2,1)			Yes	NULL			Change Drop More

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
☐ 1	id 	int(11)			No	None		AUTO_INCREMENT	 Change  Drop  More
☐ 2	name	varchar(100)	utf8mb4_general_ci		Yes	NULL			 Change  Drop  More
☐ 3	location	varchar(100)	utf8mb4_general_ci		Yes	NULL			 Change  Drop  More
☐ 4	rating	decimal(2,1)			Yes	NULL			 Change  Drop  More
☐ 5	average_cost	int(11)			Yes	NULL			 Change  Drop  More

Q-3. Write a SQL statement to DROP the 'restaurants' table you created earlier. Double-check your command before running it to avoid accidental data loss.

ANS.

DROP TABLE restaurants;

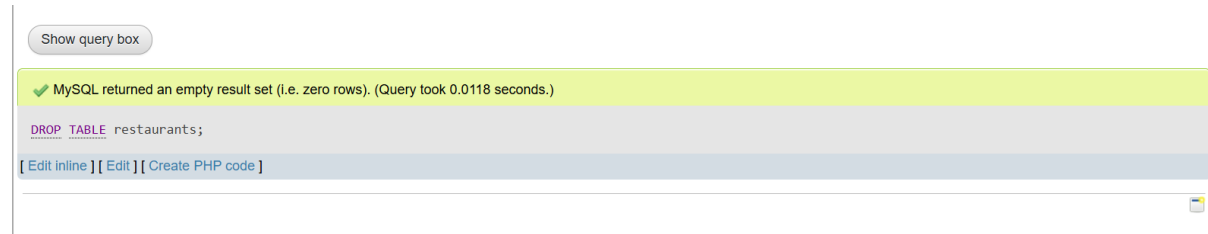

Q-4. Create a new table called 'playlists' for a music app like Spotify, with columns: playlist_id (INT, primary key, auto-increment), title (VARCHAR(50)), created_by (VARCHAR(50)), and created_at (DATE).

ANS.

```
CREATE TABLE playlists (  
    playlist_id INT PRIMARY KEY AUTO_INCREMENT,  
    title VARCHAR(50),  
    created_by VARCHAR(50),  
    created_at DATE  
);
```

Show query box

✓ MySQL returned an empty result set (i.e. zero rows). (Query took 0.0711 seconds.)

```
CREATE TABLE playlists ( playlist_id INT PRIMARY KEY AUTO_INCREMENT, title VARCHAR(50), created_by VARCHAR(50), created_at DATE );
```

[\[Edit inline \]](#) [\[Edit \]](#) [\[Create PHP code \]](#)



Table structure



Relation view

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
☐	1 playlist_id	int(11)			No	None		AUTO_INCREMENT	Change Drop More
☐	2 title	varchar(50)	utf8mb4_general_ci		Yes	NULL			Change Drop More
☐	3 created_by	varchar(50)	utf8mb4_general_ci		Yes	NULL			Change Drop More
☐	4 created_at	date			Yes	NULL			Change Drop More