



Dr. Vishwanath Karad

**MIT WORLD PEACE  
UNIVERSITY** | PUNE

TECHNOLOGY, RESEARCH, SOCIAL INNOVATION & PARTNERSHIPS

# Process Management

---

# Syllabus OS [ 2018-2019]--Trimester VI

---

## Process Management

**Process:** Concept of a Process, Process States, Process Control-creation, new program execution, termination.

**Threads:** Processes and Threads, Concept of Multithreading, Types of Threads, Thread programming Using Pthreads.

**Scheduling:** Types of Scheduling, Scheduling Algorithms: FCFS, SJF, Priority, Round Robin.

# References

1. William Stallings, Operating System: Internals and Design Principles, Prentice Hall, ISBN-10: 0-13-380591-3, ISBN-13: 978-0-13-380591-8, 8th Edition
2. Abraham Silberschatz, Peter Baer Galvin and Greg Gagne, Operating System Concepts, WILEY, ISBN 978-1-118-06333-0, 9th Edition

# Process Management

- **Concept of a Process :** Process is an instance of a program in execution
- It is an entity that can be assigned to and executed on a processor
- **A process is comprised of:**
  - Program code/instructions
  - Data
  - Stack
  - A number of attributes describing the state of the process
- When a process is mapped on to the memory it has an address space. This address space includes the code , data and stack for the process
- Terms *job*, *task* and *process* are used almost interchangeably.
- Many copies of editor program(passive entity) invoked, each is a separate process(active entity)

# Process Management

---

## What is process management ?

- The processes are represented and controlled by the OS, this is known as process management.
- **The Process states** which characterize the behaviour of processes.
- **The Data structures** that are used to manage processes.
- It describes the ways in which the OS uses these data structures to control process execution.

# *Process Management* tasks of an Operating System

---

- Interleave the execution of multiple processes
- Allocate resources to processes, and protect the resources of each process from other processes,
- Enable processes to share and exchange information,
- Enable synchronization among processes.


# Process States

---

When a program executes as a process it goes through multiple states before it completes execution

- **new:** process is created
- **ready:** process is waiting to be assigned processor. The process has every other resource except the processor
- **running:** Instructions are being executed. State has all resources including the processor
- **waiting:** process is waiting for some event to occur (eg. I/O completion). When an executing process needs an I/O device/services, it gets into wait state and when the i/o requirement is fulfilled it goes back into ready state
- **terminated:** process has finished execution

# Diagram for Process States

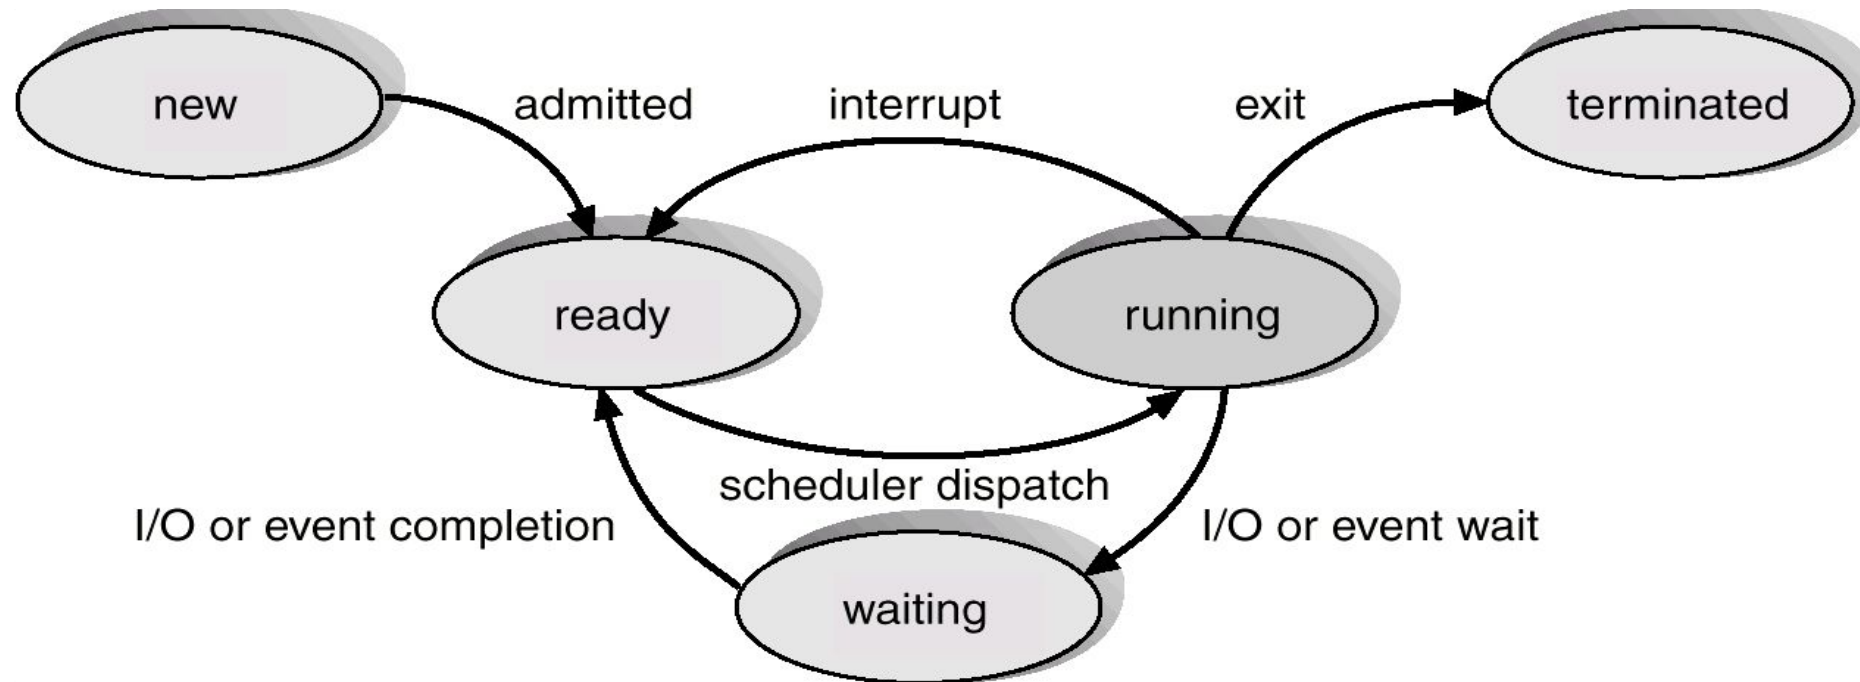



# Suspended State

---

- Processor is faster than I/O so many processes could be waiting for I/O
- Swap these processes to disk to free up more memory
- Ready/Waiting state becomes *suspend* state when swapped to disk

# Process Control Block (PCB)

**Process Control Block [ PCB ]** : It is a Data-structure maintained by the Operating System. It holds all necessary information related to a Process.

**Information associated with each process is as follows:-**

Process state

Program counter

CPU registers

CPU scheduling information

Memory-management information

Accounting information

I/O status information

pointer	process state
process number	
program counter	
registers	
memory limits	
list of open files	
⋮	

# Process Modes

---


**There are two modes of operations :-**

**Kernel mode** ( Privileged mode)..it can access its own data-structures as well as the user mode data structures.

**User mode** : it can access only the user mode data structures.

- User programs initially work in the User mode.
- Whenever a system call is encountered the control switches to the kernel mode.
- All interrupts are serviced in the Kernel mode.
- When the system call is serviced the control returns back to the user mode

# Process Management --- context switch

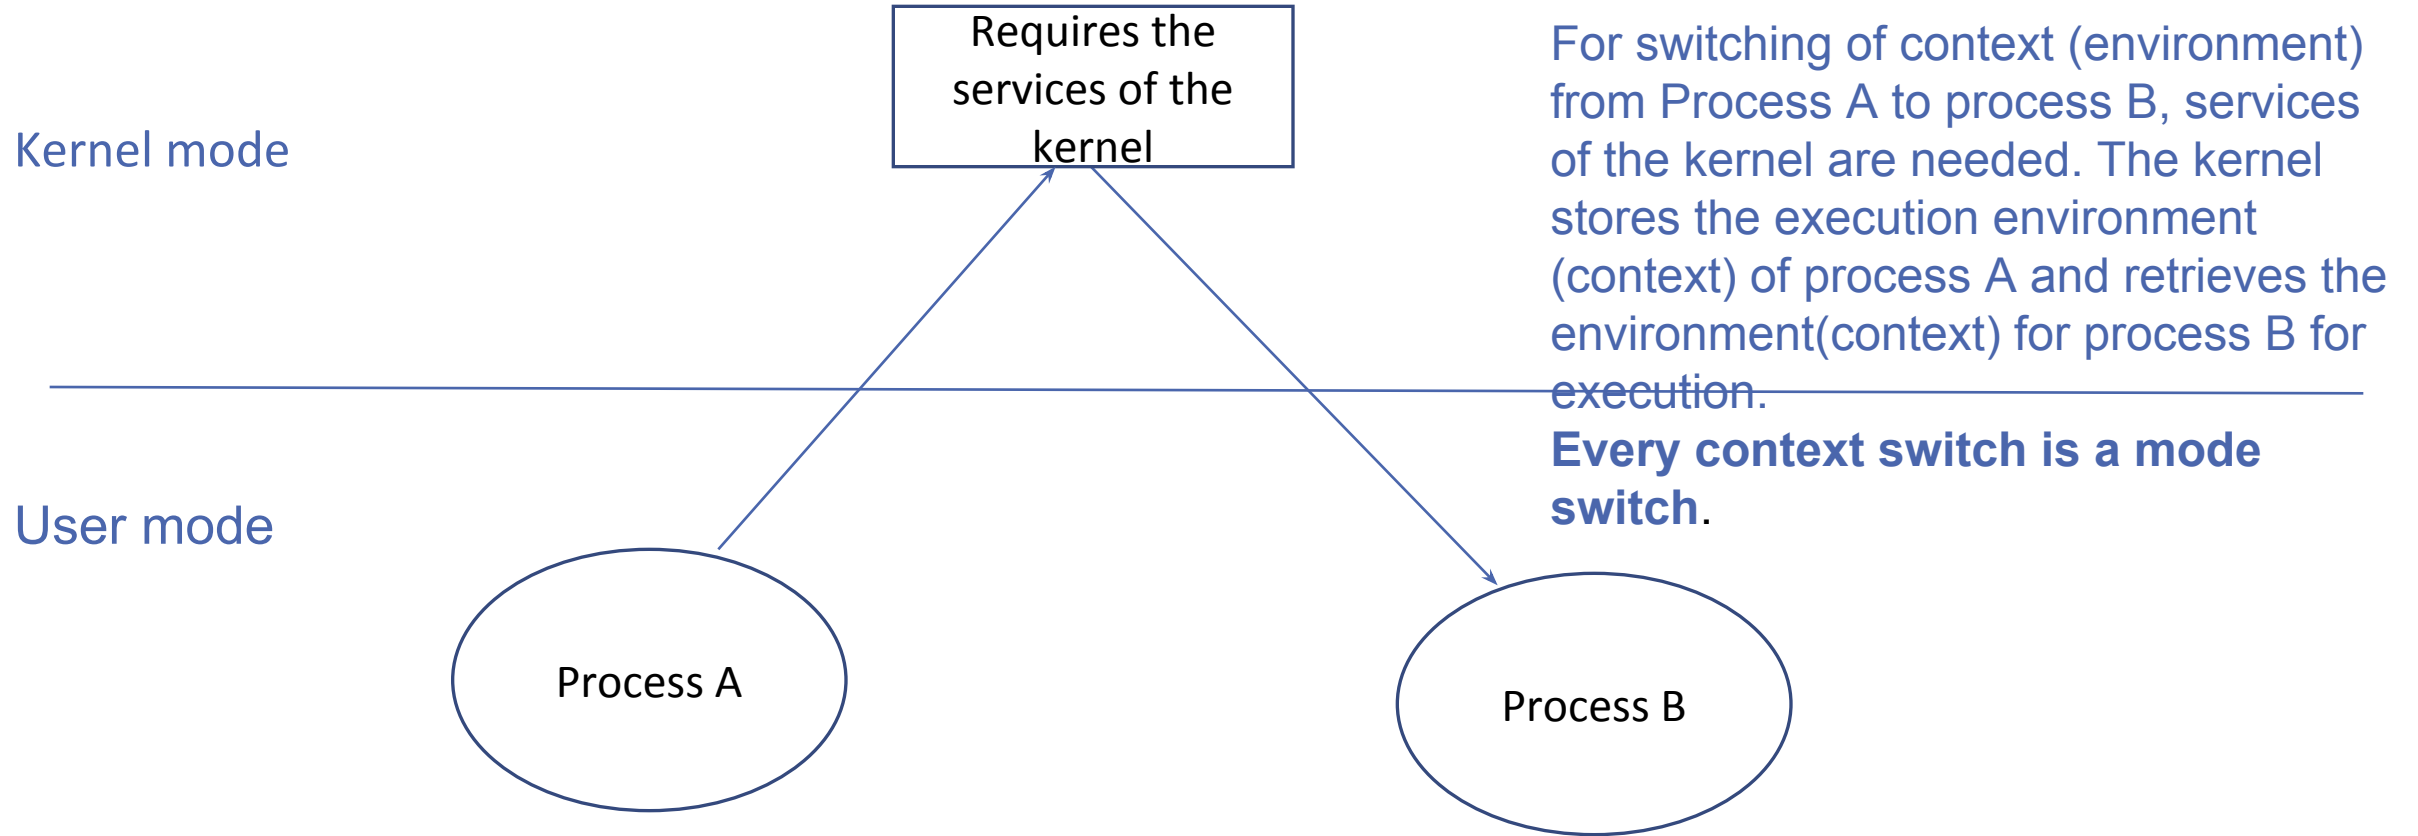


# Context Switch

---


When CPU switches to another process, the system must save the state of the old process and load the saved state for the new process.

Context-switch time is overhead; the system does no useful work while switching.


# Context Switch

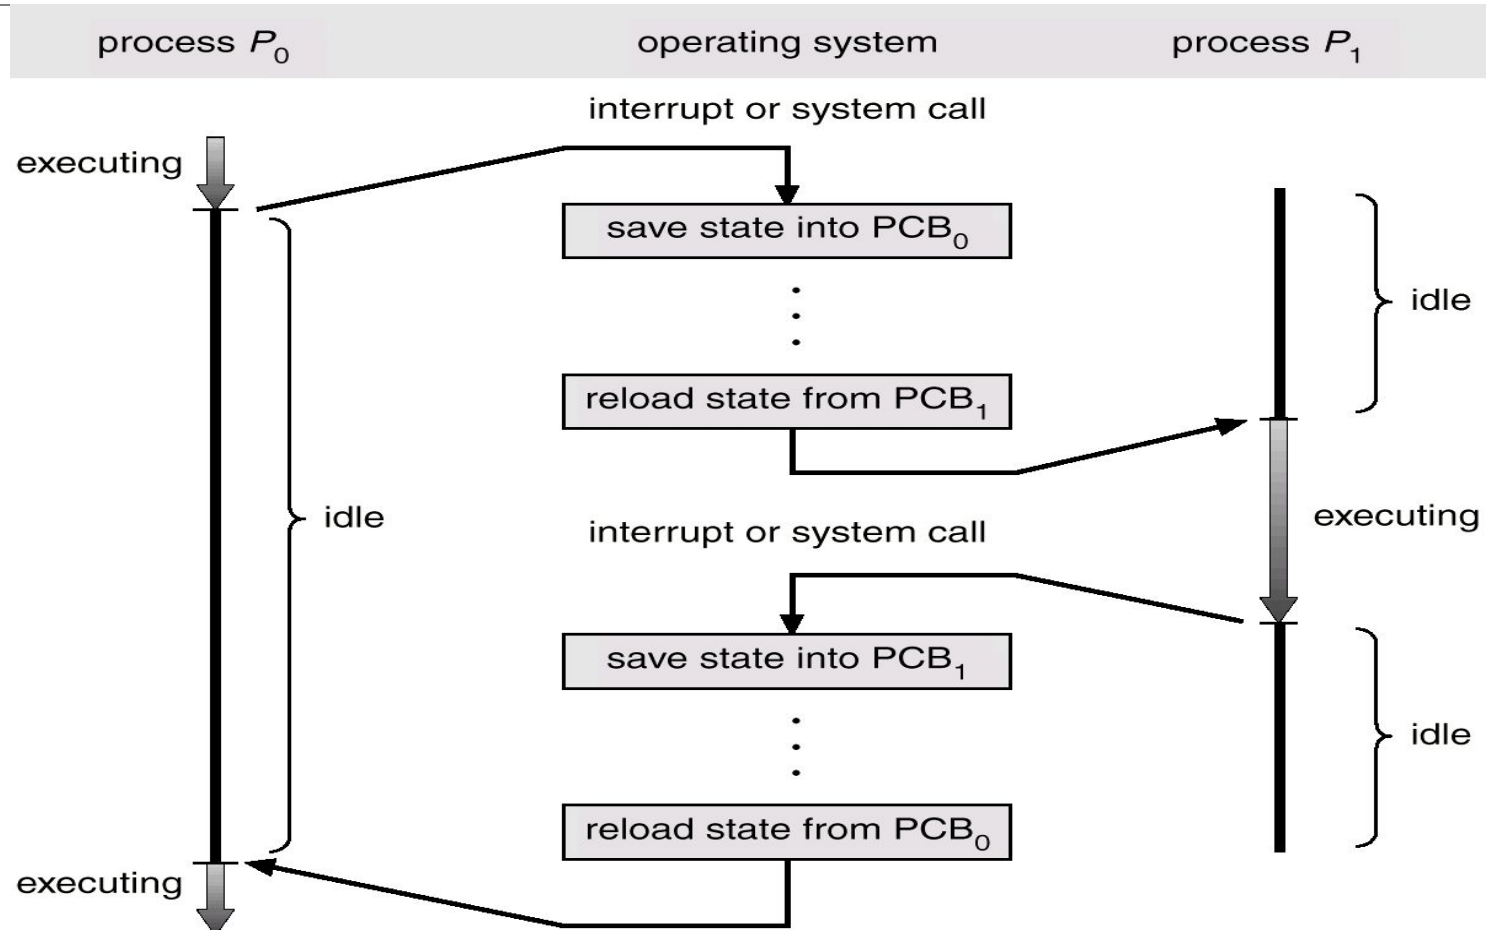

# Process Management – Mode switch

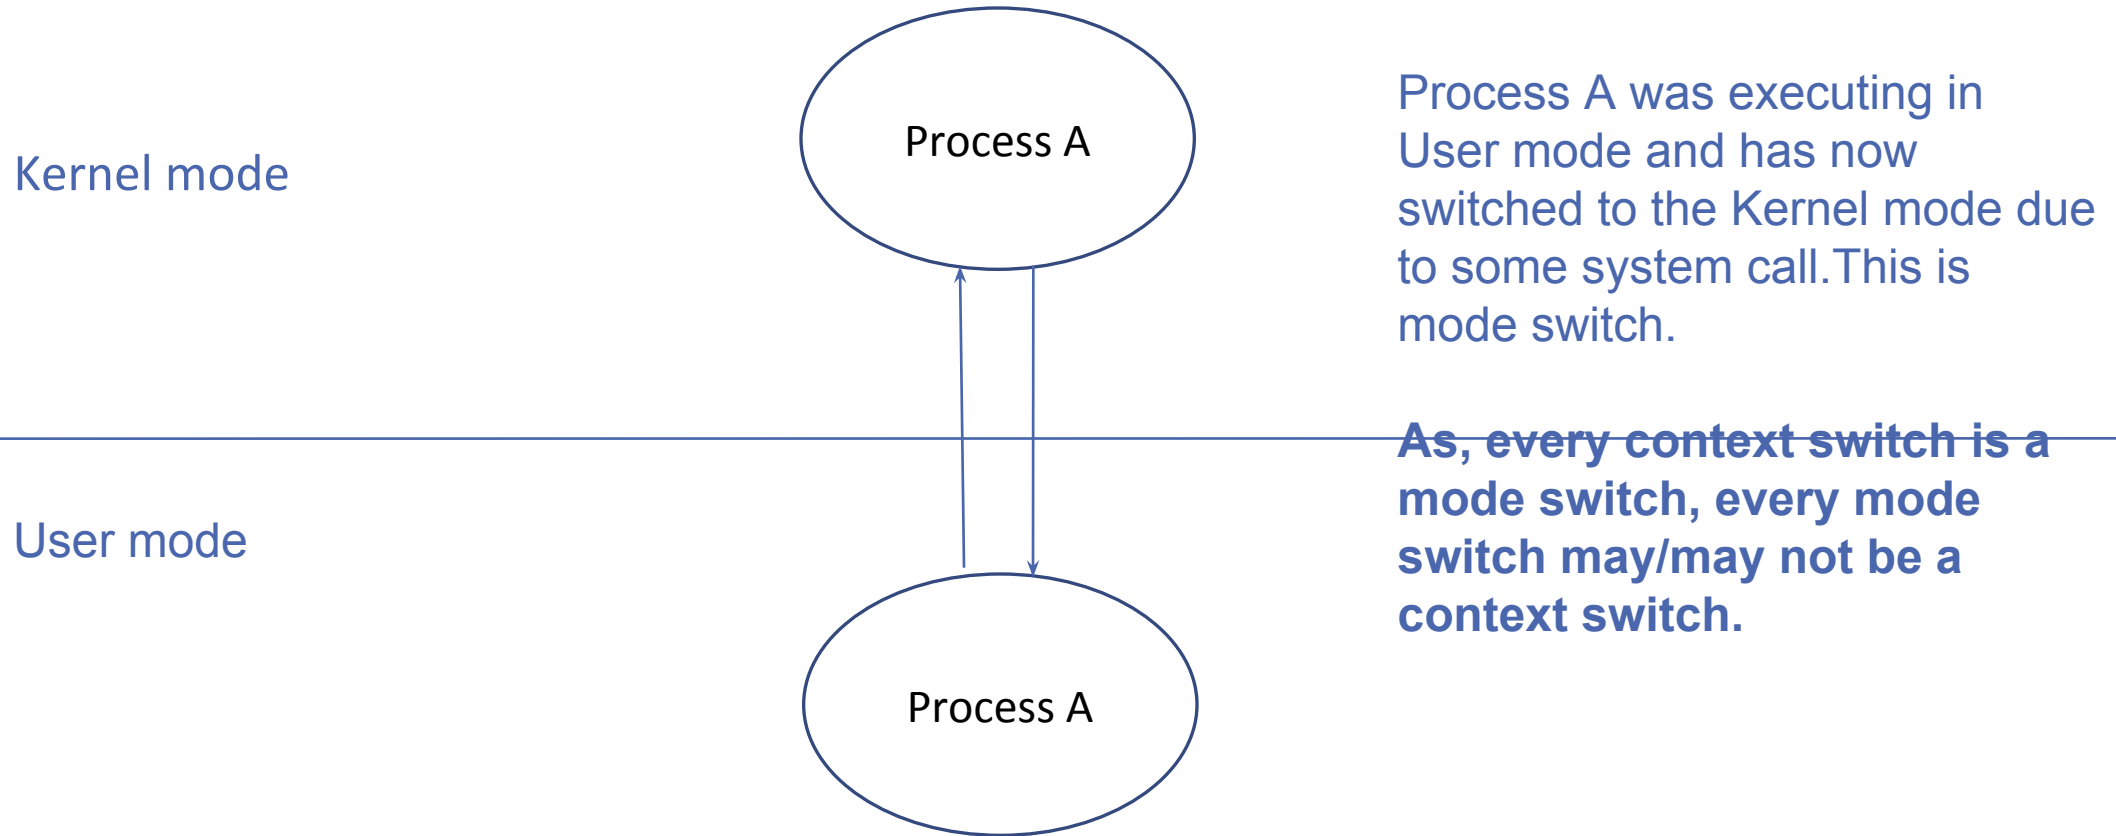

# Process Execution

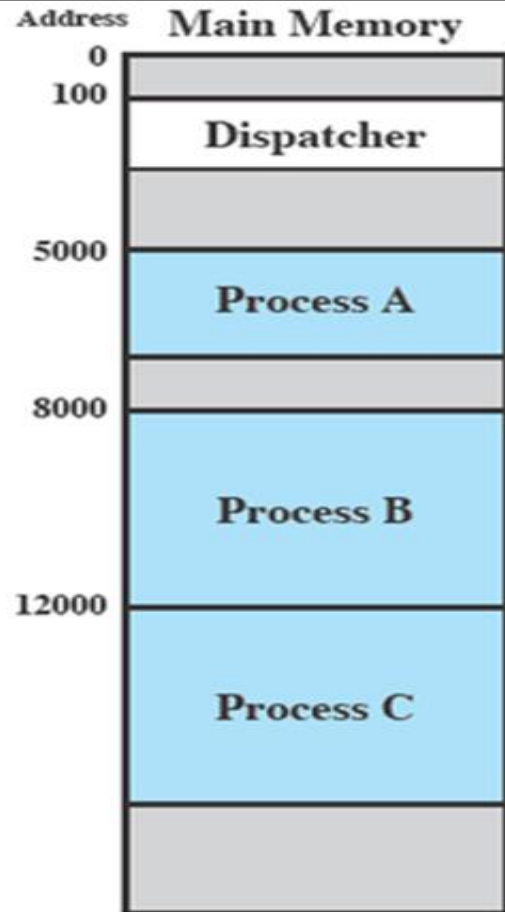

Consider three processes being executed


All are in memory (plus the dispatcher)

**Dispatcher** is a small program which switches the processor from one process to another

Selecting a process among various processes is done by **scheduler**. Here the task of scheduler completed. Now **dispatcher** comes into picture as scheduler have decide a process for execution, it is dispatcher who takes that process from ready queue to the running status, or providing CPU to that process is the task of dispatcher.



# Process Execution

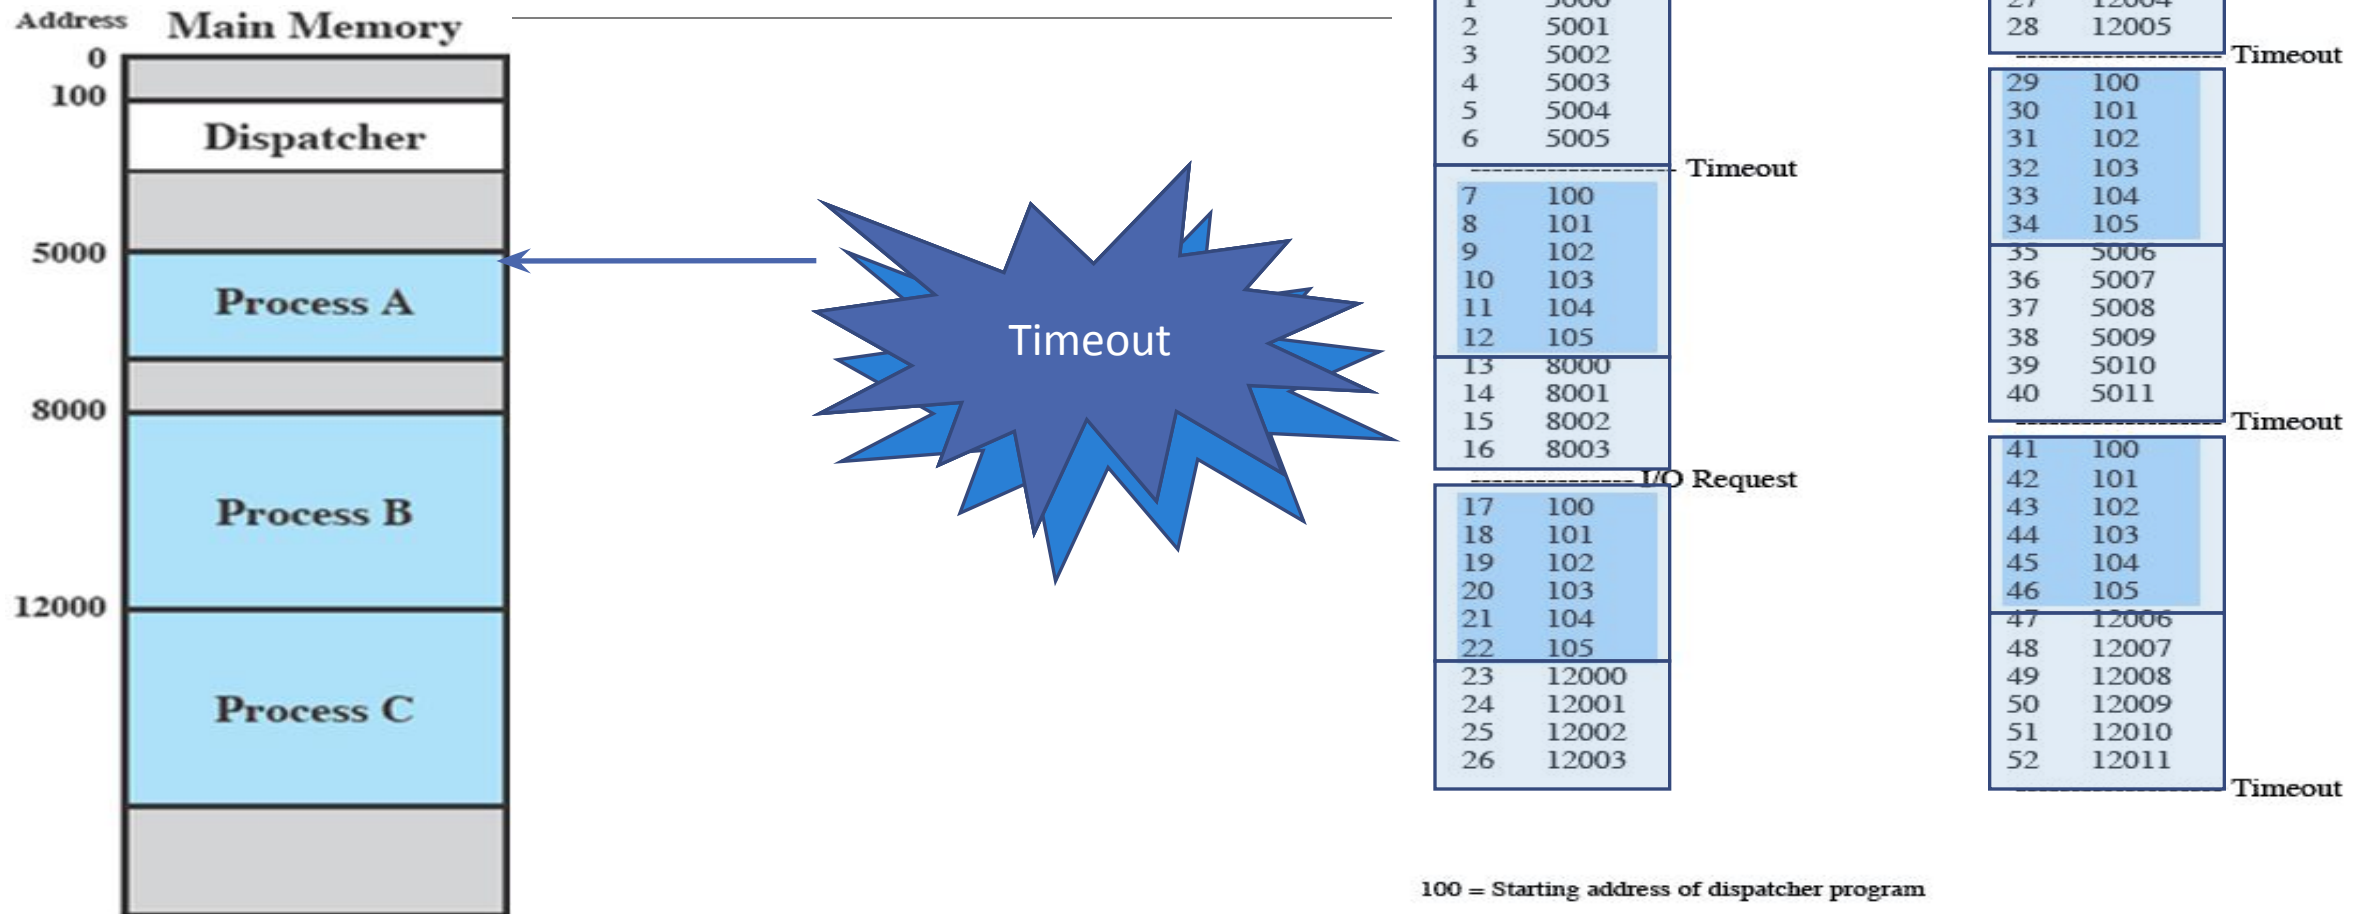


100 = Starting address of dispatcher program

Shaded areas indicate execution of dispatcher process;  
first and third columns count instruction cycles;  
second and fourth columns show address of instruction being executed

**Figure 3.4 Combined Trace of Processes of Figure 3.2**

# Queuing Diagram

---

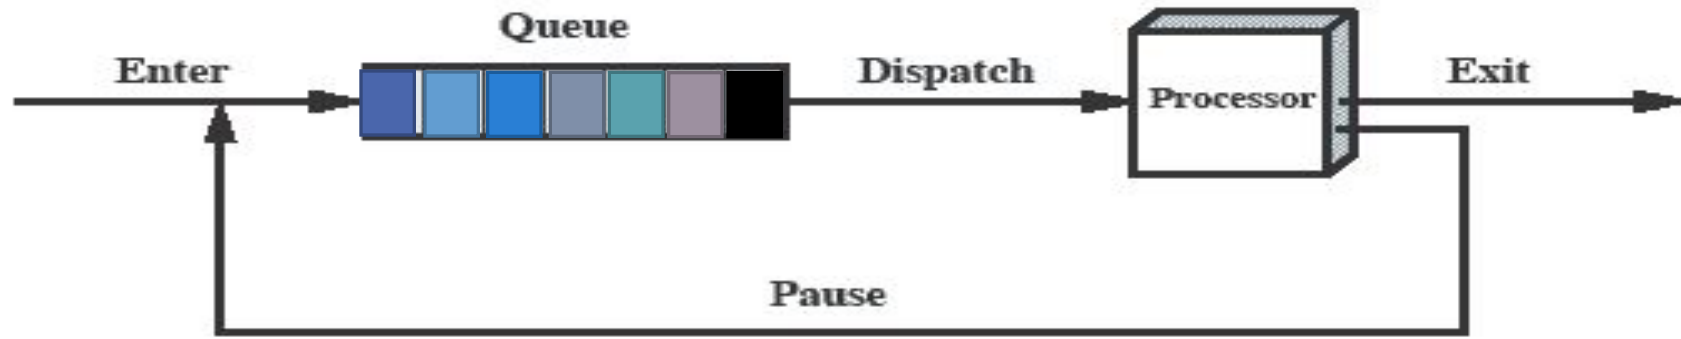

(b) Queuing diagram

Processes moved by the dispatcher of the OS to the CPU then back to the queue until the task is completed

# Process Creation

---

**When a new process is created , the following happens :-**

- Allocates space to the process in memory.
- Assign a unique process ID to the process
- A Process control block (PCB) gets associated with the process.
- OS maintains pointers to each process's PCB in a process table so that it can access the PCB quickly.

## **Reasons to create a new process**

- New user Job
- Created by O/S to provide a service
- Spawned by existing process: The action of creating a new process (Child Process) at the explicit request of another process (Parent Process) is called as process spawning. E.g A print server or file server may generate a new process for each request that it handles

# After Creation

---

After creating the process the Kernel can do one of the following:

- Stay in the parent process.
- Transfer control to the child process
- Transfer control to another process.

# Process Creation

---

## Fork

System call **fork()** is used to create processes. It takes no arguments and returns a process ID.

The syntax for the fork system call

- `pid = fork();`
  - In the parent process, pid is the child process ID
  - In the child process, pid is 0

Sequence of operations for fork.

- 1. It allocates a slot in the process table for the new process
- 2. It assigns a unique ID number to the child process
- 3. It makes a copy of the context of the parent process.
- 4. It returns the ID number of the child to the parent process, and a 0 value to the child process.

# Fork

---



- Purpose of **fork()** is to create a **new** process, which becomes the *child* process of the caller.
- After a process is created, **both** processes will execute the next instruction following the **fork()** system call.
- To distinguish the parent from the child, the returned value of **fork()** can be used:


❑ **fork()** returns a negative value, the creation of a child process was unsuccessful.

❑ **fork()** returns a zero to the newly created child process.

❑ **fork()** returns a positive value, the **process ID** of the child process, to the parent

- Returned process ID is of type **pid\_t** defined in **sys/types.h**
- Process can use function **getpid()** to retrieve the process ID assigned to this process
- **Unix/Linux will make an exact copy of the parent's address space and give it to the child. Therefore, the parent and child processes have separate address spaces.**

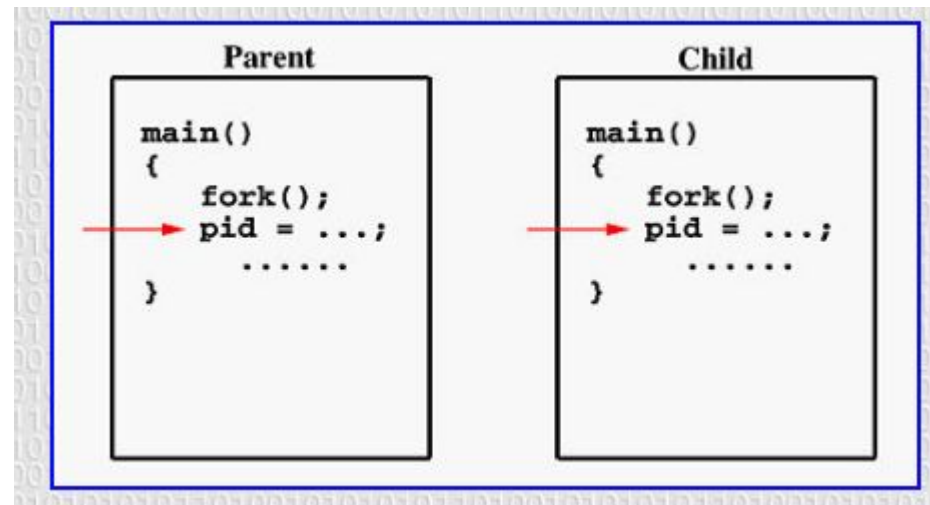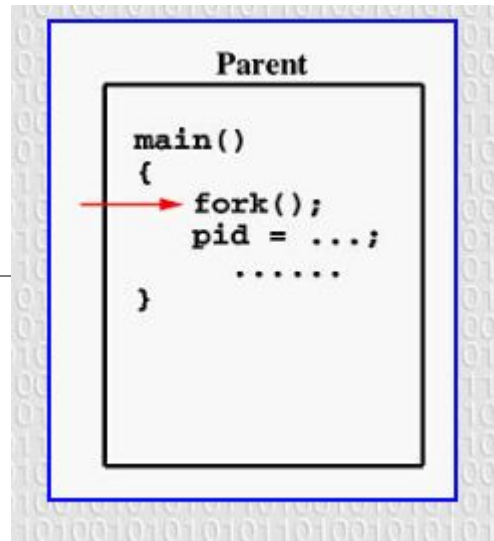

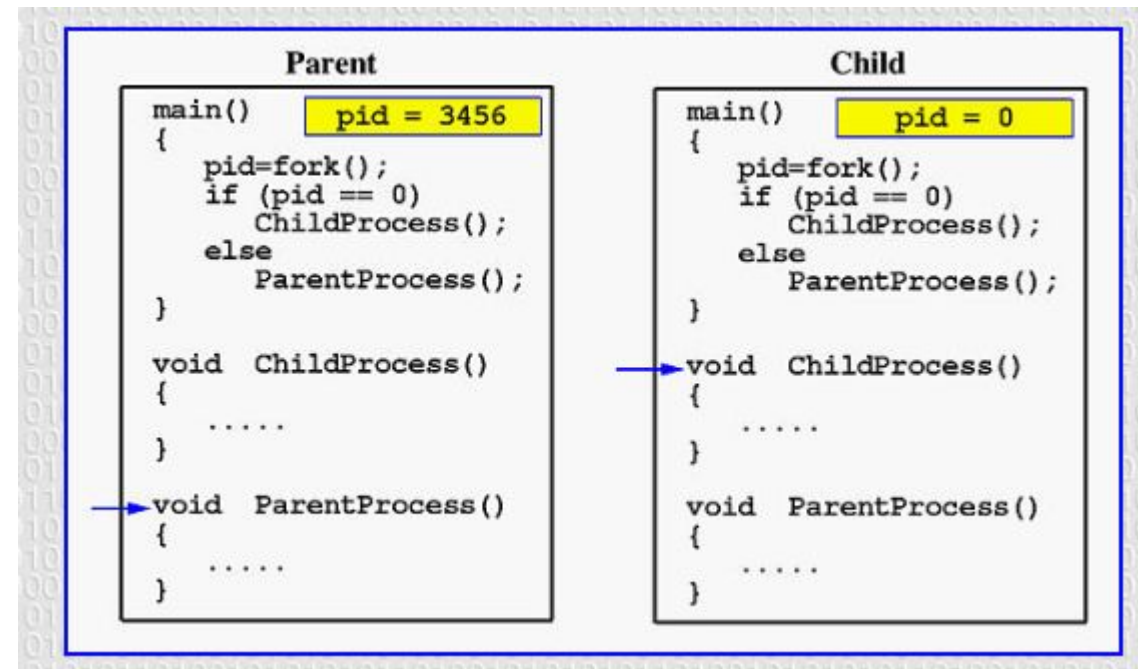



# Process Management—creating a Process in Unix(example)

```
#include<stdio.h>
#include<sys/types.h>
#include<unistd.h>

/* pid_t : is a long integer type data type...prototype in types.h */
pid_t num_pid;

main()
{
    num_pid=fork(); /* return value of fork */

    if(num_pid==0) /* this is child process */
    {
        printf("this is the child process id %d\n",getpid());
    }

    if(num_pid>0) /* this is parent process */
    {
        printf("this is the parent process id %d",getpid());
    }
    exit();
}
```

\$cc program.c

\$ ./a.out

\$ this is the child process id 1001

\$ this is the parent process id 1000

# Process Creation – Parent/Child

---

## Parent Process

The parent process has its unique ID

The parent process creates a child process by giving a call to `fork()` system call

## Child Process

The child process has its unique ID

The child process gets created due to the `fork()` system call

The child is initially a duplication of the parent process.

The child and parent do exist in separate address spaces.

The child inherits all data structures

A client-server application can be built using the parent-child concept.

Any IPC mechanism can be implemented using the parent child relationship.

# Process Termination

---

When a process terminates :

- All the resources held by process are released
- All the information held in all data structures is removed
- A process goes back to becoming a program and is stored on the secondary memory.

# Process Management-- Threads

---

- A thread is a part of a program.
- It is an execution unit of the CPU.
- All threads of the same process share the same address space.
- All Threads have separate stacks and individual Thread IDs
- Thread is a lightweight process because :The context switching between threads is inexpensive in terms of memory and resources.

# Process Management-- Threads

---

Multithreading: Ability of an OS to support multiple, concurrent paths of execution within a single process.

It is also described as the interleaved execution of threads.

# Process Management– Differences between threads and processes


Process	Threads
A process is a program in execution	A thread is a part of the process
A process has its own Process ID	A thread has its own thread ID
Every process has its own memory space	Threads use the memory of the process they belong to
Inter process communication is slow as processes have different memory address	Inter thread communication for threads within the same process is fast
The context switching is more expensive in terms of memory and resources.	The context switching is less expensive in terms of memory and resources . Majorly because threads of the same process share the same memory space.



# Process Management- ---


Threads, a diagrammatic

representation

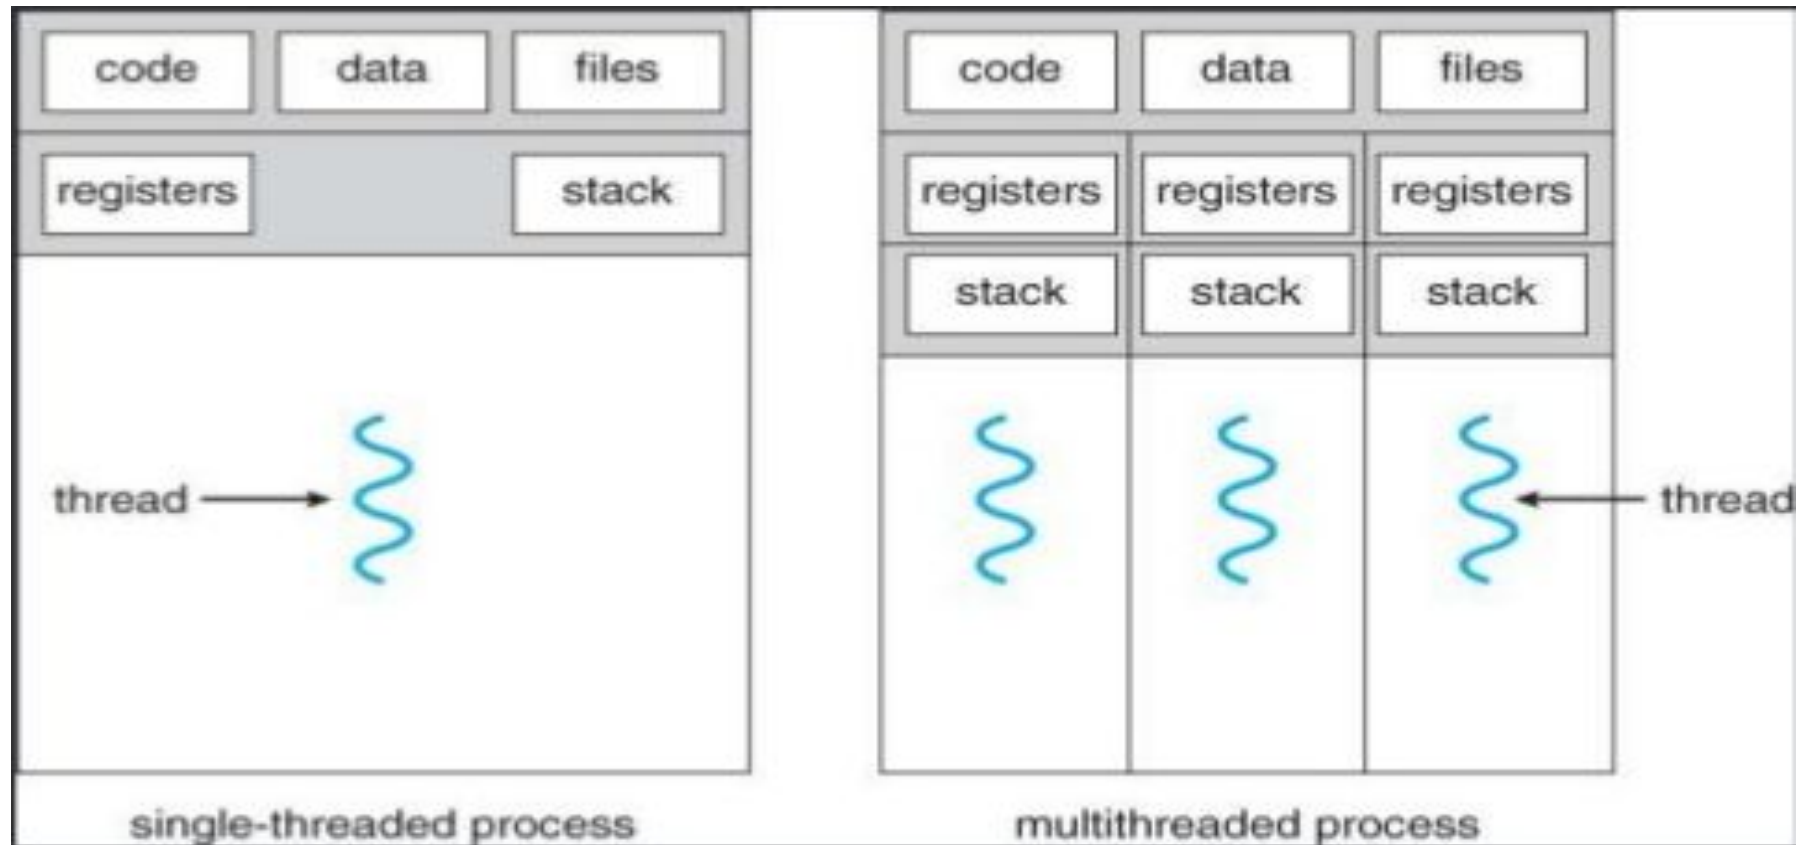


# Process Management


## Threads and processes diagrammatic representation

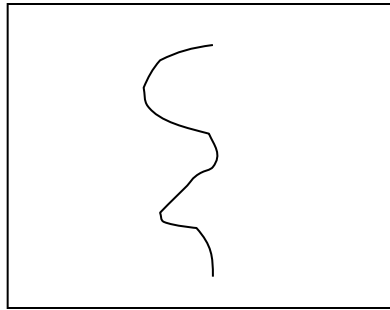



One process  
one thread

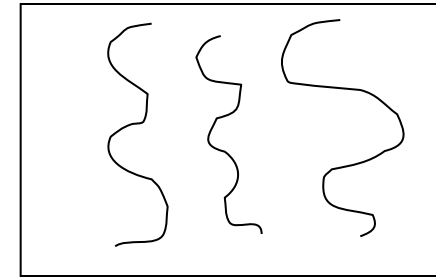

One Process  
Multiple threads

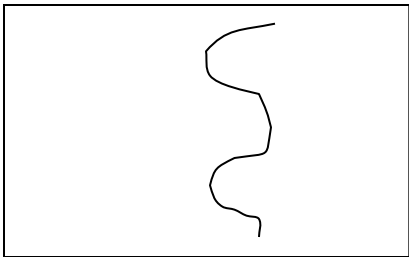

Multiple Processes  
one thread per process

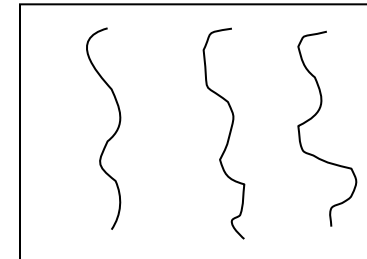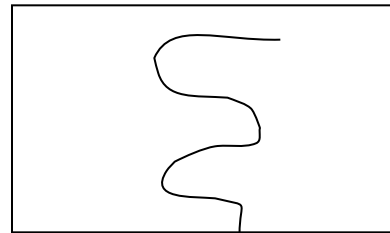

Multiple Processes  
Multiple thread per process



# Multithreading

---

- Operating system supports multiple threads of execution within a single process
- Examples:
  - MS-DOS supports a single thread
  - UNIX supports multiple user processes but only supports one thread per process
  - Java run time environment supports one process with multiple threads
  - Windows, Solaris, Linux, Mach, and OS/2 support multiple threads

# Process Management—Thread basics

Thread operations include thread creation, termination, synchronization (join, blocking), scheduling, etc.

All threads within a process share the same address space.

Threads in the same process share: Process instructions

- Data
- open files (descriptors)
- signals
- current working directory
- User and group id

Each thread has a unique: Thread ID


- set of registers
- stack for local variables, return addresses
- priority

# Process Management—Thread basics

## Types of Threads :-

There are majorly two types of threads :-

1. kernel level threads
2. User level threads

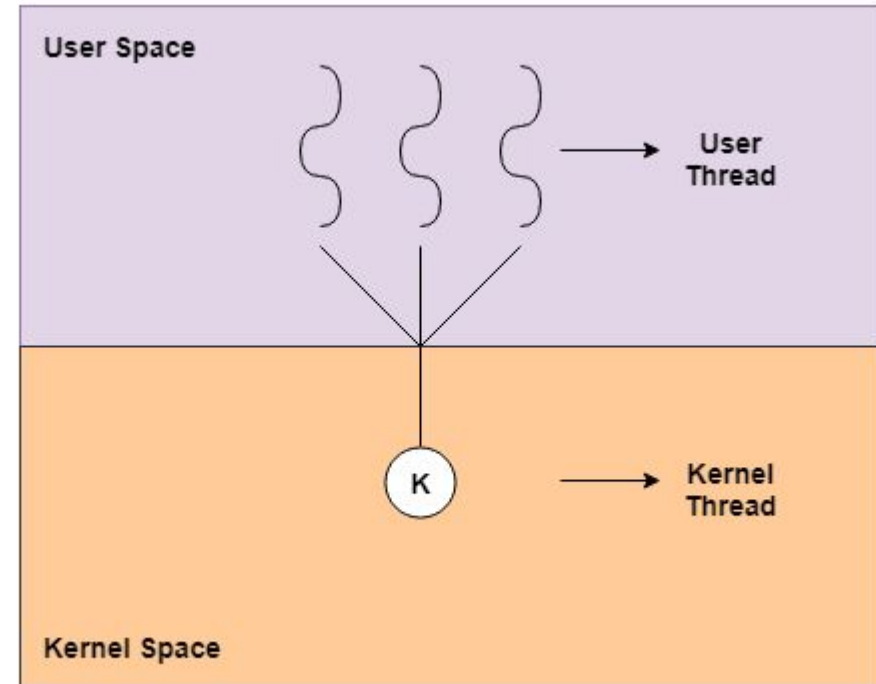

# Process Management—Thread basics

## User - Level Threads

- User-level threads are implemented by users and the kernel is not aware of the existence of these threads
- Kernel handles them as if they were single-threaded processes.
- User-level threads are small and much faster than kernel level threads.
- They are represented by a program counter(PC), stack, registers and a small process control block.
- Also, there is no kernel involvement in synchronization for user-level threads.
- User-Level threads are managed entirely by the user-level library

# Process Management—Thread basics

## Advantages of User-Level Threads

- User-level threads are easier and faster to create than kernel-level threads. They can also be more easily managed.
- User-level threads can be run on any operating system.
- There are no kernel mode privileges required for thread switching in user-level threads.

## Disadvantages of User-Level Threads

- Multithreaded applications in user-level threads cannot use multiprocessing to their advantage.
- Entire process is blocked if one user-level thread performs blocking operation.

# Process Management—Thread basics

## Kernel-Level Threads

- Kernel-level threads are handled by the operating system directly and the thread management is done by the kernel
- Context information for the process as well as the process threads is all managed by the kernel.
- Because of this, kernel-level threads are slower than user-level threads.

# Process Management—Thread basics

## Advantages of Kernel-Level Threads

- Multiple threads of the same process can be scheduled on different processors in kernel-level threads.
- The kernel routines can also be multithreaded.
- If a kernel-level thread is blocked, another thread of the same process can be scheduled by the kernel.

## Disadvantages of Kernel-Level Threads

- A mode switch to kernel mode is required to transfer control from one thread to another in a process.
- Kernel-level threads are slower to create as well as manage as compared to user-level threads.

---

```
#include<pthread.h>
```

```
int pthread_create (pthread_t *tid, const pthread_attr_t *attr, void *(*func)(void*),void *arg);
```

0 : OK                    +ve : error

pthread\_t \*tid : Returns the thread ID which is of type pthread\_t, i.e. long int.

const pthread\_attr\_t \*attr : Thread attribute list

void \*(\*func)(void\*) : A function that works as a thread.

void \*arg : A list of arguments sent to the function



# Process Management—POSIX pthread

## Portable Operating System Interface Standard (POSIX)

---

```
#include <pthread.h>
```

```
void pthread_exit(void *retval);
```

The `pthread_exit()` function terminates the calling thread and returns a value via `retval` that (if the thread is joinable) is available to another thread in the same process that calls [`pthread\_join\(\)`](#).



# Process Management—POSIX pthread

## Portable Operating System Interface Standard

### POSIX)

---

```
#include<pthread.h>
```

```
int pthread_join(pthread_t tid, void **status);
```

0:OK          +ve:error

pthread\_join() function shall suspend execution of the calling thread until the target thread terminates

On return from a successful pthread\_join() call with a non-NULL status argument, the value passed to [pthread\\_exit\(\)](#) by the terminating thread shall be made available in the location referenced by status.

# Process Management—POSIX pthread

## Portable Operating System Interface Standard (POSIX)

---

```
#include<pthread.h>
```

```
pthread_t pthread_self(void);
```

Returns: thread ID of calling thread

The `pthread_self()` function returns the ID of the calling thread. This is the same value that is returned in `*tid` in the [`pthread\_create\(\)`](#) call that created this thread.

# Process Management--POSIX pthread

```
#include<pthread.h>
```

```
int pthread_detach(pthread_t tid);
```

Returns : 0:OK      +ve: error

The **pthread\_detach()** function marks the thread identified by *thread* as detached.

When a detached thread terminates, its resources are automatically released back to the system without the need for another thread to join with the terminated thread.

**Need for linking `-lpthread` flag at the time of compilation :-**

**`-lpthread`** in essence tells the GCC compiler that it must link the pthread library to the compiled executable. pthread or POSIX Threads is a standardized library for implementing threads in C

# pthread example

```
#include<stdio.h>
#include<pthread.h>
```

```
int add1(int a[3])
{
    a[2] = a[1] + a[0];
    printf("result from thread 1 is %d\n",a[2]);
}
int add2(int b[3])
{
    b[2] = b[1] + b[0];
    printf("result from thread 2 is %d\n",b[2]);
}
```

```
main()
{
    int arr[4],a[3],b[3],i,ans=0;
    pthread_t thread1,thread2;
    printf("enter 4 numbers\n");
    for(i=0;i<4;i++)
        scanf("%d",&arr[i]);
    a[0]=arr[0];    a[1]=arr[1];

    b[0]=arr[2];    b[1]=arr[3];

    pthread_create(&thread1,NULL,(void*)add1,a);
    pthread_create(&thread2,NULL,(void*)add2,b);
    pthread_join(thread1,NULL);
    pthread_join(thread2,NULL);

    ans=a[2]+b[2];
    printf("the result = %d\n",ans);
}
```