


DATA MODEL

What gets stored, and what it is joined by

Eight tables in SQLite. The arrows are the joins that make a claim checkable: every fact reaches a page and a quote, and every relationship reaches two facts.

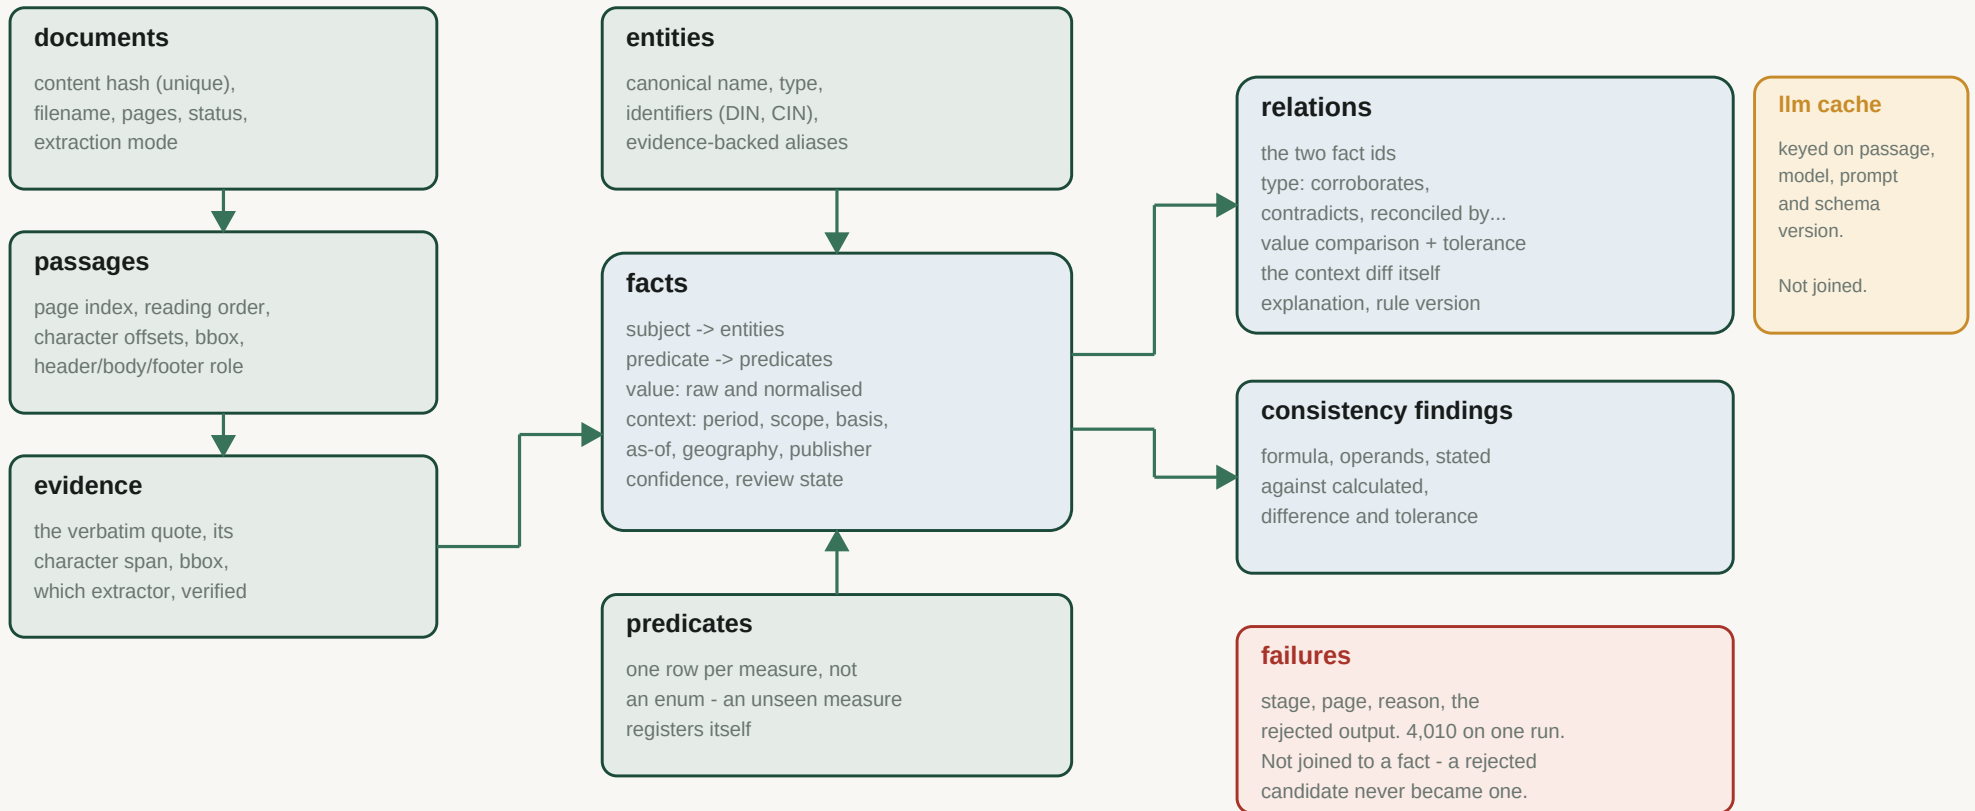

Two invariants hold the design up. A fact cannot be written without evidence that resolves to a stored passage and page, so nothing ungrounded can enter the layer. And a relationship stores the context diff it reasoned from, so its explanation can be re-derived rather than taken on trust.

Identifiers are what travel between documents. A DIN joins a director across two filings where a name would not.