

# **File Browser**

*Native file browser for Windows and macOS*



API

© 2017 **crosstales** LLC

<https://www.crosstales.com>

Date: 18.10.2018

Version: 2018.3.1

# Contents

<b>1</b>	<b>Namespace Index</b>	<b>1</b>
1.1	Packages . . . . .	1
<b>2</b>	<b>Hierarchical Index</b>	<b>3</b>
2.1	Class Hierarchy . . . . .	3
<b>3</b>	<b>Class Index</b>	<b>5</b>
3.1	Class List . . . . .	5
<b>4</b>	<b>Namespace Documentation</b>	<b>7</b>
4.1	Crosstales Namespace Reference . . . . .	7
4.2	Crosstales.Common Namespace Reference . . . . .	7
4.3	Crosstales.Common.EditorTask Namespace Reference . . . . .	7
4.4	Crosstales.Common.EditorUtil Namespace Reference . . . . .	7
4.5	Crosstales.Common.Model Namespace Reference . . . . .	8
4.6	Crosstales.Common.Model.Enum Namespace Reference . . . . .	8
4.6.1	Enumeration Type Documentation . . . . .	8
4.6.1.1	Platform . . . . .	8
4.7	Crosstales.Common.Util Namespace Reference . . . . .	8
4.8	Crosstales.FB Namespace Reference . . . . .	9
4.9	Crosstales.FB.Demo Namespace Reference . . . . .	9
4.10	Crosstales.FB.EditorTask Namespace Reference . . . . .	9
4.10.1	Enumeration Type Documentation . . . . .	10
4.10.1.1	UpdateStatus . . . . .	10
4.11	Crosstales.FB.EditorUtil Namespace Reference . . . . .	10
4.12	Crosstales.FB.Util Namespace Reference . . . . .	10
4.13	Crosstales.FB.Wrapper Namespace Reference . . . . .	10
4.14	Crosstales.UI Namespace Reference . . . . .	11
4.15	Crosstales.UI.Util Namespace Reference . . . . .	11

<b>5</b>	<b>Class Documentation</b>	<b>13</b>
5.1	<a href="#">Crosstales.UI.Util.AudioFilterController Class Reference</a>	13
5.1.1	<a href="#">Detailed Description</a>	14
5.1.2	<a href="#">Member Data Documentation</a>	14
5.1.2.1	<a href="#">FindAllAudioFiltersOnStart</a>	14
5.2	<a href="#">Crosstales.UI.Util.AudioSourceController Class Reference</a>	14
5.2.1	<a href="#">Detailed Description</a>	15
5.2.2	<a href="#">Member Data Documentation</a>	15
5.2.2.1	<a href="#">AudioSources</a>	15
5.2.2.2	<a href="#">FindAllAudioSourcesOnStart</a>	15
5.2.2.3	<a href="#">Loop</a>	16
5.2.2.4	<a href="#">Mute</a>	16
5.2.2.5	<a href="#">Pitch</a>	16
5.2.2.6	<a href="#">ResetAudioSourcesOnStart</a>	16
5.2.2.7	<a href="#">StereoPan</a>	16
5.2.2.8	<a href="#">Volume</a>	16
5.3	<a href="#">Crosstales.Common.EditorTask.BaseCompileDefines Class Reference</a>	16
5.3.1	<a href="#">Detailed Description</a>	17
5.4	<a href="#">Crosstales.Common.Util.BaseConstants Class Reference</a>	17
5.4.1	<a href="#">Detailed Description</a>	18
5.4.2	<a href="#">Member Data Documentation</a>	18
5.4.2.1	<a href="#">ASSET_3P_PLAYMAKER</a>	18
5.4.2.2	<a href="#">ASSET_AUTHOR</a>	18
5.4.2.3	<a href="#">ASSET_AUTHOR_URL</a>	19
5.4.2.4	<a href="#">ASSET_CT_URL</a>	19
5.4.2.5	<a href="#">ASSET_SOCIAL_DISCORD</a>	19
5.4.2.6	<a href="#">ASSET_SOCIAL_FACEBOOK</a>	19
5.4.2.7	<a href="#">ASSET_SOCIAL_LINKEDIN</a>	19
5.4.2.8	<a href="#">ASSET_SOCIAL_TWITTER</a>	19
5.4.2.9	<a href="#">ASSET_SOCIAL_XING</a>	19

5.4.2.10	ASSET_SOCIAL_YOUTUBE . . . . .	19
5.4.2.11	DEV_DEBUG . . . . .	19
5.4.2.12	FACTOR_GB . . . . .	19
5.4.2.13	FACTOR_KB . . . . .	20
5.4.2.14	FACTOR_MB . . . . .	20
5.4.2.15	FLOAT_32768 . . . . .	20
5.4.2.16	FORMAT_NO_DECIMAL_PLACES . . . . .	20
5.4.2.17	FORMAT_PERCENT . . . . .	20
5.4.2.18	FORMAT_TWO_DECIMAL_PLACES . . . . .	20
5.4.2.19	PATH_DELIMITER_UNIX . . . . .	20
5.4.2.20	PATH_DELIMITER_WINDOWS . . . . .	20
5.5	Crosstales.Common.EditorUtil.BaseGAApi Class Reference . . . . .	21
5.5.1	Detailed Description . . . . .	21
5.5.2	Member Function Documentation . . . . .	21
5.5.2.1	Event(string name, string version, string category, string action, string label="","", int value=0) . . . . .	21
5.6	Crosstales.Common.Util.BaseHelper Class Reference . . . . .	21
5.6.1	Detailed Description . . . . .	23
5.6.2	Member Function Documentation . . . . .	23
5.6.2.1	ClearLineEndings(string text) . . . . .	23
5.6.2.2	ClearSpaces(string text) . . . . .	24
5.6.2.3	ClearTags(string text) . . . . .	24
5.6.2.4	FileCopy(string inputFile, string outputFile, bool move=false) . . . . .	24
5.6.2.5	FormatBytesToHRF(long bytes) . . . . .	25
5.6.2.6	FormatSecondsToHourMinSec(double seconds) . . . . .	25
5.6.2.7	HSVToRGB(float h, float s, float v, float a=1f) . . . . .	25
5.6.2.8	IsValidURL(string url) . . . . .	25
5.6.2.9	RemoteCertificateValidationCallback(System.Object sender, System.Security.Crypto- graphy.X509Certificates.X509Certificate certificate, System.Security.Crypto- graphy.X509Certificates.X509Chain chain, System.Net.Security.SslPolicyErrors sslPolicyErrors) . . . . .	26
5.6.2.10	SplitStringToLines(string text, bool ignoreCommentedLines=true, int skipHeaderLines=0, int skipFooterLines=0) . . . . .	26

5.6.2.11	<a href="#">ValidateFile(string path)</a>	26
5.6.2.12	<a href="#">ValidatePath(string path, bool addEndDelimiter=true)</a>	26
5.6.2.13	<a href="#">ValidURLFromFilePath(string path)</a>	27
5.6.3	<a href="#">Property Documentation</a>	27
5.6.3.1	<a href="#">CurrentPlatform</a>	27
5.6.3.2	<a href="#">isAndroidPlatform</a>	27
5.6.3.3	<a href="#">isAppleBasedPlatform</a>	27
5.6.3.4	<a href="#">isEditor</a>	28
5.6.3.5	<a href="#">isEditorMode</a>	28
5.6.3.6	<a href="#">isInternetAvailable</a>	28
5.6.3.7	<a href="#">isIOSPlatform</a>	28
5.6.3.8	<a href="#">isLinuxPlatform</a>	28
5.6.3.9	<a href="#">isMacOSPlatform</a>	28
5.6.3.10	<a href="#">isStandalonePlatform</a>	29
5.6.3.11	<a href="#">isWebGLPlatform</a>	29
5.6.3.12	<a href="#">isWebPlatform</a>	29
5.6.3.13	<a href="#">isWindowsBasedPlatform</a>	29
5.6.3.14	<a href="#">isWindowsPlatform</a>	29
5.6.3.15	<a href="#">isWSAPlatform</a>	30
5.7	<a href="#">Crosstales.Common.EditorTask.BaseSetupResources Class Reference</a>	30
5.7.1	<a href="#">Detailed Description</a>	30
5.8	<a href="#">Crosstales.FB.EditorTask.CompileDefines Class Reference</a>	30
5.8.1	<a href="#">Detailed Description</a>	31
5.9	<a href="#">Crosstales.FB.Util.Config Class Reference</a>	31
5.9.1	<a href="#">Detailed Description</a>	31
5.9.2	<a href="#">Member Function Documentation</a>	31
5.9.2.1	<a href="#">Load()</a>	31
5.9.2.2	<a href="#">Reset()</a>	31
5.9.2.3	<a href="#">Save()</a>	32
5.9.3	<a href="#">Member Data Documentation</a>	32

5.9.3.1	DEBUG	32
5.9.3.2	isLoading	32
5.10	Crosstales.FB.EditorTask.ConfigLoader Class Reference	32
5.10.1	Detailed Description	32
5.11	Crosstales.FB.Util.Constants Class Reference	32
5.11.1	Detailed Description	33
5.11.2	Member Data Documentation	33
5.11.2.1	ASSET_BUILD	33
5.11.2.2	ASSET_CHANGED	33
5.11.2.3	ASSET_CONTACT	34
5.11.2.4	ASSET_CREATED	34
5.11.2.5	ASSET_NAME	34
5.11.2.6	ASSET_PRO_URL	34
5.11.2.7	ASSET_UPDATE_CHECK_URL	34
5.11.2.8	ASSET_VERSION	34
5.11.2.9	isPro	34
5.12	Crosstales.Common.Util.CTPlayerPrefs Class Reference	34
5.12.1	Detailed Description	35
5.12.2	Member Function Documentation	35
5.12.2.1	DeleteAll()	35
5.12.2.2	DeleteKey(string key)	35
5.12.2.3	GetBool(string key)	36
5.12.2.4	GetFloat(string key)	36
5.12.2.5	GetInt(string key)	36
5.12.2.6	GetString(string key)	36
5.12.2.7	HasKey(string key)	37
5.12.2.8	Save()	37
5.12.2.9	SetBool(string key, bool value)	37
5.12.2.10	SetFloat(string key, float value)	37
5.12.2.11	SetInt(string key, int value)	37

5.12.2.12 SetString(string key, string value) . . . . .	38
5.13 Crosstales.Common.Util.CTWebClient Class Reference . . . . .	38
5.13.1 Detailed Description . . . . .	39
5.13.2 Property Documentation . . . . .	39
5.13.2.1 ConnectionLimit . . . . .	39
5.13.2.2 Timeout . . . . .	39
5.14 Crosstales.FB.EditorUtil.EditorConfig Class Reference . . . . .	39
5.14.1 Detailed Description . . . . .	40
5.14.2 Member Function Documentation . . . . .	40
5.14.2.1 Load() . . . . .	40
5.14.2.2 Reset() . . . . .	40
5.14.2.3 Save() . . . . .	40
5.14.3 Member Data Documentation . . . . .	40
5.14.3.1 CT_REMINDER_CHECK . . . . .	40
5.14.3.2 isLoading . . . . .	40
5.14.3.3 REMINDER_CHECK . . . . .	40
5.14.3.4 TELEMETRY . . . . .	40
5.14.3.5 UPDATE_CHECK . . . . .	40
5.14.3.6 UPDATE_OPEN_UAS . . . . .	41
5.15 Crosstales.FB.EditorUtil.EditorConstants Class Reference . . . . .	41
5.15.1 Detailed Description . . . . .	41
5.15.2 Property Documentation . . . . .	42
5.15.2.1 ASSET_UID . . . . .	42
5.15.2.2 ASSET_URL . . . . .	42
5.16 Crosstales.FB.Demo.Examples Class Reference . . . . .	42
5.16.1 Detailed Description . . . . .	43
5.17 Crosstales.FB.ExtensionFilter Struct Reference . . . . .	43
5.17.1 Detailed Description . . . . .	43
5.18 Crosstales.ExtensionMethods Class Reference . . . . .	43
5.18.1 Detailed Description . . . . .	45

5.18.2	Member Function Documentation	45
5.18.2.1	CTAddRange< K, V >(this System.Collections.Generic.IDictionary< K, V > source, System.Collections.Generic.IDictionary< K, V > collection)	45
5.18.2.2	CTContains(this string str, string toCheck, System.StringComparison comp=↵ System.StringComparison.OrdinalIgnoreCase)	45
5.18.2.3	CTContainsAll(this string str, string searchTerms, char splitChar= ' ')	45
5.18.2.4	CTContainsAny(this string str, string searchTerms, char splitChar= ' ')	46
5.18.2.5	CTDump(this Vector2[] array)	46
5.18.2.6	CTDump(this Vector3[] array)	46
5.18.2.7	CTDump(this Vector4[] array)	46
5.18.2.8	CTDump(this System.Collections.Generic.IList< Vector2 > list)	47
5.18.2.9	CTDump(this System.Collections.Generic.IList< Vector3 > list)	47
5.18.2.10	CTDump(this System.Collections.Generic.IList< Vector4 > list)	47
5.18.2.11	CTDump< K, V >(this System.Collections.Generic.IDictionary< K, V > dict)	48
5.18.2.12	CTDump< T >(this T[] array)	48
5.18.2.13	CTDump< T >(this System.Collections.Generic.IList< T > list)	48
5.18.2.14	CTEquals(this string str, string toCheck, System.StringComparison comp=↵ System.StringComparison.OrdinalIgnoreCase)	48
5.18.2.15	CTIsVisibleFrom(this Renderer renderer, Camera camera)	49
5.18.2.16	CTReplace(this string str, string oldString, string newString, System.String↵ Comparison comp=System.StringComparison.OrdinalIgnoreCase)	49
5.18.2.17	CTReverse(this string str)	49
5.18.2.18	CTShuffle< T >(this T[] array, int seed=0)	50
5.18.2.19	CTShuffle< T >(this System.Collections.Generic.IList< T > list, int seed=0)	50
5.18.2.20	CTToString< T >(this T[] array)	50
5.18.2.21	CTToString< T >(this System.Collections.Generic.IList< T > list)	50
5.18.2.22	CTToTitleCase(this string str)	51
5.19	Crosstales.FB.FileBrowser Class Reference	51
5.19.1	Detailed Description	52
5.19.2	Member Function Documentation	52
5.19.2.1	GetDirectories(string path, bool isRecursive=false)	52
5.19.2.2	GetFiles(string path, string extension, bool isRecursive=false)	52



5.19.2.3	<a href="#">GetFiles(string path, ExtensionFilter[] extensions, bool isRecursive=false)</a>	53
5.19.2.4	<a href="#">OpenFiles(string title, string directory, string extension, bool multiselect)</a>	53
5.19.2.5	<a href="#">OpenFiles(string title, string directory, ExtensionFilter[] extensions, bool multiselect)</a>	53
5.19.2.6	<a href="#">OpenFilesAsync(string title, string directory, string extension, bool multiselect, System.Action&lt; string[]&gt; cb)</a>	54
5.19.2.7	<a href="#">OpenFilesAsync(string title, string directory, ExtensionFilter[] extensions, bool multiselect, System.Action&lt; string[]&gt; cb)</a>	54
5.19.2.8	<a href="#">OpenFolders(string title, string directory="", bool multiselect=true)</a>	55
5.19.2.9	<a href="#">OpenFoldersAsync(string title, string directory, bool multiselect, System.Action&lt; string[]&gt; cb)</a>	55
5.19.2.10	<a href="#">OpenSingleFile(string title, string directory, string extension)</a>	55
5.19.2.11	<a href="#">OpenSingleFile(string title, string directory, ExtensionFilter[] extensions)</a>	56
5.19.2.12	<a href="#">OpenSingleFolder(string title, string directory="")</a>	56
5.19.2.13	<a href="#">SaveFile(string title, string directory, string defaultName, string extension)</a>	56
5.19.2.14	<a href="#">SaveFile(string title, string directory, string defaultName, ExtensionFilter[] extensions)</a>	57
5.19.2.15	<a href="#">SaveFileAsync(string title, string directory, string defaultName, string extension, System.Action&lt; string &gt; cb)</a>	57
5.19.2.16	<a href="#">SaveFileAsync(string title, string directory, string defaultName, ExtensionFilter[] extensions, System.Action&lt; string &gt; cb)</a>	57
5.20	<a href="#">Crosstales.FB.Wrapper.FileBrowserBase Class Reference</a>	58
5.20.1	<a href="#">Detailed Description</a>	58
5.20.2	<a href="#">Member Function Documentation</a>	58
5.20.2.1	<a href="#">OpenFiles(string title, string directory, ExtensionFilter[] extensions, bool multiselect)</a>	58
5.20.2.2	<a href="#">OpenFilesAsync(string title, string directory, ExtensionFilter[] extensions, bool multiselect, System.Action&lt; string[]&gt; cb)</a>	59
5.20.2.3	<a href="#">OpenFolders(string title, string directory, bool multiselect)</a>	59
5.20.2.4	<a href="#">OpenFoldersAsync(string title, string directory, bool multiselect, System.Action&lt; string[]&gt; cb)</a>	60
5.20.2.5	<a href="#">OpenSingleFile(string title, string directory, ExtensionFilter[] extensions)</a>	60
5.20.2.6	<a href="#">OpenSingleFolder(string title, string directory)</a>	60
5.20.2.7	<a href="#">SaveFile(string title, string directory, string defaultName, ExtensionFilter[] extensions)</a>	61
5.20.2.8	<a href="#">SaveFileAsync(string title, string directory, string defaultName, ExtensionFilter[] extensions, System.Action&lt; string &gt; cb)</a>	61

5.21	Crosstales.FB.Wrapper.FileBrowserGeneric Class Reference	62
5.21.1	Detailed Description	62
5.21.2	Member Function Documentation	62
5.21.2.1	OpenFiles(string title, string directory, ExtensionFilter[] extensions, bool multiselect)	62
5.21.2.2	OpenFolders(string title, string directory, bool multiselect)	63
5.21.2.3	SaveFile(string title, string directory, string defaultName, ExtensionFilter[] extensions)	63
5.22	Crosstales.UI.Util.FPSDisplay Class Reference	64
5.22.1	Detailed Description	64
5.23	Crosstales.FB.EditorUtil.GAApi Class Reference	64
5.23.1	Detailed Description	65
5.23.2	Member Function Documentation	65
5.23.2.1	Event(string category, string action, string label="", int value=0)	65
5.24	Crosstales.FB.Demo.GUIMain Class Reference	65
5.24.1	Detailed Description	66
5.25	Crosstales.FB.Demo.GUIScenes Class Reference	66
5.25.1	Detailed Description	66
5.26	Crosstales.FB.Util.Helper Class Reference	67
5.26.1	Detailed Description	67
5.26.2	Property Documentation	67
5.26.2.1	isSupportedPlatform	67
5.27	Crosstales.FB.Wrapper.IFileBrowser Interface Reference	67
5.27.1	Detailed Description	68
5.27.2	Member Function Documentation	68
5.27.2.1	OpenFiles(string title, string directory, ExtensionFilter[] extensions, bool multiselect)	68
5.27.2.2	OpenFilesAsync(string title, string directory, ExtensionFilter[] extensions, bool multiselect, System.Action< string[]> cb)	68
5.27.2.3	OpenFolders(string title, string directory, bool multiselect)	69
5.27.2.4	OpenFoldersAsync(string title, string directory, bool multiselect, System.Action< string[]> cb)	69
5.27.2.5	OpenSingleFile(string title, string directory, ExtensionFilter[] extensions)	70
5.27.2.6	OpenSingleFolder(string title, string directory)	70

5.27.2.7	<a href="#">SaveFile(string title, string directory, string defaultName, ExtensionFilter[] extensions)</a>	70
5.27.2.8	<a href="#">SaveFileAsync(string title, string directory, string defaultName, ExtensionFilter[] extensions, System.Action&lt; string &gt; cb)</a>	71
5.28	<a href="#">Crosstales.Common.EditorTask.NYCheck Class Reference</a>	71
5.28.1	<a href="#">Detailed Description</a>	71
5.29	<a href="#">Crosstales.Common.Util.PlatformController Class Reference</a>	71
5.29.1	<a href="#">Detailed Description</a>	72
5.29.2	<a href="#">Member Data Documentation</a>	72
5.29.2.1	<a href="#">Objects</a>	72
5.29.2.2	<a href="#">Platforms</a>	72
5.30	<a href="#">Crosstales.Common.Util.RandomColor Class Reference</a>	73
5.30.1	<a href="#">Detailed Description</a>	73
5.31	<a href="#">Crosstales.Common.Util.RandomRotator Class Reference</a>	73
5.31.1	<a href="#">Detailed Description</a>	74
5.32	<a href="#">Crosstales.Common.Util.RandomScaler Class Reference</a>	74
5.32.1	<a href="#">Detailed Description</a>	75
5.33	<a href="#">Crosstales.FB.EditorTask.ReminderCheck Class Reference</a>	75
5.33.1	<a href="#">Detailed Description</a>	75
5.34	<a href="#">Crosstales.FB.EditorTask.ReminderCT Class Reference</a>	75
5.34.1	<a href="#">Detailed Description</a>	75
5.35	<a href="#">Crosstales.UI.Util.ScrollRectHandler Class Reference</a>	75
5.35.1	<a href="#">Detailed Description</a>	76
5.36	<a href="#">Crosstales.Common.Util.SerializableDictionary&lt; TKey, TVal &gt; Class Template Reference</a>	76
5.36.1	<a href="#">Detailed Description</a>	77
5.37	<a href="#">Crosstales.UI.Social Class Reference</a>	77
5.37.1	<a href="#">Detailed Description</a>	77
5.38	<a href="#">Crosstales.UI.StaticManager Class Reference</a>	77
5.38.1	<a href="#">Detailed Description</a>	78
5.39	<a href="#">Crosstales.FB.EditorTask.Tracer Class Reference</a>	78
5.39.1	<a href="#">Detailed Description</a>	78

5.40	Crosstales.UI.UIDrag Class Reference	78
5.40.1	Detailed Description	79
5.41	Crosstales.UI.UIFocus Class Reference	79
5.41.1	Detailed Description	79
5.41.2	Member Data Documentation	79
5.41.2.1	ManagerName	79
5.42	Crosstales.UI.UIHint Class Reference	80
5.42.1	Detailed Description	80
5.42.2	Member Data Documentation	80
5.42.2.1	Delay	80
5.42.2.2	Disable	81
5.42.2.3	FadeAtStart	81
5.42.2.4	FadeTime	81
5.42.2.5	Group	81
5.43	Crosstales.UI.UIResize Class Reference	81
5.43.1	Detailed Description	82
5.43.2	Member Data Documentation	82
5.43.2.1	MaxSize	82
5.43.2.2	MinSize	82
5.44	Crosstales.UI.UIWindowManager Class Reference	82
5.44.1	Detailed Description	82
5.44.2	Member Data Documentation	83
5.44.2.1	Windows	83
5.45	Crosstales.FB.EditorTask.UpdateCheck Class Reference	83
5.45.1	Detailed Description	83
5.46	Crosstales.UI.WindowManager Class Reference	83
5.46.1	Detailed Description	84
5.46.2	Member Data Documentation	84
5.46.2.1	Dependencies	84
5.46.2.2	Speed	84
5.47	Crosstales.Common.Util.XmlHelper Class Reference	84
5.47.1	Detailed Description	85
5.47.2	Member Function Documentation	85
5.47.2.1	DeserializeFromFile< T >(string filename, bool skipBOM=false)	85
5.47.2.2	DeserializeFromResource< T >(string resourceName, bool skipBOM=true)	85
5.47.2.3	DeserializeFromString< T >(string xmlAsString, bool skipBOM=true)	85
5.47.2.4	SerializeToFile< T >(T obj, string filename)	86
5.47.2.5	SerializeToString< T >(T obj)	86

<b>6</b>	<b>More information</b>	<b>87</b>
6.1	Homepage . . . . .	87
6.2	AssetStore . . . . .	87
6.3	Forum . . . . .	87
6.4	Documentation . . . . .	87
6.5	Discord . . . . .	87
6.6	Demos . . . . .	87
6.6.1	Windows . . . . .	87
6.6.2	macOS . . . . .	88
6.7	Videos . . . . .	88
	<b>Index</b>	<b>89</b>

# Chapter 1

## Namespace Index

### 1.1 Packages

Here are the packages with brief descriptions (if available):

<a href="#">Crosstales</a>	7
<a href="#">Crosstales.Common</a>	7
<a href="#">Crosstales.Common.EditorTask</a>	7
<a href="#">Crosstales.Common.EditorUtil</a>	7
<a href="#">Crosstales.Common.Model</a>	8
<a href="#">Crosstales.Common.Model.Enum</a>	8
<a href="#">Crosstales.Common.Util</a>	8
<a href="#">Crosstales.FB</a>	9
<a href="#">Crosstales.FB.Demo</a>	9
<a href="#">Crosstales.FB.EditorTask</a>	9
<a href="#">Crosstales.FB.EditorUtil</a>	10
<a href="#">Crosstales.FB.Util</a>	10
<a href="#">Crosstales.FB.Wrapper</a>	10
<a href="#">Crosstales.UI</a>	11
<a href="#">Crosstales.UI.Util</a>	11



## Chapter 2

# Hierarchical Index

### 2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Crosstales.Common.EditorTask.BaseCompileDefines . . . . .	16
Crosstales.FB.EditorTask.CompileDefines . . . . .	30
Crosstales.Common.Util.BaseConstants . . . . .	17
Crosstales.FB.Util.Constants . . . . .	32
Crosstales.Common.EditorUtil.BaseGAApi . . . . .	21
Crosstales.FB.EditorUtil.GAApi . . . . .	64
Crosstales.Common.Util.BaseHelper . . . . .	21
Crosstales.FB.Util.Helper . . . . .	67
Crosstales.Common.EditorTask.BaseSetupResources . . . . .	30
Crosstales.FB.Util.Config . . . . .	31
Crosstales.FB.EditorTask.ConfigLoader . . . . .	32
Crosstales.Common.Util.CTPlayerPrefs . . . . .	34
Dictionary	
Crosstales.Common.Util.SerializableDictionary< TKey, TVal > . . . . .	76
Crosstales.FB.EditorUtil.EditorConfig . . . . .	39
Crosstales.FB.EditorUtil.EditorConstants . . . . .	41
Crosstales.FB.ExtensionFilter . . . . .	43
Crosstales.ExtensionMethods . . . . .	43
Crosstales.FB.FileBrowser . . . . .	51
IDragHandler	
Crosstales.UI.UIResize . . . . .	81
Crosstales.FB.Wrapper.IFileBrowser . . . . .	67
Crosstales.FB.Wrapper.FileBrowserBase . . . . .	58
Crosstales.FB.Wrapper.FileBrowserGeneric . . . . .	62
IPointerDownHandler	
Crosstales.UI.UIResize . . . . .	81
ISerializable	
Crosstales.Common.Util.SerializableDictionary< TKey, TVal > . . . . .	76
IXmlSerializable	
Crosstales.Common.Util.SerializableDictionary< TKey, TVal > . . . . .	76
MonoBehaviour	
Crosstales.Common.Util.PlatformController . . . . .	71
Crosstales.Common.Util.RandomColor . . . . .	73
Crosstales.Common.Util.RandomRotator . . . . .	73



Crosstales.Common.Util.RandomScaler . . . . .	74
Crosstales.FB.Demo.Examples . . . . .	42
Crosstales.FB.Demo.GUIMain . . . . .	65
Crosstales.FB.Demo.GUIScenes . . . . .	66
Crosstales.UI.Social . . . . .	77
Crosstales.UI.StaticManager . . . . .	77
Crosstales.UI.UIDrag . . . . .	78
Crosstales.UI.UIFocus . . . . .	79
Crosstales.UI.UIHint . . . . .	80
Crosstales.UI.UIResize . . . . .	81
Crosstales.UI.UIWindowManager . . . . .	82
Crosstales.UI.Util.AudioFilterController . . . . .	13
Crosstales.UI.Util.AudioSourceController . . . . .	14
Crosstales.UI.Util.FPSDisplay . . . . .	64
Crosstales.UI.Util.ScrollRectHandler . . . . .	75
Crosstales.UI.WindowManager . . . . .	83
Crosstales.Common.EditorTask.NYCheck . . . . .	71
Crosstales.FB.EditorTask.ReminderCheck . . . . .	75
Crosstales.FB.EditorTask.ReminderCT . . . . .	75
Crosstales.Common.Util.SerializableDictionary< string, string > . . . . .	76
Crosstales.FB.EditorTask.Tracer . . . . .	78
Crosstales.FB.EditorTask.UpdateCheck . . . . .	83
WebClient	
Crosstales.Common.Util.CTWebClient . . . . .	38
Crosstales.Common.Util.XmlHelper . . . . .	84

## Chapter 3

# Class Index

### 3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">Crosstales.UI.Util.AudioFilterController</a>	
Controller for audio filters. . . . .	13
<a href="#">Crosstales.UI.Util.AudioSourceController</a>	
Controller for AudioSources. . . . .	14
<a href="#">Crosstales.Common.EditorTask.BaseCompileDefines</a>	
Base for adding the given define symbols to PlayerSettings define symbols. . . . .	16
<a href="#">Crosstales.Common.Util.BaseConstants</a>	
Base for collected constants of very general utility for the asset. . . . .	17
<a href="#">Crosstales.Common.EditorUtil.BaseGAApi</a>	
Base GA-wrapper API. . . . .	21
<a href="#">Crosstales.Common.Util.BaseHelper</a>	
Base for various helper functions. . . . .	21
<a href="#">Crosstales.Common.EditorTask.BaseSetupResources</a>	
Base for copying all resources to 'Editor Default Resources'. . . . .	30
<a href="#">Crosstales.FB.EditorTask.CompileDefines</a>	
Adds the given define symbols to PlayerSettings define symbols. . . . .	30
<a href="#">Crosstales.FB.Util.Config</a>	
Configuration for the asset. . . . .	31
<a href="#">Crosstales.FB.EditorTask.ConfigLoader</a>	
Loads the configuration at startup. . . . .	32
<a href="#">Crosstales.FB.Util.Constants</a>	
Collected constants of very general utility for the asset. . . . .	32
<a href="#">Crosstales.Common.Util.CTPlayerPrefs</a>	
Wrapper for the PlayerPrefs. . . . .	34
<a href="#">Crosstales.Common.Util.CTWebClient</a>	
Specialized WebClient. . . . .	38
<a href="#">Crosstales.FB.EditorUtil.EditorConfig</a>	
Editor configuration for the asset. . . . .	39
<a href="#">Crosstales.FB.EditorUtil.EditorConstants</a>	
Collected editor constants of very general utility for the asset. . . . .	41
<a href="#">Crosstales.FB.Demo.Examples</a>	
Examples for all methods. . . . .	42
<a href="#">Crosstales.FB.ExtensionFilter</a>	
Filter for extensions. . . . .	43
<a href="#">Crosstales.ExtensionMethods</a>	
Various extension methods. . . . .	43

<a href="#">Crosstales.FB.FileBrowser</a>	
Native file browser various actions like open file, open folder and save file. . . . .	51
<a href="#">Crosstales.FB.Wrapper.FileBrowserBase</a>	
Base class for all file browsers. . . . .	58
<a href="#">Crosstales.FB.Wrapper.FileBrowserGeneric</a>	
File browser implementation for generic devices (currently NOT IMPLEMENTED). . . . .	62
<a href="#">Crosstales.UI.Util.FPSDisplay</a>	
Simple FPS-Counter. . . . .	64
<a href="#">Crosstales.FB.EditorUtil.GAApi</a>	
GA-wrapper API. . . . .	64
<a href="#">Crosstales.FB.Demo.GUIMain</a>	
Main GUI component for all demo scenes. . . . .	65
<a href="#">Crosstales.FB.Demo.GUIScenes</a>	
Main GUI scene manager for all demo scenes. . . . .	66
<a href="#">Crosstales.FB.Util.Helper</a>	
Various helper functions. . . . .	67
<a href="#">Crosstales.FB.Wrapper.IFileBrowser</a>	
Interface for all file browsers. . . . .	67
<a href="#">Crosstales.Common.EditorTask.NYCheck</a>	
Checks if a 'Happy new year'-message must be displayed. . . . .	71
<a href="#">Crosstales.Common.Util.PlatformController</a>	
Enables or disable game objects for a given platform. . . . .	71
<a href="#">Crosstales.Common.Util.RandomColor</a>	
Random color changer. . . . .	73
<a href="#">Crosstales.Common.Util.RandomRotator</a>	
Random rotation changer. . . . .	73
<a href="#">Crosstales.Common.Util.RandomScaler</a>	
Random scale changer. . . . .	74
<a href="#">Crosstales.FB.EditorTask.ReminderCheck</a>	
Reminds the customer to create an UAS review. . . . .	75
<a href="#">Crosstales.FB.EditorTask.ReminderCT</a>	
Reminds the customer to visit our other assets. . . . .	75
<a href="#">Crosstales.UI.Util.ScrollRectHandler</a>	
Changes the sensitivity of ScrollRects under various platforms. . . . .	75
<a href="#">Crosstales.Common.Util.SerializableDictionary&lt; TKey, TValue &gt;</a>	
Serializable Dictionary-class for XML. . . . .	76
<a href="#">Crosstales.UI.Social</a>	
<a href="#">Crosstales</a> social media links. . . . .	77
<a href="#">Crosstales.UI.StaticManager</a>	
Static Button Manager. . . . .	77
<a href="#">Crosstales.FB.EditorTask.Tracer</a>	
Gather some tracing data for the asset. . . . .	78
<a href="#">Crosstales.UI.UIDrag</a>	
Allow to Drag the Windows around. . . . .	78
<a href="#">Crosstales.UI.UIFocus</a>	
Change the Focus on from a Window. . . . .	79
<a href="#">Crosstales.UI.UIHint</a>	
Controls a <a href="#">UI</a> group (hint). . . . .	80
<a href="#">Crosstales.UI.UIResize</a>	
Resize a <a href="#">UI</a> element. . . . .	81
<a href="#">Crosstales.UI.UIWindowManager</a>	
Change the state of all Window panels. . . . .	82
<a href="#">Crosstales.FB.EditorTask.UpdateCheck</a>	
Checks for updates of the asset. . . . .	83
<a href="#">Crosstales.UI.WindowManager</a>	
Manager for a Window. . . . .	83
<a href="#">Crosstales.Common.Util.XmlHelper</a>	
Helper-class for XML. . . . .	84

## Chapter 4

# Namespace Documentation

### 4.1 Crosstales Namespace Reference

#### Namespaces

#### Classes

- class [ExtensionMethods](#)  
*Various extension methods.*

### 4.2 Crosstales.Common Namespace Reference

#### Namespaces

### 4.3 Crosstales.Common.EditorTask Namespace Reference

#### Classes

- class [BaseCompileDefines](#)  
*Base for adding the given define symbols to PlayerSettings define symbols.*
- class [BaseSetupResources](#)  
*Base for copying all resources to 'Editor Default Resources'.*
- class [NYCheck](#)  
*Checks if a 'Happy new year'-message must be displayed.*

### 4.4 Crosstales.Common.EditorUtil Namespace Reference

#### Classes

- class [BaseGAApi](#)  
*Base GA-wrapper API.*

## 4.5 Crosstales.Common.Model Namespace Reference

### Namespaces

## 4.6 Crosstales.Common.Model.Enum Namespace Reference

### Enumerations

- enum [Platform](#) {  
**Windows, OSX, Linux, IOS,**  
**Android, WSA, Web, Unsupported,**  
**MaryTTS** }

*All available platforms.*

### 4.6.1 Enumeration Type Documentation

#### 4.6.1.1 enum [Crosstales.Common.Model.Enum.Platform](#) [strong]

All available platforms.

## 4.7 Crosstales.Common.Util Namespace Reference

### Classes

- class [BaseConstants](#)  
*Base for collected constants of very general utility for the asset.*
- class [BaseHelper](#)  
*Base for various helper functions.*
- class [CTPlayerPrefs](#)  
*Wrapper for the PlayerPrefs.*
- class [CTWebClient](#)  
*Specialized WebClient.*
- class [PlatformController](#)  
*Enables or disable game objects for a given platform.*
- class [RandomColor](#)  
*Random color changer.*
- class [RandomRotator](#)  
*Random rotation changer.*
- class [RandomScaler](#)  
*Random scale changer.*
- class [SerializableDictionary](#)  
*Serializable Dictionary-class for XML.*
- class [XmlHelper](#)  
*Helper-class for XML.*

## 4.8 Crosstales.FB Namespace Reference

### Namespaces

### Classes

- struct [ExtensionFilter](#)  
*Filter for extensions.*
- class [FileBrowser](#)  
*Native file browser various actions like open file, open folder and save file.*

## 4.9 Crosstales.FB.Demo Namespace Reference

### Classes

- class [Examples](#)  
*Examples for all methods.*
- class [GUIMain](#)  
*Main GUI component for all demo scenes.*
- class [GUIScenes](#)  
*Main GUI scene manager for all demo scenes.*

## 4.10 Crosstales.FB.EditorTask Namespace Reference

### Classes

- class [CompileDefines](#)  
*Adds the given define symbols to PlayerSettings define symbols.*
- class [ConfigLoader](#)  
*Loads the configuration at startup.*
- class [ReminderCheck](#)  
*Reminds the customer to create an UAS review.*
- class [ReminderCT](#)  
*Reminds the customer to visit our other assets.*
- class [Tracer](#)  
*Gather some tracing data for the asset.*
- class [UpdateCheck](#)  
*Checks for updates of the asset.*

### Enumerations

- enum [UpdateStatus](#) {  
    **NOT\_CHECKED, NO\_UPDATE, UPDATE, UPDATE\_PRO,**  
    **UPDATE\_VERSION, DEPRECATED** }  
*All possible update stati.*

## 4.10.1 Enumeration Type Documentation

### 4.10.1.1 enum Crosstales.FB.EditorTask.UpdateStatus [strong]

All possible update stati.

## 4.11 Crosstales.FB.EditorUtil Namespace Reference

### Classes

- class [EditorConfig](#)  
*Editor configuration for the asset.*
- class [EditorConstants](#)  
*Collected editor constants of very general utility for the asset.*
- class [GAApi](#)  
*GA-wrapper API.*

## 4.12 Crosstales.FB.Util Namespace Reference

### Classes

- class [Config](#)  
*Configuration for the asset.*
- class [Constants](#)  
*Collected constants of very general utility for the asset.*
- class [Helper](#)  
*Various helper functions.*

## 4.13 Crosstales.FB.Wrapper Namespace Reference

### Classes

- class [FileBrowserBase](#)  
*Base class for all file browsers.*
- class [FileBrowserGeneric](#)  
*File browser implementation for generic devices (currently NOT IMPLEMENTED).*
- interface [IFileBrowser](#)  
*Interface for all file browsers.*

## 4.14 Crosstales.UI Namespace Reference

### Namespaces

### Classes

- class [Social](#)  
*Crosstales social media links.*
- class [StaticManager](#)  
*Static Button Manager.*
- class [UIDrag](#)  
*Allow to Drag the Windows around.*
- class [UIFocus](#)  
*Change the Focus on from a Window.*
- class [UIHint](#)  
*Controls a [UI](#) group (hint).*
- class [UIResize](#)  
*Resize a [UI](#) element.*
- class [UIWindowManager](#)  
*Change the state of all Window panels.*
- class [WindowManager](#)  
*Manager for a Window.*

## 4.15 Crosstales.UI.Util Namespace Reference

### Classes

- class [AudioFilterController](#)  
*Controller for audio filters.*
- class [AudioSourceController](#)  
*Controller for AudioSources.*
- class [FPSDisplay](#)  
*Simple FPS-Counter.*
- class [ScrollRectHandler](#)  
*Changes the sensitivity of ScrollRects under various platforms.*






## Chapter 5

# Class Documentation

### 5.1 Crosstales.UI.Util.AudioFilterController Class Reference

Controller for audio filters.

Inheritance diagram for Crosstales.UI.Util.AudioFilterController:



#### Public Member Functions

- void **Start** ()
- void **Update** ()
- void **FindAllAudioFilters** ()
- void **ResetAudioFilters** ()
- void **ReverbFilterDropdownChanged** (System.Int32 index)
- void **ChorusFilterEnabled** (bool enabled)
- void **EchoFilterEnabled** (bool enabled)
- void **DistortionFilterEnabled** (bool enabled)
- void **DistortionFilterChanged** (float value)
- void **LowPassFilterEnabled** (bool enabled)
- void **LowPassFilterChanged** (float value)
- void **HighPassFilterEnabled** (bool enabled)
- void **HighPassFilterChanged** (float value)

## Public Attributes

- bool **FindAllAudioFiltersOnStart** = true  
*Searches for all audio filters in the whole scene (default: true).*
- AudioReverbFilter[] **ReverbFilters**
- AudioChorusFilter[] **ChorusFilters**
- AudioEchoFilter[] **EchoFilters**
- AudioDistortionFilter[] **DistortionFilters**
- AudioLowPassFilter[] **LowPassFilters**
- AudioHighPassFilter[] **HighPassFilters**
- bool **ResetAudioFiltersOnStart** = true
- bool **ChorusFilter** = false
- bool **EchoFilter** = false
- bool **DistortionFilter** = false
- float **DistortionFilterValue** = 0.5f
- bool **LowpassFilter** = false
- float **LowpassFilterValue** = 5000f
- bool **HighpassFilter** = false
- float **HighpassFilterValue** = 5000f
- Dropdown **ReverbFilterDropdown**
- Text **DistortionText**
- Text **LowpassText**
- Text **HighpassText**

### 5.1.1 Detailed Description

Controller for audio filters.

### 5.1.2 Member Data Documentation

#### 5.1.2.1 bool Crosstales.UI.Util.AudioFilterController.FindAllAudioFiltersOnStart = true

Searches for all audio filters in the whole scene (default: true).


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/UI/Scripts/↔ Util/AudioFilterController.cs

## 5.2 Crosstales.UI.Util.AudioSourceController Class Reference

Controller for AudioSources.

Inheritance diagram for Crosstales.UI.Util.AudioSourceController:



## Public Member Functions

- void **Update** ()
- void **FindAllAudioSources** ()
- void **ResetAudioFilters** ()
- void **MuteEnabled** (bool enabled)
- void **LoopEnabled** (bool enabled)
- void **VolumeChanged** (float value)
- void **PitchChanged** (float value)
- void **StereoPanChanged** (float value)

## Public Attributes

- bool [FindAllAudioSourcesOnStart](#) = true  
*Searches for all AudioSource in the whole scene (default: true).*
- AudioSource[] [AudioSources](#)  
*Active controlled AudioSources.*
- bool [ResetAudioSourcesOnStart](#) = true  
*Resets all active AudioSources (default: true).*
- bool [Mute](#) = false  
*Mute on/off (default: false).*
- bool [Loop](#) = false  
*Loop on/off (default: false).*
- float [Volume](#) = 1f  
*Volume of the audio (default: 1)*
- float [Pitch](#) = 1f  
*Pitch of the audio (default: 1).*
- float [StereoPan](#) = 0f  
*Stereo pan of the audio (default: 0).*
- Text **VolumeText**
- Text **PitchText**
- Text **StereoPanText**

### 5.2.1 Detailed Description

Controller for AudioSources.

### 5.2.2 Member Data Documentation

#### 5.2.2.1 [AudioSource \[\]](#) Crosstales.UI.Util.AudioSourceController.AudioSources

Active controlled AudioSources.

#### 5.2.2.2 bool Crosstales.UI.Util.AudioSourceController.FindAllAudioSourcesOnStart = true

Searches for all AudioSource in the whole scene (default: true).

5.2.2.3 `bool Crosstales.UI.Util.AudioSourceController.Loop = false`

Loop on/off (default: false).

5.2.2.4 `bool Crosstales.UI.Util.AudioSourceController.Mute = false`

Mute on/off (default: false).

5.2.2.5 `float Crosstales.UI.Util.AudioSourceController.Pitch = 1f`

Pitch of the audio (default: 1).

5.2.2.6 `bool Crosstales.UI.Util.AudioSourceController.ResetAudioSourcesOnStart = true`

Resets all active AudioSources (default: true).

5.2.2.7 `float Crosstales.UI.Util.AudioSourceController.StereoPan = 0f`

Stereo pan of the audio (default: 0).

5.2.2.8 `float Crosstales.UI.Util.AudioSourceController.Volume = 1f`

Volume of the audio (default: 1)


The documentation for this class was generated from the following file:

- `D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/UI/Scripts/↔ Util/AudioSourceController.cs`

## 5.3 Crosstales.Common.EditorTask.BaseCompileDefines Class Reference

Base for adding the given define symbols to PlayerSettings define symbols.

Inheritance diagram for `Crosstales.Common.EditorTask.BaseCompileDefines`:



### Static Protected Member Functions

- static void **setCompileDefines** (string[ ] symbols)

### 5.3.1 Detailed Description

Base for adding the given define symbols to PlayerSettings define symbols.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Editor/Task/Base↵  
CompileDefines.cs

## 5.4 Crosstales.Common.Util.BaseConstants Class Reference

Base for collected constants of very general utility for the asset.

Inheritance diagram for Crosstales.Common.Util.BaseConstants:



### Public Attributes

- const string **ASSET\_AUTHOR** = "crosstales LLC"  
*Author of the asset.*
- const string **ASSET\_AUTHOR\_URL** = "https://www.crosstales.com"  
*URL of the asset author.*
- const string **ASSET\_CT\_URL** = "https://goo.gl/qwtXyb"  
*URL of the crosstales assets in UAS.*
- const string **ASSET\_SOCIAL\_DISCORD** = "https://discord.gg/ZbZ2sh4"  
*URL of the crosstales Discord-channel.*
- const string **ASSET\_SOCIAL\_FACEBOOK** = "https://www.facebook.com/crosstales/"  
*URL of the crosstales Facebook-profile.*
- const string **ASSET\_SOCIAL\_TWITTER** = "https://twitter.com/crosstales"  
*URL of the crosstales Twitter-profile.*
- const string **ASSET\_SOCIAL\_YOUTUBE** = "https://www.youtube.com/c/Crosstales"  
*URL of the crosstales Youtube-profile.*
- const string **ASSET\_SOCIAL\_LINKEDIN** = "https://www.linkedin.com/company/crosstales"  
*URL of the crosstales LinkedIn-profile.*
- const string **ASSET\_SOCIAL\_XING** = "https://www.xing.com/companies/crosstales"  
*URL of the crosstales XING-profile.*
- const string **ASSET\_3P\_PLAYMAKER** = "https://www.assetstore.unity3d.com/#!/content/368?aid=1011IN↵  
GT"  
*URL of the 3rd party asset "PlayMaker".*
- const int **FACTOR\_KB** = 1024  
*Factor for kilo bytes.*
- const int **FACTOR\_MB** = **FACTOR\_KB** \* 1024  
*Factor for mega bytes.*
- const int **FACTOR\_GB** = **FACTOR\_MB** \* 1024

*Factor for giga bytes.*

- const float **FLOAT\_32768** = 32768f

*Float value of 32768.*

- const string **FORMAT\_TWO\_DECIMAL\_PLACES** = "0.00"

*ToString for two decimal places.*

- const string **FORMAT\_NO\_DECIMAL\_PLACES** = "0"

*ToString for no decimal places.*

- const string **FORMAT\_PERCENT** = "0%"

*ToString for percent.*

- const bool **DEFAULT\_DEBUG** = false
- const string **PATH\_DELIMITER\_WINDOWS** = @"\"

*Path delimiter for Windows.*

- const string **PATH\_DELIMITER\_UNIX** = "/"

*Path delimiter for Unix.*

## Static Public Attributes

- static bool **DEV\_DEBUG** = false

*Development debug logging for the asset.*

- static string **TEXT\_TOSTRING\_END** = "}"
- static string **TEXT\_TOSTRING\_DELIMITER** = ", "
- static string **TEXT\_TOSTRING\_DELIMITER\_END** = ""
- static string **TEXT\_TOSTRING\_START** = "{"
- static string **PREFIX\_HTTP** = "http://"
- static string **PREFIX\_HTTPS** = "https://"

## Properties

- static string **PREFIX\_FILE** [get]

### 5.4.1 Detailed Description

Base for collected constants of very general utility for the asset.

### 5.4.2 Member Data Documentation

- 5.4.2.1 const string **Crosstales.Common.Util.BaseConstants.ASSET\_3P\_PLAYMAKER** = "https://www.assetstore.unity3d.com/#!/content/368?aid=1011INGT"

URL of the 3rd party asset "PlayMaker".

- 5.4.2.2 const string **Crosstales.Common.Util.BaseConstants.ASSET\_AUTHOR** = "crosstales LLC"

Author of the asset.

5.4.2.3 `const string Crosstales.Common.Util.BaseConstants.ASSET_AUTHOR_URL = "https://www.crosstales.com"`

URL of the asset author.

5.4.2.4 `const string Crosstales.Common.Util.BaseConstants.ASSET_CT_URL = "https://goo.gl/qwtXyb"`

URL of the crosstales assets in UAS.

5.4.2.5 `const string Crosstales.Common.Util.BaseConstants.ASSET_SOCIAL_DISCORD = "https://discord.gg/ZbZ2sh4"`

URL of the crosstales Discord-channel.

5.4.2.6 `const string Crosstales.Common.Util.BaseConstants.ASSET_SOCIAL_FACEBOOK =  
"https://www.facebook.com/crosstales/"`

URL of the crosstales Facebook-profile.

5.4.2.7 `const string Crosstales.Common.Util.BaseConstants.ASSET_SOCIAL_LINKEDIN =  
"https://www.linkedin.com/company/crosstales"`

URL of the crosstales LinkedIn-profile.

5.4.2.8 `const string Crosstales.Common.Util.BaseConstants.ASSET_SOCIAL_TWITTER = "https://twitter.com/crosstales"`

URL of the crosstales Twitter-profile.

5.4.2.9 `const string Crosstales.Common.Util.BaseConstants.ASSET_SOCIAL_XING = "https://www.xing.  
com/companies/crosstales"`

URL of the crosstales XING-profile.

5.4.2.10 `const string Crosstales.Common.Util.BaseConstants.ASSET_SOCIAL_YOUTUBE =  
"https://www.youtube.com/c/Crosstales"`

URL of the crosstales Youtube-profile.

5.4.2.11 `bool Crosstales.Common.Util.BaseConstants.DEV_DEBUG = false` `[static]`

Development debug logging for the asset.

5.4.2.12 `const int Crosstales.Common.Util.BaseConstants.FACTOR_GB = FACTOR_MB * 1024`

Factor for giga bytes.



5.4.2.13 `const int Crosstales.Common.Util.BaseConstants.FACTOR_KB = 1024`

Factor for kilo bytes.

5.4.2.14 `const int Crosstales.Common.Util.BaseConstants.FACTOR_MB = FACTOR_KB * 1024`

Factor for mega bytes.

5.4.2.15 `const float Crosstales.Common.Util.BaseConstants.FLOAT_32768 = 32768f`

Float value of 32768.

5.4.2.16 `const string Crosstales.Common.Util.BaseConstants.FORMAT_NO_DECIMAL_PLACES = "0"`

ToString for no decimal places.

5.4.2.17 `const string Crosstales.Common.Util.BaseConstants.FORMAT_PERCENT = "0%"`

ToString for percent.

5.4.2.18 `const string Crosstales.Common.Util.BaseConstants.FORMAT_TWO_DECIMAL_PLACES = "0.00"`

ToString for two decimal places.

5.4.2.19 `const string Crosstales.Common.Util.BaseConstants.PATH_DELIMITER_UNIX = "/"`

Path delimiter for Unix.

5.4.2.20 `const string Crosstales.Common.Util.BaseConstants.PATH_DELIMITER_WINDOWS = @"\"`

Path delimiter for Windows.


The documentation for this class was generated from the following file:

- `D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Scripts/Util/BaseConstants.cs`

## 5.5 Crosstales.Common.EditorUtil.BaseGAApi Class Reference

Base GA-wrapper API.

Inheritance diagram for Crosstales.Common.EditorUtil.BaseGAApi:



### Static Public Member Functions

- static void [Event](#) (string name, string version, string category, string action, string label="", int value=0)  
*Tracks an event from the asset.*

#### 5.5.1 Detailed Description

Base GA-wrapper API.

#### 5.5.2 Member Function Documentation

**5.5.2.1** static void Crosstales.Common.EditorUtil.BaseGAApi.Event ( string name, string version, string category, string action, string label = " ", int value = 0 ) [static]

Tracks an event from the asset.

##### Parameters

<i>category</i>	Specifies the event category.
<i>action</i>	Specifies the event action.
<i>label</i>	Specifies the event label.
<i>value</i>	Specifies the event value.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Editor/Util/BaseGAApi.cs

## 5.6 Crosstales.Common.Util.BaseHelper Class Reference

Base for various helper functions.

Inheritance diagram for Crosstales.Common.Util.BaseHelper:



## Static Public Member Functions

- static bool [RemoteCertificateValidationCallback](#) (System.Object sender, System.Security.Cryptography.X509Certificates.X509Certificate certificate, System.Security.Cryptography.X509Certificates.X509Chain chain, System.Net.Security.SslPolicyErrors sslPolicyErrors)  
*HTTPS-certification callback.*
- static string [ValidatePath](#) (string path, bool addEndDelimiter=true)  
*Validates a given path and add missing slash.*
- static string [ValidateFile](#) (string path)  
*Validates a given file.*
- static string [ValidURLFromFilePath](#) (string path)  
*Validates a given file.*
- static string [CleanUrl](#) (string url, bool removeProtocol=true, bool removeWWW=true, bool removeSlash=true)  
*Cleans a given URL.*

### Parameters

url	URL to clean
removeProtocol	Remove the protocol, e.g. <a href="#">http://</a> (default: true, optional).
removeWWW	Remove www (default: true, optional).
removeSlash	Remove slash at the end (default: true, optional)

### Returns

*Clean URL*

- static string [ClearTags](#) (string text)  
*Cleans a given text from tags.*
- static string [ClearSpaces](#) (string text)  
*Cleans a given text from multiple spaces.*
- static string [ClearLineEndings](#) (string text)  
*Cleans a given text from line endings.*
- static System.Collections.Generic.List< string > [SplitStringToLines](#) (string text, bool ignoreCommented↵ Lines=true, int skipHeaderLines=0, int skipFooterLines=0)  
*Split the given text to lines and return it as list.*
- static string [FormatBytesToHRF](#) (long bytes)  
*Format byte-value to Human-Readable-Form.*
- static string [FormatSecondsToHourMinSec](#) (double seconds)  
*Format seconds to Human-Readable-Form.*
- static Color [HSVToRGB](#) (float h, float s, float v, float a=1f)  
*Generate nice HSV colors. Based on <https://gist.github.com/rje/6206099>*
- static bool [IsValidURL](#) (string url)  
*Checks if the URL is valid.*
- static void [FileCopy](#) (string inputFile, string outputFile, bool move=false)  
*Copy or move a file.*

## Static Public Attributes

- static readonly System.Globalization.CultureInfo **BaseCulture** = new System.Globalization.CultureInfo("en-US")

## Properties

- static bool [isInternetAvailable](#) [get]  
*Checks if an Internet connection is available.*
- static bool [isWindowsPlatform](#) [get]  
*Checks if the current platform is Windows.*
- static bool [isMacOSPlatform](#) [get]  
*Checks if the current platform is OSX.*
- static bool [isLinuxPlatform](#) [get]  
*Checks if the current platform is Linux.*
- static bool [isStandalonePlatform](#) [get]  
*Checks if the current platform is standalone (Windows, macOS or Linux).*
- static bool [isAndroidPlatform](#) [get]  
*Checks if the current platform is Android.*
- static bool [isIOSPlatform](#) [get]  
*Checks if the current platform is iOS.*
- static bool [isWSAPlatform](#) [get]  
*Checks if the current platform is WSA.*
- static bool [isWebGLPlatform](#) [get]  
*Checks if the current platform is WebGL.*
- static bool [isWebPlatform](#) [get]  
*Checks if the current platform is Web (WebPlayer or WebGL).*
- static bool [isWindowsBasedPlatform](#) [get]  
*Checks if the current platform is Windows-based (Windows standalone or WSA).*
- static bool [isAppleBasedPlatform](#) [get]  
*Checks if the current platform is Apple-based (macOS standalone or iOS).*
- static bool [isEditor](#) [get]  
*Checks if we are inside the Editor.*
- static bool [isEditorMode](#) [get]  
*Checks if we are in Editor mode.*
- static [Model.Enum.Platform CurrentPlatform](#) [get]  
*Returns the current platform.*

### 5.6.1 Detailed Description

Base for various helper functions.

### 5.6.2 Member Function Documentation

#### 5.6.2.1 static string Crosstales.Common.Util.BaseHelper.ClearLineEndings ( string text ) [static]

Cleans a given text from line endings.

## Parameters

<i>text</i>	Text to clean.
-------------	----------------

## Returns

Clean text without line endings.

### 5.6.2.2 static string Crosstales.Common.Util.BaseHelper.ClearSpaces ( string *text* ) [static]

Cleans a given text from multiple spaces.

## Parameters

<i>text</i>	Text to clean.
-------------	----------------

## Returns

Clean text without multiple spaces.

### 5.6.2.3 static string Crosstales.Common.Util.BaseHelper.ClearTags ( string *text* ) [static]

Cleans a given text from tags.

## Parameters

<i>text</i>	Text to clean.
-------------	----------------

## Returns

Clean text without tags.

### 5.6.2.4 static void Crosstales.Common.Util.BaseHelper.FileCopy ( string *inputFile*, string *outputFile*, bool *move* = false ) [static]

Copy or move a file.

## Parameters

<i>inputFile</i>	Input file path
<i>outputFile</i>	Output file path
<i>move</i>	Move file instead of copy (default: false, optional)

#### 5.6.2.5 static string Crosstales.Common.Util.BaseHelper.FormatBytesToHRF ( long *bytes* ) [static]

Format byte-value to Human-Readable-Form.

##### Returns

Formatted byte-value in Human-Readable-Form.

#### 5.6.2.6 static string Crosstales.Common.Util.BaseHelper.FormatSecondsToHourMinSec ( double *seconds* ) [static]

Format seconds to Human-Readable-Form.

##### Returns

Formatted seconds in Human-Readable-Form.

#### 5.6.2.7 static Color Crosstales.Common.Util.BaseHelper.HSVToRGB ( float *h*, float *s*, float *v*, float *a* = 1f ) [static]

Generate nice HSV colors. Based on <https://gist.github.com/rje/6206099>

##### Parameters

<i>h</i>	Hue
<i>s</i>	Saturation
<i>v</i>	Value
<i>a</i>	Alpha (optional)

##### Returns

True if the current platform is supported.

#### 5.6.2.8 static bool Crosstales.Common.Util.BaseHelper.IsValidURL ( string *url* ) [static]

Checks if the URL is valid.

##### Parameters

<i>url</i>	URL to check
------------	--------------

##### Returns

True if the URL is valid.

**5.6.2.9** static bool Crosstales.Common.Util.BaseHelper.RemoteCertificateValidationCallback ( System.Object sender, System.Security.Cryptography.X509Certificates.X509Certificate certificate, System.Security.Cryptography.X509Certificates.X509Chain chain, System.Net.Security.SslPolicyErrors sslPolicyErrors ) [static]

HTTPS-certification callback.

**5.6.2.10** static System.Collections.Generic.List<string> Crosstales.Common.Util.BaseHelper.SplitStringToLines ( string text, bool ignoreCommentedLines = true, int skipHeaderLines = 0, int skipFooterLines = 0 ) [static]

Split the given text to lines and return it as list.

#### Parameters

<i>text</i>	Complete text fragment
<i>ignoreCommentedLines</i>	Ignore commente lines (default: true, optional)
<i>skipHeaderLines</i>	Number of skipped header lines (default: 0, optional)
<i>skipFooterLines</i>	Number of skipped footer lines (default: 0, optional)

#### Returns

Splitted lines as array

**5.6.2.11** static string Crosstales.Common.Util.BaseHelper.ValidateFile ( string path ) [static]

Validates a given file.

#### Parameters

<i>path</i>	File to validate
-------------	------------------

#### Returns

Valid file path

**5.6.2.12** static string Crosstales.Common.Util.BaseHelper.ValidatePath ( string path, bool addEndDelimiter = true ) [static]

Validates a given path and add missing slash.

#### Parameters

<i>path</i>	Path to validate
<i>addEndDelimiter</i>	Add delimiter at the end of the path (optional, default: true)

**Returns**

Valid path

**5.6.2.13** `static string Crosstales.Common.Util.BaseHelper.ValidURLFromFilePath ( string path )` `[static]`

Validates a given file.

**Parameters**

<i>path</i>	File to validate
-------------	------------------

**Returns**

Valid file path

### 5.6.3 Property Documentation

**5.6.3.1** `Model.Enum.Platform Crosstales.Common.Util.BaseHelper.CurrentPlatform` `[static], [get]`

Returns the current platform.

**Returns**

The current platform.

**5.6.3.2** `bool Crosstales.Common.Util.BaseHelper.isAndroidPlatform` `[static], [get]`

Checks if the current platform is Android.

**Returns**

True if the current platform is Android.

**5.6.3.3** `bool Crosstales.Common.Util.BaseHelper.isAppleBasedPlatform` `[static], [get]`

Checks if the current platform is Apple-based (macOS standalone or iOS).

**Returns**

True if the current platform is Apple-based (macOS standalone or iOS).



**5.6.3.4 bool Crosstales.Common.Util.BaseHelper.isEditor** [static], [get]

Checks if we are inside the Editor.

**Returns**

True if we are inside the Editor.

**5.6.3.5 bool Crosstales.Common.Util.BaseHelper.isEditorMode** [static], [get]

Checks if we are in Editor mode.

**Returns**

True if in Editor mode.

**5.6.3.6 bool Crosstales.Common.Util.BaseHelper.isInternetAvailable** [static], [get]

Checks if an Internet connection is available.

**Returns**

True if an Internet connection is available.

**5.6.3.7 bool Crosstales.Common.Util.BaseHelper.isiOSPlatform** [static], [get]

Checks if the current platform is iOS.

**Returns**

True if the current platform is iOS.

**5.6.3.8 bool Crosstales.Common.Util.BaseHelper.isLinuxPlatform** [static], [get]

Checks if the current platform is Linux.

**Returns**

True if the current platform is Linux.

**5.6.3.9 bool Crosstales.Common.Util.BaseHelper.isMacOSPlatform** [static], [get]

Checks if the current platform is OSX.

**Returns**

True if the current platform is OSX.

**5.6.3.10** `bool Crosstales.Common.Util.BaseHelper.isStandalonePlatform` `[static], [get]`

Checks if the current platform is standalone (Windows, macOS or Linux).

**Returns**

True if the current platform is standalone (Windows, macOS or Linux).

**5.6.3.11** `bool Crosstales.Common.Util.BaseHelper.isWebGLPlatform` `[static], [get]`

Checks if the current platform is WebGL.

**Returns**

True if the current platform is WebGL.

**5.6.3.12** `bool Crosstales.Common.Util.BaseHelper.isWebPlatform` `[static], [get]`

Checks if the current platform is Web (WebPlayer or WebGL).

**Returns**

True if the current platform is Web (WebPlayer or WebGL).

**5.6.3.13** `bool Crosstales.Common.Util.BaseHelper.isWindowsBasedPlatform` `[static], [get]`

Checks if the current platform is Windows-based (Windows standalone or WSA).

**Returns**

True if the current platform is Windows-based (Windows standalone or WSA).

**5.6.3.14** `bool Crosstales.Common.Util.BaseHelper.isWindowsPlatform` `[static], [get]`

Checks if the current platform is Windows.

**Returns**

True if the current platform is Windows.

5.6.3.15 bool `Crosstales.Common.Util.BaseHelper.isWSAPlatform` `[static], [get]`

Checks if the current platform is WSA.

#### Returns

True if the current platform is WSA.

The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Scripts/Util/Base↵  
Helper.cs

## 5.7 Crosstales.Common.EditorTask.BaseSetupResources Class Reference

Base for copying all resources to 'Editor Default Resources'.

### Static Protected Member Functions

- static void **setupResources** (string source, string sourceFolder, string target, string targetFolder, string metafile)

#### 5.7.1 Detailed Description

Base for copying all resources to 'Editor Default Resources'.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Editor/Task/Base↵  
SetupResources.cs

## 5.8 Crosstales.FB.EditorTask.CompileDefines Class Reference

Adds the given define symbols to PlayerSettings define symbols.

Inheritance diagram for `Crosstales.FB.EditorTask.CompileDefines`:



## Additional Inherited Members

### 5.8.1 Detailed Description

Adds the given define symbols to PlayerSettings define symbols.

The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Editor/↵  
Task/CompileDefines.cs

## 5.9 Crosstales.FB.Util.Config Class Reference

Configuration for the asset.

### Static Public Member Functions

- static void [Reset](#) ()  
*Resets all changable variables to their default value.*
- static void [Load](#) ()  
*Loads the all changable variables.*
- static void [Save](#) ()  
*Saves the all changable variables.*

### Static Public Attributes

- static bool [DEBUG](#) = Constants.DEFAULT\_DEBUG  
*Enable or disable debug logging for the asset.*
- static bool [isLoading](#) = false  
*Is the configuration loaded?*

### 5.9.1 Detailed Description

Configuration for the asset.

### 5.9.2 Member Function Documentation

#### 5.9.2.1 static void Crosstales.FB.Util.Config.Load ( ) [static]

Loads the all changable variables.

#### 5.9.2.2 static void Crosstales.FB.Util.Config.Reset ( ) [static]

Resets all changable variables to their default value.

5.9.2.3 `static void Crosstales.FB.Util.Config.Save ( ) [static]`

Saves the all changable variables.

### 5.9.3 Member Data Documentation

5.9.3.1 `bool Crosstales.FB.Util.Config.DEBUG = Constants.DEFAULT_DEBUG [static]`

Enable or disable debug logging for the asset.

5.9.3.2 `bool Crosstales.FB.Util.Config.isLoaded = false [static]`

Is the configuration loaded?

The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Scripts/↔ Util/Config.cs

## 5.10 Crosstales.FB.EditorTask.ConfigLoader Class Reference

Loads the configuration at startup.

### 5.10.1 Detailed Description

Loads the configuration at startup.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Editor/↔ Task/ConfigLoader.cs

## 5.11 Crosstales.FB.Util.Constants Class Reference

Collected constants of very general utility for the asset.

Inheritance diagram for Crosstales.FB.Util.Constants:



## Public Attributes

- const string **ASSET\_NAME** = "File Browser"  
*Name of the asset.*
- const string **ASSET\_VERSION** = "2018.3.1"  
*Version of the asset.*
- const int **ASSET\_BUILD** = 20181018  
*Build number of the asset.*
- const string **ASSET\_PRO\_URL** = "https://www.assetstore.unity3d.com/#!/content/98713?aid=1011ING↵T&pubref=" + **ASSET\_NAME**  
*URL of the PRO asset in UAS.*
- const string **ASSET\_UPDATE\_CHECK\_URL** = "https://www.crosstales.com/media/assets/fb\_versions.txt"  
*URL for update-checks of the asset*
- const string **ASSET\_CONTACT** = "fb@crosstales.com"  
*Contact to the owner of the asset.*
- const string **KEY\_PREFIX** = "FILEBROWSER\_CFG\_"
- const string **KEY\_DEBUG** = **KEY\_PREFIX** + "DEBUG"

## Static Public Attributes

- static readonly bool **isPro** = false  
*Is PRO-version?*
- static readonly System.DateTime **ASSET\_CREATED** = new System.DateTime(2017, 8, 1)  
*Create date of the asset (YYYY, MM, DD).*
- static readonly System.DateTime **ASSET\_CHANGED** = new System.DateTime(2018, 10, 18)  
*Change date of the asset (YYYY, MM, DD).*

## Additional Inherited Members

### 5.11.1 Detailed Description

Collected constants of very general utility for the asset.

### 5.11.2 Member Data Documentation

#### 5.11.2.1 const int Crosstales.FB.Util.Constants.ASSET\_BUILD = 20181018

Build number of the asset.

#### 5.11.2.2 readonly System.DateTime Crosstales.FB.Util.Constants.ASSET\_CHANGED = new System.DateTime(2018, 10, 18) [static]

Change date of the asset (YYYY, MM, DD).

5.11.2.3 `const string Crosstales.FB.Util.Constants.ASSET_CONTACT = "fb@crosstales.com"`

Contact to the owner of the asset.

5.11.2.4 `readonly System.DateTime Crosstales.FB.Util.Constants.ASSET_CREATED = new System.DateTime(2017, 8, 1)`  
`[static]`

Create date of the asset (YYYY, MM, DD).

5.11.2.5 `const string Crosstales.FB.Util.Constants.ASSET_NAME = "File Browser"`

Name of the asset.

5.11.2.6 `const string Crosstales.FB.Util.Constants.ASSET_PRO_URL = "https://www.assetstore.unity3d.com/#!/content/98713?aid=1011INGT&pubref=" + ASSET_NAME`

URL of the PRO asset in UAS.

5.11.2.7 `const string Crosstales.FB.Util.Constants.ASSET_UPDATE_CHECK_URL = "https://www.crosstales.com/media/assets/fb_versions.txt"`

URL for update-checks of the asset

5.11.2.8 `const string Crosstales.FB.Util.Constants.ASSET_VERSION = "2018.3.1"`

Version of the asset.

5.11.2.9 `readonly bool Crosstales.FB.Util.Constants.isPro = false` `[static]`

Is PRO-version?

The documentation for this class was generated from the following file:

- `D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Scripts/Util/Constants.cs`

## 5.12 Crosstales.Common.Util.CTPlayerPrefs Class Reference

Wrapper for the PlayerPrefs.

## Static Public Member Functions

- static bool [HasKey](#) (string key)  
*Exists the key?*
- static void [DeleteAll](#) ()  
*Deletes all keys.*
- static void [DeleteKey](#) (string key)  
*Delete the key.*
- static void [Save](#) ()  
*Saves all modifications.*
- static string [GetString](#) (string key)  
*Allows to get a string from a key.*
- static float [GetFloat](#) (string key)  
*Allows to get a float from a key.*
- static int [GetInt](#) (string key)  
*Allows to get an int from a key.*
- static bool [GetBool](#) (string key)  
*Allows to get a bool from a key.*
- static void [SetString](#) (string key, string value)  
*Allows to set a string for a key.*
- static void [SetFloat](#) (string key, float value)  
*Allows to set a float for a key.*
- static void [SetInt](#) (string key, int value)  
*Allows to set an int for a key.*
- static void [SetBool](#) (string key, bool value)  
*Allows to set a bool for a key.*

### 5.12.1 Detailed Description

Wrapper for the PlayerPrefs.

### 5.12.2 Member Function Documentation

#### 5.12.2.1 static void Crosstales.Common.Util.CTPlayerPrefs.DeleteAll ( ) [static]

Deletes all keys.

#### 5.12.2.2 static void Crosstales.Common.Util.CTPlayerPrefs.DeleteKey ( string key ) [static]

Delete the key.

##### Parameters

<i>key</i>	Key to delete in the PlayerPrefs.
------------	-----------------------------------



#### 5.12.2.3 static bool Crosstales.Common.Util.CTPlayerPrefs.GetBool ( string *key* ) [static]

Allows to get a bool from a key.

##### Parameters

<i>key</i>	Key for the PlayerPrefs.
------------	--------------------------

##### Returns

Value for the key.

#### 5.12.2.4 static float Crosstales.Common.Util.CTPlayerPrefs.GetFloat ( string *key* ) [static]

Allows to get a float from a key.

##### Parameters

<i>key</i>	Key for the PlayerPrefs.
------------	--------------------------

##### Returns

Value for the key.

#### 5.12.2.5 static int Crosstales.Common.Util.CTPlayerPrefs.GetInt ( string *key* ) [static]

Allows to get an int from a key.

##### Parameters

<i>key</i>	Key for the PlayerPrefs.
------------	--------------------------

##### Returns

Value for the key.

#### 5.12.2.6 static string Crosstales.Common.Util.CTPlayerPrefs.GetString ( string *key* ) [static]

Allows to get a string from a key.

##### Parameters

<i>key</i>	Key for the PlayerPrefs.
------------	--------------------------

**Returns**

Value for the key.

**5.12.2.7 static bool Crosstales.Common.Util.CTPlayerPrefs.HasKey ( string key ) [static]**

Exists the key?

**Parameters**

<i>key</i>	Key for the PlayerPrefs.
------------	--------------------------

**Returns**

Value for the key.

**5.12.2.8 static void Crosstales.Common.Util.CTPlayerPrefs.Save ( ) [static]**

Saves all modifications.

**5.12.2.9 static void Crosstales.Common.Util.CTPlayerPrefs.SetBool ( string key, bool value ) [static]**

Allows to set a bool for a key.

**Parameters**

<i>key</i>	Key for the PlayerPrefs.
<i>value</i>	Value for the PlayerPrefs.

**5.12.2.10 static void Crosstales.Common.Util.CTPlayerPrefs.SetFloat ( string key, float value ) [static]**

Allows to set a float for a key.

**Parameters**

<i>key</i>	Key for the PlayerPrefs.
<i>value</i>	Value for the PlayerPrefs.

**5.12.2.11 static void Crosstales.Common.Util.CTPlayerPrefs.SetInt ( string key, int value ) [static]**

Allows to set an int for a key.

## Parameters

<i>key</i>	Key for the PlayerPrefs.
<i>value</i>	Value for the PlayerPrefs.

5.12.2.12 `static void Crosstales.Common.Util.CTPlayerPrefs.SetString ( string key, string value )` [static]

Allows to set a string for a key.

## Parameters

<i>key</i>	Key for the PlayerPrefs.
<i>value</i>	Value for the PlayerPrefs.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Scripts/Util/CT↔PlayerPrefs.cs

## 5.13 Crosstales.Common.Util.CTWebClient Class Reference

Specialized WebClient.

Inheritance diagram for Crosstales.Common.Util.CTWebClient:



### Public Member Functions

- **CTWebClient** (int timeout, int connectionLimit=20)
- System.Net.WebRequest **CTGetWebRequest** (string uri)

### Protected Member Functions

- override System.Net.WebRequest **GetWebRequest** (System.Uri uri)

### Properties

- int **Timeout** [get, set]  
*Timeout in milliseconds*
- int **ConnectionLimit** [get, set]  
*Connection limit for all WebClients*

### 5.13.1 Detailed Description

Specialized WebClient.

### 5.13.2 Property Documentation

5.13.2.1 `int Crosstales.Common.Util.CTWebClient.ConnectionLimit` `[get]`, `[set]`

Connection limit for all WebClients

5.13.2.2 `int Crosstales.Common.Util.CTWebClient.Timeout` `[get]`, `[set]`

Timeout in milliseconds

The documentation for this class was generated from the following file:

- `D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Scripts/Util/CTWebClient.cs`

## 5.14 Crosstales.FB.EditorUtil.EditorConfig Class Reference

Editor configuration for the asset.

### Static Public Member Functions

- static void `Reset` ()  
*Resets all changable variables to their default value.*
- static void `Load` ()  
*Loads the all changable variables.*
- static void `Save` ()  
*Saves the all changable variables.*

### Static Public Attributes

- static bool `UPDATE_CHECK` = `EditorConstants.DEFAULT_UPDATE_CHECK`  
*Enable or disable update-checks for the asset.*
- static bool `UPDATE_OPEN_UAS` = `EditorConstants.DEFAULT_UPDATE_OPEN_UAS`  
*Open the UAS-site when an update is found.*
- static bool `REMINDER_CHECK` = `EditorConstants.DEFAULT_REMINDER_CHECK`  
*Enable or disable reminder-checks for the asset.*
- static bool `CT_REMINDER_CHECK` = `EditorConstants.DEFAULT_CT_REMINDER_CHECK`  
*Enable or disable CT reminder-checks for the asset.*
- static bool `TELEMETRY` = `EditorConstants.DEFAULT_TRACER`  
*Enable or disable anonymous telemetry data.*
- static bool `isLoading` = `false`  
*Is the configuration loaded?*

### 5.14.1 Detailed Description

Editor configuration for the asset.

### 5.14.2 Member Function Documentation

**5.14.2.1** `static void Crosstales.FB.EditorUtil.EditorConfig.Load ( ) [static]`

Loads the all changable variables.

**5.14.2.2** `static void Crosstales.FB.EditorUtil.EditorConfig.Reset ( ) [static]`

Resets all changable variables to their default value.

**5.14.2.3** `static void Crosstales.FB.EditorUtil.EditorConfig.Save ( ) [static]`

Saves the all changable variables.

### 5.14.3 Member Data Documentation

**5.14.3.1** `bool Crosstales.FB.EditorUtil.EditorConfig.CT_REMINDER_CHECK = EditorConstants.DEFAULT_CT_REMINDER_CHECK [static]`

Enable or disable CT reminder-checks for the asset.

**5.14.3.2** `bool Crosstales.FB.EditorUtil.EditorConfig.isLoaded = false [static]`

Is the configuration loaded?

**5.14.3.3** `bool Crosstales.FB.EditorUtil.EditorConfig.REMINDER_CHECK = EditorConstants.DEFAULT_REMINDER_CHECK [static]`

Enable or disable reminder-checks for the asset.

**5.14.3.4** `bool Crosstales.FB.EditorUtil.EditorConfig.TELEMTRY = EditorConstants.DEFAULT_TRACER [static]`

Enable or disable anonymous telemetry data.

**5.14.3.5** `bool Crosstales.FB.EditorUtil.EditorConfig.UPDATE_CHECK = EditorConstants.DEFAULT_UPDATE_CHECK [static]`

Enable or disable update-checks for the asset.

5.14.3.6 **bool** Crosstales.FB.EditorUtil.EditorConfig.UPDATE\_OPEN\_UAS = EditorConstants.DEFAULT\_UPDATE\_OPEN\_UAS  
[static]

Open the UAS-site when an update is found.

The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Editor/↵  
Util/EditorConfig.cs

## 5.15 Crosstales.FB.EditorUtil.EditorConstants Class Reference

Collected editor constants of very general utility for the asset.

### Public Attributes

- const string **KEY\_UPDATE\_CHECK** = Util.Constants.KEY\_PREFIX + "UPDATE\_CHECK"
- const string **KEY\_UPDATE\_OPEN\_UAS** = Util.Constants.KEY\_PREFIX + "UPDATE\_OPEN\_UAS"
- const string **KEY\_REMINDER\_CHECK** = Util.Constants.KEY\_PREFIX + "REMINDER\_CHECK"
- const string **KEY\_CT\_REMINDER\_CHECK** = Util.Constants.KEY\_PREFIX + "CT\_REMINDER\_CHECK"
- const string **KEY\_TRACER** = Util.Constants.KEY\_PREFIX + "TRACER"
- const string **KEY\_UPDATE\_DATE** = Util.Constants.KEY\_PREFIX + "UPDATE\_DATE"
- const string **KEY\_REMINDER\_DATE** = Util.Constants.KEY\_PREFIX + "REMINDER\_DATE"
- const string **KEY\_REMINDER\_COUNT** = Util.Constants.KEY\_PREFIX + "REMINDER\_COUNT"
- const string **KEY\_CT\_REMINDER\_DATE** = Util.Constants.KEY\_PREFIX + "CT\_REMINDER\_DATE"
- const string **KEY\_CT\_REMINDER\_COUNT** = Util.Constants.KEY\_PREFIX + "CT\_REMINDER\_COUNT"
- const string **KEY\_TRACER\_DATE** = Util.Constants.KEY\_PREFIX + "TRACER\_DATE"
- const bool **DEFAULT\_UPDATE\_CHECK** = true
- const bool **DEFAULT\_UPDATE\_OPEN\_UAS** = false
- const bool **DEFAULT\_REMINDER\_CHECK** = true
- const bool **DEFAULT\_CT\_REMINDER\_CHECK** = true
- const bool **DEFAULT\_TRACER** = true

### Properties

- static string **ASSET\_URL** [get]  
*Returns the URL of the asset in UAS.*
- static System.Guid **ASSET\_UID** [get]  
*Returns the UID of the asset.*

### 5.15.1 Detailed Description

Collected editor constants of very general utility for the asset.

## 5.15.2 Property Documentation

### 5.15.2.1 `System.Guid Crosstales.FB.EditorUtil.EditorConstants.ASSET_UID` `[static], [get]`

Returns the UID of the asset.

#### Returns

The UID of the asset.

### 5.15.2.2 `string Crosstales.FB.EditorUtil.EditorConstants.ASSET_URL` `[static], [get]`

Returns the URL of the asset in UAS.

#### Returns

The URL of the asset in UAS.


The documentation for this class was generated from the following file:

- `D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Editor/Util/EditorConstants.cs`

## 5.16 Crosstales.FB.Demo.Examples Class Reference

[Examples](#) for all methods.

Inheritance diagram for `Crosstales.FB.Demo.Examples`:



### Public Member Functions

- void **OpenSingleFile** ()
- void **OpenFiles** ()
- void **OpenSingleFolder** ()
- void **OpenFolders** ()
- void **SaveFile** ()
- void **OpenFilesAsync** ()
- void **OpenFoldersAsync** ()
- void **SaveFileAsync** ()

## Public Attributes

- GameObject **TextPrefab**
- GameObject **ScrollView**
- Text **Error**

### 5.16.1 Detailed Description

[Examples](#) for all methods.

The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Demo/↵  
Scripts/Examples.cs

## 5.17 Crosstales.FB.ExtensionFilter Struct Reference

Filter for extensions.

## Public Member Functions

- **ExtensionFilter** (string filterName, params string[] filterExtensions)

## Public Attributes

- string **Name**
- string[] **Extensions**

### 5.17.1 Detailed Description

Filter for extensions.

The documentation for this struct was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Scripts/File↵  
Browser.cs

## 5.18 Crosstales.ExtensionMethods Class Reference

Various extension methods.



## Static Public Member Functions

- static string [CTToTitleCase](#) (this string str)  
*Extension method for strings. Converts a string to title case (first letter uppercase).*
- static string [CTReverse](#) (this string str)  
*Extension method for strings. Reverses a string.*
- static string [CTReplace](#) (this string str, string oldString, string newString, System.StringComparison comp=System.StringComparison.OrdinalIgnoreCase)  
*Extension method for strings. Case insensitive 'Replace'.*
- static bool [CTEquals](#) (this string str, string toCheck, System.StringComparison comp=System.StringComparison.OrdinalIgnoreCase)  
*Extension method for strings. Case insensitive 'Equals'.*
- static bool [CTContains](#) (this string str, string toCheck, System.StringComparison comp=System.StringComparison.OrdinalIgnoreCase)  
*Extension method for strings. Case insensitive 'Contains'.*
- static bool [CTContainsAny](#) (this string str, string searchTerms, char splitChar= ' ')  
*Extension method for strings. Contains any given string.*
- static bool [CTContainsAll](#) (this string str, string searchTerms, char splitChar= ' ')  
*Extension method for strings. Contains all given strings.*
- static void [CTShuffle< T >](#) (this T[] array, int seed=0)  
*Extension method for Arrays. Shuffles an Array.*
- static string [CTDump< T >](#) (this T[] array)  
*Extension method for Arrays. Dumps an array to a string.*
- static string [CTDump](#) (this Vector2[] array)  
*Extension method for Vector2-Arrays. Dumps an array to a string.*
- static string [CTDump](#) (this Vector3[] array)  
*Extension method for Vector3-Arrays. Dumps an array to a string.*
- static string [CTDump](#) (this Vector4[] array)  
*Extension method for Vector4-Arrays. Dumps an array to a string.*
- static string[] [CTToString< T >](#) (this T[] array)  
*Extension method for Arrays. Generates a string array with all entries (via ToString).*
- static void [CTShuffle< T >](#) (this System.Collections.Generic.IList< T > list, int seed=0)  
*Extension method for IList. Shuffles a List.*
- static string [CTDump< T >](#) (this System.Collections.Generic.IList< T > list)  
*Extension method for IList. Dumps a list to a string.*
- static string [CTDump](#) (this System.Collections.Generic.IList< Vector2 > list)  
*Extension method for Vector2-IList. Dumps a list to a string.*
- static string [CTDump](#) (this System.Collections.Generic.IList< Vector3 > list)  
*Extension method for Vector3-IList. Dumps a list to a string.*
- static string [CTDump](#) (this System.Collections.Generic.IList< Vector4 > list)  
*Extension method for Vector4-IList. Dumps a list to a string.*
- static System.Collections.Generic.List< string > [CTToString< T >](#) (this System.Collections.Generic.IList< T > list)  
*Extension method for IList. Generates a string list with all entries (via ToString).*
- static string [CTDump< K, V >](#) (this System.Collections.Generic.IDictionary< K, V > dict)  
*Extension method for IDictionary. Dumps a dictionary to a string.*
- static void [CTAddRange< K, V >](#) (this System.Collections.Generic.IDictionary< K, V > source, System.Collections.Generic.IDictionary< K, V > collection)  
*Extension method for IDictionary. Adds a dictionary to an existing one.*
- static bool [CTIsVisibleFrom](#) (this Renderer renderer, Camera camera)  
*Extension method for Renderer. Determines if the renderer is visible from a certain camera.*

## 5.18.1 Detailed Description

Various extension methods.

## 5.18.2 Member Function Documentation

**5.18.2.1** `static void Crosstales.ExtensionMethods.CTAddRange< K, V > ( this System.Collections.Generic.IDictionary< K, V > source, System.Collections.Generic.IDictionary< K, V > collection )` [static]

Extension method for IDictionary. Adds a dictionary to an existing one.

### Parameters

<i>source</i>	IDictionary-instance.
<i>collection</i>	Dictionary to add.

**5.18.2.2** `static bool Crosstales.ExtensionMethods.CTContains ( this string str, string toCheck, System.StringComparison comp = System.StringComparison.OrdinalIgnoreCase )` [static]

Extension method for strings. Case insensitive 'Contains'.

### Parameters

<i>str</i>	String-instance.
<i>toCheck</i>	String to check.
<i>comp</i>	StringComparison-method (default: StringComparison.OrdinalIgnoreCase, optional)

### Returns

True if the string contains the given string.

**5.18.2.3** `static bool Crosstales.ExtensionMethods.CTContainsAll ( this string str, string searchTerms, char splitChar = ' ' )` [static]

Extension method for strings. Contains all given strings.

### Parameters

<i>str</i>	String-instance.
<i>searchTerms</i>	Search terms separated by the given split-character.
<i>splitChar</i>	Split-character (default: ' ', optional)

### Returns

True if the string contains all parts of the given string.

**5.18.2.4**   `static bool Crosstales.ExtensionMethods.CTContainsAny ( this string str, string searchTerms, char splitChar = ' ' )`  
[static]

Extension method for strings. Contains any given string.

#### Parameters

<i>str</i>	String-instance.
<i>searchTerms</i>	Search terms separated by the given split-character.
<i>splitChar</i>	Split-character (default: ' ', optional)

#### Returns

True if the string contains any parts of the given string.

**5.18.2.5**   `static string Crosstales.ExtensionMethods.CTDump ( this Vector2[] array )` [static]

Extension method for Vector2-Arrays. Dumps an array to a string.

#### Parameters

<i>array</i>	Vector2-Array-instance to dump.
--------------	---------------------------------

#### Returns

String with lines for all array entries.

**5.18.2.6**   `static string Crosstales.ExtensionMethods.CTDump ( this Vector3[] array )` [static]

Extension method for Vector3-Arrays. Dumps an array to a string.

#### Parameters

<i>array</i>	Vector3-Array-instance to dump.
--------------	---------------------------------

#### Returns

String with lines for all array entries.

**5.18.2.7**   `static string Crosstales.ExtensionMethods.CTDump ( this Vector4[] array )` [static]

Extension method for Vector4-Arrays. Dumps an array to a string.

**Parameters**

<i>array</i>	Vector4-Array-instance to dump.
--------------	---------------------------------

**Returns**

String with lines for all array entries.

**5.18.2.8** `static string Crosstales.ExtensionMethods.CTDump ( this System.Collections.Generic.IList< Vector2 > list )`  
[static]

Extension method for Vector2-IList. Dumps a list to a string.

**Parameters**

<i>list</i>	Vector2-IList-instance to dump.
-------------	---------------------------------

**Returns**

String with lines for all list entries.

**5.18.2.9** `static string Crosstales.ExtensionMethods.CTDump ( this System.Collections.Generic.IList< Vector3 > list )`  
[static]

Extension method for Vector3-IList. Dumps a list to a string.

**Parameters**

<i>list</i>	Vector3-IList-instance to dump.
-------------	---------------------------------

**Returns**

String with lines for all list entries.

**5.18.2.10** `static string Crosstales.ExtensionMethods.CTDump ( this System.Collections.Generic.IList< Vector4 > list )`  
[static]

Extension method for Vector4-IList. Dumps a list to a string.

**Parameters**

<i>list</i>	Vector4-IList-instance to dump.
-------------	---------------------------------

**Returns**

String with lines for all list entries.

**5.18.2.11** `static string Crosstales.ExtensionMethods.CTDump< K, V > ( this System.Collections.Generic.IDictionary< K, V > dict ) [static]`

Extension method for IDictionary. Dumps a dictionary to a string.

**Parameters**

<i>dict</i>	IDictionary-instance to dump.
-------------	-------------------------------

**Returns**

String with lines for all dictionary entries.

**5.18.2.12** `static string Crosstales.ExtensionMethods.CTDump< T > ( this T[] array ) [static]`

Extension method for Arrays. Dumps an array to a string.

**Parameters**

<i>array</i>	Array-instance to dump.
--------------	-------------------------

**Returns**

String with lines for all array entries.

**5.18.2.13** `static string Crosstales.ExtensionMethods.CTDump< T > ( this System.Collections.Generic.IList< T > list ) [static]`

Extension method for IList. Dumps a list to a string.

**Parameters**

<i>list</i>	IList-instance to dump.
-------------	-------------------------

**Returns**

String with lines for all list entries.

**5.18.2.14** `static bool Crosstales.ExtensionMethods.CTEquals ( this string str, string toCheck, System.StringComparison comp = System.StringComparison.OrdinalIgnoreCase ) [static]`

Extension method for strings. Case insensitive 'Equals'.

## Parameters

<i>str</i>	String-instance.
<i>toCheck</i>	String to check.
<i>comp</i>	StringComparison-method (default: StringComparison.OrdinalIgnoreCase, optional)

## Returns

True if the string contains the given string.

**5.18.2.15** static bool Crosstales.ExtensionMethods.CTIsVisibleFrom ( this *Renderer* *renderer*, *Camera* *camera* ) [static]

Extension method for *Renderer*. Determines if the renderer is visible from a certain camera.

## Parameters

<i>renderer</i>	Renderer to test the visibility.
<i>camera</i>	Camera for the test.

## Returns

True if the renderer is visible by the given camera.

**5.18.2.16** static string Crosstales.ExtensionMethods.CTReplace ( this string *str*, string *oldString*, string *newString*, System.StringComparison *comp* = StringComparison.OrdinalIgnoreCase ) [static]

Extension method for strings. Case insensitive 'Replace'.

## Parameters

<i>str</i>	String-instance.
<i>oldString</i>	String to replace.
<i>newString</i>	New replacement string.
<i>comp</i>	StringComparison-method (default: StringComparison.OrdinalIgnoreCase, optional)

## Returns

Replaced string.

**5.18.2.17** static string Crosstales.ExtensionMethods.CTReverse ( this string *str* ) [static]

Extension method for strings. Reverses a string.

## Parameters

<i>str</i>	String-instance.
------------	------------------

## Returns

Reversed string.

**5.18.2.18** `static void Crosstales.ExtensionMethods.CTShuffle< T > ( this T[] array, int seed = 0 ) [static]`

Extension method for Arrays. Shuffles an Array.

## Parameters

<i>array</i>	Array-instance to shuffle.
<i>seed</i>	Seed for the PRNG (default: 0 (=standard), optional)

**5.18.2.19** `static void Crosstales.ExtensionMethods.CTShuffle< T > ( this System.Collections.Generic.IList< T > list, int seed = 0 ) [static]`

Extension method for IList. Shuffles a List.

## Parameters

<i>list</i>	IList-instance to shuffle.
<i>seed</i>	Seed for the PRNG (default: 0 (=standard), optional)

**5.18.2.20** `static string [] Crosstales.ExtensionMethods.CTToString< T > ( this T[] array ) [static]`

Extension method for Arrays. Generates a string array with all entries (via ToString).

## Parameters

<i>array</i>	Array-instance to ToString.
--------------	-----------------------------

## Returns

String array with all entries (via ToString).

**5.18.2.21** `static System.Collections.Generic.List<string> Crosstales.ExtensionMethods.CTToString< T > ( this System.Collections.Generic.IList< T > list ) [static]`

Extension method for IList. Generates a string list with all entries (via ToString).

## Parameters

<i>list</i>	IList-instance to ToString.
-------------	-----------------------------

## Returns

String list with all entries (via ToString).

**5.18.2.22** `static string Crosstales.ExtensionMethods.CTToTitleCase ( this string str ) [static]`

Extension method for strings. Converts a string to title case (first letter uppercase).

## Parameters

<i>str</i>	String-instance.
------------	------------------

## Returns

Converted string in title case.

The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Scripts/Extension↔  
Methods.cs

## 5.19 Crosstales.FB.FileBrowser Class Reference

Native file browser various actions like open file, open folder and save file.

### Static Public Member Functions

- static string [OpenSingleFile](#) (string title, string directory, string extension)  
*Open native file browser for a single file.*
- static string [OpenSingleFile](#) (string title, string directory, [ExtensionFilter](#)[] extensions)  
*Open native file browser for a single file.*
- static string[] [OpenFiles](#) (string title, string directory, string extension, bool multiselect)  
*Open native file browser for multiple files.*
- static string[] [OpenFiles](#) (string title, string directory, [ExtensionFilter](#)[] extensions, bool multiselect)  
*Open native file browser for multiple files.*
- static string [OpenSingleFolder](#) (string title, string directory="")  
*Open native folder browser for a single folder.*
- static string[] [OpenFolders](#) (string title, string directory="", bool multiselect=true)  
*Open native folder browser for multiple folders. NOTE: Multiple folder selection isn't supported on Windows!*
- static string [SaveFile](#) (string title, string directory, string defaultName, string extension)  
*Open native save file browser*



- static string [SaveFile](#) (string title, string directory, string defaultName, [ExtensionFilter](#)[] extensions)  
*Open native save file browser*
- static void [OpenFilesAsync](#) (string title, string directory, string extension, bool multiselect, System.Action< string[]> cb)  
*Open native file browser for multiple files.*
- static void [OpenFilesAsync](#) (string title, string directory, [ExtensionFilter](#)[] extensions, bool multiselect, System.Action< string[]> cb)  
*Open native file browser for multiple files (async).*
- static void [OpenFoldersAsync](#) (string title, string directory, bool multiselect, System.Action< string[]> cb)  
*Open native folder browser for multiple folders (async).*
- static void [SaveFileAsync](#) (string title, string directory, string defaultName, string extension, System.Action< string > cb)  
*Open native save file browser*
- static void [SaveFileAsync](#) (string title, string directory, string defaultName, [ExtensionFilter](#)[] extensions, System.Action< string > cb)  
*Open native save file browser (async).*
- static string[] [GetFiles](#) (string path, string extension, bool isRecursive=false)  
*Find files inside a path.*
- static string[] [GetFiles](#) (string path, [ExtensionFilter](#)[] extensions, bool isRecursive=false)  
*Find files inside a path.*
- static string[] [GetDirectories](#) (string path, bool isRecursive=false)  
*Find directories inside a path without recursion.*

### 5.19.1 Detailed Description

Native file browser various actions like open file, open folder and save file.

### 5.19.2 Member Function Documentation

**5.19.2.1** static string [] Crosstales.FB.FileBrowser.GetDirectories ( string path, bool isRecursive = false ) [static]

Find directories inside a path without recursion.

#### Parameters

<i>path</i>	Path to find the directories
<i>isRecursive</i>	Recursive search (default: false, optional)

#### Returns

Returns array of the found directories inside the path. Zero length array when an error occurred.

**5.19.2.2** static string [] Crosstales.FB.FileBrowser.GetFiles ( string path, string extension, bool isRecursive = false ) [static]

Find files inside a path.

## Parameters

<i>path</i>	Path to find the files
<i>extension</i>	Extension for the file search
<i>isRecursive</i>	Recursive search (default: false, optional)

## Returns

Returns array of the found files inside the path. Zero length array when an error occurred.

```
5.19.2.3 static string [] Crosstales.FB.FileBrowser.GetFiles ( string path, ExtensionFilter[] extensions, bool isRecursive = false ) [static]
```

Find files inside a path.

## Parameters

<i>path</i>	Path to find the files
<i>extensions</i>	List of extension filters for the find. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")
<i>isRecursive</i>	Recursive search (default: false, optional)

## Returns

Returns array of the found files inside the path. Zero length array when an error occurred.

```
5.19.2.4 static string [] Crosstales.FB.FileBrowser.OpenFiles ( string title, string directory, string extension, bool multiselect ) [static]
```

Open native file browser for multiple files.

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extension</i>	Allowed extension, e.g. "png"
<i>multiselect</i>	Allow multiple file selection

## Returns

Returns array of chosen files. Zero length array when cancelled

```
5.19.2.5 static string [] Crosstales.FB.FileBrowser.OpenFiles ( string title, string directory, ExtensionFilter[] extensions, bool multiselect ) [static]
```

Open native file browser for multiple files.

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")
<i>multiselect</i>	Allow multiple file selection

## Returns

Returns array of chosen files. Zero length array when cancelled

**5.19.2.6** `static void Crosstales.FB.FileBrowser.OpenFilesAsync ( string title, string directory, string extension, bool multiselect, System.Action< string[]> cb )` `[static]`

Open native file browser for multiple files.

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extension</i>	Allowed extension, e.g. "png"
<i>multiselect</i>	Allow multiple file selection
<i>cb</i>	Callback for the async operation.

## Returns

Returns array of chosen files. Zero length array when cancelled

**5.19.2.7** `static void Crosstales.FB.FileBrowser.OpenFilesAsync ( string title, string directory, ExtensionFilter[] extensions, bool multiselect, System.Action< string[]> cb )` `[static]`

Open native file browser for multiple files (async).

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")
<i>multiselect</i>	Allow multiple file selection
<i>cb</i>	Callback for the async operation.

## Returns

Returns array of chosen files. Zero length array when cancelled

**5.19.2.8** `static string [] Crosstales.FB.FileBrowser.OpenFolders ( string title, string directory = " ", bool multiselect = true )`  
[static]

Open native folder browser for multiple folders. NOTE: Multiple folder selection isn't supported on Windows!

#### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory (default: current, optional)
<i>multiselect</i>	Allow multiple folder selection (default: true, optional)

#### Returns

Returns array of chosen folders. Zero length array when cancelled

**5.19.2.9** `static void Crosstales.FB.FileBrowser.OpenFoldersAsync ( string title, string directory, bool multiselect, System.Action< string[]> cb )` [static]

Open native folder browser for multiple folders (async).

#### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>multiselect</i>	
<i>cb</i>	Callback for the async operation.

#### Returns

Returns array of chosen folders. Zero length array when cancelled

**5.19.2.10** `static string Crosstales.FB.FileBrowser.OpenSingleFile ( string title, string directory, string extension )`  
[static]

Open native file browser for a single file.

#### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extension</i>	Allowed extension, e.g. "png"

#### Returns

Returns a string of the chosen file. Empty string when cancelled

**5.19.2.11** static string Crosstales.FB.FileBrowser.OpenSingleFile ( string *title*, string *directory*, ExtensionFilter[] *extensions* ) [static]

Open native file browser for a single file.

#### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")

#### Returns

Returns a string of the chosen file. Empty string when cancelled

**5.19.2.12** static string Crosstales.FB.FileBrowser.OpenSingleFolder ( string *title*, string *directory* = " " ) [static]

Open native folder browser for a single folder.

#### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory (default: current, optional)

#### Returns

Returns a string of the chosen folder. Empty string when cancelled

**5.19.2.13** static string Crosstales.FB.FileBrowser.SaveFile ( string *title*, string *directory*, string *defaultName*, string *extension* ) [static]

Open native save file browser

#### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>defaultName</i>	Default file name
<i>extension</i>	File extension, e.g. "png"

#### Returns

Returns chosen file. Empty string when cancelled

5.19.2.14 **static string** Crosstales.FB.FileBrowser.SaveFile ( *string title*, *string directory*, *string defaultName*, **ExtensionFilter[] extensions** ) [static]

Open native save file browser

#### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>defaultName</i>	Default file name
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")

#### Returns

Returns chosen file. Empty string when cancelled

5.19.2.15 **static void** Crosstales.FB.FileBrowser.SaveFileAsync ( *string title*, *string directory*, *string defaultName*, *string extension*, **System.Action< string > cb** ) [static]

Open native save file browser

#### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>defaultName</i>	Default file name
<i>extension</i>	File extension, e.g. "png"
<i>cb</i>	Callback for the async operation.

#### Returns

Returns chosen file. Empty string when cancelled

5.19.2.16 **static void** Crosstales.FB.FileBrowser.SaveFileAsync ( *string title*, *string directory*, *string defaultName*, **ExtensionFilter[] extensions**, **System.Action< string > cb** ) [static]

Open native save file browser (async).

#### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>defaultName</i>	Default file name
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")
<i>cb</i>	Callback for the async operation.

## Returns

Returns chosen file. Empty string when cancelled


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Scripts/FileBrowser.cs

## 5.20 Crosstales.FB.Wrapper.FileBrowserBase Class Reference

Base class for all file browsers.

Inheritance diagram for Crosstales.FB.Wrapper.FileBrowserBase:

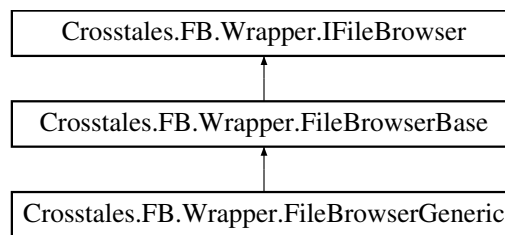

### Public Member Functions

- string [OpenSingleFile](#) (string title, string directory, [ExtensionFilter\[\]](#) extensions)  
*Open native file browser for a single file.*
- abstract string[] [OpenFiles](#) (string title, string directory, [ExtensionFilter\[\]](#) extensions, bool multiselect)  
*Open native file browser for multiple files.*
- string [OpenSingleFolder](#) (string title, string directory)  
*Open native folder browser for a single folder.*
- abstract string[] [OpenFolders](#) (string title, string directory, bool multiselect)  
*Open native folder browser for multiple folders.*
- abstract string [SaveFile](#) (string title, string directory, string defaultName, [ExtensionFilter\[\]](#) extensions)  
*Open native save file browser.*
- abstract void [OpenFilesAsync](#) (string title, string directory, [ExtensionFilter\[\]](#) extensions, bool multiselect, System.Action< string[]> cb)  
*Open native file browser for multiple files (async).*
- abstract void [OpenFoldersAsync](#) (string title, string directory, bool multiselect, System.Action< string[]> cb)  
*Open native folder browser for multiple folders (async).*
- abstract void [SaveFileAsync](#) (string title, string directory, string defaultName, [ExtensionFilter\[\]](#) extensions, System.Action< string > cb)  
*Open native save file browser (async).*

### 5.20.1 Detailed Description

Base class for all file browsers.

### 5.20.2 Member Function Documentation

5.20.2.1 abstract string [] Crosstales.FB.Wrapper.FileBrowserBase.OpenFiles ( string title, string directory, [ExtensionFilter\[\]](#) extensions, bool multiselect ) [pure virtual]

Open native file browser for multiple files.

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")
<i>multiselect</i>	Allow multiple file selection

## Returns

Returns array of chosen files. Zero length array when cancelled

Implements [Crosstales.FB.Wrapper.IFileBrowser](#).

Implemented in [Crosstales.FB.Wrapper.FileBrowserGeneric](#).

**5.20.2.2** `abstract void Crosstales.FB.Wrapper.FileBrowserBase.OpenFilesAsync ( string title, string directory,  
ExtensionFilter[] extensions, bool multiselect, System.Action< string[]> cb ) [pure virtual]`

Open native file browser for multiple files (async).

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")
<i>multiselect</i>	Allow multiple file selection
<i>cb</i>	Callback for the async operation.

## Returns

Returns array of chosen files. Zero length array when cancelled

Implements [Crosstales.FB.Wrapper.IFileBrowser](#).

**5.20.2.3** `abstract string [] Crosstales.FB.Wrapper.FileBrowserBase.OpenFolders ( string title, string directory, bool multiselect  
) [pure virtual]`

Open native folder browser for multiple folders.

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>multiselect</i>	Allow multiple folder selection



**Returns**

Returns array of chosen folders. Zero length array when cancelled

Implements [Crosstales.FB.Wrapper.IFileBrowser](#).

Implemented in [Crosstales.FB.Wrapper.FileBrowserGeneric](#).

**5.20.2.4** `abstract void Crosstales.FB.Wrapper.FileBrowserBase.OpenFoldersAsync ( string title, string directory, bool multiselect, System.Action< string[]> cb )` [pure virtual]

Open native folder browser for multiple folders (async).

**Parameters**

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>multiselect</i>	Allow multiple folder selection
<i>cb</i>	Callback for the async operation.

**Returns**

Returns array of chosen folders. Zero length array when cancelled

Implements [Crosstales.FB.Wrapper.IFileBrowser](#).

**5.20.2.5** `string Crosstales.FB.Wrapper.FileBrowserBase.OpenSingleFile ( string title, string directory, ExtensionFilter[] extensions )`

Open native file browser for a single file.

**Parameters**

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", ".jpg", ".png")

**Returns**

Returns a string of the chosen file. Empty string when cancelled

Implements [Crosstales.FB.Wrapper.IFileBrowser](#).

**5.20.2.6** `string Crosstales.FB.Wrapper.FileBrowserBase.OpenSingleFolder ( string title, string directory )`

Open native folder browser for a single folder.

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory

## Returns

Returns a string of the chosen folder. Empty string when cancelled

Implements [Crosstales.FB.Wrapper.IFileBrowser](#).

**5.20.2.7** `abstract string Crosstales.FB.Wrapper.FileBrowserBase.SaveFile ( string title, string directory, string defaultName, ExtensionFilter[] extensions ) [pure virtual]`

Open native save file browser.

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>defaultName</i>	Default file name
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")

## Returns

Returns chosen file. Empty string when cancelled

Implements [Crosstales.FB.Wrapper.IFileBrowser](#).

Implemented in [Crosstales.FB.Wrapper.FileBrowserGeneric](#).

**5.20.2.8** `abstract void Crosstales.FB.Wrapper.FileBrowserBase.SaveFileAsync ( string title, string directory, string defaultName, ExtensionFilter[] extensions, System.Action< string > cb ) [pure virtual]`

Open native save file browser (async).

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>defaultName</i>	Default file name
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")
<i>cb</i>	Callback for the async operation.

## Returns

Returns chosen file. Empty string when cancelled

Implements [Crosstales.FB.Wrapper.IFileBrowser](#).


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Scripts/↔  
Wrapper/FileBrowserBase.cs

## 5.21 Crosstales.FB.Wrapper.FileBrowserGeneric Class Reference

File browser implementation for generic devices (currently NOT IMPLEMENTED).

Inheritance diagram for Crosstales.FB.Wrapper.FileBrowserGeneric:

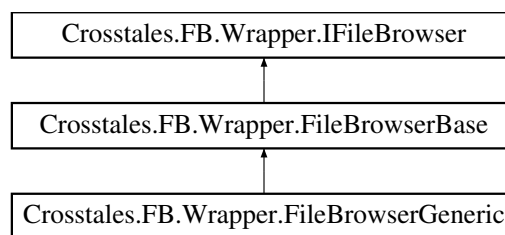

### Public Member Functions

- override string[] **OpenFiles** (string title, string directory, [ExtensionFilter](#)[] extensions, bool multiselect)  
*Open native file browser for multiple files.*
- override string[] **OpenFolders** (string title, string directory, bool multiselect)  
*Open native folder browser for multiple folders.*
- override string **SaveFile** (string title, string directory, string defaultName, [ExtensionFilter](#)[] extensions)  
*Open native save file browser.*
- override void **OpenFilesAsync** (string title, string directory, [ExtensionFilter](#)[] extensions, bool multiselect, Action< string[]> cb)
- override void **OpenFoldersAsync** (string title, string directory, bool multiselect, Action< string[]> cb)
- override void **SaveFileAsync** (string title, string directory, string defaultName, [ExtensionFilter](#)[] extensions, Action< string > cb)

### 5.21.1 Detailed Description

File browser implementation for generic devices (currently NOT IMPLEMENTED).

### 5.21.2 Member Function Documentation

- 5.21.2.1 override string [] Crosstales.FB.Wrapper.FileBrowserGeneric.OpenFiles ( string title, string directory, [ExtensionFilter](#)[] extensions, bool multiselect ) [virtual]

Open native file browser for multiple files.

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")
<i>multiselect</i>	Allow multiple file selection

## Returns

Returns array of chosen files. Zero length array when cancelled

Implements [Crosstales.FB.Wrapper.FileBrowserBase](#).

5.21.2.2 `override string [] Crosstales.FB.Wrapper.FileBrowserGeneric.OpenFolders ( string title, string directory, bool multiselect ) [virtual]`

Open native folder browser for multiple folders.

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>multiselect</i>	Allow multiple folder selection

## Returns

Returns array of chosen folders. Zero length array when cancelled

Implements [Crosstales.FB.Wrapper.FileBrowserBase](#).

5.21.2.3 `override string Crosstales.FB.Wrapper.FileBrowserGeneric.SaveFile ( string title, string directory, string defaultName, ExtensionFilter\[\] extensions ) [virtual]`

Open native save file browser.

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>defaultName</i>	Default file name
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")

## Returns

Returns chosen file. Empty string when cancelled

Implements [Crosstales.FB.Wrapper.FileBrowserBase](#).


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Scripts/↔  
Wrapper/FileBrowserGeneric.cs

## 5.22 Crosstales.UI.Util.FPSDisplay Class Reference

Simple FPS-Counter.

Inheritance diagram for Crosstales.UI.Util.FPSDisplay:



### Public Member Functions

- void **Update** ()

### Public Attributes

- Text **FPS**

### 5.22.1 Detailed Description

Simple FPS-Counter.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/UI/Scripts/Util/F↔  
PSDisplay.cs

## 5.23 Crosstales.FB.EditorUtil.GAApi Class Reference

GA-wrapper API.

Inheritance diagram for Crosstales.FB.EditorUtil.GAApi:



## Static Public Member Functions

- static void [Event](#) (string category, string action, string label="", int value=0)  
*Tracks an event from the asset.*

### 5.23.1 Detailed Description

GA-wrapper API.

### 5.23.2 Member Function Documentation

5.23.2.1 static void Crosstales.FB.EditorUtil.GAApi.Event ( string *category*, string *action*, string *label* = " ", int *value* = 0 )  
[static]

Tracks an event from the asset.

#### Parameters

<i>category</i>	Specifies the event category.
<i>action</i>	Specifies the event action.
<i>label</i>	Specifies the event label.
<i>value</i>	Specifies the event value.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Editor/Util/GAApi.cs

## 5.24 Crosstales.FB.Demo.GUIMain Class Reference

Main GUI component for all demo scenes.

Inheritance diagram for Crosstales.FB.Demo.GUIMain:



## Public Member Functions

- void **Start** ()
- void **OpenAssetURL** ()
- void **OpenCTURL** ()
- void **Quit** ()

## Public Attributes

- Text **Name**
- Text **Version**
- Text **Scene**

### 5.24.1 Detailed Description

Main GUI component for all demo scenes.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstailes/FileBrowser/Demo/Scripts/GUIMain.cs

## 5.25 Crosstailes.FB.Demo.GUIScenes Class Reference

Main GUI scene manager for all demo scenes.

Inheritance diagram for Crosstailes.FB.Demo.GUIScenes:



## Public Member Functions

- void **LoadPrevoiusScene** ()
- void **LoadNextScene** ()

## Public Attributes

- string **PreviousScene**
- string **NextScene**

### 5.25.1 Detailed Description

Main GUI scene manager for all demo scenes.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstailes/FileBrowser/Demo/Scripts/GUIScenes.cs

## 5.26 Crosstales.FB.Util.Helper Class Reference

Various helper functions.

Inheritance diagram for Crosstales.FB.Util.Helper:



### Properties

- static bool `isSupportedPlatform` [get]  
*Checks if the current platform is supported.*

### Additional Inherited Members

#### 5.26.1 Detailed Description

Various helper functions.

#### 5.26.2 Property Documentation

##### 5.26.2.1 bool Crosstales.FB.Util.Helper.isSupportedPlatform [static], [get]

Checks if the current platform is supported.

##### Returns

True if the current platform is supported.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Scripts/↔  
Util/Helper.cs

## 5.27 Crosstales.FB.Wrapper.IFileBrowser Interface Reference

Interface for all file browsers.

Inheritance diagram for Crosstales.FB.Wrapper.IFileBrowser:

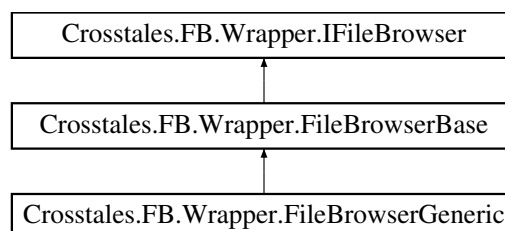



## Public Member Functions

- string [OpenSingleFile](#) (string title, string directory, [ExtensionFilter\[\]](#) extensions)  
*Open native file browser for a single file.*
- string[] [OpenFiles](#) (string title, string directory, [ExtensionFilter\[\]](#) extensions, bool multiselect)  
*Open native file browser for multiple files.*
- string [OpenSingleFolder](#) (string title, string directory)  
*Open native folder browser for a single folder.*
- string[] [OpenFolders](#) (string title, string directory, bool multiselect)  
*Open native folder browser for multiple folders.*
- string [SaveFile](#) (string title, string directory, string defaultName, [ExtensionFilter\[\]](#) extensions)  
*Open native save file browser.*
- void [OpenFilesAsync](#) (string title, string directory, [ExtensionFilter\[\]](#) extensions, bool multiselect, System.Action< string[]> cb)  
*Open native file browser for multiple files (async).*
- void [OpenFoldersAsync](#) (string title, string directory, bool multiselect, System.Action< string[]> cb)  
*Open native folder browser for multiple folders (async).*
- void [SaveFileAsync](#) (string title, string directory, string defaultName, [ExtensionFilter\[\]](#) extensions, System.Action< string > cb)  
*Open native save file browser (async).*

### 5.27.1 Detailed Description

Interface for all file browsers.

### 5.27.2 Member Function Documentation

5.27.2.1 string [] Crosstales.FB.Wrapper.IFileBrowser.OpenFiles ( string title, string directory, [ExtensionFilter\[\]](#) extensions, bool multiselect )

Open native file browser for multiple files.

#### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")
<i>multiselect</i>	Allow multiple file selection

#### Returns

Returns array of chosen files. Zero length array when cancelled

Implemented in [Crosstales.FB.Wrapper.FileBrowserBase](#), and [Crosstales.FB.Wrapper.FileBrowserGeneric](#).

5.27.2.2 void Crosstales.FB.Wrapper.IFileBrowser.OpenFilesAsync ( string title, string directory, [ExtensionFilter\[\]](#) extensions, bool multiselect, System.Action< string[]> cb )

Open native file browser for multiple files (async).

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")
<i>multiselect</i>	Allow multiple file selection
<i>cb</i>	Callback for the async operation.

## Returns

Returns array of chosen files. Zero length array when cancelled

Implemented in [Crosstales.FB.Wrapper.FileBrowserBase](#).

5.27.2.3 `string [] Crosstales.FB.Wrapper.IFileBrowser.OpenFolders ( string title, string directory, bool multiselect )`

Open native folder browser for multiple folders.

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>multiselect</i>	Allow multiple folder selection

## Returns

Returns array of chosen folders. Zero length array when cancelled

Implemented in [Crosstales.FB.Wrapper.FileBrowserBase](#), and [Crosstales.FB.Wrapper.FileBrowserGeneric](#).

5.27.2.4 `void Crosstales.FB.Wrapper.IFileBrowser.OpenFoldersAsync ( string title, string directory, bool multiselect, System.Action< string[]> cb )`

Open native folder browser for multiple folders (async).

## Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>multiselect</i>	Allow multiple folder selection
<i>cb</i>	Callback for the async operation.

## Returns

Returns array of chosen folders. Zero length array when cancelled

Implemented in [Crosstales.FB.Wrapper.FileBrowserBase](#).

#### 5.27.2.5 string Crosstales.FB.Wrapper.IFileBrowser.OpenSingleFile ( string *title*, string *directory*, ExtensionFilter[] *extensions* )

Open native file browser for a single file.

##### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")

##### Returns

Returns a string of the chosen file. Empty string when cancelled

Implemented in [Crosstales.FB.Wrapper.FileBrowserBase](#).

#### 5.27.2.6 string Crosstales.FB.Wrapper.IFileBrowser.OpenSingleFolder ( string *title*, string *directory* )

Open native folder browser for a single folder.

##### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory

##### Returns

Returns a string of the chosen folder. Empty string when cancelled

Implemented in [Crosstales.FB.Wrapper.FileBrowserBase](#).

#### 5.27.2.7 string Crosstales.FB.Wrapper.IFileBrowser.SaveFile ( string *title*, string *directory*, string *defaultName*, ExtensionFilter[] *extensions* )

Open native save file browser.

##### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>defaultName</i>	Default file name
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")

##### Returns

Returns chosen file. Empty string when cancelled

Implemented in [Crosstales.FB.Wrapper.FileBrowserBase](#), and [Crosstales.FB.Wrapper.FileBrowserGeneric](#).

5.27.2.8 void [Crosstales.FB.Wrapper.IFileBrowser](#).SaveFileAsync ( string *title*, string *directory*, string *defaultName*, [ExtensionFilter\[\]](#) *extensions*, System.Action< string > *cb* )

Open native save file browser (async).

#### Parameters

<i>title</i>	Dialog title
<i>directory</i>	Root directory
<i>defaultName</i>	Default file name
<i>extensions</i>	List of extension filters. Filter Example: new <a href="#">ExtensionFilter</a> ("Image Files", "jpg", "png")
<i>cb</i>	Callback for the async operation.

#### Returns

Returns chosen file. Empty string when cancelled

Implemented in [Crosstales.FB.Wrapper.FileBrowserBase](#).

The documentation for this interface was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Scripts/↔  
Wrapper/IFileBrowser.cs

## 5.28 Crosstales.Common.EditorTask.NYCheck Class Reference

Checks if a 'Happy new year'-message must be displayed.

### 5.28.1 Detailed Description

Checks if a 'Happy new year'-message must be displayed.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Editor/Task/NY↔  
Check.cs

## 5.29 Crosstales.Common.Util.PlatformController Class Reference

Enables or disable game objects for a given platform.

Inheritance diagram for [Crosstales.Common.Util.PlatformController](#):



## Public Member Functions

- virtual void **Start** ()

## Public Attributes

- System.Collections.Generic.List< [Model.Enum.Platform](#) > [Platforms](#)  
*Selected platforms for the controller.*
- bool **Active** = true
- GameObject[] [Objects](#)  
*Selected objects for the controller.*

## Protected Member Functions

- void **selectPlatform** ()
- void **activateGO** ()

## Protected Attributes

- [Model.Enum.Platform](#) **currentPlatform**

### 5.29.1 Detailed Description

Enables or disable game objects for a given platform.

### 5.29.2 Member Data Documentation

#### 5.29.2.1 [GameObject \[\]](#) [Crosstales.Common.Util.PlatformController.Objects](#)

Selected objects for the controller.

#### 5.29.2.2 [System.Collections.Generic.List<Model.Enum.Platform>](#) [Crosstales.Common.Util.PlatformController.Platforms](#)

Selected platforms for the controller.

summary>Enable or disable the 'Objects' for the selected 'Platforms' (default: true).


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Scripts/Util/Platform↔  
Controller.cs

## 5.30 Crosstales.Common.Util.RandomColor Class Reference

Random color changer.

Inheritance diagram for Crosstales.Common.Util.RandomColor:



### Public Member Functions

- void **Start** ()
- void **Update** ()

### Public Attributes

- bool **UseInterval** = true
- Vector2 **ChangeInterval** = new Vector2(5, 15)
- Vector2 **HueRange** = new Vector2(0f, 1f)
- Vector2 **SaturationRange** = new Vector2(1f, 1f)
- Vector2 **ValueRange** = new Vector2(1f, 1f)
- Vector2 **AlphaRange** = new Vector2(1f, 1f)
- bool **GrayScale** = false
- bool **ChangeMaterial** = false
- Material **Material**
- bool **RandomColorAtStart** = false

### 5.30.1 Detailed Description

Random color changer.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Scripts/Util/RandomColor.cs↩

## 5.31 Crosstales.Common.Util.RandomRotator Class Reference

Random rotation changer.

Inheritance diagram for Crosstales.Common.Util.RandomRotator:



## Public Member Functions

- void **Start** ()
- void **Update** ()

## Public Attributes

- bool **UseInterval** = true
- Vector2 **ChangeInterval** = new Vector2(10, 20)
- Vector3 **SpeedMin** = new Vector3(5, 5, 5)
- Vector3 **SpeedMax** = new Vector3(15, 15, 15)
- bool **RandomRotationAtStart** = false

### 5.31.1 Detailed Description

Random rotation changer.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Scripts/Util/Random↔  
Rotator.cs

## 5.32 Crosstales.Common.Util.RandomScaler Class Reference

Random scale changer.

Inheritance diagram for Crosstales.Common.Util.RandomScaler:



## Public Member Functions

- void **Start** ()
- void **Update** ()

## Public Attributes

- bool **UseInterval** = true
- Vector2 **ChangeInterval** = new Vector2(5, 15)
- Vector3 **ScaleMin** = new Vector3(0.1f, 0.1f, 0.1f)
- Vector3 **ScaleMax** = new Vector3(3, 3, 3)
- bool **Uniform** = true
- bool **RandomScaleAtStart** = false

### 5.32.1 Detailed Description

Random scale changer.

The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Scripts/Util/Random↔  
Scaler.cs

## 5.33 Crosstales.FB.EditorTask.ReminderCheck Class Reference

Reminds the customer to create an UAS review.

### 5.33.1 Detailed Description

Reminds the customer to create an UAS review.

The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Editor/↔  
Task/ReminderCheck.cs

## 5.34 Crosstales.FB.EditorTask.ReminderCT Class Reference

Reminds the customer to visit our other assets.

### 5.34.1 Detailed Description

Reminds the customer to visit our other assets.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Editor/↔  
Task/ReminderCT.cs

## 5.35 Crosstales.UI.Util.ScrollRectHandler Class Reference

Changes the sensitivity of ScrollRects under various platforms.

Inheritance diagram for Crosstales.UI.Util.ScrollRectHandler:





## Public Member Functions

- void **Start** ()

## Public Attributes

- ScrollRect **Scroll**

### 5.35.1 Detailed Description

Changes the sensitivity of ScrollRects under various platforms.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/UI/Scripts/↔  
Util/ScrollRectHandler.cs

## 5.36 Crosstales.Common.Util.SerializableDictionary< TKey, TVal > Class Template Reference

Serializable Dictionary-class for XML.

Inheritance diagram for Crosstales.Common.Util.SerializableDictionary< TKey, TVal >:



## Public Member Functions

- **SerializableDictionary** (System.Collections.Generic.IDictionary< TKey, TVal > dictionary)
- **SerializableDictionary** (System.Collections.Generic.IEqualityComparer< TKey > comparer)
- **SerializableDictionary** (int capacity)
- **SerializableDictionary** (System.Collections.Generic.IDictionary< TKey, TVal > dictionary, System.Collections.Generic.IEqualityComparer< TKey > comparer)
- **SerializableDictionary** (int capacity, System.Collections.Generic.IEqualityComparer< TKey > comparer)

## Protected Member Functions

- **SerializableDictionary** (System.Runtime.Serialization.SerializationInfo info, System.Runtime.Serialization.StreamingContext context)

## Properties

- System.Xml.Serialization.XmlSerializer **ValueSerializer** [get]

### 5.36.1 Detailed Description

Serializable Dictionary-class for XML.


The documentation for this class was generated from the following file:

- [D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Scripts/Util/SerializableDictionary.cs](#)

## 5.37 Crosstales.UI.Social Class Reference

[Crosstales](#) social media links.

Inheritance diagram for Crosstales.UI.Social:



### Public Member Functions

- void **Facebook** ()
- void **Twitter** ()
- void **LinkedIn** ()
- void **Xing** ()
- void **Youtube** ()
- void **Discord** ()

### 5.37.1 Detailed Description

[Crosstales](#) social media links.


The documentation for this class was generated from the following file:

- [D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/UI/Scripts/Social.cs](#)

## 5.38 Crosstales.UI.StaticManager Class Reference

Static Button Manager.

Inheritance diagram for Crosstales.UI.StaticManager:



## Public Member Functions

- void **Quit** ()
- void **OpenCrosstales** ()
- void **OpenAssetstore** ()

### 5.38.1 Detailed Description

Static Button Manager.

The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/UI/Scripts/Static↔  
Manager.cs

## 5.39 Crosstales.FB.EditorTask.Tracer Class Reference

Gather some tracing data for the asset.

### 5.39.1 Detailed Description

Gather some tracing data for the asset.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Editor/↔  
Task/Tracer.cs

## 5.40 Crosstales.UI.UIDrag Class Reference

Allow to Drag the Windows arround.

Inheritance diagram for Crosstales.UI.UIDrag:



## Public Member Functions

- void **Start** ()
- void **BeginDrag** ()
- void **OnDrag** ()

### 5.40.1 Detailed Description

Allow to Drag the Windows arround.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/UI/Scripts/UI↔ Drag.cs

## 5.41 Crosstales.UI.UIFocus Class Reference

Change the Focus on from a Window.

Inheritance diagram for Crosstales.UI.UIFocus:



### Public Member Functions

- void **Start** ()
- void **OnPanelEnter** ()

### Public Attributes

- string **ManagerName** = "Canvas"  
*Name of the gameobject containing the [UIWindowManager](#).*

### 5.41.1 Detailed Description

Change the Focus on from a Window.

### 5.41.2 Member Data Documentation

#### 5.41.2.1 string Crosstales.UI.UIFocus.ManagerName = "Canvas"

Name of the gameobject containing the [UIWindowManager](#).


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/UI/Scripts/UI↔ Focus.cs

## 5.42 Crosstales.UI.UIHint Class Reference

Controls a [UI](#) group (hint).

Inheritance diagram for Crosstales.UI.UIHint:



### Public Member Functions

- void **Start** ()
- void **FadeUp** ()
- void **FadeDown** ()
- IEnumerator **LerpAlphaDown** (float startAlphaValue, float endAlphaValue, float time, float delay, CanvasGroup gameObjectToFade)
- IEnumerator **LerpAlphaUp** (float startAlphaValue, float endAlphaValue, float time, float delay, CanvasGroup gameObjectToFade)

### Public Attributes

- CanvasGroup [Group](#)  
*Group to fade.*
- float [Delay](#) = 2f  
*Delay in seconds before fading (default: 2).*
- float [FadeTime](#) = 2f  
*Fade time in seconds (default: 2).*
- bool [Disable](#) = true  
*Disable [UI](#) element after the fade (default: true).*
- bool [FadeAtStart](#) = true  
*Fade at Start (default: true).*

### 5.42.1 Detailed Description

Controls a [UI](#) group (hint).

### 5.42.2 Member Data Documentation

#### 5.42.2.1 float Crosstales.UI.UIHint.Delay = 2f

Delay in seconds before fading (default: 2).

#### 5.42.2.2 bool Crosstales.UI.UIHint.Disable = true

Disable [UI](#) element after the fade (default: true).

#### 5.42.2.3 bool Crosstales.UI.UIHint.FadeAtStart = true

Fade at Start (default: true).

#### 5.42.2.4 float Crosstales.UI.UIHint.FadeTime = 2f

Fade time in seconds (default: 2).

#### 5.42.2.5 CanvasGroup Crosstales.UI.UIHint.Group

Group to fade.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/UI/Scripts/UIHint.cs

## 5.43 Crosstales.UI.UIResize Class Reference

Resize a [UI](#) element.

Inheritance diagram for Crosstales.UI.UIResize:



### Public Member Functions

- void **Awake** ()
- void **OnPointerDown** (PointerEventData data)
- void **OnDrag** (PointerEventData data)

### Public Attributes

- Vector2 **MinSize** = new Vector2(300, 160)  
*Minimum size of the [UI](#) element.*
- Vector2 **MaxSize** = new Vector2(800, 600)  
*Maximum size of the [UI](#) element.*

### 5.43.1 Detailed Description

Resize a [UI](#) element.

### 5.43.2 Member Data Documentation

#### 5.43.2.1 Vector2 Crosstales.UI.UIResize.MaxSize = new Vector2(800, 600)

Maximum size of the [UI](#) element.

#### 5.43.2.2 Vector2 Crosstales.UI.UIResize.MinSize = new Vector2(300, 160)

Minimum size of the [UI](#) element.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/UI/Scripts/UI↔  
Resize.cs

## 5.44 Crosstales.UI.UIWindowManager Class Reference

Change the state of all Window panels.

Inheritance diagram for Crosstales.UI.UIWindowManager:



### Public Member Functions

- void **Start** ()
- void **ChangeState** (GameObject x)

### Public Attributes

- GameObject[] [Windows](#)  
*All Windows of the scene.*

### 5.44.1 Detailed Description

Change the state of all Window panels.

## 5.44.2 Member Data Documentation

### 5.44.2.1 GameObject [ ] Crosstales.UI.UIWindowManager.Windows

All Windows of the scene.

The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/UI/Scripts/UI↔  
WindowManager.cs

## 5.45 Crosstales.FB.EditorTask.UpdateCheck Class Reference

Checks for updates of the asset.

### Static Public Member Functions

- static void **UpdateCheckForEditor** (out string result, out [UpdateStatus](#) st)

### Public Attributes

- const string **TEXT\_NOT\_CHECKED** = "Not checked."
- const string **TEXT\_NO\_UPDATE** = "No update available - you are using the latest version."

### 5.45.1 Detailed Description

Checks for updates of the asset.


The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/FileBrowser/Editor/↔  
Task/UpdateCheck.cs

## 5.46 Crosstales.UI.WindowManager Class Reference

Manager for a Window.

Inheritance diagram for Crosstales.UI.WindowManager:





## Public Member Functions

- void **Start** ()
- void **Update** ()
- void **SwitchPanel** ()
- void **OpenPanel** ()
- void **ClosePanel** ()

## Public Attributes

- float **Speed** = 3f  
*Window movement speed (default: 3).*
- GameObject[] **Dependencies**  
*Dependent GameObjects (active == open).*

### 5.46.1 Detailed Description

Manager for a Window.

### 5.46.2 Member Data Documentation

#### 5.46.2.1 GameObject [ ] Crosstales.UI.WindowManager.Dependencies

Dependent GameObjects (active == open).

#### 5.46.2.2 float Crosstales.UI.WindowManager.Speed = 3f

Window movement speed (default: 3).

The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/UI/Scripts/Window↵  
Manager.cs

## 5.47 Crosstales.Common.Util.XmlHelper Class Reference

Helper-class for XML.

## Static Public Member Functions

- static void **SerializeToFile**< T > (T obj, string filename)  
*Serialize an object to an XML-file.*
- static T **DeserializeFromFile**< T > (string filename, bool skipBOM=false)  
*Deserialize a XML-file to an object.*
- static string **SerializeToString**< T > (T obj)  
*Serialize an object to an XML-string.*
- static T **DeserializeFromString**< T > (string xmlAsString, bool skipBOM=true)  
*Deserialize a XML-string to an object.*
- static T **DeserializeFromResource**< T > (string resourceName, bool skipBOM=true)  
*Deserialize a Unity XML resource (TextAsset) to an object.*

### 5.47.1 Detailed Description

Helper-class for XML.

### 5.47.2 Member Function Documentation

**5.47.2.1** `static T Crosstales.Common.Util.XmlHelper.DeserializeFromFile< T > ( string filename, bool skipBOM = false ) [static]`

Deserialize a XML-file to an object.

#### Parameters

<i>filename</i>	XML-file of the object
<i>skipBOM</i>	Skip BOM (optional, default: false)

#### Returns

Object

**5.47.2.2** `static T Crosstales.Common.Util.XmlHelper.DeserializeFromResource< T > ( string resourceName, bool skipBOM = true ) [static]`

Deserialize a Unity XML resource (TextAsset) to an object.

#### Parameters

<i>resourceName</i>	Name of the resource
<i>skipBOM</i>	Skip BOM (optional, default: true)

#### Returns

Object

**5.47.2.3** `static T Crosstales.Common.Util.XmlHelper.DeserializeFromString< T > ( string xmlAsString, bool skipBOM = true ) [static]`

Deserialize a XML-string to an object.

#### Parameters

<i>xmlAsString</i>	XML of the object
<i>skipBOM</i>	Skip BOM (optional, default: true)

## Returns

Object

**5.47.2.4** `static void Crosstales.Common.Util.XmlHelper.SerializeToFile< T > ( T obj, string filename ) [static]`

Serialize an object to an XML-file.

## Parameters

<i>obj</i>	Object to serialize.
<i>filename</i>	File name of the XML.

**5.47.2.5** `static string Crosstales.Common.Util.XmlHelper.SerializeToString< T > ( T obj ) [static]`

Serialize an object to an XML-string.

## Parameters

<i>obj</i>	Object to serialize.
------------	----------------------

## Returns

Object as XML-stringValid path

The documentation for this class was generated from the following file:

- D:/slaubenberger/git/assets/FileBrowser/FileBrowser/Assets/Plugins/crosstales/Common/Scripts/Util/Xml↵  
Helper.cs

## Chapter 6

# More information

### 6.1 Homepage

<https://www.crosstales.com/>

### 6.2 AssetStore

<https://goo.gl/qwtXyb>

### 6.3 Forum

<https://forum.unity.com/threads/file-browser-native-file-browser-for-windows-and-macos.510403/>

### 6.4 Documentation

<https://www.crosstales.com/media/data/assets/FileBrowser/FileBrowser-doc.pdf>

### 6.5 Discord

<https://discord.gg/ZbZ2sh4>

### 6.6 Demos

#### 6.6.1 Windows

[https://www.crosstales.com/media/data/assets/FileBrowser/downloads/FileBrowser\\_win.zip](https://www.crosstales.com/media/data/assets/FileBrowser/downloads/FileBrowser_win.zip)

### 6.6.2 macOS

[https://www.crosstales.com/media/data/assets/FileBrowser/downloads/FileBrowser\\_mac.zip](https://www.crosstales.com/media/data/assets/FileBrowser/downloads/FileBrowser_mac.zip)

## 6.7 Videos

<https://www.youtube.com/c/Crosstales>

# Index

- ASSET\_3P\_PLAYMAKER
  - Crosstales::Common::Util::BaseConstants, [18](#)
- ASSET\_AUTHOR\_URL
  - Crosstales::Common::Util::BaseConstants, [18](#)
- ASSET\_AUTHOR
  - Crosstales::Common::Util::BaseConstants, [18](#)
- ASSET\_BUILD
  - Crosstales::FB::Util::Constants, [33](#)
- ASSET\_CHANGED
  - Crosstales::FB::Util::Constants, [33](#)
- ASSET\_CONTACT
  - Crosstales::FB::Util::Constants, [33](#)
- ASSET\_CREATED
  - Crosstales::FB::Util::Constants, [34](#)
- ASSET\_CT\_URL
  - Crosstales::Common::Util::BaseConstants, [19](#)
- ASSET\_NAME
  - Crosstales::FB::Util::Constants, [34](#)
- ASSET\_PRO\_URL
  - Crosstales::FB::Util::Constants, [34](#)
- ASSET\_SOCIAL\_DISCORD
  - Crosstales::Common::Util::BaseConstants, [19](#)
- ASSET\_SOCIAL\_FACEBOOK
  - Crosstales::Common::Util::BaseConstants, [19](#)
- ASSET\_SOCIAL\_LINKEDIN
  - Crosstales::Common::Util::BaseConstants, [19](#)
- ASSET\_SOCIAL\_TWITTER
  - Crosstales::Common::Util::BaseConstants, [19](#)
- ASSET\_SOCIAL\_XING
  - Crosstales::Common::Util::BaseConstants, [19](#)
- ASSET\_SOCIAL\_YOUTUBE
  - Crosstales::Common::Util::BaseConstants, [19](#)
- ASSET\_UID
  - Crosstales::FB::EditorUtil::EditorConstants, [42](#)
- ASSET\_UPDATE\_CHECK\_URL
  - Crosstales::FB::Util::Constants, [34](#)
- ASSET\_URL
  - Crosstales::FB::EditorUtil::EditorConstants, [42](#)
- ASSET\_VERSION
  - Crosstales::FB::Util::Constants, [34](#)
- AudioSources
  - Crosstales::UI::Util::AudioSourceController, [15](#)
- CT\_REMINDER\_CHECK
  - Crosstales::FB::EditorUtil::EditorConfig, [40](#)
- CTAddRange< K, V >
  - Crosstales::ExtensionMethods, [45](#)
- CTContains
  - Crosstales::ExtensionMethods, [45](#)
- CTContainsAll
  - Crosstales::ExtensionMethods, [45](#)
- CTContainsAny
  - Crosstales::ExtensionMethods, [45](#)
- CTDump
  - Crosstales::ExtensionMethods, [46, 47](#)
- CTDump< K, V >
  - Crosstales::ExtensionMethods, [48](#)
- CTDump< T >
  - Crosstales::ExtensionMethods, [48](#)
- CTEquals
  - Crosstales::ExtensionMethods, [48](#)
- CTIsVisibleFrom
  - Crosstales::ExtensionMethods, [49](#)
- CTReplace
  - Crosstales::ExtensionMethods, [49](#)
- CTReverse
  - Crosstales::ExtensionMethods, [49](#)
- CTShuffle< T >
  - Crosstales::ExtensionMethods, [50](#)
- CTToString< T >
  - Crosstales::ExtensionMethods, [50](#)
- CTToTitleCase
  - Crosstales::ExtensionMethods, [51](#)
- ClearLineEndings
  - Crosstales::Common::Util::BaseHelper, [23](#)
- ClearSpaces
  - Crosstales::Common::Util::BaseHelper, [24](#)
- ClearTags
  - Crosstales::Common::Util::BaseHelper, [24](#)
- ConnectionLimit
  - Crosstales::Common::Util::CTWebClient, [39](#)
- Crosstales, [7](#)
- Crosstales.Common, [7](#)
- Crosstales.Common.EditorTask, [7](#)
- Crosstales.Common.EditorTask.BaseCompileDefines,
  - [16](#)
- Crosstales.Common.EditorTask.BaseSetupResources,
  - [30](#)
- Crosstales.Common.EditorTask.NYCheck, [71](#)
- Crosstales.Common.EditorUtil, [7](#)
- Crosstales.Common.EditorUtil.BaseGAApi, [21](#)
- Crosstales.Common.Model, [8](#)
- Crosstales.Common.Model.Enum, [8](#)
- Crosstales.Common.Util, [8](#)
- Crosstales.Common.Util.BaseConstants, [17](#)
- Crosstales.Common.Util.BaseHelper, [21](#)
- Crosstales.Common.Util.CTPlayerPrefs, [34](#)
- Crosstales.Common.Util.CTWebClient, [38](#)
- Crosstales.Common.Util.PlatformController, [71](#)

- Crosstales.Common.Util.RandomColor, [73](#)
- Crosstales.Common.Util.RandomRotator, [73](#)
- Crosstales.Common.Util.RandomScaler, [74](#)
- Crosstales.Common.Util.SerializableDictionary< TKey, TVal >, [76](#)
- Crosstales.Common.Util.XmlHelper, [84](#)
- Crosstales.ExtensionMethods, [43](#)
- Crosstales.FB.Demo, [9](#)
- Crosstales.FB.Demo.Examples, [42](#)
- Crosstales.FB.Demo.GUIMain, [65](#)
- Crosstales.FB.Demo.GUIScenes, [66](#)
- Crosstales.FB.EditorTask, [9](#)
- Crosstales.FB.EditorTask.CompileDefines, [30](#)
- Crosstales.FB.EditorTask.ConfigLoader, [32](#)
- Crosstales.FB.EditorTask.ReminderCheck, [75](#)
- Crosstales.FB.EditorTask.ReminderCT, [75](#)
- Crosstales.FB.EditorTask.Tracer, [78](#)
- Crosstales.FB.EditorTask.UpdateCheck, [83](#)
- Crosstales.FB.EditorUtil, [10](#)
- Crosstales.FB.EditorUtil.EditorConfig, [39](#)
- Crosstales.FB.EditorUtil.EditorConstants, [41](#)
- Crosstales.FB.EditorUtil.GAApi, [64](#)
- Crosstales.FB.ExtensionFilter, [43](#)
- Crosstales.FB.FileBrowser, [51](#)
- Crosstales.FB.Util, [10](#)
- Crosstales.FB.Util.Config, [31](#)
- Crosstales.FB.Util.Constants, [32](#)
- Crosstales.FB.Util.Helper, [67](#)
- Crosstales.FB.Wrapper, [10](#)
- Crosstales.FB.Wrapper.FileBrowserBase, [58](#)
- Crosstales.FB.Wrapper.FileBrowserGeneric, [62](#)
- Crosstales.FB.Wrapper.IFileBrowser, [67](#)
- Crosstales.FB, [9](#)
- Crosstales.UI.Social, [77](#)
- Crosstales.UI.StaticManager, [77](#)
- Crosstales.UI.UIDrag, [78](#)
- Crosstales.UI.UIFocus, [79](#)
- Crosstales.UI.UIHint, [80](#)
- Crosstales.UI.UIResize, [81](#)
- Crosstales.UI.UIWindowManager, [82](#)
- Crosstales.UI.Util, [11](#)
- Crosstales.UI.Util.AudioFilterController, [13](#)
- Crosstales.UI.Util.AudioSourceController, [14](#)
- Crosstales.UI.Util.FPSDisplay, [64](#)
- Crosstales.UI.Util.ScrollRectHandler, [75](#)
- Crosstales.UI.WindowManager, [83](#)
- Crosstales.UI, [11](#)
- Crosstales::Common::EditorUtil::BaseGAApiEvent, [21](#)
- Crosstales::Common::Model::EnumPlatform, [8](#)
- Crosstales::Common::Util::BaseConstants
  - ASSET\_3P\_PLAYMAKER, [18](#)
  - ASSET\_AUTHOR\_URL, [18](#)
  - ASSET\_AUTHOR, [18](#)
  - ASSET\_CT\_URL, [19](#)
  - ASSET\_SOCIAL\_DISCORD, [19](#)
  - ASSET\_SOCIAL\_FACEBOOK, [19](#)
  - ASSET\_SOCIAL\_LINKEDIN, [19](#)
  - ASSET\_SOCIAL\_TWITTER, [19](#)
  - ASSET\_SOCIAL\_XING, [19](#)
  - ASSET\_SOCIAL\_YOUTUBE, [19](#)
  - DEV\_DEBUG, [19](#)
  - FACTOR\_GB, [19](#)
  - FACTOR\_KB, [19](#)
  - FACTOR\_MB, [20](#)
  - FLOAT\_32768, [20](#)
  - FORMAT\_NO\_DECIMAL\_PLACES, [20](#)
  - FORMAT\_PERCENT, [20](#)
  - FORMAT\_TWO\_DECIMAL\_PLACES, [20](#)
  - PATH\_DELIMITER\_UNIX, [20](#)
  - PATH\_DELIMITER\_WINDOWS, [20](#)
- Crosstales::Common::Util::BaseHelper
  - ClearLineEndings, [23](#)
  - ClearSpaces, [24](#)
  - ClearTags, [24](#)
  - CurrentPlatform, [27](#)
  - FileCopy, [24](#)
  - FormatBytesToHRF, [24](#)
  - FormatSecondsToHourMinSec, [25](#)
  - HSVToRGB, [25](#)
  - isAndroidPlatform, [27](#)
  - isAppleBasedPlatform, [27](#)
  - isEditor, [27](#)
  - isEditorMode, [28](#)
  - isIOSPlatform, [28](#)
  - isInternetAvailable, [28](#)
  - isLinuxPlatform, [28](#)
  - isMacOSPlatform, [28](#)
  - isStandalonePlatform, [28](#)
  - isValidURL, [25](#)
  - isWSAPlatform, [29](#)
  - isWebGLPlatform, [29](#)
  - isWebPlatform, [29](#)
  - isWindowsBasedPlatform, [29](#)
  - isWindowsPlatform, [29](#)
  - RemoteCertificateValidationCallback, [25](#)
  - SplitStringToLines, [26](#)
  - ValidURLFromFilePath, [27](#)
  - ValidateFile, [26](#)
  - ValidatePath, [26](#)
- Crosstales::Common::Util::CTPlayerPrefs
  - DeleteAll, [35](#)
  - DeleteKey, [35](#)
  - GetBool, [35](#)
  - GetFloat, [36](#)
  - GetInt, [36](#)
  - GetString, [36](#)
  - HasKey, [37](#)
  - Save, [37](#)
  - SetBool, [37](#)
  - SetFloat, [37](#)
  - SetInt, [37](#)
  - SetString, [38](#)
- Crosstales::Common::Util::CTWebClient
  - ConnectionLimit, [39](#)

- Timeout, [39](#)
- Crosstales::Common::Util::PlatformController
  - Objects, [72](#)
  - Platforms, [72](#)
- Crosstales::Common::Util::XmlHelper
  - DeserializeFromFile< T >, [85](#)
  - DeserializeFromResource< T >, [85](#)
  - DeserializeFromString< T >, [85](#)
  - SerializeToFile< T >, [86](#)
  - SerializeToString< T >, [86](#)
- Crosstales::ExtensionMethods
  - CTAddRange< K, V >, [45](#)
  - CTContains, [45](#)
  - CTContainsAll, [45](#)
  - CTContainsAny, [45](#)
  - CTDump, [46](#), [47](#)
  - CTDump< K, V >, [48](#)
  - CTDump< T >, [48](#)
  - CTEquals, [48](#)
  - CTIsVisibleFrom, [49](#)
  - CTReplace, [49](#)
  - CTReverse, [49](#)
  - CTShuffle< T >, [50](#)
  - CTToString< T >, [50](#)
  - CTToTitleCase, [51](#)
- Crosstales::FB::EditorTask
  - UpdateStatus, [10](#)
- Crosstales::FB::EditorUtil::EditorConfig
  - CT\_REMINDER\_CHECK, [40](#)
  - isLoading, [40](#)
  - Load, [40](#)
  - REMINDER\_CHECK, [40](#)
  - Reset, [40](#)
  - Save, [40](#)
  - TELEMETRY, [40](#)
  - UPDATE\_CHECK, [40](#)
  - UPDATE\_OPEN\_UAS, [40](#)
- Crosstales::FB::EditorUtil::EditorConstants
  - ASSET\_UID, [42](#)
  - ASSET\_URL, [42](#)
- Crosstales::FB::EditorUtil::GAApi
  - Event, [65](#)
- Crosstales::FB::FileBrowser
  - GetDirectories, [52](#)
  - GetFiles, [52](#), [53](#)
  - OpenFiles, [53](#)
  - OpenFilesAsync, [54](#)
  - OpenFolders, [54](#)
  - OpenFoldersAsync, [55](#)
  - OpenSingleFile, [55](#)
  - OpenSingleFolder, [56](#)
  - SaveFile, [56](#)
  - SaveFileAsync, [57](#)
- Crosstales::FB::Util::Config
  - DEBUG, [32](#)
  - isLoading, [32](#)
  - Load, [31](#)
  - Reset, [31](#)
- Save, [31](#)
- Crosstales::FB::Util::Constants
  - ASSET\_BUILD, [33](#)
  - ASSET\_CHANGED, [33](#)
  - ASSET\_CONTACT, [33](#)
  - ASSET\_CREATED, [34](#)
  - ASSET\_NAME, [34](#)
  - ASSET\_PRO\_URL, [34](#)
  - ASSET\_UPDATE\_CHECK\_URL, [34](#)
  - ASSET\_VERSION, [34](#)
  - isPro, [34](#)
- Crosstales::FB::Util::Helper
  - isSupportedPlatform, [67](#)
- Crosstales::FB::Wrapper::FileBrowserBase
  - OpenFiles, [58](#)
  - OpenFilesAsync, [59](#)
  - OpenFolders, [59](#)
  - OpenFoldersAsync, [60](#)
  - OpenSingleFile, [60](#)
  - OpenSingleFolder, [60](#)
  - SaveFile, [61](#)
  - SaveFileAsync, [61](#)
- Crosstales::FB::Wrapper::FileBrowserGeneric
  - OpenFiles, [62](#)
  - OpenFolders, [63](#)
  - SaveFile, [63](#)
- Crosstales::FB::Wrapper::IFileBrowser
  - OpenFiles, [68](#)
  - OpenFilesAsync, [68](#)
  - OpenFolders, [69](#)
  - OpenFoldersAsync, [69](#)
  - OpenSingleFile, [69](#)
  - OpenSingleFolder, [70](#)
  - SaveFile, [70](#)
  - SaveFileAsync, [71](#)
- Crosstales::UI::UIFocus
  - ManagerName, [79](#)
- Crosstales::UI::UIHint
  - Delay, [80](#)
  - Disable, [80](#)
  - FadeAtStart, [81](#)
  - FadeTime, [81](#)
  - Group, [81](#)
- Crosstales::UI::UIResize
  - MaxSize, [82](#)
  - MinSize, [82](#)
- Crosstales::UI::UIWindowManager
  - Windows, [83](#)
- Crosstales::UI::Util::AudioFilterController
  - FindAllAudioFiltersOnStart, [14](#)
- Crosstales::UI::Util::AudioSourceController
  - AudioSources, [15](#)
  - FindAllAudioSourcesOnStart, [15](#)
  - Loop, [15](#)
  - Mute, [16](#)
  - Pitch, [16](#)
  - ResetAudioSourcesOnStart, [16](#)
  - StereoPan, [16](#)



- Volume, [16](#)
- Crosstales::UI::WindowManager
  - Dependencies, [84](#)
  - Speed, [84](#)
- CurrentPlatform
  - Crosstales::Common::Util::BaseHelper, [27](#)
- DEBUG
  - Crosstales::FB::Util::Config, [32](#)
- DEV\_DEBUG
  - Crosstales::Common::Util::BaseConstants, [19](#)
- Delay
  - Crosstales::UI::UIHint, [80](#)
- DeleteAll
  - Crosstales::Common::Util::CTPlayerPrefs, [35](#)
- DeleteKey
  - Crosstales::Common::Util::CTPlayerPrefs, [35](#)
- Dependencies
  - Crosstales::UI::WindowManager, [84](#)
- DeserializeFromFile< T >
  - Crosstales::Common::Util::XmlHelper, [85](#)
- DeserializeFromResource< T >
  - Crosstales::Common::Util::XmlHelper, [85](#)
- DeserializeFromString< T >
  - Crosstales::Common::Util::XmlHelper, [85](#)
- Disable
  - Crosstales::UI::UIHint, [80](#)
- Event
  - Crosstales::Common::EditorUtil::BaseGAApi, [21](#)
  - Crosstales::FB::EditorUtil::GAApi, [65](#)
- FACTOR\_GB
  - Crosstales::Common::Util::BaseConstants, [19](#)
- FACTOR\_KB
  - Crosstales::Common::Util::BaseConstants, [19](#)
- FACTOR\_MB
  - Crosstales::Common::Util::BaseConstants, [20](#)
- FLOAT\_32768
  - Crosstales::Common::Util::BaseConstants, [20](#)
- FORMAT\_NO\_DECIMAL\_PLACES
  - Crosstales::Common::Util::BaseConstants, [20](#)
- FORMAT\_PERCENT
  - Crosstales::Common::Util::BaseConstants, [20](#)
- FORMAT\_TWO\_DECIMAL\_PLACES
  - Crosstales::Common::Util::BaseConstants, [20](#)
- FadeAtStart
  - Crosstales::UI::UIHint, [81](#)
- FadeTime
  - Crosstales::UI::UIHint, [81](#)
- FileCopy
  - Crosstales::Common::Util::BaseHelper, [24](#)
- FindAllAudioFiltersOnStart
  - Crosstales::UI::Util::AudioFilterController, [14](#)
- FindAllAudioSourcesOnStart
  - Crosstales::UI::Util::AudioSourceController, [15](#)
- FormatBytesToHRF
  - Crosstales::Common::Util::BaseHelper, [24](#)
- FormatSecondsToHourMinSec
  - Crosstales::Common::Util::BaseHelper, [25](#)
- GetBool
  - Crosstales::Common::Util::CTPlayerPrefs, [35](#)
- GetDirectories
  - Crosstales::FB::FileBrowser, [52](#)
- GetFiles
  - Crosstales::FB::FileBrowser, [52, 53](#)
- GetFloat
  - Crosstales::Common::Util::CTPlayerPrefs, [36](#)
- GetInt
  - Crosstales::Common::Util::CTPlayerPrefs, [36](#)
- GetString
  - Crosstales::Common::Util::CTPlayerPrefs, [36](#)
- Group
  - Crosstales::UI::UIHint, [81](#)
- HSVToRGB
  - Crosstales::Common::Util::BaseHelper, [25](#)
- HasKey
  - Crosstales::Common::Util::CTPlayerPrefs, [37](#)
- isAndroidPlatform
  - Crosstales::Common::Util::BaseHelper, [27](#)
- isAppleBasedPlatform
  - Crosstales::Common::Util::BaseHelper, [27](#)
- isEditor
  - Crosstales::Common::Util::BaseHelper, [27](#)
- isEditorMode
  - Crosstales::Common::Util::BaseHelper, [28](#)
- isIOSPlatform
  - Crosstales::Common::Util::BaseHelper, [28](#)
- isInternetAvailable
  - Crosstales::Common::Util::BaseHelper, [28](#)
- isLinuxPlatform
  - Crosstales::Common::Util::BaseHelper, [28](#)
- isLoaded
  - Crosstales::FB::EditorUtil::EditorConfig, [40](#)
  - Crosstales::FB::Util::Config, [32](#)
- isMacOSPlatform
  - Crosstales::Common::Util::BaseHelper, [28](#)
- isPro
  - Crosstales::FB::Util::Constants, [34](#)
- isStandalonePlatform
  - Crosstales::Common::Util::BaseHelper, [28](#)
- isSupportedPlatform
  - Crosstales::FB::Util::Helper, [67](#)
- isValidURL
  - Crosstales::Common::Util::BaseHelper, [25](#)
- isWSAPlatform
  - Crosstales::Common::Util::BaseHelper, [29](#)
- isWebGLPlatform
  - Crosstales::Common::Util::BaseHelper, [29](#)
- isWebPlatform
  - Crosstales::Common::Util::BaseHelper, [29](#)
- isWindowsBasedPlatform
  - Crosstales::Common::Util::BaseHelper, [29](#)
- isWindowsPlatform
  - Crosstales::Common::Util::BaseHelper, [29](#)

- Load
  - Crosstales::FB::EditorUtil::EditorConfig, 40
  - Crosstales::FB::Util::Config, 31
- Loop
  - Crosstales::UI::Util::AudioSourceController, 15
- ManagerName
  - Crosstales::UI::UIFocus, 79
- MaxSize
  - Crosstales::UI::UIResize, 82
- MinSize
  - Crosstales::UI::UIResize, 82
- Mute
  - Crosstales::UI::Util::AudioSourceController, 16
- Objects
  - Crosstales::Common::Util::PlatformController, 72
- OpenFiles
  - Crosstales::FB::FileBrowser, 53
  - Crosstales::FB::Wrapper::FileBrowserBase, 58
  - Crosstales::FB::Wrapper::FileBrowserGeneric, 62
  - Crosstales::FB::Wrapper::IFileBrowser, 68
- OpenFilesAsync
  - Crosstales::FB::FileBrowser, 54
  - Crosstales::FB::Wrapper::FileBrowserBase, 59
  - Crosstales::FB::Wrapper::IFileBrowser, 68
- OpenFolders
  - Crosstales::FB::FileBrowser, 54
  - Crosstales::FB::Wrapper::FileBrowserBase, 59
  - Crosstales::FB::Wrapper::FileBrowserGeneric, 63
  - Crosstales::FB::Wrapper::IFileBrowser, 69
- OpenFoldersAsync
  - Crosstales::FB::FileBrowser, 55
  - Crosstales::FB::Wrapper::FileBrowserBase, 60
  - Crosstales::FB::Wrapper::IFileBrowser, 69
- OpenSingleFile
  - Crosstales::FB::FileBrowser, 55
  - Crosstales::FB::Wrapper::FileBrowserBase, 60
  - Crosstales::FB::Wrapper::IFileBrowser, 69
- OpenSingleFolder
  - Crosstales::FB::FileBrowser, 56
  - Crosstales::FB::Wrapper::FileBrowserBase, 60
  - Crosstales::FB::Wrapper::IFileBrowser, 70
- PATH\_DELIMITER\_UNIX
  - Crosstales::Common::Util::BaseConstants, 20
- PATH\_DELIMITER\_WINDOWS
  - Crosstales::Common::Util::BaseConstants, 20
- Pitch
  - Crosstales::UI::Util::AudioSourceController, 16
- Platform
  - Crosstales::Common::Model::Enum, 8
- Platforms
  - Crosstales::Common::Util::PlatformController, 72
- REMINDER\_CHECK
  - Crosstales::FB::EditorUtil::EditorConfig, 40
- RemoteCertificateValidationCallback
  - Crosstales::Common::Util::BaseHelper, 25
- Reset
  - Crosstales::FB::EditorUtil::EditorConfig, 40
  - Crosstales::FB::Util::Config, 31
- ResetAudioSourcesOnStart
  - Crosstales::UI::Util::AudioSourceController, 16
- Save
  - Crosstales::Common::Util::CTPlayerPrefs, 37
  - Crosstales::FB::EditorUtil::EditorConfig, 40
  - Crosstales::FB::Util::Config, 31
- SaveFile
  - Crosstales::FB::FileBrowser, 56
  - Crosstales::FB::Wrapper::FileBrowserBase, 61
  - Crosstales::FB::Wrapper::FileBrowserGeneric, 63
  - Crosstales::FB::Wrapper::IFileBrowser, 70
- SaveFileAsync
  - Crosstales::FB::FileBrowser, 57
  - Crosstales::FB::Wrapper::FileBrowserBase, 61
  - Crosstales::FB::Wrapper::IFileBrowser, 71
- SerializeToFile< T >
  - Crosstales::Common::Util::XmlHelper, 86
- SerializeToString< T >
  - Crosstales::Common::Util::XmlHelper, 86
- SetBool
  - Crosstales::Common::Util::CTPlayerPrefs, 37
- SetFloat
  - Crosstales::Common::Util::CTPlayerPrefs, 37
- SetInt
  - Crosstales::Common::Util::CTPlayerPrefs, 37
- SetString
  - Crosstales::Common::Util::CTPlayerPrefs, 38
- Speed
  - Crosstales::UI::WindowManager, 84
- SplitStringToLines
  - Crosstales::Common::Util::BaseHelper, 26
- StereoPan
  - Crosstales::UI::Util::AudioSourceController, 16
- TELEMETRY
  - Crosstales::FB::EditorUtil::EditorConfig, 40
- Timeout
  - Crosstales::Common::Util::CTWebClient, 39
- UPDATE\_CHECK
  - Crosstales::FB::EditorUtil::EditorConfig, 40
- UPDATE\_OPEN\_UAS
  - Crosstales::FB::EditorUtil::EditorConfig, 40
- UpdateStatus
  - Crosstales::FB::EditorTask, 10
- ValidURLFromFilePath
  - Crosstales::Common::Util::BaseHelper, 27
- ValidateFile
  - Crosstales::Common::Util::BaseHelper, 26
- ValidatePath
  - Crosstales::Common::Util::BaseHelper, 26
- Volume
  - Crosstales::UI::Util::AudioSourceController, 16
- Windows

Crosstales::UI::UIWindowManager, [83](#)