

Intro to Java Week 5 Coding Assignment

Points possible: 70

Category	Criteria	% of Grade
Functionality	Does the code work?	25
Organization	Is the code clean and organized? Proper use of white space, syntax, and consistency are utilized. Names and comments are concise and clear.	25
Creativity	Student solved the problems presented in the assignment using creativity and out of the box thinking.	25
Completeness	All requirements of the assignment are complete.	25

Instructions: In Eclipse, or an IDE of your choice, write the code that accomplishes the objectives listed below. Ensure that the code compiles and runs as directed. Take screenshots of the code and of the running program (make sure to get screenshots of all required functionality) and paste them in this document where instructed below. Create a new repository on GitHub for this week's assignments and push this document, with your Java project code, to the repository. Add the URL for this week's repository to this document where instructed and submit this document to your instructor when complete.

Coding Steps:

1. Create an interface named Logger.
2. Add two void methods to the Logger interface, each should take a String as an argument
 - a. Log
 - b. Error
3. Create two classes that implement the Logger interface
 - a. AsteriskLogger
 - b. SpacedLogger
4. The log method on the AsteriskLogger should print out the String it receives between 3 asterisks on either side of the String (e.g. if the String passed in is "Hello", then it should print ***Hello*** to the console.
5. The error method on the AsteriskLogger should print the String it receives inside a box of asterisks, with the String preceded by the word "ERROR:". For example, if "Hello" is the argument, the following should be printed:


```
*****

***Error: Hello***


*****
```

6. The SpacedLogger should add spaces between each character of the String argument passed into its methods.
7. If the log method received “Hello” as an argument, it should print H e l l o
8. The error method should do the same, but with “ERROR:” preceding the spaced out input (i.e. ERROR: H e l l o)
9. Create a class named App that has a main method.
10. In this class instantiate an instance of each of your logger classes that implement the Logger interface.
11. Test both methods on both instances, passing in Strings of your choice.

Screenshots of Code:

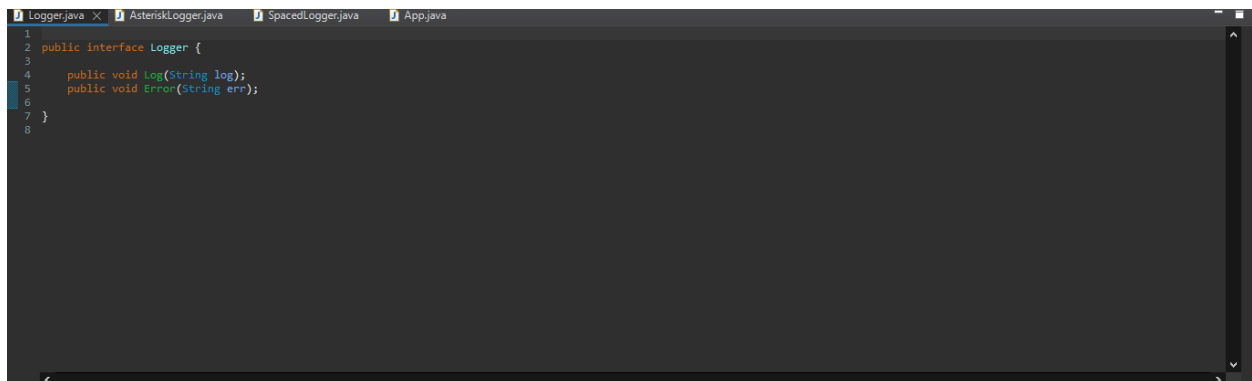

```
1 public interface Logger {
2
3
4     public void log(String log);
5     public void error(String err);
6
7 }
8
```

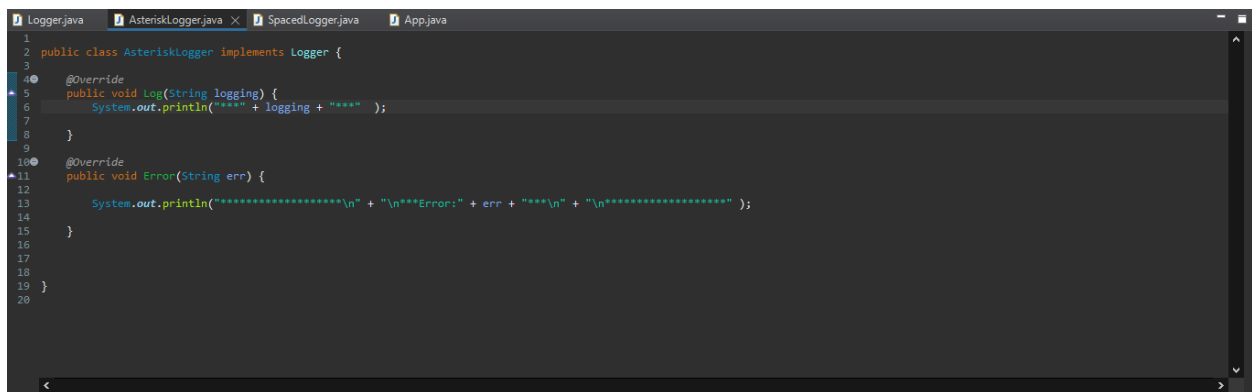


```
1 public class AsteriskLogger implements Logger {
2
3
4     @Override
5     public void log(String logging) {
6         System.out.println("*****" + logging + "*****");
7     }
8
9
10    @Override
11    public void error(String err) {
12        System.out.println("*****\n" + "\n***Error:" + err + "*****\n" + "\n*****");
13    }
14
15
16 }
17
18
19
20
```

```
1 Logger.java 2 AsteriskLogger.java 3 SpacedLogger.java X 4 App.java
2 public class SpacedLogger implements Logger {
3
4     @Override
5     public void Log(String log) {
6         StringBuilder word = new StringBuilder();
7         for(int i = 0; i < log.length(); i++) {
8             char letter = log.charAt(i);
9             word.append(letter + " ");
10        }
11
12        System.out.println(word);
13    }
14
15    @Override
16    public void Error(String err) {
17        StringBuilder word = new StringBuilder();
18        for(int i = 0; i < err.length(); i++) {
19            char letter = err.charAt(i);
20            word.append(letter + " ");
21        }
22        System.out.println("ERROR: " + word);
23    }
24 }
25
```

```
1 Logger.java 2 AsteriskLogger.java 3 SpacedLogger.java 4 App.java X
2 public class App {
3
4     public static void main(String[] args) {
5
6         Logger logger = new AsteriskLogger();
7
8         logger.Log("Hello");
9         logger.Error("TEST");
10
11         Logger logging = new SpacedLogger();
12
13         logging.Log("Trial Test");
14         logging.Error("Supercalifragilisticexpalidocious");
15
16     }
17 }
18
```

Screenshots of Running Application

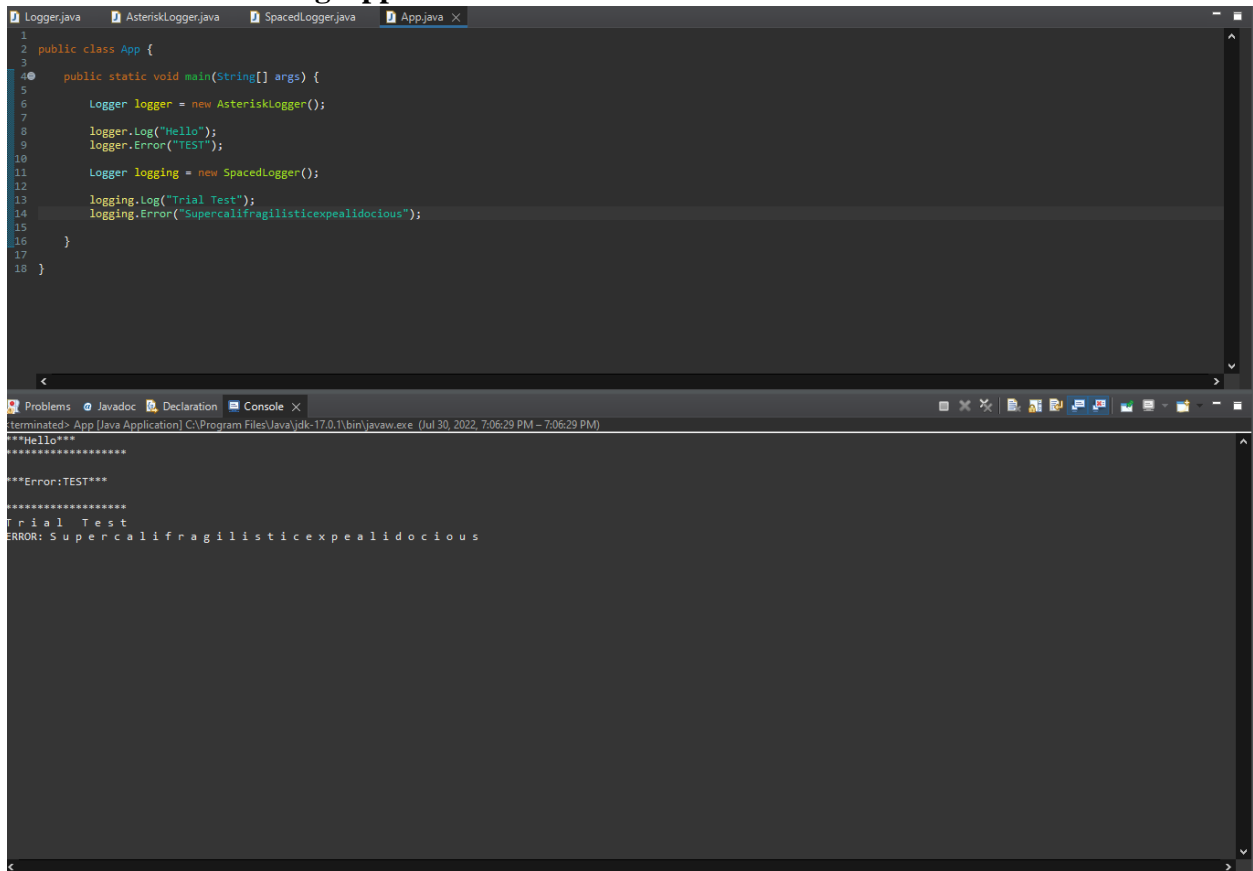

The screenshot displays an IDE with two panels. The top panel shows the source code for a Java application named 'App.java'. The code defines two logger classes, 'AsteriskLogger' and 'SpacedLogger', and a main class 'App' that uses them. The bottom panel shows the console output of the application, which includes a 'Hello' message, an error message 'TEST', and a log entry 'Trial Test' followed by a long string of characters.

```
1 public class App {
2     public static void main(String[] args) {
3
4         Logger logger = new AsteriskLogger();
5
6         logger.Log("Hello");
7         logger.Error("TEST");
8
9         Logger logging = new SpacedLogger();
10
11        logging.Log("Trial Test");
12        logging.Error("Supercalifragilisticexpealidocious");
13    }
14 }
15
16
17
18 }
```

```
terminated> App [Java Application] C:\Program Files\Java\jdk-17.0.11\bin\javaw.exe (Jul 30, 2022, 7:06:29 PM - 7:06:29 PM)
***Hello***
*****
***Error:TEST***
*****
Trial Test
ERROR: Supercalifragilisticexpealidocious
```

URL to GitHub Repository:

https://github.com/KristianPador/Week5_Coding_Assignment