


Multiple Destinations

If the Rover has to land on multiple destinations from the same source, we can use Dijkstra's algorithm to find out the shortest route to each destination.

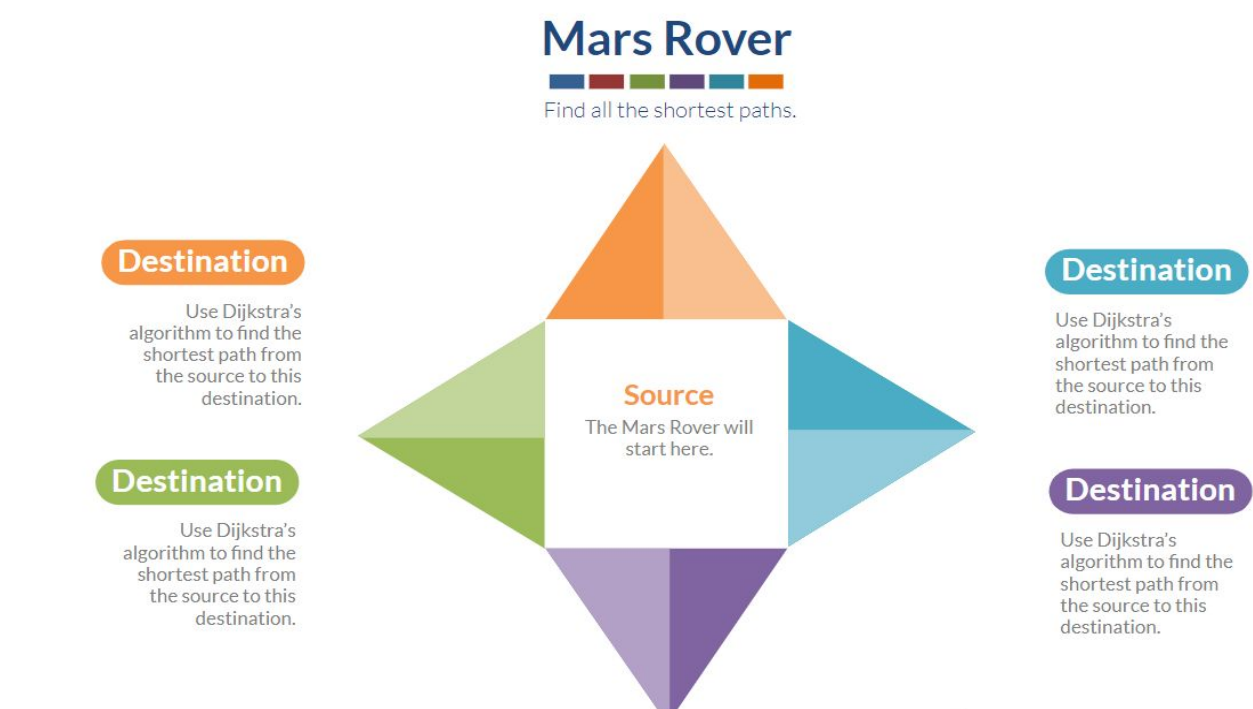

We can also pass each destination in a given order until we reach the last destination. In this case, the current destination would become the source for the next destination.