

Experiment No: 08

Date: 17/09/2026

Title: Employee Salary Details using Interface

Objective / Aim

To design and implement an Employee Salary System in Java using an interface, demonstrating the concepts of interfaces, classes, objects, implementation, and runtime polymorphism.

System Requirements

Hardware

- Standard PC/Laptop
- Intel Core i3/i5 processor or equivalent
- Minimum 4 GB RAM
- Minimum 500 MB free storage


Software


- Operating System: Windows / Linux / macOS
- Java Development Kit (JDK 17 or JDK 21)
- Text Editor or IDE such as Eclipse, IntelliJ IDEA, NetBeans, or VS Code
- Command Prompt / Terminal

Algorithm / Logic Description

1. Create an interface named Employee.
2. Declare a "salary()" method inside the Employee interface.
3. Create a Regular class that implements the Employee interface.
4. Implement the "salary()" method in the Regular class to display salary details.
5. Create a Contract class that implements the Employee interface.
6. Implement the "salary()" method in the Contract class to display salary details.
7. Create the main class named EmployeeContractSalary.
8. Create a "Scanner" object to accept the Employee ID from the user.
9. Create an Employee interface reference.
10. Check the first character of the Employee ID.
11. If the first character is R, create a Regular employee object.
12. Otherwise, create a Contract employee object.
13. Call the "salary()" method using the Employee interface reference.
14. Display the salary details.

UML Class Diagram

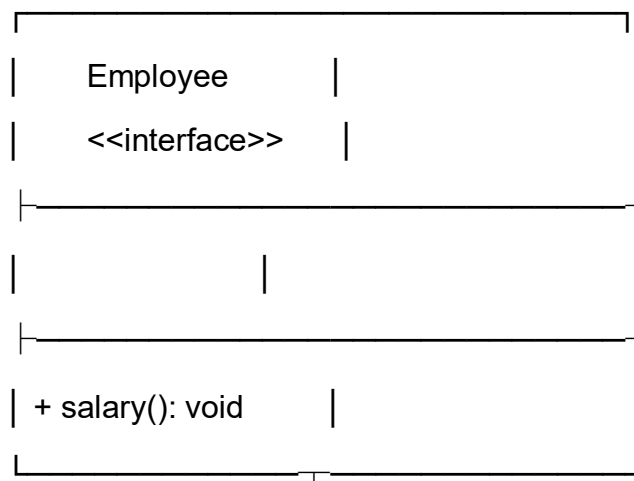

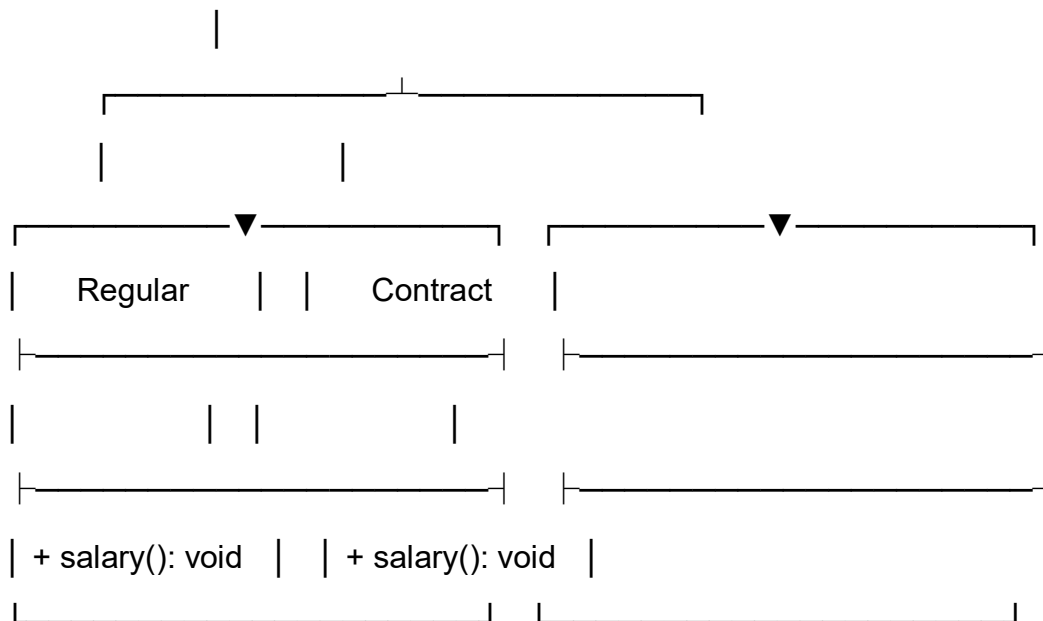

Relationship: "Regular" and "Contract" classes implement the "Employee" interface.

Source Code

```
package javacore;
```

```
import java.util.*;
```

```
// Interface for Employee salary
```

```
interface Employee {
```

```
    // Declare salary method
```

```
    void salary();
```

```
}
```

```
// Regular Employee class
```

```
class Regular implements Employee {
```

```
// Display regular employee salary details
public void salary() {

    System.out.println("Salary Details:\n");
    System.out.println("Basic Pay: 15000");
    System.out.println("H.R:0");
    System.out.println("T.A:5000");
    System.out.println("Total Amount:20000");
}
}
```

```
// Contract Employee class
class Contract implements Employee {

    // Display contract employee salary details
    public void salary() {

        System.out.println("Salary Details:\n");
        System.out.println("Basic Pay: 15000");
        System.out.println("H.R:0");
        System.out.println("T.A:5000");
        System.out.println("Total Amount:20000");
    }
}
```

```
// Main class
public class EmployeeContractSalary {
```

```
public static void main(String args[]) {  
  
    // Create Scanner object for input  
    Scanner sc = new Scanner(System.in);  
  
    // Read Employee ID  
    System.out.printf("Enter Employee Id: ");  
    String id = sc.next();  
  
    // Create interface reference  
    Employee e;  
  
    // Check employee type using first character of ID  
    if (id.charAt(0) == 'R')  
        e = new Regular();  
    else  
        e = new Contract();  
  
    // Call salary method using interface reference  
    e.salary();  
}  
}
```

Compilation & Execution Commands

Save the source code as:

EmployeeContractSalary.java

If you are using the "package javacore;" statement, save the file inside the appropriate "javacore" package/folder.

Compile the program:

```
javac EmployeeContractSalary.java
```

Run the program:

```
java EmployeeContractSalary
```

Output Screen

Example 1 – Regular Employee

Enter Employee Id: R101

Salary Details:

Basic Pay: 15000

H.R:0

T.A:5000

Total Amount:20000

Example 2 – Contract Employee

Enter Employee Id: C101

Salary Details:

Basic Pay: 15000

H.R:0

T.A:5000

Total Amount:20000

Result

The Employee Salary System was successfully implemented in Java using an interface. The program demonstrates how the "Employee" interface is implemented by the "Regular" and "Contract" classes, and how an interface reference is used to call the "salary()" method.