

Objective

To implement and demonstrate Interface Implementation in Java, where class C1 implements the I1 interface and provides an implementation for its abstract method.


Steps for Execution


- 1.Create a Java project and package named javacore.
- 2.Create a file named C1.java and enter the given code.
- 3.Define the I1 interface with variable a and method demo().
- 4.Create class C1 implementing the I1 interface.
- 5.Implement the demo() method.
- 6.Create a C1 object and access a and demo().
- 7.Compile and run the program.
- 8.Observe the output.

Algorithm

- 1.Start the program.
- 2.Define interface I1 with variable a and method demo().
- 3.Create class C1 implementing I1.
- 4.Implement the demo() method.
- 5.Create a C1 object.
- 6.Display the value of a.
- 7.Call the demo() method.
- 8.Display the output.
- 9.Stop the program.

UML CLASS DIAGRAM:

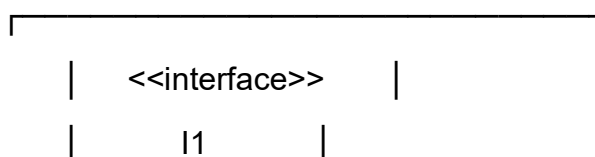

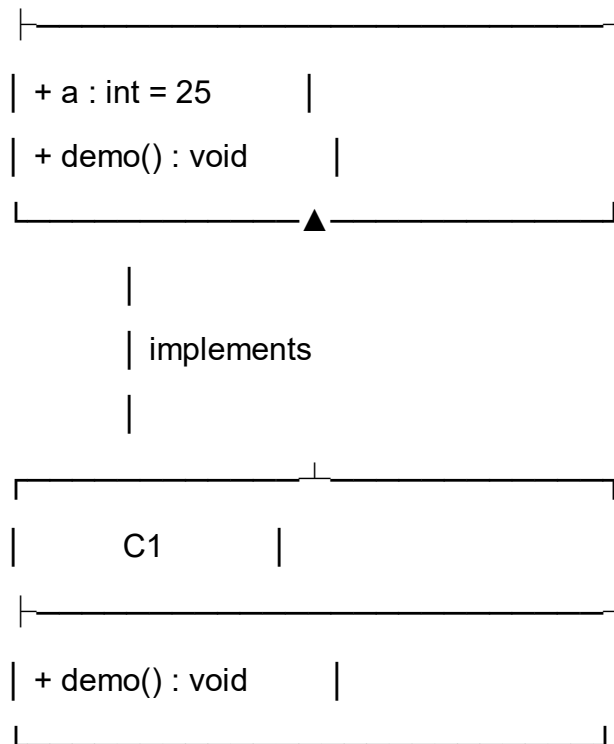

Relationship

- C1 implements I1
- C1 provides the implementation of the demo() method.
- The interface variable a has the value 25.

CODE:

```
package javacore;
```

```
interface I1{
```

```
    int a=25;
```

```
    void demo();
```

```
}
```

```
public class C1 implements I1{
```

```
    @Override
```

```
public void demo() {  
    System.out.println("this is the abstract method of interface1");  
  
}  
  
public static void main(String[] args){  
    C1 ac=new C1();  
    System.out.println(ac.a);  
    ac.demo();  
  
}  
}
```

OUTPUT:

25

this is the abstract method of interface1

Result:

The program successfully demonstrates Interface Implementation in Java. The C1 class implements the I1 interface, accesses its variable a, and provides an implementation for the abstract demo() method.