

Basic Information

Experiment No.: 07

Date: 08-10-2026

Title: Java LinkedHashMap and Its Methods

Objective / Aim

To implement "LinkedHashMap" in Java and demonstrate key-value operations while maintaining insertion order.

System Requirements

Hardware

- Computer/Laptop
- Minimum 4 GB RAM

Software


- Java JDK
 - Any Java IDE or Command Prompt
 - Operating System: Windows/Linux/macOS
-

Algorithm / Logic Description

1. Create a "LinkedHashMap" with integer keys and string values.
2. Add key-value pairs using "put()".
3. Access a value using "get()".
4. Check a key using "containsKey()".
5. Remove an entry using "remove()".

6. Display keys using "keySet()".
 7. Display values using "values()".
 8. Display key-value pairs using "entrySet()".
 9. Display the map to observe insertion order.
 10. End the program.
-

UML Class Diagram

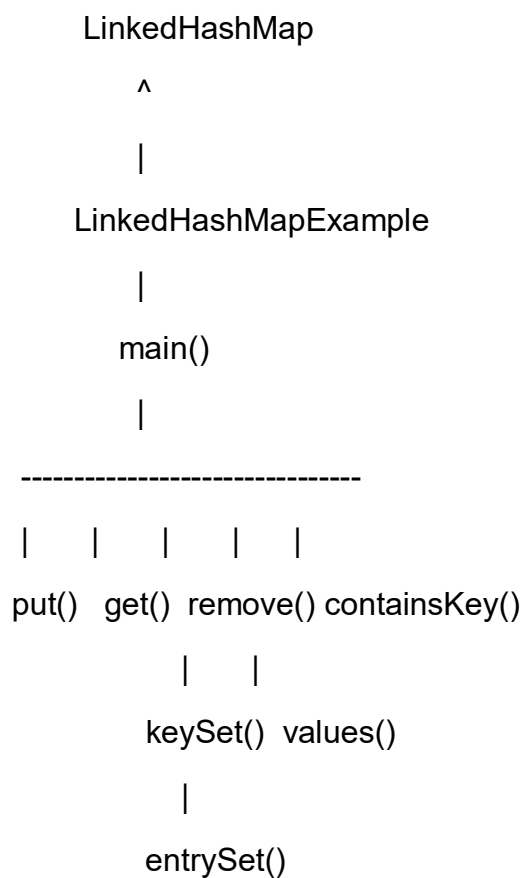

Source Code

```
package collectionframework;

import java.util.LinkedHashMap;
```

```
public class LinkedHashMapExample {  
    public static void main(String[] args) {  
  
        LinkedHashMap<Integer, String> map =  
            new LinkedHashMap<>();  
  
        // put()  
        map.put(101, "Rahul");  
        map.put(102, "Priya");  
        map.put(103, "John");  
  
        System.out.println("LinkedHashMap: " + map);  
  
        // get()  
        System.out.println("Value of key 102: " +  
            map.get(102));  
  
        // containsKey()  
        System.out.println("Contains key 101: " +  
            map.containsKey(101));  
  
        // remove()  
        map.remove(103);  
        System.out.println("After remove: " + map);  
  
        // keySet()  
        System.out.println("Keys: " + map.keySet());  
    }  
}
```

```
// values()
System.out.println("Values: " + map.values());

// entrySet()
System.out.println("Entries: " + map.entrySet());
}
}
```

Compilation & Execution Commands

Save the file as:

LinkedHashMapExample.java

Since the program contains:

package collectionframework;

the file should be inside the "collectionframework" folder.

Compile:

javac LinkedHashMapExample.java

Run:

java collectionframework.LinkedHashMapExample

Output Screen

LinkedHashMap: {101=Rahul, 102=Priya, 103=John}

Value of key 102: Priya

Contains key 101: true

After remove: {101=Rahul, 102=Priya}

Keys: [101, 102]

Values: [Rahul, Priya]

Entries: [101=Rahul, 102=Priya]

Result

The "LinkedHashMap" class was successfully implemented, and the "put()", "get()", "remove()", "containsKey()", "keySet()", "values()", and "entrySet()" operations were successfully demonstrated. The insertion order was maintained.