




Sunbeam Institute of Information Technology

Pune and Karad

Module – Real Time Operating System

Trainer - Devendra Dhande

Email – devendra.dhande@sunbeaminfo.com

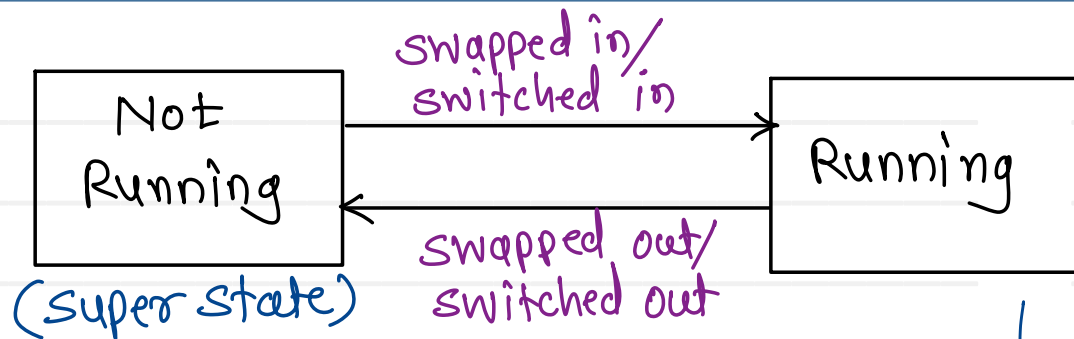

1. Suspended state

- infinite waiting
- `vTaskSuspend()` - used to put task in suspended state
- `vTaskResume()` - used to get back from suspended state.


if task is executing on CPU (means it is utilizing CPU cycles)


2. Ready state

- if task want to execute (needs CPU cycles)





3. Waiting state

- by calling some blocking call task will go into waiting state.
- task will go into waiting
 - blocking call
 - IO
 - synchronisation
 - ITC



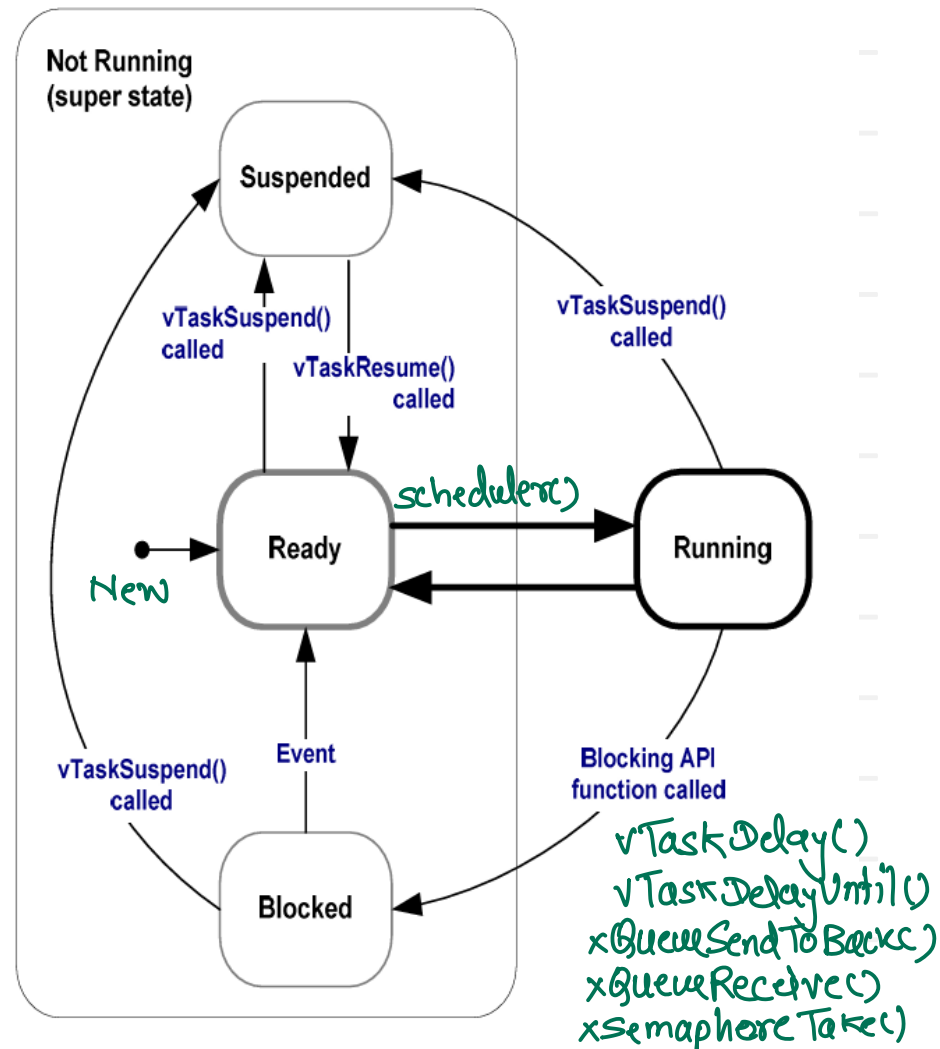


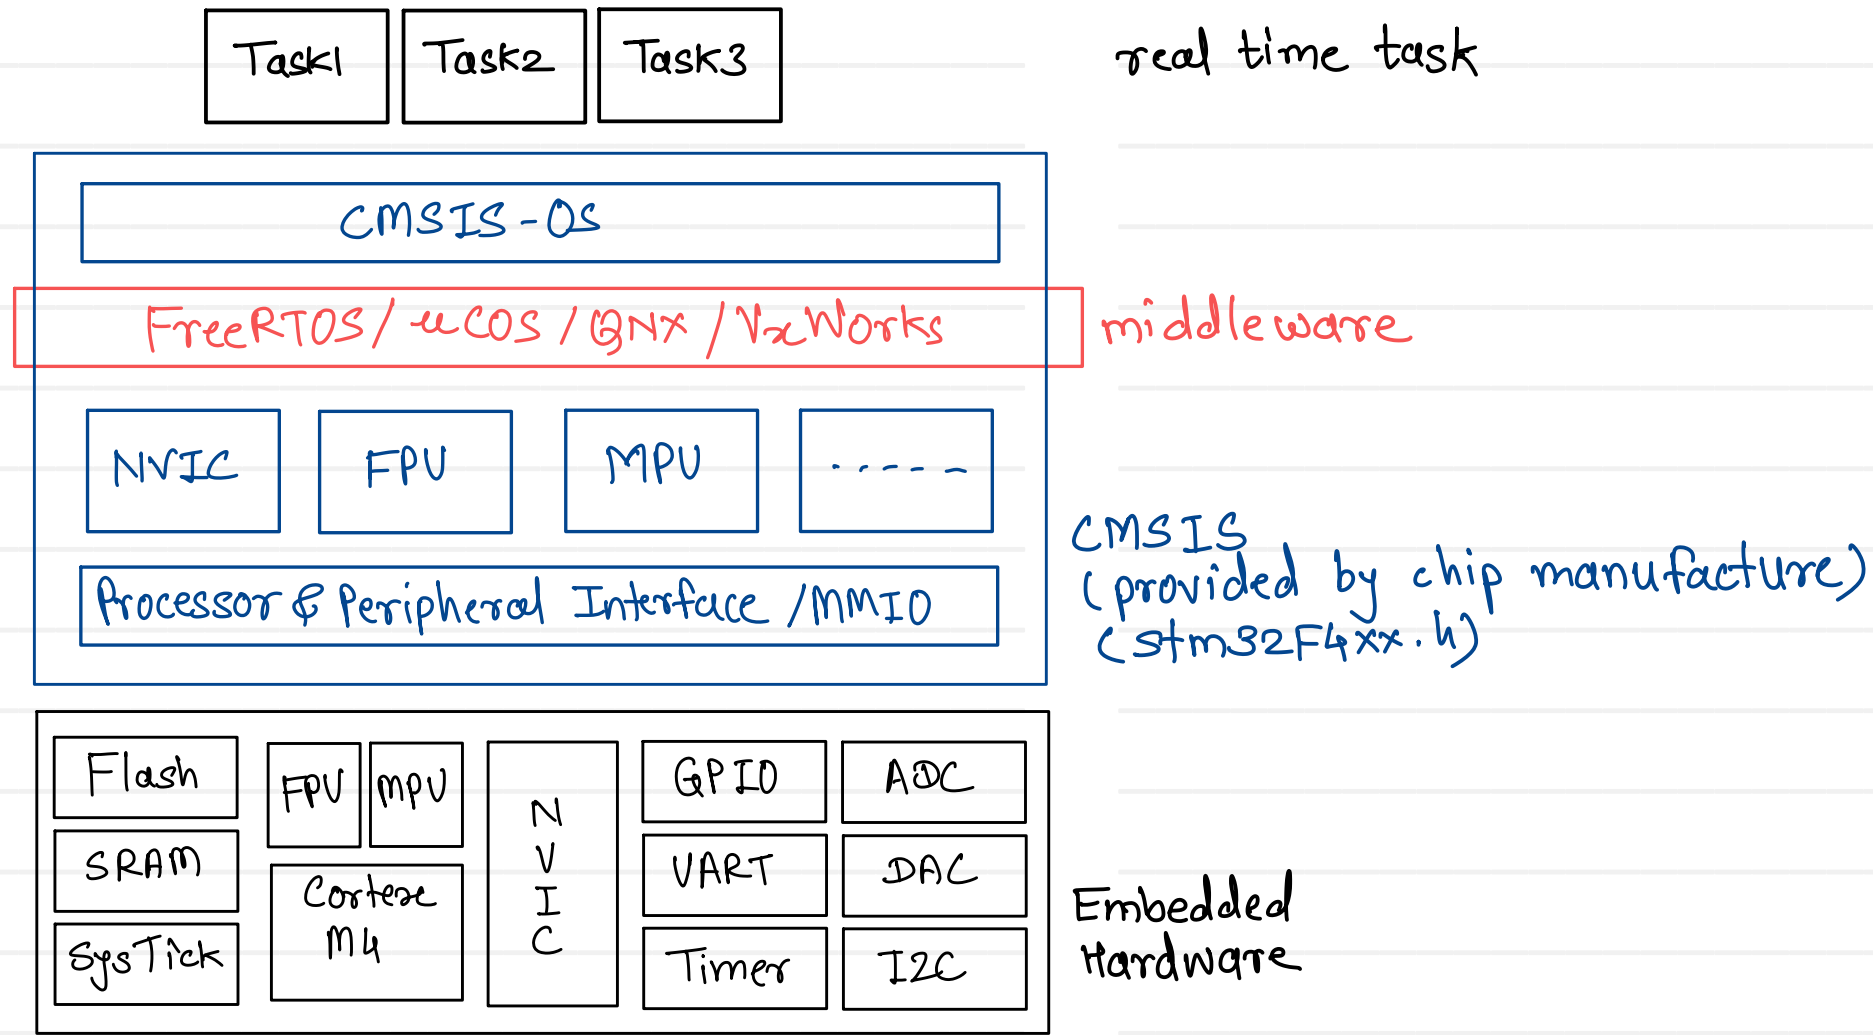


configUSEPreemption - Enabled

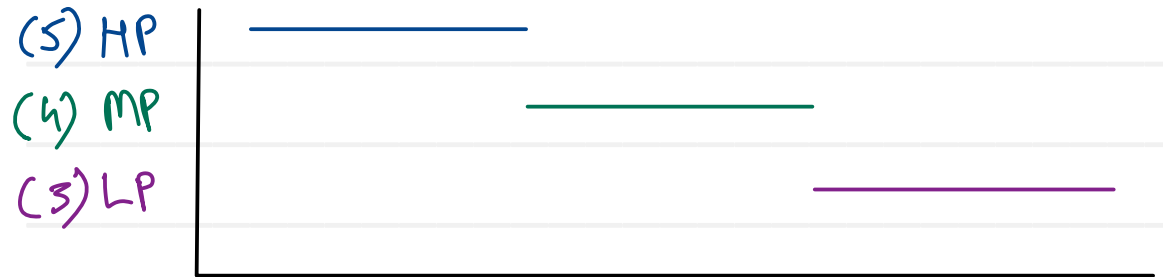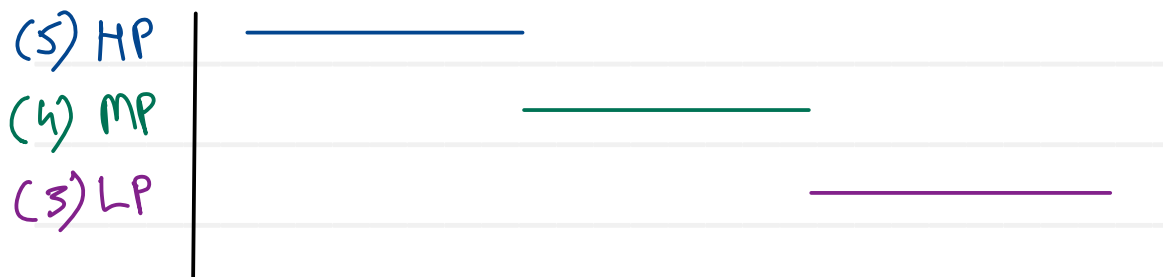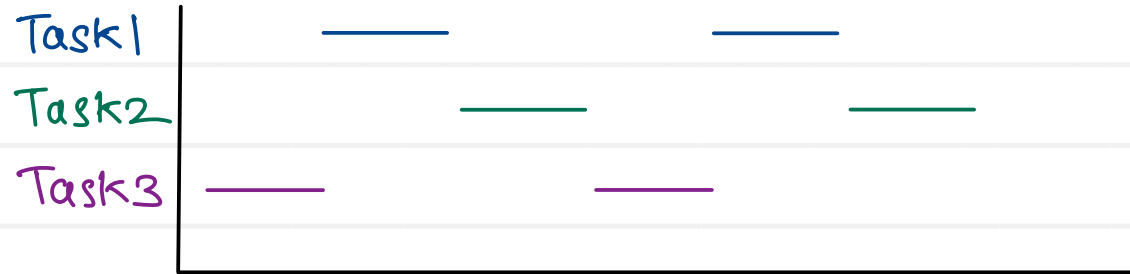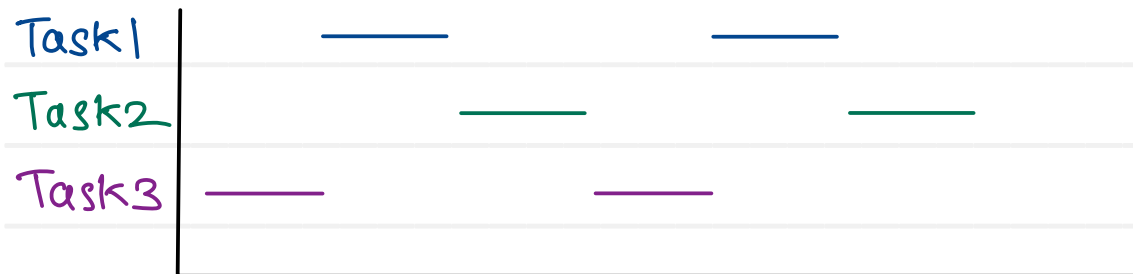


configUSEPreemption - Disabled

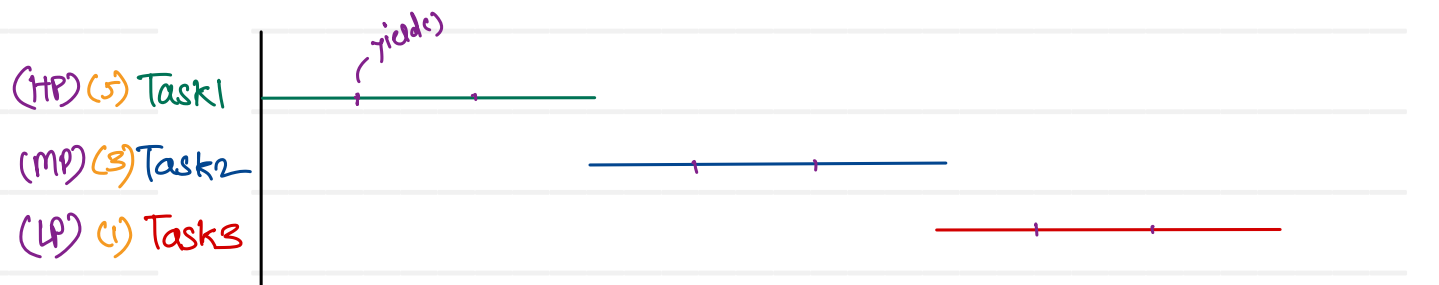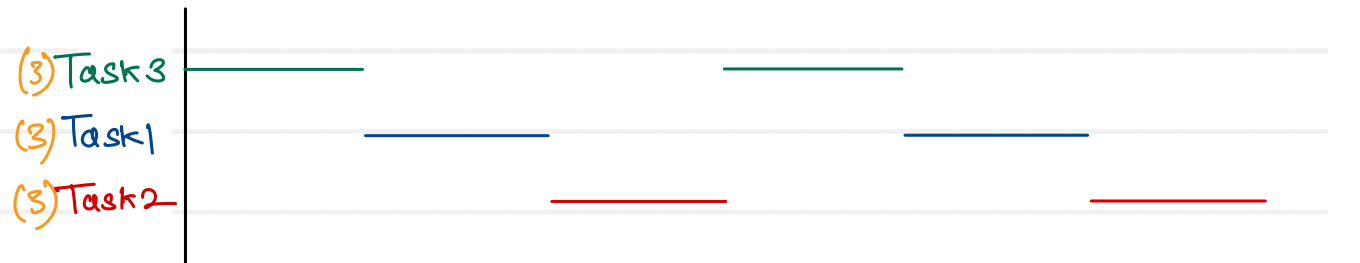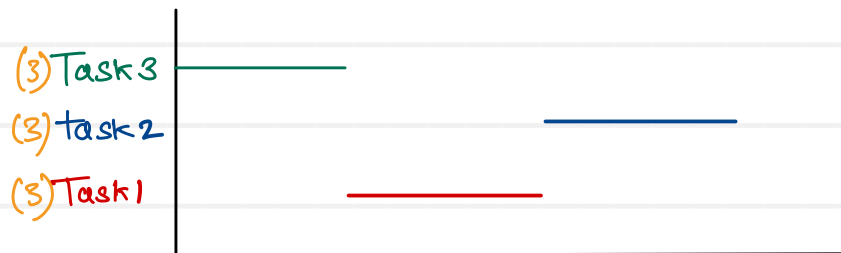

configUSEPreemption - Disabled

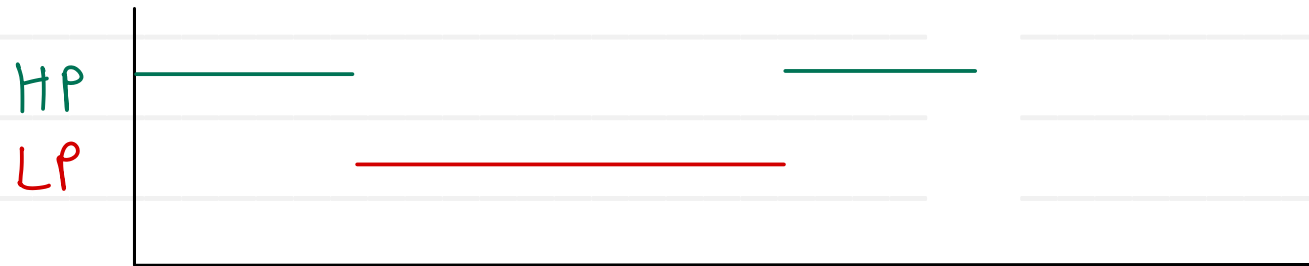

configUSEPreemption - Enabled

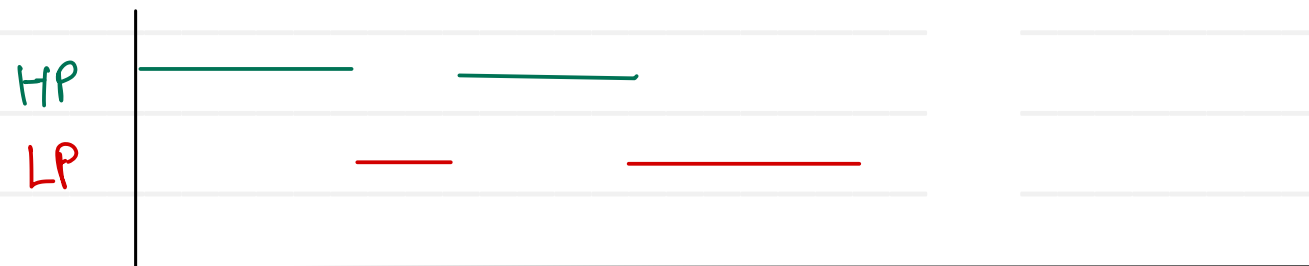



Thank you!!!

Devendra Dhande

devendra.dhande@sunbeaminfo.com