




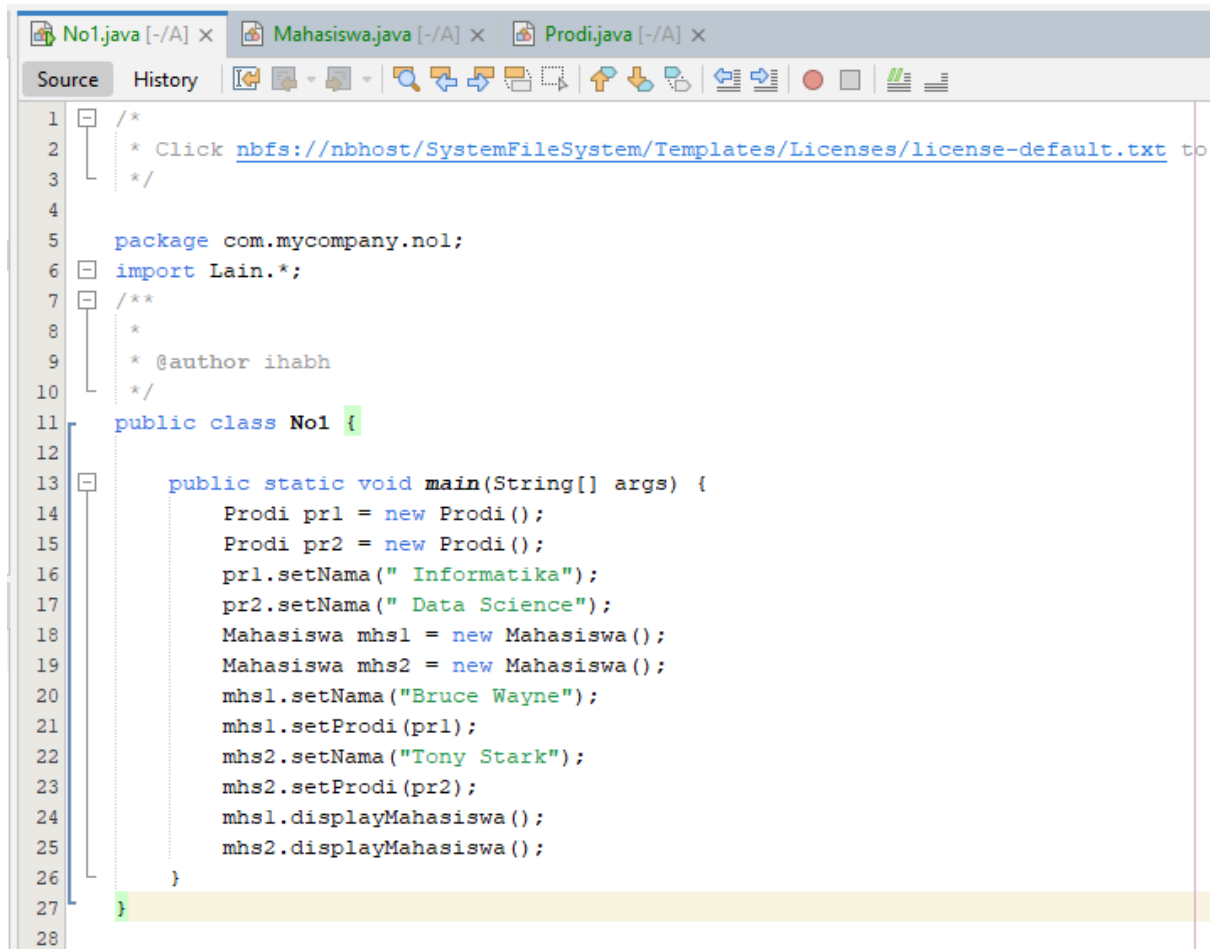

```
1  /*
2   * Click nbfs://nbhost/SystemFileSystem/Templates/Licenses/license-default.txt to
3   */
4
5   package com.mycompany.nol;
6   import Lain.*;
7   /**
8    *
9    * @author ihabh
10   */
11  public class No1 {
12
13      public static void main(String[] args) {
14          Prodi pr1 = new Prodi();
15          Prodi pr2 = new Prodi();
16          pr1.setNama(" Informatika");
17          pr2.setNama(" Data Science");
18          Mahasiswa mhs1 = new Mahasiswa();
19          Mahasiswa mhs2 = new Mahasiswa();
20          mhs1.setNama("Bruce Wayne");
21          mhs1.setProdi(pr1);
22          mhs2.setNama("Tony Stark");
23          mhs2.setProdi(pr2);
24          mhs1.displayMahasiswa();
25          mhs2.displayMahasiswa();
26      }
27  }
28
```

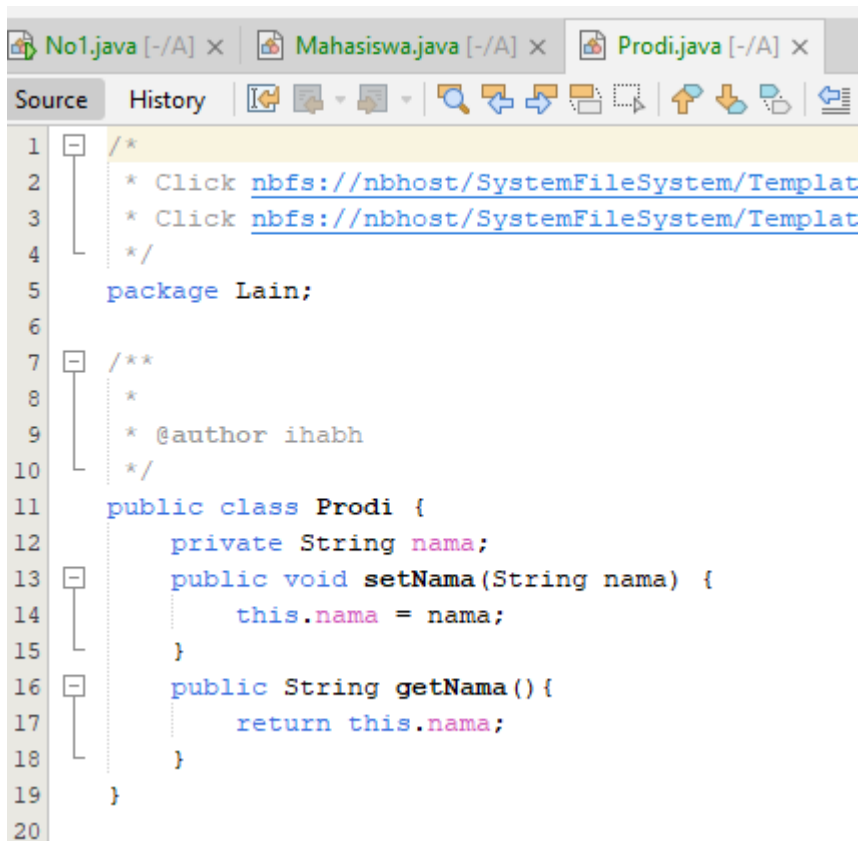

```
1  /*
2   * Click nbfs://nbhost/SystemFileSystem/Templates/Licenses/license-default.txt to
3   * Click nbfs://nbhost/SystemFileSystem/Templates/Licenses/license-default.txt to
4   */
5   package Lain;
6
7   /**
8    *
9    * @author ihabh
10   */
11  public class Prodi {
12      private String nama;
13      public void setNama(String nama) {
14          this.nama = nama;
15      }
16      public String getNama() {
17          return this.nama;
18      }
19  }
20
```

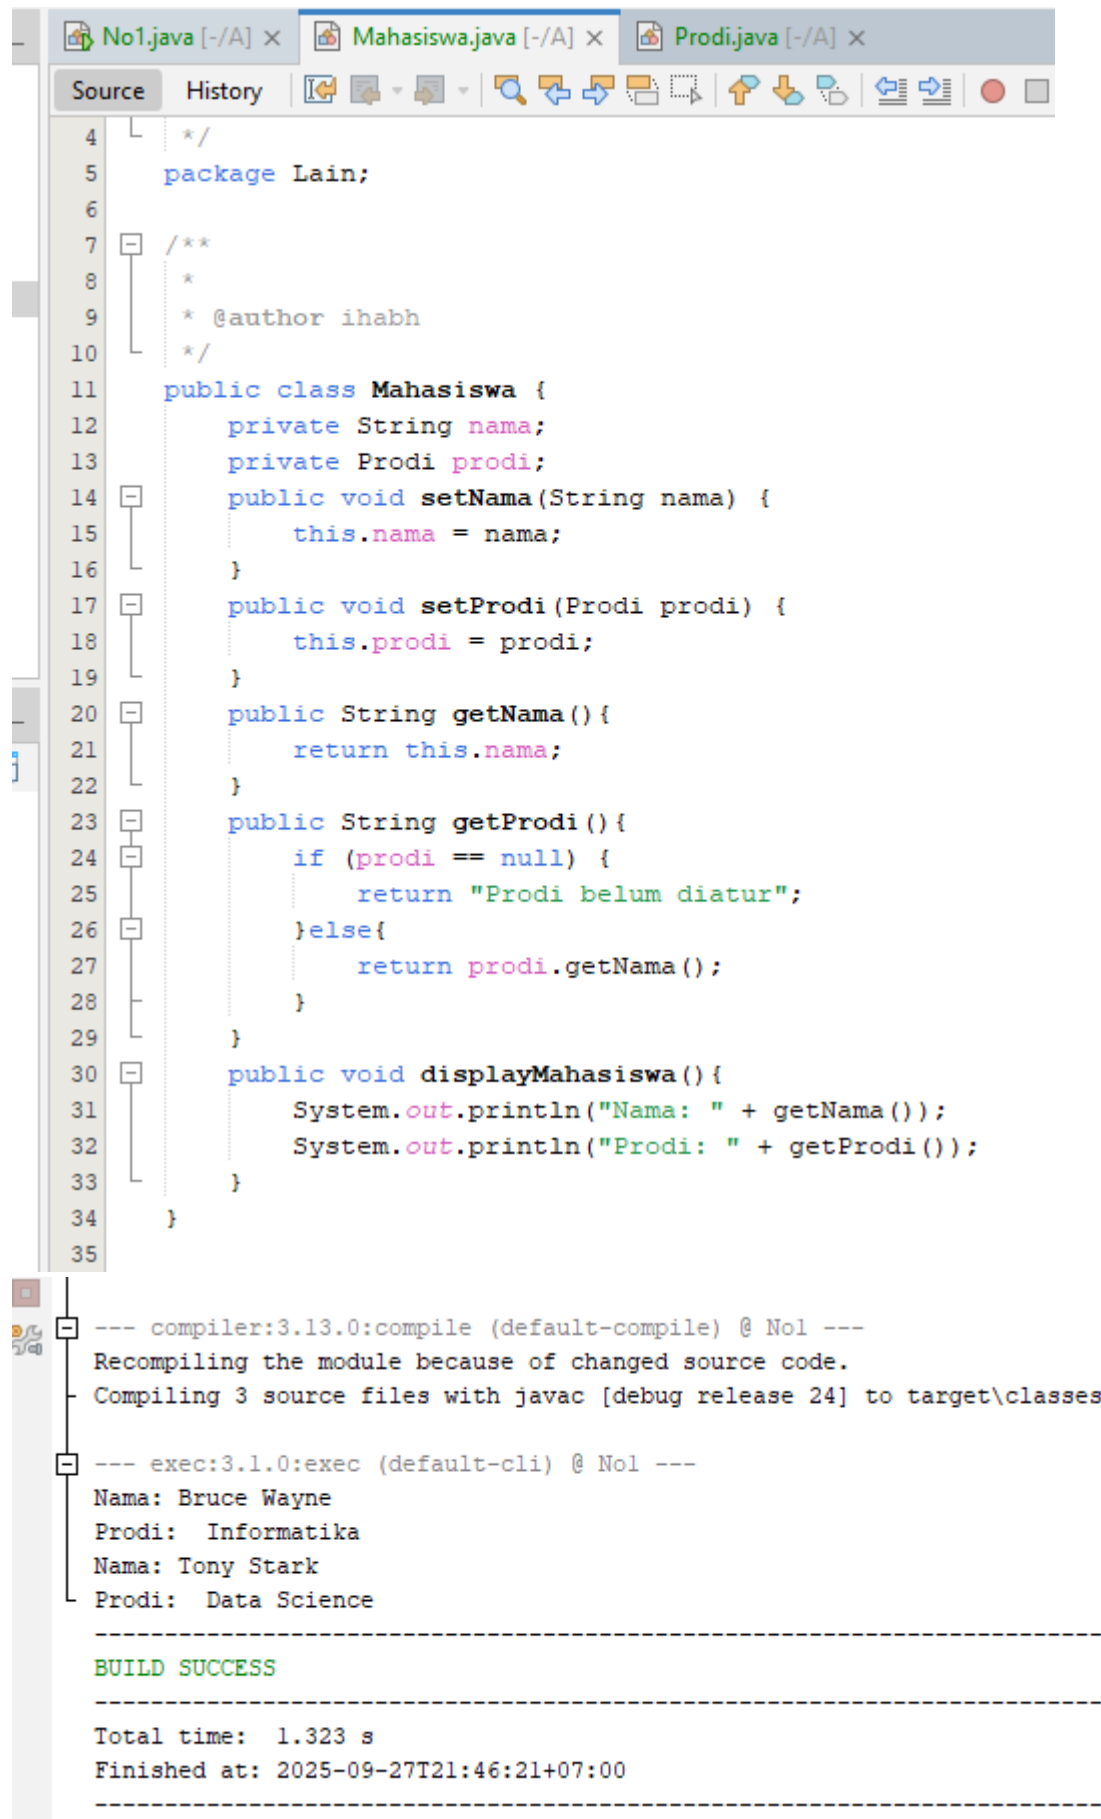

The screenshot displays an IDE with three open files: `No1.java`, `Mahasiswa.java`, and `Prodi.java`. The `Mahasiswa.java` file is the active editor, showing a Java class with private attributes `nama` and `prodi`, and public methods for setting, getting, and displaying these attributes. The code is as follows:

```
4  */
5  package Lain;
6
7  /**
8   *
9   * @author ihabh
10  */
11 public class Mahasiswa {
12     private String nama;
13     private Prodi prodi;
14     public void setNama(String nama) {
15         this.nama = nama;
16     }
17     public void setProdi(Prodi prodi) {
18         this.prodi = prodi;
19     }
20     public String getNama() {
21         return this.nama;
22     }
23     public String getProdi() {
24         if (prodi == null) {
25             return "Prodi belum diatur";
26         } else {
27             return prodi.getNama();
28         }
29     }
30     public void displayMahasiswa() {
31         System.out.println("Nama: " + getNama());
32         System.out.println("Prodi: " + getProdi());
33     }
34 }
35
```

Below the code editor, the IDE's output window shows the compilation and execution results:

```
--- compiler:3.13.0:compile (default-compile) @ N01 ---
Recompiling the module because of changed source code.
Compiling 3 source files with javac [debug release 24] to target\classes

--- exec:3.1.0:exec (default-cli) @ N01 ---
Nama: Bruce Wayne
Prodi: Informatika
Nama: Tony Stark
Prodi: Data Science

-----
BUILD SUCCESS
-----

Total time: 1.323 s
Finished at: 2025-09-27T21:46:21+07:00
-----
```