


1. These protocols are commonly allowed through firewalls and not always monitored for hidden malicious traffic, making them useful for attackers to create covert communication channels.
2.
  - i) Log deletion/Manipulation
  - ii) IP spoofing
  - iii) Encryption & obfuscation
  - iv) Use of anonymous networks
3. It is a technique used to bypass security controls by encapsulating malicious traffic within legitimate network protocols like HTTP, DNS/ICMP.
4. Smishing: A cyberattack using fraudulent SMS messages to trick users into sharing sensitive information.  
Vishing: A voice phishing attack where attackers impersonate trusted entities over phone calls to steal information.
5. The website allows users to report suspicious calls, helping organizations monitor if their phone numbers are flagged as scams or if fraudsters are misusing their brand name.
6. Attackers impersonate trusted sources over phone calls, create urgency (e.g. fake fraud alerts), and trick victims into revealing sensitive details like passwords / card numbers.
7. A bot is an infected computer controlled remotely by attackers to perform malicious tasks like data theft / launching cyberattacks.

### centralized Botnet infrastructure:-

- 1) A central command-and-control (C2C) server sends instructions to infected bots.
- 2) Attackers use it to execute large-scale cyberattacks, such as DDoS attacks or spamming.

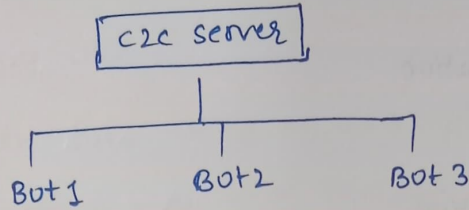

Each bot follows commands from the attacker via the C2C server.

### 8. Differences b/w Antivirus and Rogue Antivirus

| Antivirus                           | Rogue Antivirus                                              |
|-------------------------------------|--------------------------------------------------------------|
| 1. Protects system from malware     | 1. Pretends to be security software, actually it is malware. |
| 2. Detects and removes real threats | 2. Displays fake threats to trick users into paying.         |
| 3. Trusted security company         | 3. Cybercriminals                                            |
| 4. Keeps system safe                | 4. Infects system, steals data or demands money.             |

9. → Attackers encapsulate malicious commands/stolen data inside normal HTTP traffic to bypass security measures.
- Since HTTP is commonly allowed through firewalls, it serves as a stealthy transport mechanism.
- They can set up C2 communication using HTTP based tunnels to remotely control infected devices.
- Ex: webshells, HTTP proxies, encoded payloads hidden in requests.

- 10.
- 1) Click fraud:- Attackers use bots or human click farms to generate fake clicks on ads.
  - 2) Ad Injection: Malware injects unauthorized ads into legitimate web-sites, stealing revenue from site owners.
  - 3) Malvertising: Attackers distribute malware through fake ads that users unknowingly click.
  - 4) Affiliate fraud:- fake clicks on ads generate commission payouts for fraudsters without real user engagement.

These techniques deceive advertisers and result in financial losses while generating illegal revenue for attackers.