IT114 Module 3 User Input Challenges

Student submission

Assignment revision: 2 | Maximum points: 10 | Student: kk753 | Submitted: 2026-10-13T02:04:15.362Z | Submission revision: 143 | Receipt: v4r_01M4SG1NM2AHW4PW4JVE0JQ2CW | Exported: 2026-10-13T02:04:19.827Z

Worksheet link

https://courses.ethereallab.app/assignment/v4/IT114-001-F2026/it114-module-3-user-input-challenges/kk753

Grading link

https://courses.ethereallab.app/assignment/v4/IT114-001-F2026/it114-module-3-user-input-challenges/grading/kk753

4 submission warning(s) were acknowledged.

AI disclosure: Completed; 1 entry; 1 declared AI use; 0 declared no AI use; policy v1

User Input Challenges

Complete the three starter challenges. Each challenge is worth three points; submit its source, runtime output, and explanation in separate tasks.

Command-line calculator source

Complete `CommandLineCalculator.java` using two numeric command-line arguments and the supported `+` or `-` operator.

URL prompt

Submit the GitHub URL that opens `M3/CommandLineCalculator.java` on your `M3-Homework` branch.

Requirements and potential deductions

- A nearby source comment includes your UCID, date, and a brief solution summary. (up to -0.2 points)
- The program reads two numeric operands and an operator from command-line arguments. (up to -0.3 points)
- The program accepts integer and floating-point operands. (up to -0.3 points)
- The program performs the requested addition or subtraction. (up to -0.3 points)
- The result has as many decimal places as the operand with the longer fractional part, including the stated `0.1 + 0.2` example. (up to -0.2 points)
- Invalid numeric input produces an error. (up to -0.1 points)
- An unsupported operator produces an error. (up to -0.1 points)

https://github.com/KubaKNJIT/kk753-it114-001-f2026/blob/M3-Homework/M3/CommandLineCalculator.java

Command-line calculator output

Image evidence prompt

Upload readable terminal captures showing the complete program output for five test variations run from `M3-Homework`. Use additional images when needed to keep every run readable.

Requirements and potential deductions

- The captures show five distinct test inputs and their program output. (up to -0.6 points)
- The runs demonstrate the supported operations and both integer and floating-point input. (up to -0.2 points)
- The captures include one test with operands that have different numbers of fractional digits and show the required decimal-place result. (up to -0.2 points)

```
(base) pingwinmobile@mac kk753-it114-001-f2026 % java M3.CommandLineCalculator 0.1 + 0.2
Running Problem 1 for [kk753] [2026-10-12T21:05:44.737903]
 Objective: Implement a calculator using command-line arguments.
Calculating result...
addition
0.3
Completed Problem 1 for [kk753] [2026-10-12T21:05:44.752326]
(base) pingwinmobile@mac kk753-it114-001-f2026 % java M3.CommandLineCalculator 0.01 + 0.2
Running Problem 1 for [kk753] [2026-10-12T21:05:54.800719]
 Objective: Implement a calculator using command-line arguments.
Calculating result...
addition
0.21
Completed Problem 1 for [kk753] [2026-10-12T21:05:54.814308]
(base) pingwinmobile@mac kk753-it114-001-f2026 % java M3.CommandLineCalculator 0.000001 + 0.0003
Running Problem 1 for [kk753] [2026-10-12T21:06:12.216782]
 Objective: Implement a calculator using command-line arguments.
Calculating result...
addition
0.000301
Completed Problem 1 for [kk753] [2026-10-12T21:06:12.231241]
(base) pingwinmobile@mac kk753-it114-001-f2026 % java M3.CommandLineCalculator 2 + 2
Running Problem 1 for [kk753] [2026-10-12T21:06:20.719348]
 Objective: Implement a calculator using command-line arguments.
Calculating result...
addition
4
Completed Problem 1 for [kk753] [2026-10-12T21:06:20.731958]
(base) pingwinmobile@mac kk753-it114-001-f2026 % java M3.CommandLineCalculator 2.9 + 2.1
Running Problem 1 for [kk753] [2026-10-12T21:06:33.029973]
 Objective: Implement a calculator using command-line arguments.
Calculating result...
addition
5.0
Completed Problem 1 for [kk753] [2026-10-12T21:06:33.043157]
```

Command-line calculator explanation

Response prompt

Briefly explain how your solution reads the arguments, chooses the operation, and handles invalid input.

Requirements and potential deductions

- The response explains the solution's argument, operation, and error-handling decisions. (up to -0.5 points)

Submitted response

A lot of this code was just if statements ensuring that whats being put through is what is desired. If something is a double or int execute this and such. If also served as the method of looking for addition or subtraction.

Slash-command handler source

Complete `SlashCommandHandler.java` so the interactive program handles the required slash commands and invalid command input.

URL prompt

Submit the GitHub URL that opens `M3/SlashCommandHandler.java` on your `M3-Homework` branch.

Requirements and potential deductions

- A nearby source comment includes your UCID, date, and a brief solution summary. (up to -0.2 points)
- `/greet <name>` performs the intended greeting action. (up to -0.05 points)
- `/roll <num>d<sides>` performs the intended dice-roll action. (up to -0.1 points)
- `/echo <message>` performs the intended echo action. (up to -0.05 points)
- Commands are recognized without case sensitivity. (up to -0.2 points)
- `/greet` uses its required response format. (up to -0.1 points)
- `/echo` uses its required response format. (up to -0.1 points)

- `/roll` reports the dice expression and its outcome in the required format. (up to -0.2 points)
- `/quit` exits the program. (up to -0.2 points)
- An unrecognized command produces an error. (up to -0.15 points)
- An invalid format for a recognized command produces an error. (up to -0.15 points)

Warning at submission: minimum-items

No URL submitted.

Slash-command handler output

Image evidence prompt

Upload readable terminal captures showing three variations each of `/greet`, `/roll`, and `/echo`, plus `/quit` ending the program. Show the output from `M3-Homework`.

Requirements and potential deductions

- The output shows three input variations for `/greet`. (up to -0.2 points)
- The output shows three input variations for `/roll`. (up to -0.2 points)
- The output shows three input variations for `/echo`. (up to -0.2 points)
- The greeting output follows its required format. (up to -0.1 points)
- The dice-roll output follows its required format. (up to -0.1 points)
- The echo output follows its required format. (up to -0.1 points)
- The output shows the program exiting after `/quit`. (up to -0.1 points)

Warning at submission: minimum-items

No image submitted.

Slash-command handler explanation

Response prompt

Briefly explain how your solution recognizes commands and handles an unrecognized command or invalid format.

Requirements and potential deductions

- The response explains the command-selection and invalid-input decisions in the linked source. (up to -0.5 points)

Warning at submission: response-required

Submitted response

No response submitted.

Mad Libs generator source

Complete `MadLibsGenerator.java` using the five provided stories in `M3/stories`.

URL prompt

Submit the GitHub URL that opens `M3/MadLibsGenerator.java` on your `M3-Homework` branch.

Requirements and potential deductions

- A nearby source comment includes your UCID, date, and a brief solution summary. (up to -0.2 points)
- The program randomly selects one of the five provided stories. (up to -0.1 points)
- The program reads every line of the selected story into a collection. (up to -0.2 points)
- The program prompts for each placeholder. (up to -0.1 points)
- Placeholder underscores display as spaces in the prompts. (up to -0.2 points)
- The program accepts the entered word without checking whether it matches the placeholder type. (up to -0.3 points)
- Each response replaces its matching placeholder in the original line collection. (up to -0.4 points)

https://github.com/KubaKNJIT/kk753-it114-001-f2026/blob/M3-Homework/M3/MadLibsGenerator.java

Mad Libs generator output


Image evidence prompt

Upload readable terminal captures showing the prompts and completed output for two different stories selected from `M3/stories`, run from `M3-Homework`.

Requirements and potential deductions

- The image shows completed output for two different provided stories. (up to -0.6 points)

- The output shows prompted words substituted into their matching story locations. (up to -0.4 points)
Warning at submission: expected-items

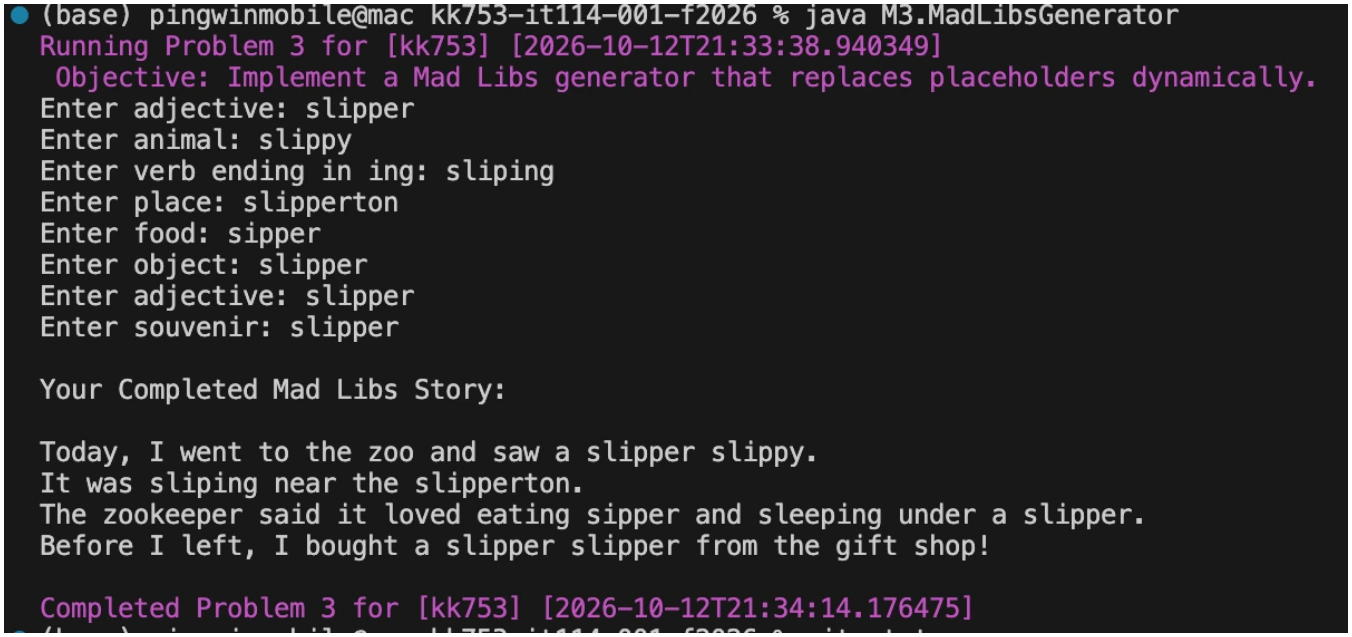

Mad Libs generator explanation

Response prompt

Briefly explain how your solution selects a story, reads its lines, and replaces placeholders with responses.

Requirements and potential deductions

- The response explains story selection, line collection, and placeholder replacement in the linked source. (up to -0.5 points)

Submitted response

I made the mistake of not actively implementing a way to randomly select a story, I just have it going through story1.txt. So I ad the other files for no reason because I don't know how to read properly. I had to look more into how try/catch works since in cla seemed more effective at error handling than trying to if/else my way around every possible issue. That and if/else started to ge chunky in the way I intended on doing it. Scanner class and its methods allowed me to read through the txt file. Similar method used in the first homework to edit strings was used here with minor adjustments to fit this assignment.

Reflection

Pull request and commit history

URL prompt

Submit the GitHub pull-request URL from `M3-Homework` into `main`.

Requirements and potential deductions

- The pull request has `M3-Homework` as its source branch and `main` as its target. (up to -0.1 points)
- Its commit history shows the untouched starter baseline, the planning commit before solutions, and subsequent solution work. (up to -0.1 points)

https://github.com/KubaKNJIT/kk753-it114-001-f2026/pull/6


WakaTime project activity

Image evidence prompt

Upload one readable WakaTime Projects image identifying your personal IT114 repository and showing its activity during this assignment.

Requirements and potential deductions

- The image identifies your repository and shows its project activity; time duration is not graded. (up to -0.1 points)

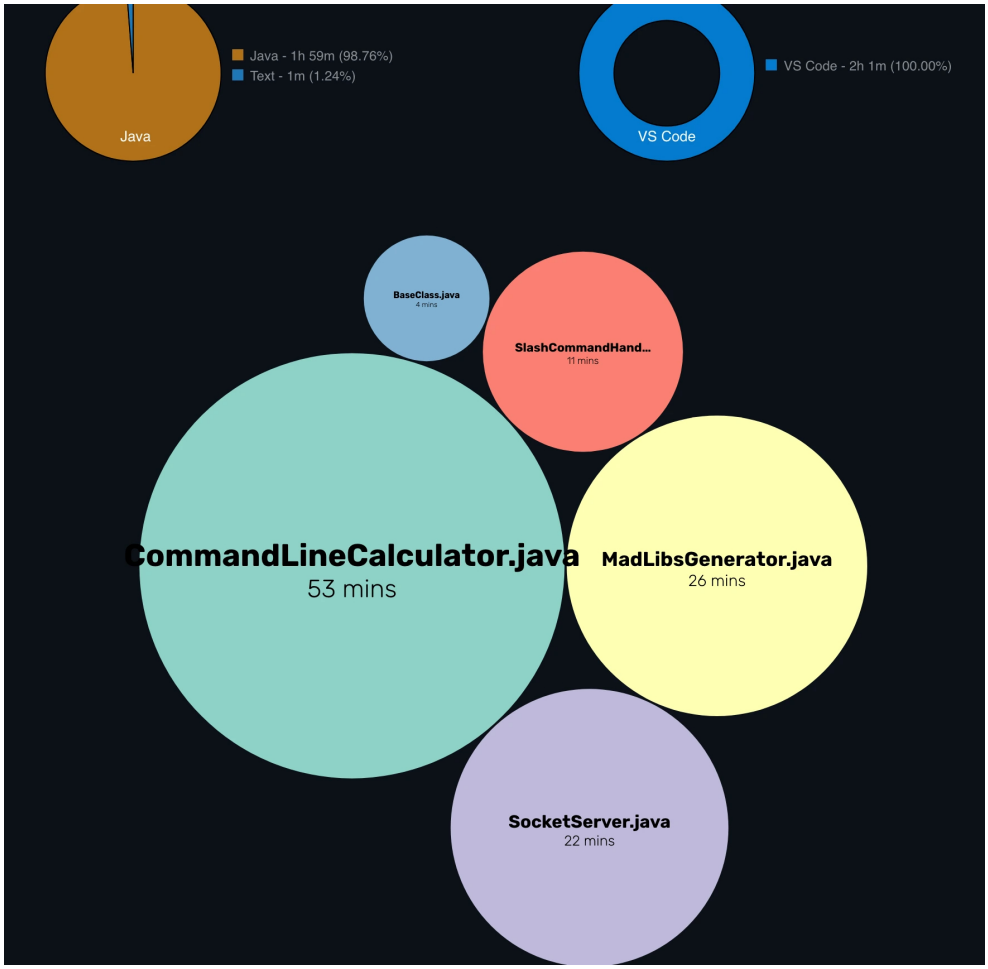

WakaTime file activity

Image evidence prompt

Upload one readable WakaTime image showing Java file activity for your personal IT114 repository during this assignment.

Requirements and potential deductions

- The image shows relevant Java file activity; time duration is not graded. (up to -0.1 points)

Files	
53 mins	M3/CommandLineCalculator.java
26 mins	M3/MadLibsGenerator.java
22 mins	M4/SocketServer.java
11 mins	M3/SlashCommandHandler.java
4 mins	M3/BaseClass.java
41 secs	M3/Stories/story5.txt
24 secs	M3/Stories/story3.txt
10 secs	M4/SocketClient.java
8 secs	M3/Stories/story4.txt
8 secs	M3/story1.txt
6 secs	M3/Stories/story2.txt
0 secs	M3/Stories/story1.txt

Branches	
1 hr 38 mins	M3-Homework
22 mins	Module04-Sockets-Overview

Learned or verified

Response prompt

What did you learn or verify while completing `M3-Homework`?

Requirements and potential deductions

- The response identifies something learned or verified through specific assignment experience. (up to -0.2 points)

Submitted response

Though still a work in progress I learned more about how to utilize try/catch. I've worked more on Scanner and reading in .txt fi need to do more looking into it because some commands I just have since I saw it was used in other programs and did roughly wanted it to.

Easiest part

Response prompt

What was easiest or most straightforward in the `M3-Homework` work, and why?

Requirements and potential deductions

- The response identifies an easiest or most straightforward part and gives a reason. (up to -0.2 points)

Submitted response

Submitting it.

Most difficult or uncertain part

Response prompt

What was most difficult or uncertain in the `M3-Homework` work, or still needs work?

Requirements and potential deductions

- The response identifies a concrete difficulty, uncertainty, or remaining next step. (up to -0.2 points)

Submitted response

Working on the inline calculator was difficult for two reasons. First reason is I didn't understand how to parse the integers and o properly. The next hardest part was understanding that I was supposed to type in the equation while running the run command spent a good 5 minutes looking through my code trying to understand where I went wrong only to have the best idea, "what if i the equations after the java M3." It worked.