

SYLLABUS
PROGRAMMING IN JAVA (CIC-212)
Applicable from the Academic Session 2021-22

Marking Scheme:

1. Teachers Continuous Evaluation: 25 marks
2. Term End Theory Examinations: 75 marks

Instructions for paper setter:

1. There should be 9 questions in the term end examinations question paper.
2. The first (Ist) question should be compulsory and cover the entire syllabus. This question should be objective, single line answers or short answer type question of total 15 marks.
3. Apart from question 1 which is compulsory, rest of the paper shall consist of 4 units as per the syllabus. Every unit shall have two questions covering the corresponding unit of the syllabus. However, the student shall be asked to attempt only one of the two questions in the unit. Individual questions may contain upto 5 sub-parts / sub-questions. Each Unit shall have a marks weightage of 15.

UNIT I

Overview and characteristics of Java, Java program Compilation and Execution Process Organization of the Java Virtual Machine, JVM as an interpreter and emulator, Instruction Set, class File Format, Verification, Class Area, Java Stack, Heap, Garbage Collection. Security Promises of the JVM, Security Architecture and Security Policy. Class loaders and security aspects, sandbox model

UNIT II

Java Fundamentals, Data Types & Literals Variables, Wrapper Classes, Arrays, Arithmetic Operators, Logical Operators, Control of Flow, Classes and Instances, Class Member Modifiers Anonymous Inner Class Interfaces and Abstract Classes, inheritance, throw and throws clauses, user defined Exceptions, The String Buffer Class, tokenizer, applets, Life cycle of applet and Security concerns.

UNIT III

Threads: Creating Threads, Thread Priority, Blocked States, Extending Thread Class, Runnable Interface, Starting Threads, Thread Synchronization, Synchronize Threads, Sync Code Block, Overriding Synced Methods, Thread Communication, wait, notify and notify all.

AWT Components, Component Class, Container Class, Layout Manager Interface Default Layouts, Insets and Dimensions, Border Layout, Flow Layout, Grid Layout, Card Layout Grid Bag Layout AWT Events, Event Models, Listeners, Class Listener, Adapters, Action Event Methods Focus Event Key Event, Mouse Events, Window Event

UNIT IV

Input/Output Stream, Stream Filters, Buffered Streams, Data input and Output Stream, Print Stream Random Access File, JDBC (Database connectivity with MS-Access, Oracle, MS-SQL Server), Object serialization, Sockets, development of client Server applications, design of multithreaded server. Remote Method invocation, Java Native interfaces, Development of a JNI based application. Collection API Interfaces, Vector, stack, Hashtable classes, enumerations, set, List, Map, Iterators.

SYLLABUS

(Academic Session (2015-16)

JAVA PROGRAMMING [ETCS-307]

JAVA PROGRAMMING [ETCS-307]

UNIT I

UNIT I
Overview and characteristics of Java, Java program Compilation and Execution Process Organization of the Java Virtual Machine, JVM as an interpreter and emulator, Instruction Set, class File Format, Verification, Class Area, Java Stack, Heap, Garbage Collection. Security Promises of the JVM, Security Architecture and Security Policy. Class loaders and security aspects, sandbox model.

[T1,R2] [No. of Hrs.: 11]

UNIT II

UNIT 2
Java Fundamentals, Data Types & Literals Variables, Wrapper Classes, Array, Arithmetic Operators, Logical Operators, Control of Flow, Classes and Instances, Class Member Modifiers Anonymous Inner Class Interfaces and Abstract Classes, inheritance, throw and throws clauses, user defined Exceptions, The String Buffer Class, tokenizer, applets, Life cycle of applet and Security concerns.

[T1, T2] [No. of Hrs.: 2]

UNIT III

Threads: Creating Threads, Thread Priority, Blocked States, Extending Thread Class, Runnable Interface, Starting Threads, Thread Synchronization, Synchronize Threads, Sync Code Block, Overriding Synced Methods, Thread Communication, wait, notify and notifyAll, AWT Components, Component Class, Container Class, Layout Manager Interface Default Layouts, Insets and Dimensions, Border Layout, Flow Layout, Grid Layout, Card Layout, Grid Bag Layout, AWT Events, Event Models, Listeners, Class Listener, Adapters, Action Event Methods, Focus Event, Key Event, Mouse Events, Window Event.

[T2] [No. of Hrs.: 11]

UNIT IV

Input/Output Stream, Stream Filters, Buffered Streams, Data input and Output Stream, Print Stream Random Access File, JDBC (Database connectivity with MS-Access, Oracle, MS-SQL Server), Object serialization, Sockets, development of client Server applications, design of multithreaded server. Remote Method invocation, Java Native interfaces, Development of a JNI based application, Collection API Interfaces, Vector, stack, Hashtable classes, enumerations, set, List, Map, Iterators.

[TUR] [No. of Hrs.: 10]

ACCORDING TO NEW SYLLABUS (CIC-212)

UNIT - I

- Q.1** Refer to Q.1 (c) of First Term Examination 2015 (Pg. No. 2-2015).
Q.2 Refer to Q.2 (b) of First Term Examination 2015 (Pg. No. 4-2015).
Q.3 Refer to Q.4 (a) of First Term Examination 2015 (Pg. No. 8-2015).
Q.4 Refer to Q.1 (a),(b) of End Term Examination 2015 (Pg. No. 21,22-2015).
Q.5 Refer to Q.2 (b) of First Term Examination 2016 (Pg. No. 4-2016).
Q.6 Refer to Q.3(a) of First Term Examination 2016 (Pg. No. 8-2016).
Q.7 Refer to Q.7 (b)(i) of End Term Examination 2016 (Pg. No. 28-2016).
Q.8 Refer to Q.1 (a),(b) of First Term Examination 2017 (Pg. No. 1-2017).
Q.9 Refer to Q.3 of First Term Examination 2017 (Pg. No. 7-2017).
Q.10 Refer to Q.4 of First Term Examination 2017 (Pg. No. 8-2017).
Q.11 Refer to Q.1 (b) of First Term Examination 2018 (Pg. No. 1-2018).
Q.12 Refer to Q.1 (h),(j) of End Term Examination 2018 (Pg. No. 15-2018).
Q.13 Refer to Q.2 (a),(b) of End Term Examination 2018 (Pg. No. 16,17-2018).
Q.14 Refer to Q.3 (a) of End Term Examination 2018 (Pg. No. 18-2018).

UNIT - II

- Q.1** Refer to Q 1 (a),(b),(d),(e) of First Term Examination 2015 (Pg. No. 1,2,3-2015)
Q.2 Refer to Q 2 (a) of First Term Examination 2015 (Pg. No. 3-2015)
Q.3 Refer to Q 3 (a),(b),(c) of First Term Examination 2015 (Pg. No. 5,6,8-2015)
Q.4 Refer to Q 4 (b),(c) of First Term Examination 2015 (Pg. No. 9,10-2015)
Q.5 Refer to Q 1 (d) of Second Term Examination 2015 (Pg. No. 13-2015)
Q.6 Refer to Q 1 (c),(e) of End Term Examination 2015 (Pg. No. 23,25-2015)
Q.7 Refer to Q 2 (a) of End Term Examination 2015 (Pg. No. 25-2015)
Q.8 Refer to Q 3 (a) of End Term Examination 2015 (Pg. No. 28-2015)
Q.9 Refer to Q 6 of End Term Examination 2015 (Pg. No. 36-2015)
Q.10 Refer to Q 7 of End Term Examination 2015 (Pg. No. 37-2015)
Q.11 Refer to Q 1 (a),(b),(c),(d),(e) of First Term Exam 2016 (Pg. No. 1,2,3-2016)
Q.12 Refer to Q 2 (c) of First Term Examination 2016 (Pg. No. 5-2016)
Q.13 Refer to Q 3 (b),(c) of First Term Examination 2016 (Pg. No. 6,7-2016)
Q.14 Refer to Q 4 (c) of First Term Examination 2016 (Pg. No. 9-2016)
Q.15 Refer to Q 1 (a),(b),(c) of End Term Examination 2016 (Pg. No. 1,2-2016)
Q.16 Refer to Q 3 (b) of End Term Examination 2016 (Pg. No. 15-2016)
Q.17 Refer to Q 5 (a),(b),(c) of End Term Examination 2016 (Pg. No. 21,22,24-2016)
Q.18 Refer to Q 6 (a),(b) of End Term Examination 2016 (Pg. No. 26,27-2016)
Q.19 Refer to Q 7 (b)(ii) of End Term Examination 2016 (Pg. No. 29-2016)
Q.20 Refer to Q 1 (c),(e),(h),(i) of First Term Examination 2017 (Pg. No. 1,2,3-2017)
Q.21 Refer to Q 2 of First Term Examination 2017 (Pg. No. 4-2017)
Q.22 Refer to Q 4 of First Term Examination 2017 (Pg. No. 8-2017)
Q.23 Refer to Q 1 (b),(c),(d),(e) of End Term Exam 2017 (Pg. No. 10,11,12,13-2017)
Q.24 Refer to Q 4 (c) of End Term Examination 2017 (Pg. No. 23-2017)
Q.25 Refer to Q 5 (a),(c) of End Term Examination 2017 (Pg. No. 23,25-2017)
Q.26 Refer to Q 1 (a),(c),(d),(e) of First Term Examination 2018 (Pg. No. 1,2,3-2018)
Q.27 Refer to Q 2 (b),(c) of First Term Examination 2018 (Pg. No. 3,4-2018)
Q.28 Refer to Q 3 (a) of First Term Examination 2018 (Pg. No. 6-2018)
Q.29 Refer to Q 4 (a),(b),(c) of First Term Examination 2018 (Pg. No. 7,8,9-2018)
Q.30 Refer to Q 1 (a),(c),(d),(e),(f),(i) of First Term Exam 2018 (Pg. No. 10 to 15 2018)
Q.31 Refer to Q 4 (a),(b) of End Term Examination 2018 (Pg. No. 19,20-2018)

UNIT - III

- Q.1** Refer to Q.1 (e) of Second Term Examination 2015 (Pg. No. 13-2015).
Q.2 Refer to Q.2 (a),(c) of Second Term Examination 2015 (Pg. No. 14-2015).
Q.3 Refer to Q.3 (a),(c) of Second Term Examination 2015 (Pg. No. 15,16-2015).
Q.4 Refer to Q.1 (c) of End Term Examination 2015 (Pg. No. 23-2015).
Q.5 Refer to Q.5 of End Term Examination 2015 (Pg. No. 32-2015).
Q.6 Refer to Q.8 (b) of End Term Examination 2016 (Pg. No. 39-2015).
Q.7 Refer to Q.1 (d) of End Term Examination 2016 (Pg. No. 13-2016).
Q.8 Refer to Q.2 (b) of End Term Examination 2016 (Pg. No. 15-2016).
Q.9 Refer to Q.4 (a),(b) of End Term Examination 2016 (Pg. No. 17,19-2016).
Q.10 Refer to Q.7 (a) of End Term Examination 2016 (Pg. No. 28-2016).
Q.11 Refer to Q.7 (b)(iii) of End Term Examination 2016 (Pg. No. 31-2016).
Q.12 Refer to Q.2 (a),(b) of End Term Examination 2017 (Pg. No. 14,16-2017).
Q.13 Refer to Q.4 (a) of End Term Examination 2017 (Pg. No. 20-2017).
Q.14 Refer to Q.5 (b) of End Term Examination 2017 (Pg. No. 24-2017).
Q.15 Refer to Q.6 (a),(b) of End Term Examination 2017 (Pg. No. 26-2017).
Q.16 Refer to Q.7 (a) of End Term Examination 2017 (Pg. No. 28-2017).
Q.17 Refer to Q.1 (b) of End Term Examination 2018 (Pg. No. 12-2018).
Q.18 Refer to Q.6 (a) of End Term Examination 2018 (Pg. No. 23-2018).
Q.19 Refer to Q.7 (b) of End Term Examination 2018 (Pg. No. 25-2018).
Q.20 Refer to Q.9 (b) of End Term Examination 2018 (Pg. No. 31-2018).

UNIT - IV

- Q.1** Refer to Q.1 (a),(b),(c) of Second Term Examination 2015 (Pg. No. 11,12-2015).
Q.2 Refer to Q.3 (b) of Second Term Examination 2015 (Pg. No. 15-2015).
Q.3 Refer to Q.4 (a)(i),(iii) of Second Term Examination 2015 (Pg. No. 18,19-2015).
Q.4 Refer to Q.4 (b) of Second Term Examination 2016 (Pg. No. 19-2015).
Q.5 Refer to Q.1 (e) of End Term Examination 2015 (Pg. No. 25-2015).
Q.6 Refer to Q.2 (b) of End Term Examination 2015 (Pg. No. 27-2015).
Q.7 Refer to Q.4 (a),(b) of End Term Examination 2015 (Pg. No. 30,31-2015).
Q.8 Refer to Q.8 (a) of End Term Examination 2015 (Pg. No. 39-2015).
Q.9 Refer to Q.2 (a) of First Term Examination 2016 (Pg. No. 3-2016).
Q.10 Refer to Q.1 (e) of First Term Examination 2016 (Pg. No. 14-2016).
Q.11 Refer to Q.2 (a) of End Term Examination 2016 (Pg. No. 14-2016).
Q.12 Refer to Q.3 (a) of End Term Examination 2016 (Pg. No. 15-2016).
Q.13 Refer to Q.7 (b)(iv) of End Term Examination 2016 (Pg. No. 32-2016).
Q.14 Refer to Q.1 (e) of End Term Examination 2017 (Pg. No. 13-2017).
Q.15 Refer to Q.3 (a),(b) of End Term Examination 2017 (Pg. No. 17,18,19-2017).
Q.16 Refer to Q.4 (b) of End Term Examination 2017 (Pg. No. 22-2017).
Q.17 Refer to Q.7 (b) of End Term Examination 2017 (Pg. No. 29-2017).
Q.18 Refer to Q.8 (a) of End Term Examination 2017 (Pg. No. 30-2017).
Q.19 Refer to Q.7 (a) of End Term Examination 2018 (Pg. No. 25-2018).
Q.20 Refer to Q.8 (a),(b) of End Term Examination 2018 (Pg. No. 27-2018).
Q.21 Refer to Q.9 (a) of End Term Examination 2018 (Pg. No. 29-2018).

FIRST TERM EXAMINATION [SEPT. 2015]

FIFTH SEMESTER [B.TECH]

JAVA PROGRAMMING [ETCS-307]

Time: 1.5 Hours

M.M.: 30

*Note: Q No.1 is compulsory. Attempt any two from the remaining three questions.***Q.1. (a) What is method overriding in java?****Ans. Method Overriding in Java:** If subclass (child class) has the same method as declared in the parent class, it is known as **method overriding in java**.In other words, if subclass provides the specific implementation of the method that has been provided by one of its parent class, it is known as **method overriding**.**Usage of java method overriding:**

• Method overriding is used to provide specific implementation of a method that is already provided by its super class.

• Method overriding is used for runtime polymorphism.

Example:

One of the simplest example – Here Boy class extends Human class. Both the classes have a common method void eat(). Boy class is giving its own implementation to the eat() method or in other words it is overriding the method eat().

```
class Human{
    public void eat(){
        System.out.println("Human is eating");
    }
}

class Boy extends Human{
    public void eat(){
        System.out.println("Boy is eating");
    }

    public static void main( String args[] ) {
        Boy obj = new Boy();
        obj.eat();
    }
}
```

Output:

Boy is eating

Q.1. (b) Difference between abstract class and interface?

(2)

Ans.

Abstract Classes	Interfaces
1. Abstract class can extend only one class or one abstract class at a time	Interface can extend any number of interfaces at a time
2. Abstract class can extend from a class or from an abstract class	Interface can extend only from an interface
3. Abstract class can have both abstract and concrete methods	Interface can have only abstract methods

4. A class can extend only one abstract class.
5. In abstract class keyword 'abstract' is mandatory to declare a method as an abstract
6. Abstract class can have protected, public and public abstract methods

A class can implement any number of interfaces

In an interface keyword 'abstract' is optional to declare a method as an abstract

Interface can have only public abstract methods i.e by default

Q 1. (c) What is java sandbox model?

Ans. A security measure in the Java development environment. The sandbox is a set of rules that are when creating an applet that prevents certain functions when the applet is sent as part of a Web page. When a browser requests a Web page with applets, the applets are sent automatically and can be executed as soon as the page arrives in the browser. If the applet is allowed unlimited access to memory and operating system resources, it can do harm in the hands of someone with malicious intent. The sandbox creates an environment in which there are strict limitations on what system resources the applet can request or access. Sandboxes are used when executable code comes from unknown or untrusted sources and allow the user to run untrusted code safely.

The Java sandbox relies on a three-tiered defense. If any one of these three elements fails, the security model is completely compromised and vulnerable to attack.

- Byte code verifier
- applet class loader
- security manager

Q 1. (d) Can we initialize final static variable inside the constructor? Explain

Ans. No, we can not initialize final static variable inside constructor.

Static final variables cannot be assigned value in constructor; they must be assigned a value with their declaration. Non-static final variables can be assigned a value either in constructor or with the declaration.

```
public class A {
    private static final int x;
    public A() {
        x = 5;
    }
}
```

Final means the variable can only be assigned once (in the constructor).
Static means it's a class instance.

A constructor will be called each time an instance of the class is created. Thus, the above code means that the value of x will be re-initialized each time an instance is created. But because the variable is declared final (and static), you can only do this

```
class A {
    private static final int x;
    static {
        x = 5;
    }
}
```

But, if you remove static, you are allowed to do this:

```
class A {
    private final int x;
    public A() {
        x = 5;
    }
}
```

Q 1. (e) What is the purpose of using Wrapper classes?

Ans. A wrapper class is defined as a class in which a primitive value is wrapped up. These primitive wrapper classes are used to represent primitive data type values as objects. The Java platform provides wrapper classes for each of the primitive data types. For example, Integer wrapper class holds primitive 'int' data type value. Similarly, Float wrapper class contains 'float' primitive values, Character wrapper class holds a 'char' type value, and Boolean wrapper class represents 'boolean' value.

```
int i = 26; // Primitive data type 'int'
// Integer Wrapper class instantiation
Integer i_Obj = new Integer(i);
// Unwrapping primitive data 'int' from wrapper object
int i2 = i_Obj.intValue();
```

Q 2. (a) Explain Various uses of final keyword with example. (2)

Ans. Final keyword in Java has three different uses: create constants, prevent inheritance and prevent methods from being overridden. Following is a list of uses of final keyword.

1. Using final to define constants: If you want to make a local variable, class variable (static field), or instance variable (non-static field) constant, declare it final. A final variable may only be assigned to once and its value will not change and can help avoid programming errors.

Once a final variable has been assigned, it always contains the same value.

```
1. class Bike9{
2.     final int speedlimit=90;//final variable
3.     void run(){
4.         speedlimit=400;
5.     }
6.     public static void main(String args[]){
7.         Bike9 obj=new Bike9();
8.         obj.run();
9.     }
10. } //end of class
```

Output: Compile Time Error

2. Using final to prevent inheritance: If you find a class's definition is complete, and you don't want it to be sub-classed, declare it final. A final class cannot be inherited, therefore, it will be a compile-time error if the name of a final class appears in the extends clause of another class declaration; this implies that a final class cannot have any subclasses.

It is a compile-time error if a class is declared both final and abstract, because the implementation of such a class could never be completed.

```
final class XYZ{
}
class ABC extends XYZ{
    void demo(){}
}
```

```

System.out.println("My Method");

public static void main(String args[])
{
    ABC obj = new ABC();
    obj.demo();
}

```

Output:

The type ABC cannot subclass the final class XYZ

3. Using final to prevent overriding: When a class is extended by other classes, its methods can be overridden for reuse. There may be circumstances when you want to prevent a particular method from being overridden, in that case, declare that method final. Methods declared as final cannot be overridden.

```

class XYZ{
    final void demo(){
        System.out.println("XYZ Class Method");
    }
}

```

```

class ABC extends XYZ{
    void demo(){
        System.out.println("ABC Class Method");
    }

    public static void main(String args[]){
        ABC obj = new ABC();
        obj.demo();
    }
}


```

The above program would throw a compilation error.

Q.2. (b) What is JVM and class loader architecture?

(3)

Ans. A Java virtual machine (JVM) is an abstract computing machine. There are three notions of the JVM: specification, implementation, and instance. The specification

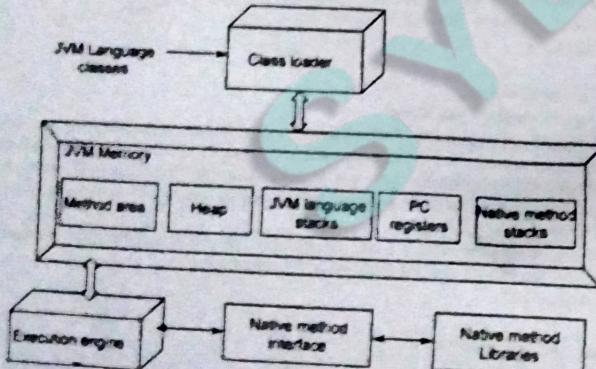

is a book that formally describes what is required of a JVM implementation. Having a single specification ensures all implementations are interoperable. A JVM implementation is a computer program that meets the requirements of the JVM specification in a compliant and preferably performance manner. An instance of the JVM is a process that executes a computer program compiled into Java bytecode.

Class loader architecture: Java ClassLoader loads a java class file into java virtual machine. It is as simple as that. It is not a huge complicated concept to learn and every java developer must know about the java class loaders and how it works.

Like NullPointerException, one exception that is very popular is ClassNotFoundException. At least in your beginner stage you might have got ample number of ClassNotFoundException. Java class loader is the culprit that is causing this exception.


Types (Hierarchy) of Java Class Loaders.

Java class loaders can be broadly classified into below categories:

- **Bootstrap Class Loader:** Bootstrap class loader loads Java's core classes like java.lang, java.util etc. These are classes that are part of java runtime environment. Bootstrap class loader is native implementation and so they may differ across different JVMs.

- **Extensions Class Loader:** JAVA_HOME/jre/lib/ext contains jar packages that are extensions of standard core java classes. Extensions class loader loads classes from this ext folder. Using the system environment property java.ext.dirs you can add 'ext' folders and jar files to be loaded using extensions class loader.

- **System Class Loader:** Java classes that are available in the java classpath are loaded using System class loader.

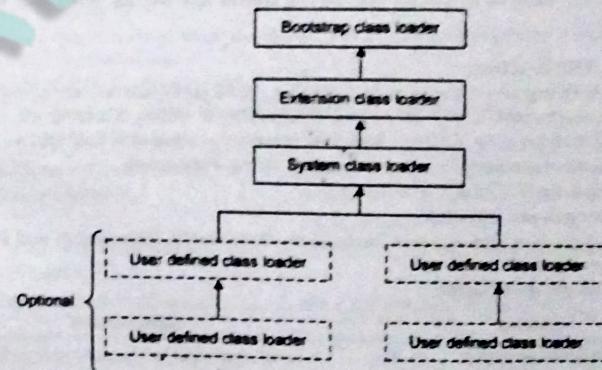

Class loader architecture

Q.2. (c) How exception handing is done in java? Explain use of throw, throws, try, catch, finally.

(5)

Ans. Refer Q.2. (a) of End Term Examination 2015

Q.3. (a) What is type conversion? Explain implicit and explicit conversion example.

(2)

Ans. Changing a value from one data type to another type is known as data type conversion. Data type conversions are either widening or narrowing. It depends on the data capacities of the data types involved. There are different ways of, implicitly or explicitly, changing an entity of one data type into another data type.

An important consideration with a type conversion is whether the result of the conversion is within the range of the destination data type.

Widening Conversion: If a value of narrower (lower size) data type converted to a value of a broader (higher size) data type without loss of information, is called Widening conversion. This is done implicitly by the JVM and also known as implicit casting. For example an integer data type is directly converted to a double.

```
int a = 100;
double b = a;
System.out.println(b);

byte -> short -> int -> long -> float -> double
                                         Widening
```

Narrowing Conversion

If a value of broader (higher size) data type converted to a value of a narrower (lower size) data type which can result in loss of information, is called Narrowing conversion. For example double data type explicitly converted into integer

```
double a = 100.7;
int b = (int) a;
System.out.println(b);

double -> float -> long -> int -> short -> byte
                                         Narrowing
```

Q. 1. (b) Explain uses of String, String Buffer and String Tokenizer with example
(3)

Ans. USE of String:

Java String provides a lot of concepts that can be performed on a string such as compare, concat, equals, split, length, replace, compareTo, intern, substring etc. In java, string is basically an object that represents sequence of char values. An array of characters works same as java string. For example:

1. `char[] ch={'J','a','V','e','Y','P','o','T','n','Y'};`
2. `String s=new String(ch);`

The `java.lang.String` class implements `Serializable`, `Comparable` and `CharSequence` interfaces.

Java String class methods

Method	Description
<code>char charAt (int index)</code>	returns char value for the particular index
<code>int length()</code>	returns string length
<code>static String format (String format, Object ... args)</code>	returns formatted string
<code>static String format(Locale l, String format, Object ... args)</code>	returns formatted string with given locale
<code>String substring (int beginIndex)</code>	returns substring for given begin index
<code>String substring (int beginIndex, int endIndex)</code>	returns substring for given begin index and end index

String Buffer class: `StringBuffer` class is used to create a mutable string object. A string that can be modified or changed is known as mutable string. `StringBuffer` and

`StringBuilder` classes are used for creating mutable string. It represents growable and writable character sequence. So if we do a lot of changes with `String` objects, we will end up with a lot of memory leak.

Important methods of `StringBuffer` class

1. `Public synchronized StringBuffer append(String s):` Is used to append the specified string with this string. The `append()` method is overloaded like `append(char)`, `append(boolean)`, `append(int)`, `append(float)`, `append(double)` etc.

2. `Public synchronized StringBuffer insert(int offset, String s):` Is used to insert the specified string with this string at the specified position. The `insert()` method is overloaded like `insert(int, char)`, `insert(int, boolean)`, `insert(int, int)`, `insert(int, float)`, `insert(int, double)` etc.

3. `Public synchronized StringBuffer replace(int startIndex, int endIndex, String str):` Is used to replace the string from specified startIndex and endIndex.

4. `Public synchronized StringBuffer delete(int startIndex, int endIndex):` Is used to delete the string from specified startIndex and endIndex.

```
class A{
    public static void main(String args[]){
        StringBuffer sb=new StringBuffer("Hello ");
        sb.append("Java");//now original string is changed
        System.out.println(sb);//prints Hello Java
    }
}
```

String Tokenizer in Java:

The `java.util.StringTokenizer` class allows you to break a string into tokens. It is simple way to break string.

Methods of StringTokenizer class

The 6 useful methods of `StringTokenizer` class are as follows:

Public method	Description
<code>Boolean hasMoreTokens()</code>	Checks if there is more tokens available.
<code>String nextToken()</code>	returns the next token from the string token Tokenizer object.
<code>String nextToken (string delim)</code>	returns the next token based on delimiter
<code>Example:</code>	
<code>Boolean hasMoreElements()</code>	Same as <code>hasMoreToken()</code> method.

```
package com.myjava.stokenizer;
import java.util.StringTokenizer;
public class MyStringTokens {
    public static void main(String a[]){
        String msg = "http://10.123.43.57:80/";
        StringTokenizer st = new StringTokenizer(msg,"://.");
        while(st.hasMoreTokens()){
            System.out.println(st.nextToken());
        }
    }
}
```

Q.3. (c) How applet is different from java application? Explain Applet life cycle with example.

Ans.

Applet	Application
Small Program	Large Program
Used to run a program on client Browser	Can be executed on stand alone computer system
Applet is portable and can be executed by supported browser.	Need JDK, JRE, JVM installed on JAVA client machine
Applet applications are executed in a Restricted Environment	Application can access all the resources of the computer
Applets are created by extending the java.applet.Applet	Applications are created by writing public static void main(String[] S) method.
Applet application has 5 methods which will be automatically invoked on occurrence of specific event	Application has a single start point which is main methods

Example:

```
import java.awt.*;
import java.applet.*;
Public class MyClass extends Applet
{
    public void init(){}
    public void start(){}
    public void stop(){}
    public void destroy(){}
    public void paint(Graphics g){}
}
```

Q. 4. (a) What is byte code and explain class file format?

Ans. Java class file format: Compiled Java is typically distributed in a very compact format called Class files. It is the assembler code for a virtual stack-oriented Java-friendly CPU (Central Processing Unit) chip. Such chips do exist, but most of the time they are simulated with interpreters, JIT (Just In Time), Hotspots or AOT (Ahead Of Time) compilation on the target machines which have quite different architectures.

Class files are usually compressed and bundled into jar files.


Each class file is marked with a class file format version, which lets you know which JDK (Java Development Kit) it was compiled for. At offset 6 in the class file is a big-endian short that gives the major version number. You can display for the classes is in a jar with JarCheck.

A java class file is a file (with the class filename extension) containing Java bytecode that can be executed on the Virtual Machine (JVM). A Java class file is produced by a Java compiler from Java programming language sources files (java files) containing Java classes. If a source file has more than one class, each class is compiled into a separate class file.

JVMs are available for many platforms, and a class file compiled on one platform will execute on a JVM of another platform. This makes Java platform-independent.

BYTE CODE: Bytecode is nothing but the intermediate representation of Java source code which is produced by the Java compiler by compiling that source code. This byte code is a machine independent code. It is not an completely a compiled code

but it is an intermediate code somewhere in the middle which is later interpreted and executed by JVM. Bytecode is a machine code for JVM. But the machine code is platform specific whereas bytecode is platform independent that is the main difference between them. It is stored in class file which is created after compiling the source code. Most developers although have never seen byte code (nor have ever wanted to see it!) One way to view the byte code is to compile your class and then open the .class file in a hex editor and translate the bytecodes by referring to the virtual machine specification.

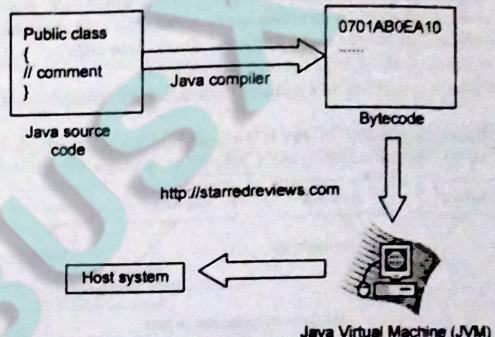

Q. 4. (b) What is inner class explain with example?

Ans. Inner Class: Creating an inner class is quite simple. You just need to write a class within a class. Unlike a class, an inner class can be private and once you declare an inner class private, it cannot be accessed from an object outside the class.

Given below is the program to create an inner class and access it. In the given example, we make the inner class private and access the class through a method.


```
class Outer_Demo{
    int num;
    //inner class
    private class Inner_Demo{
        public void print(){
            System.out.println("This is an inner class");
        }
    }
    //Accessing the inner class from the method within
    void display_Inner(){
        Inner_Demo inner = new Inner_Demo();
        inner.print();
    }
}
public class My_class{
    public static void main(String args[]){
        //Instantiating the outer class
        Outer_Demo outer = new Outer_Demo();
        //Accessing the display_Inner() method.
        outer.display_Inner();
    }
}
```

If you compile and execute the above program, you will get the following result.
This is an inner class.

Advantage of java inner classes: There are basically three advantages of inner classes in java. They are as follows:

1. Nested classes represent a special type of relationship that is it can access all the members (data members and methods) of outer class including private.
2. Nested classes are used to develop more readable and maintainable code because it logically group classes and interfaces in one place only.
3. Code Optimization: It requires less code to write.
- Q. 4. (c) Write a program to explain how multiple inheritance is done in java? (5)

Ans. Multiple inheritance in Java: If a class implements multiple interfaces, or an interface extends multiple interfaces i.e. known as multiple inheritance.

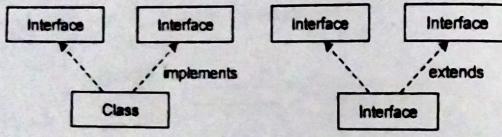

Multiple Inheritance in java

To reduce the complexity and simplify the language, multiple inheritance is not supported in java in terms of classes. Consider a scenario where A, B and C are three classes. The C class inherits A and B classes. If A and B classes have same method and you call it from child class object, there will be ambiguity to call method of A or B class.

Since compile time errors are better than runtime errors, java renders compile time error if you inherit 2 classes. So whether you have same method or different, there will be compile time error now.

Java's alternative to multiple inheritance - interfaces

```

1. interface Printable{
2. void print();
3.
4.
5. interface Showable{
6. void show();
7.
8.
9. class A7 implements Printable,Showable{
10.
11. public void print(){System.out.println("Hello");}
12. public void show(){System.out.println("Welcome");}
13.
14. public static void main(String args[]){
15. A7 obj = new A7();
16. obj.print();
17. obj.show();
18.
19. }
  
```

Output:
Hello
Welcome

SECOND TERM EXAMINATION [NOV. 2015]

FIFTH SEMESTER [B.TECH]

JAVA PROGRAMMING [ETCS-307]

M.M. : 30

Time. 1.5 Hours

Note: Attempt 3 questions in total. Question 1 is compulsory. Attempt any two the remaining 3 questions.

Q.1. (a) What is a Vector class? Explain with example. (5 x 2 = 10)

Ans. Vector class implements a growable array of objects. Like an array, it contains the components that can be accessed using an integer index. However, the size of a vector can grow or shrink as needed to accommodate adding and removing items after the vector has been created. Each vector tries to optimize storage management by maintaining a capacity and a capacity increment.

eg.

```

import Java. wil.*;
class test vector {
public static void main (strting args []){
vector < string> v = new vector <string> ();
vector add ("suresh");
vector add Element ("vinesh");
vector add Element ("kumar");
Enumeration e = Vector elements ();
while (e. has more elements ())
{
System.out.println (e. next element ());
}
}
  
```

Q.1. (b) Explain socket programming. (2)

Ans. **Socket Programming:** Sockets provide the communication mechanism between two computers using TCP. A client program creates a socket on its end of the communication and attempts to connect that socket to a server.

The following steps occur when establishing a TCP connection between two computers using sockets:

- The server instantiates a ServerSocket object, denoting which port number communication is to occur on.
- The server invokes the accept() method of the ServerSocket class. This method waits until a client connects to the server on the given port.
- After the server is waiting, a client instantiates a Socket object, specifying the server name and port number to connect to.
- The constructor of the Socket class attempts to connect the client to the specified server and port number. If communication is established, the client now has a Socket object capable of communicating with the server.

- On the server side, the `accept()` method returns a reference to a new socket on the server that is connected to the client's socket.

An example program illustrating creation of a server socket, waiting for client request, and then responding to a client that requested for connection by greeting it is given below:

```
// SimpleServer.Java: A simple server program.

import java.net.*;
import java.io.*;

public class SimpleServer {
    public static void main(String args[]) throws IOException {
        // Register service on port 1254
        ServerSocket s = new ServerSocket(1254);
        Socket s1 = s.accept(); // Wait and accept a connection
        // Get a communication stream associated with the socket
        OutputStream sout = s1.getOutputStream();
        DataOutputStream dos = new DataOutputStream(sout);
        // Send a string!
        dos.writeUTF("Hi there");
        // Close the connection, but not the server socket
        dos.close();
        sout.close();
        s1.close();
    }
}
```

```
// SimpleClient.Java: A simple client program.

import java.net.*;
import java.io.*;

public class SimpleClient {
    public static void main(String args[]) throws IOException {
        // Open your connection to a server, at port 1254
        Socket s1 = new Socket("localhost", 1254);
        // Get an input file handle from the socket and read the input
        InputStream s1In = s1.getInputStream();
        DataInputStream dis = new DataInputStream(s1In);
        String st = new String(dis.readUTF());
        System.out.print(st);
        // When done, just close the connection and exit
        dis.close();
        s1In.close();
        s1.close();
    }
}
```


Q.1. (c) Explain different types of classes under `java.io` package.

Ans. IO Stream: Java performs I/O through Streams. A Stream is linked to a physical layer by Java I/O system to make input and output operation in Java. In general, output without having every part of your code understand the physical.


Java encapsulates Stream under `java.io` package. Java defines two types of streams. They are,

- Byte Stream :** It provides a convenient means for handling input and output of byte.
- Character Stream :** It provides a convenient means for handling input and output of characters. Character stream uses Unicode and therefore can be internationalized.

(c) Different types of classes under `java.io` package.

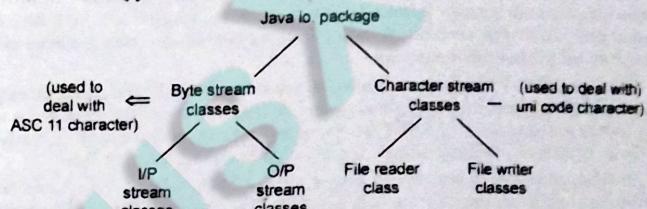

Input stream and output stream classes are further classified as following:

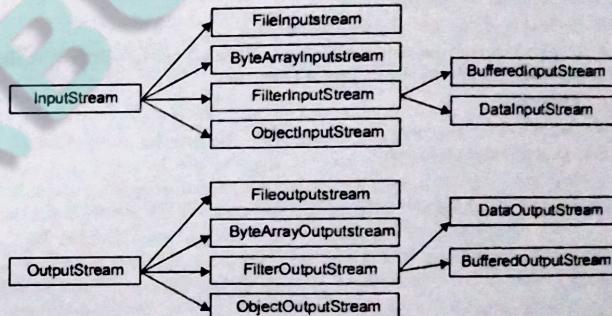

Q.1. (d) What are iterators?

(2)

Ans. When the for-each loop is not available, and an explicit Iterator is needed, then iteration over a collection may be done with a while loop or a for loop.

The two styles have different advantages:

- the while loop is considerably more legible
- the for loop minimizes the scope of the Iterator to the loop itself

Q.1. (e) What is the use of synchronized block?

(2)

Ans. Synchronized block is used to perform synchronization on any specific resource of the method. If you put all the codes of the method in the synchronized block, it will work the same as the synchronized method.

Synchronized block is used to lock an object if any shared resource.

Scope of synchronized block is smaller than the method.

Syntax:

Synchronized (object reference expression)

```

|
//code
|
```

Q.2. (a) Differentiate between java.awt and javax.swing package

Ans. Main Differences between Swing and AWT.

Swing components are light-weight as compared to AWT components for the reason that they don't make use of the native UI components of the underlying platform.

Swing components have been written completely in java language. Not the same with AWT as it uses native libraries.

Swing components use relatively less number of classes as compared to AWT components not only because it doesn't depend on native code, but also because it has a better design due to its evolution from AWT. Most of the design flaws got fixed which ultimately led to lesser redundancies.

The look and feel of the Swing components is defined only by the Swing extension classes and it's pluggable to have the look and feel of the underlying platform as whereas the look and feel of the AWT components is mostly governed by the underlying platform. By default, Swing components open up in their own look and feel.

Swing extension is completely based on the MVC (Model View Controller) architecture and hence the inherent benefits of the MVC design pattern add more to the usage of Swing.

Q. 2. (b) Explain thread life cycle?

Ans. Refer Q.5. of End Term Examination-2015.

Q.2. (c) Write a program using multithreading where in 3 different objects will run in parallel, to print the tables of three nos

Ans. Program:

```
Class Table {
    synchronized void print (int n)
    {
        for (int i = 1; i <= 10; i++)
        {
            System.out.println (n + i);
            try
            {
                Thread.sleep (400);
            }
            catch (Exception e)
            {}
        }
    }
}

Class Thread 1 extends Thread {
    Table t;
    Thread 1 (Table t)
    {
        this.t = t;
    }
    Public void run ()
    {
        t.print (5);
    }
}
```

```
class Thread2 extends Thread {
    Table t;
    Thread 2 (Table t)
    {
        this.t = t;
    }
    public void run ()
    {
        t.print (10);
    }
}
```

Q.3. (a) Differentiate between Get request method and Post method? (2)

Ans. The GET request is made by a client to read resources that is HTML documents and images currently residing at the webserver.

In GET, entire form submission can be encapsulated in one url like hyperlink. All data we are passing to the server will be displayed in the request String.

Query length is limited to 260 characters. Not secure faster, quick and easy.

POST, on the forwards sending large amount of information (Possibly mega bytes) to the server only once. Hence a POST request is literally a post.

In POST, your name or data value pairs inside the body of the HTTP request which makes the cleaner url. All data we are passing through the server will be hidden. user cannot see this information.

Q.3. (b) What are the different JSP implicit objects. Explain? (3)

Ans. JSP Implicit Objects are the Java objects that the JSP Container makes available to developers in each page and developer can call them directly without being explicitly declared. JSP Implicit Objects are also called pre-defined variables.

JSP supports nine Implicit Objects which are listed below:

The Request Object: The request object is an instance of a javax.servlet.http.HttpServlet Request object. Each time a client requests a page the JSP engine creates a new object to represent that request.

The request object provides methods to get HTTP header information including form data, cookies, HTTP methods etc.

The Response Object: The response object is an instance of a javax.servlet.http.HttpServletResponse object. Just as the server creates the request object, it also creates an object to represent the response to the client.

The Out Object: The out implicit object is an instance of a javax.servlet.jsp.JspWriter object and is used to send content in a response.

The initial Jsp Writer object is instantiated differently depending on whether the page is buffered or not. Buffering can be easily turned off by using the buffered='false' attribute of the page directive.

The Session Object: The session object is an instance of javax.servlet.http.HttpSession and behaves exactly the same way that session objects behave under Java Servlets.

The Config Object: The config object is an instantiation of javax.servlet.ServletConfig and is a direct wrapper around the Servlet Config object for the generated servlet.

The Page Object: This object is an actual reference to the instance of the page. It can be thought of as an object that represents the entire JSP page.


Q.3. (e) What is event delegation model and Write a program to create a simple calculator having four basic operations (Add, Subtract, Multiply, Divide) using swing package and event handing.

Ans. Java's delegation event model

The event model is based on the Event Source and Event Listeners. Event Listener is an object that receives the messages / events. The Event Source is any object which creates the message / event. The Event Delegation model is based on – The Event Classes, The Event Listeners, Event Objects.

There are three participants in event delegation model in Java;

- Event Source – The class which broadcasts the events
- Event Listeners – The classes which receive notifications of events
- Event Object – The class object which describes the event.

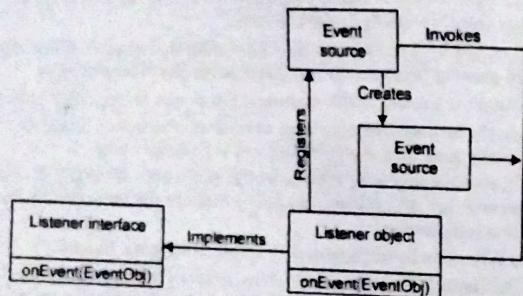

Program to create simple calculator with add, sub, mul and div operation:

```

import java.awt.BorderLayout;
import java.awt.Container;
import java.awt.GridLayout;
import java.awt.event.ActionEvent;
import java.awt.event.ActionListener;
import java.awt.event.WindowAdapter;
import java.awt.event.WindowEvent;
import javax.swing.JButton;
import javax.swing.JFrame;
import javax.swing.JPanel;
import javax.swing.JTextField;
public class Calculator extends JPanel implements ActionListener {
    private JTextField display = new JTextField("0");
    private double result = 0;
    private String operator = "=";
    private boolean calculating = true;
    public Calculator() {
        setLayout(new BorderLayout());
  
```

```

    display.setEditable(false);
    add(display, "North");
    JPanel panel = new JPanel();
    panel.setLayout(new GridLayout(4, 4));
    String buttonLabels = "789/456*123-0.=+";
    for (int i = 0; i < buttonLabels.length(); i++) {
        JButton b = new JButton(buttonLabels.substring(i, i + 1));
        panel.add(b);
        b.addActionListener(this);
    }
    add(panel, "Center");
}

public void actionPerformed(ActionEvent evt) {
    String cmd = evt.getActionCommand();
    if ('0' <= cmd.charAt(0) && cmd.charAt(0) <= '9' || cmd.equals(".")) {
        if (calculating)
            display.setText(cmd);
        else
            display.setText(display.getText() + cmd);
        calculating = false;
    } else {
        if (calculating) {
            if (cmd.equals("-")) {
                display.setText(cmd);
                calculating = false;
            } else
                operator = cmd;
        } else {
            double x = Double.parseDouble(display.getText());
            calculate(x);
            operator = cmd;
            calculating = true;
        }
    }
}

private void calculate(double n) {
    if (operator.equals("+"))
        result += n;
    else if (operator.equals("-"))
        result -= n;
    else if (operator.equals("*"))
        result *= n;
    else if (operator.equals("/"))
        result /= n;
}
  
```


```

        result *= n;
    else if (operator.equals("/"))
        result /= n;
    else if (operator.equals("*"))
        result *= n;
    display.setText(display.getText() + result);
}

public static void main(String[] args) {
    JFrame.setDefaultLookAndFeelDecorated(true);
    JFrame frame = new JFrame();
    frame.setTitle("Calculator");
    frame.setSize(200, 200);
    frame.addWindowListener(new WindowAdapter() {
        public void windowClosing(WindowEvent e) {
            System.exit(0);
        }
    });
    Container contentPane = frame.getContentPane();
    contentPane.add(new Calculator());
    frame.show();
}

```

Output:

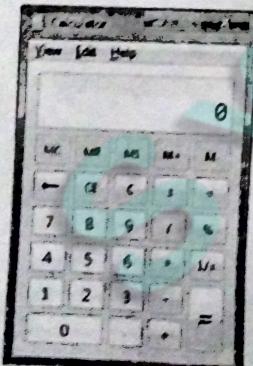**Q.4. (a) (i) Layout Manager**

Ans. The various Layout manager are the following

- Flow Layout
- Grid Layout
- Border Layout
- Card Layout

(3)

Flow Layout: Flow Layout is the default Layout manager. Flow Layout implements a simple layout style, which is similar to how words flow in a text editor.

Border Layout: It has narrow, fixed-width components at the edges and one large once in the center. The four sides one referred to as north, south, east and west. The middle area is called the center.

Grid Layout: Grid Layout lays out components in a two-dimensional grid.

Card Layout: The Card Layout class is unique among the other layout managers in that it stores several different layouts.

Q.4. (a) (ii) JDBC

Ans. Refer Q.4. (a) of End Term Examination-2015.

Q.4. (a) (iii) RMI

Ans. The RMI (Remote Method Invocation) is an API that provides a mechanism to create distributed application in java. The RMI allows an object to invoke methods on an object running in another JVM.

The RMI provides remote communication between the application using two objects stub and skeleton.

RMI uses stub and skeleton object for communication with the remote object.

A remote object is an object whose method can be invoked from another JVM.

Stub: The stub is an object, acts as a gateway for the client side. All the outgoing requests are routed through it. It resides at the client side and represents the remote object.

Skeleton: The skeleton is an object, act as a gateway for the server side objects. All the incoming requests are routed through it.

Steps to write the RMI program

These are 6 steps to write the RMI program.

1. Create the remote interface
2. Provide the implementation of the remote interface
3. Compile the implementation class and create the stub and skeleton objects using the rmic tool

4. Start the registry service by rmiregistry tool

5. Create and start the remote application

6. Create and start the client application.

Q.4. (b) Write a program to read and print contents of file

Ans. In the following program, we read a file called "temp.txt" and output the file line by line on the console.

```
import java.io.*;
```

```
public class Test {
    public static void main(String [] args) {
```

```
        // The name of the file to open.
```

```
        String fileName = "temp.txt";
```

```
        // This will reference one line at a time
```

```
        String line = null;
```

```

try {
    // FileReader reads text files in the default encoding
    FileReader fileReader =
        new FileReader(fileName);
    // Always wrap FileReader in BufferedReader.
    BufferedReader bufferedReader =
        new BufferedReader(fileReader);
    String line = bufferedReader.readLine();
    while(line = bufferedReader.readLine() != null) {
        System.out.println(line);
    }
    // Always close files.
    bufferedReader.close();
}

catch(FileNotFoundException ex) {
    System.out.println(
        "Unable to open file " +
        fileName + "");
}

catch(IOException ex) {
    System.out.println(
        "Error reading file " +
        fileName + "");
    // Or we could just do this:
    // ex.printStackTrace();
}
}

```

END TERM EXAMINATION [DEC. 2015]

FIFTH SEMESTER [B.TECH]

JAVA PROGRAMMING [ETCS-307]

M.M.: 75

Time: 3 Hours**Note: Q No. 1 is compulsory and any five questions from remaining.****Q.1. (a) Define the characteristics of Java.**

(6)

Ans. Characteristics of Java: There is given many features of java. They are also known as java buzzwords. The Java Features given below are simple and easy to understand.

1. Simple
2. Object-Oriented
3. Platform independent
4. Secured
5. Robust
6. Portable
7. Dynamic
8. Interpreted
9. Multithreaded
10. Distributed

Simple :

- Java is Easy to write and more readable and eye catching.
- Java has a concise, cohesive set of features that makes it easy to learn and use.
- Most of the concepts are drew from C++ thus making Java learning simpler.

Object-oriented

Object-oriented means we organize our software as a combination of different types of objects that incorporates both data and behaviour.

Object-oriented programming (OOPs) is a methodology that simplify software development and maintenance by providing some rules.

Object Oriented Programming Language must have the following characteristics.

- (1) Encapsulation
- (2) Polymorphism
- (3) Inheritance
- (4) Abstraction

Platform-Independent: Java Language is platform-independent due to its hardware and software environment. Java code can be run on multiple platforms e.g. windows, Linux, sun Solaris, MacOs etc. Java code is compiled by the compiler and converted into byte code. This byte code is a platform independent code because it can be run on multiple platforms i.e. Write Once and Run Anywhere(WORA).

Secure:

- Java program cannot harm other system thus making it secure.
- Java provides a secure means of creating Internet applications.
- Java provides secure way to access web applications.

Java is secured because:

- No explicit pointer
- Programs run inside virtual machine sandbox.

Robust: Java was created as a strongly typed language. Data type issues and problems are resolved at compile-time, and implicit casts of a variable from one type to another are not allowed.

Memory management has been simplified java in two ways. First Java does not support direct pointer manipulation or arithmetic. This make it possible for a program to overwrite memory or corrupt data.

Java encourages error-free programming by being strictly typed and performing run-time checks.

Portable

The feature of java "write once - run anywhere" make java portable. Many type of computers and operating systems are used for programs. By porting an interpreter to the Java Virtual Machine to any computer hardware/operating system, one is assured that all code compiled for it will run on that system. This forms the basis for Java's portability.

Dynamic

Because it is interpreted, Java is an extremely dynamic language. At runtime, the java environment can extend itself by linking in classes that may be located on remote servers on a network(for example, the internet).

At runtime, the java interpreter performs name resolution while linking in the necessary classes.

Interpreted:

- Java supports cross-platform code through the use of Java bytecode.
- Bytecode can be interpreted on any platform by JVM.

Multi-threaded: A thread is like a separate program, executing concurrently. We can write Java programs that deal with many tasks at once by defining multiple threads. The main advantage of multi-threading is that it shares the same memory. Threads are important for multi-media, Web applications etc.

Distributed: Java facilitates the building of distributed application by a collection of classes for use in networked applications. By using java's URL (Uniform Resource Locator) class, an application can easily access a remote server. Classes also are provided for establishing socket-level connections.

Q.1. (b) Differentiate between JAVA and C++ Object Oriented Language. (8)

Ans.

Java	C++
Java does not support pointers, templates, unions, operator overloading, structures etc.	C++ supports structures, unions, templates, operator overloading, pointers and pointer arithmetic.
Java supports automatic garbage collection. It does not support destructors as C++ does.	C++ supports destructors, which is automatically invoked when the object is destroyed.
Java does not support conditional compilation and inclusion.	Conditional inclusion (#ifdef #ifndef type) is one of the main features of C++.
Java has built-in support for threads. In Java, there is a Thread class that you inherit to create a new thread and override the run() method.	C++ has no built-in support for threads. C++ relies on non-standard third-party libraries for thread support.
Java doesn't provide multiple inheritance, at least not in the same sense that C++ does.	C++ does support multiple inheritance. The keyword virtual is used to resolve ambiguities during multiple inheritance if there is any. C++ supports both method overloading and operator overloading.
Java has method overloading, but no operator overloading. The String class does use the + and += operators to concatenate strings and String expressions use automatic type conversion, but that's a special built-in case.	

Java has built-in support for documentation comments /* ... */; therefore, Java source files can contain their own documentation, which is read by a separate tool usually javadoc and reformatted into HTML. This helps keeping documentation maintained in easy way.

Java is interpreted for the most part and hence platform independent.

C++ does not support documentation comments.


C++ generates object code and the same code may not run on different platforms.

Q.1. (c) Differentiate between package and Interface with examples. (6)

Ans. Packages are Java's way of grouping a variety of classes and/or interfaces together. The grouping is usually done according to functionality. Packages act as "containers" for classes. Main advantages of storing classes and interface into package are:

- (a) The classes contained in the packages are easily reused.
- (b) Packages provide a way to hide classes thus preventing other programs or packages from accessing classes.
- (c) In packages, two classes in two different packages can have the same name.

Interface: An interface is a named collection of method declarations (without definitions). An interface can also include constant declarations. The following figure shows that an interface definition has two components: the interface declaration and the interface body. The interface declaration declares various attributes about the interface such as its name and whether it extends another interface. The interface body contains the constant and method declarations within that interface.

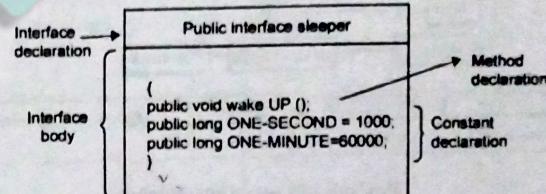


Q.1. (d) State the importance of utility package in JAVA. (5)

Ans. The **java.util Package:** The java.util package defines a number of useful classes, primarily collections classes that are useful for working with groups of objects. This package should not be considered merely a utility package that is separate from the rest of the language; in fact, Java depends directly on several of the classes in this package.

There are many methods declared in the Collection interface. They are as follows:

No.	Method	Description
1.	Public boolean add (Object element)	is used to insert an element in this collection.
2.	Public boolean add All (collection c)	is used to insert the specified collection elements in the invoking collection.
3.	Public boolean remove (Object element)	is used to delete an element from this collection.
4.	Public boolean remove All(Collection c)	is used to delete all the elements of specified collection from the invoking collection.
5.	Public Iterator iterator ()	returns an iterator.

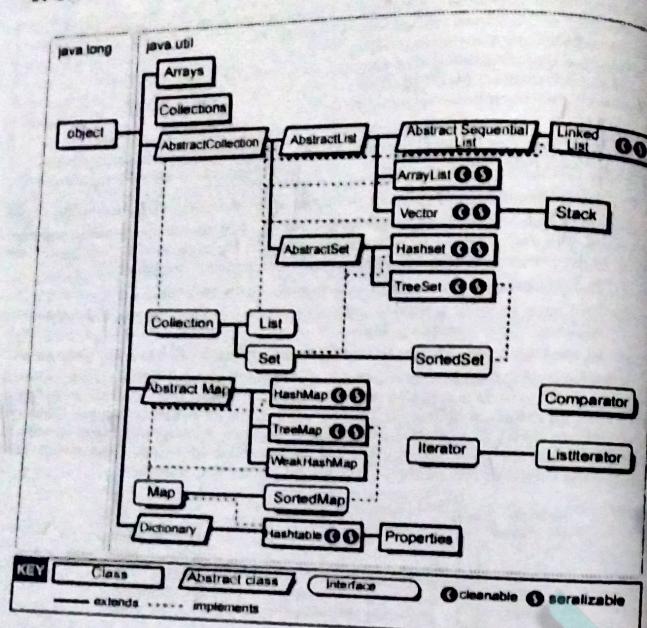

Methods of Collection interface

The final Java package, `java.util`, contains a collection of utility classes.

Data Structure Classes: A variety of useful classes implementing standard computer science data structures including `BitSet`, `Dictionary`, `Hashtable`, `Stack` and `Vector`. The `java.util` package also defines the `Enumeration` interface which provides a protocol for classes to count through a set of values.

Date: Use the `Date` class to create and manipulate calendar dates in a system-independent fashion.

String To konizer: This class converts a `String` of text into its tokens.

Properties: This class implements persistent properties. The properties table contains key/value pairs where both the key and the value are `String`s. This class is used by the `System` class to implement `System` properties.

Observer and Observable: Classes that implement the `Observer` interface can "watch" `Observable` objects for state changes. When an `Observable` object changes it notifies all of its `Observers` of the change.

Random-Number Generator: The `Random` class implements a random-number generator.

Enumeration: The `Enumeration` interface defines a generic programming interface for iterating through a set of values.

Q.1. (e) Explain the life cycle of Applet and its security concerns. (5)

Ans. Following are the methods.

1. `init()` method
2. `start()` method
3. `paint()` method
4. `stop()` method
5. `destroy()` method

These methods are known as life cycle methods. These methods are defined in `java.applet.Applet` class except `paint()` method. The `paint()` method is defined in `java.awt.Component` class, an indirect super class of `Applet`.

The life cycle methods are called as **callback methods** as they are called implicitly by the browser for the smooth execution of the applet. Browser should provide an environment known as container for the execution of the applet. Following are the responsibilities of the browser.

1. It should call the callback methods at appropriate times for the smooth execution of the applet.


2. It is responsible to maintain the life cycle of the applet.

3. It should have the capability to communicate between applets, applet to JavaScript and HTML, applet to browser etc.

Q.2. (a) Describe the various types of exceptions and illustrate how they are handled. (9)

Ans. Exception: A Java Exception is an object that describes the exception that occurs in a program. When an exceptional event occurs in java, an exception is said to be thrown. The code that's responsible for doing something about the exception is called an exception handler.

Exception are categorized into 3 category

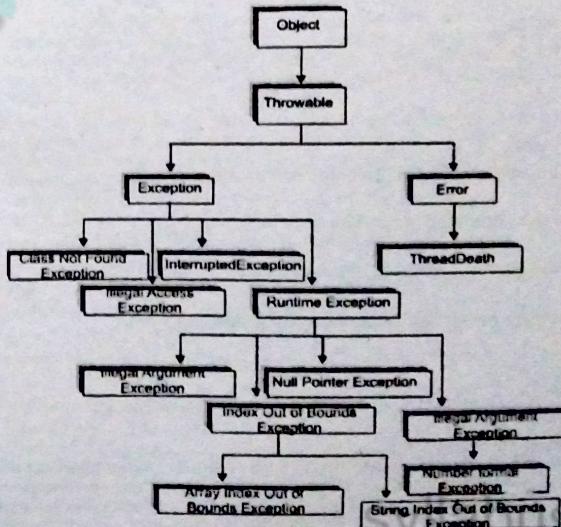

- Checked Exception:** The exception that can be predicted by the program. Example : File that need to be opened is not found. These type of exceptions are checked at compile time.

- Unchecked Exception:** Unchecked exceptions are the class that extends RuntimeException. Unchecked exception are ignored at compile time. Examples : ArithmeticException, NullPointerException, ArrayIndexOutOfBoundsException. Unchecked exceptions are checked at runtime.

Error: Errors are typically ignored in code because you can rarely do anything about an error. Example : If stack overflow occurs, an error will arise. This type of errors is not possible handle in code.

Exception Handling Mechanism

In java, exception handling is done using five keywords,

1. Try 2. Catch 3. Throw 4. Throws 5. Finally

Exception handling is done by transferring the execution of a program to appropriate exception handler when exception occurs.

- Using try and catch:** Try is used to guard a block of code in which exceptions occur. This block of code is called guarded region. A catch statement involves declaring type of exception you are trying to catch. If an exception occurs in guarded code, the block that follows the try is checked, if the type of exception that occurred is listed in catch block then the exception is handed over to the catch block which then handles it.

Example using Try and catch:

```
class Excp
{
    public static void main(String args[])
    {
        int a,b,c;
    
```

```
        try
        {
            a=0;
            b=10;
            c=b/a;
            System.out.println("This line will not be executed");
        }
        catch(ArithmeticException e)
        {
            System.out.println("Divided by zero");
        }
    
```

```
    System.out.println("After exception is handled");
}
```

Output:

Divided by zero

After exception is handled

Throw Keyword: Throw keyword is used to throw an exception explicitly. Object of Throwable class or its sub classes can be thrown. Program execution stops encountering throw statement, and the closest catch statement is checked for matching type of exception.

Syntax :

```
throw ThrowableInstance
```

Example demonstrating throw Keyword

```
class Test
{
```

```
    static void avg()
    {
        try
        {
            throw new ArithmeticException("demo");
        }
        catch(ArithmeticException e)
        {
            System.out.println("Exception caught");
        }
    }

    public static void main(String args[])
    {
        avg();
    }
}
```

In the above example the avg() method throw an instance of ArithmeticException, which is successfully handled using the catch statement.

Q.2. (b) Define multithreading with an example. (3.5)

Ans. Java is multithreaded programming language which means we develop multithreaded programs using Java. A multithreaded program contains two or more parts that can run concurrently and each part can handle different task at the same time making optimal use of the available resources specially when your computer has multiple CPUs.

By definition multitasking is when multiple processes share common processing resources such as a CPU. Multithreading extends the idea of multitasking into applications where you can subdivide specific operations within a single application into individual threads. Each of the threads can run in parallel. The OS divides processing time not only among different applications, but also among each thread within an application.

Multithreading enables you to write in way where multiple activities can proceed concurrently in the same program.

Example on creating a thread by deriving from the thread class

```
public class Derived extends Thread
```

```
{
```

```
    public void run()
    {
        /* Your implementation of the
        thread here
    }
}
```

```
Derived derivedThread = new Derived();
```

```

    /* this call will create a new independent thread
       called derivedThread, and will start its processing
    */
    derivedThread.start();
}

```

Q.3.(a) What is inheritance? How will you call parameterized constructor and override method from parent class in sub class?

Ans. Inheritance in java is a mechanism in which one object acquires all properties and behaviors of parent object.

Use inheritance in java

- For Method Overriding (so runtime polymorphism can be achieved).
- For Code Reusability.

Syntax of Java Inheritance

1. class Subclass-name extends Superclass-name


- 1
- 2 //methods and fields
- 3

The **extends keyword** indicates that you are making a new class that derives from an existing class.

In the terminology of Java, a class that is inherited is called a **super class**. The new class is called a **sub class**.

On the basis of class, there can be three types of inheritance in java: single, multilevel and hierarchical.

In java programming, multiple and hybrid inheritance is supported through interface only. We will learn about interfaces later.

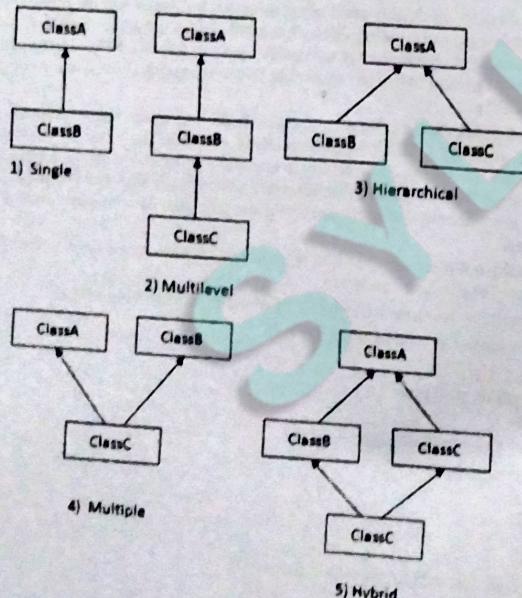

Calling parameterized constructor of parent class:

The super keyword can also be used to invoke the parent class constructor as given below:

```

Public class Student{
String name;
String studentId;
Public Student(String name, String studentId)
{
This.name=name;
This.studentId=studentId;
}
Public void printStudent()
{
System.out.println("name of the student is:" +name);
System.out.println("Id of the student is:" +studentId);
}
}

Public class GraduateStudent
{
Int noofYears_Course;
Public GraduateStudent(String name, String studentId, int noofYears_Course)
{
Super(name,studentId);
This.noofYears_Course=no of Years_Course;
}
}

```

The super class constructor is triggered using super followed by brackets. Within the brackets, the parameters to the super class constructor have to be passed.

Calling parent class method:

Super can be used to invoke parent class method

The super keyword can also be used to invoke parent class method. It should be used in case subclass contains the same method as parent class as in the example given below:

```

1. class Person{
2. void message(){System.out.println("welcome");}
3. }
4.
5. class Student16 extends Person{
6. void message(){System.out.println("welcome to java");}
7.
8. void display()

```

9. `message()` will invoke current class `message()` method
 10. `super.message()` will invoke parent class `message()` method
 11.
 12.
13. public static void main(String args[]){}
 14. `Student16 s=new Student16();`
 15. `s.display();`
 16.
 17.)

Output welcome to java
 welcome

Q.3. (b) What is an inner class? Give an example for it.

Ans. Refer to Q.4(b) of First Term Examination 2015.

Q.4. (a) List out the steps to connect JDBC with MS-Access.

Ans. JDBC connection to Microsoft Access: We make a connection using JDBC to a Microsoft Access database. This connection is made with the help of a JdbcOdbc driver. You need to use the following steps for making the connection to the data base

Creating a Database

Step 1 : Open Microsoft Access and select Blank data base option and give the data base name as File name option

Step 2 : Create a table and insert your data into the table.

Step 3 : Save the table with the desired name; in this article we save the following records with the table name student.

Now Creating DSN of your data base

Step 4 : Open your Control Panel and than select Administrative Tools.

Step 5 : Click on Data Source(ODBC)→System DSN.

Step 6 : Now click on add option for making a new DSN.select Microsoft Access Driver (*.mdb, *.accdb) and than click on Finish

Step 7 : Make your desired Data Source Name and then click on the Select option as MYDSN

Step 8 : Now you select your data source file for storing it and then click ok and then click on Create and Finish.

Step 9 : Java program code

The main important steps in any one the database connecting program is:
Step 1: specify the drivers which you are going to use in the program. For this invoke a method called as `forName()` which is present in the class "Class".

`Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");`

Step 2 : Start the connection to the Database. For this method `getConnection()` which is present in the class `DriverManager`. We need to pass the protocol, user id and password for the database. The url consists of three parts protocol, subprotocol, sourcename.

1. `Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");`
 2. `Connection con;`

3. `con = DriverManager.getConnection(url,userid,pswd);`

Step 3 : Create an statement to execute the queries. For this method `createStatement()` which is present in the `Connection` class and we use the `con` object to call the method, Which returns an object of `statement` class.

1. `Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");`

2. `Connection con;`

3. `con = DriverManager.getConnection(url,userid,pswd);`

4. `Statement st = con.createStatement();`

Step 4 : Execute the queries on the table. We use the method `executeQuery()` which is present in the class `Statement` and we use the object `st`. It returns the set of results of the operation and we need to store them in an object of `ResultSet`.

1. `Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");`

2. `Connection con;`

con = `DriverManager.getConnection(url,userid,pswd);`

3. `Statement st = con.createStatement();`

4. `ResultSet res = st.executeQuery("select * from emp");`

Q.4. (b) Create and application for online shopping with JDBC.

(6.25)

Ans. import `java.io.*;`

import `javax.servlet.*;`

import `javax.servlet.http.*;`

public class ShoppingCartViewerCookie extends HttpServlet {

public void doGet(HttpServletRequest req, HttpServletResponse res)

throws ServletException, IOException {

res.setContentType("text/html");

PrintWriter out = res.getWriter();

// Get the current session ID by searching the received cookies

String sessionid = null;

Cookie[] cookies = req.getCookies();

if (cookies != null) {

for (int i = 0; i < cookies.length; i++) {

if (cookies[i].getName().equals("sessionid")) {

sessionid = cookies[i].getValue();

break;

}

}

}

// If the session ID wasn't sent, generate one

// Then be sure to send it to the client with the response

if (sessionid == null) {

sessionid = generateSessionId();

Cookie c = new Cookie("sessionid", sessionid);

```

res.addCookie(c);
}

out.println("<HEAD><TITLE>Current Shopping Cart Items</TITLE></HEAD>");
out.println("<BODY>");

// Cart items are associated with the session ID
String[] items = getItemsFromCart(sessionid);

// Print the current cart items.
out.println("You currently have the following items in your cart.<BR>");
if(items == null) {
out.println("<B>None</B>");
}
else {
out.println("<UL>");
for (int i = 0; i < items.length; i++) {
out.println("<LI>" + items[i]);
}
out.println("</UL>");
}

// Ask if they want to add more items or check out.
out.println("<FORM ACTION=\"/servlet/ShoppingCart\" METHOD=POST>");
out.println("Would you like to<BR>");
out.println("<INPUT TYPE=submit VALUE=\" Add More Items \">");
out.println("<INPUT TYPE=submit VALUE=\" Check Out \">");
out.println("</FORM>");

// Offer a help page.
out.println("For help, click <A HREF=\"/servlet/Help\" +");
"topic=ShoppingCartViewerCookie">here</A>";
out.println("</BODY></HTML>");

}

private static String generateSessionId() {
String uid = new java.rmi.server.UID().toString(); // guaranteed unique
return java.net.URLEncoder.encode(uid); // encode any special chars
}

private static String[] getItemsFromCart(String sessionid) {
// Not implemented
}
}

```

Q.5. Explain life cycle of a thread with help of a diagram. How do the wait and notify All/notify methods enable cooperation between threads.


Ans. Life cycle of a Thread (Thread States):

A thread goes through various stages in its life cycle. For example, a thread is born, started, runs, and then dies. Following diagram shows complete life cycle of a thread.

- Thread having below states.

1. New State
2. Ready State
3. Running State
4. Dead State
5. Non Runnable States

Life cycle of thread in java with diagram

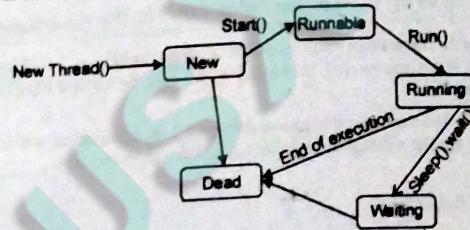

1. New State:

- A thread has been created but not started yet. A thread will be started by calling its start() method.

2. Runnable State:

- This state is also called ready to run stage also called queue. A thread starts in runnable state by calling start() method.

- The Thread scheduler decides which thread runs and how long.

3. Running State:

- If a Thread is executing that means Thread is in Running stage.

4. Dead State:

- Once a Thread reached dead state it can not run again.

5. Non runnable or waiting States:

- A Running Thread transit to one of the non runnable states, depending upon the circumstances.

- A Thread remains non runnable until a special transition occurs.

- A Thread does not go directly to the running state from non runnable state.

- But transits first to runnable state.

1. Sleeping: The Threads sleeps for specified amount of time.

2. Blocked for I/O: The Thread waits for a blocking operation to complete.

3. Blocked for join completion: The Thread waits for completion of another Thread.

4. Waiting for notification: The Thread waits for notification another Thread.

5. Blocked for lock acquisition: The Thread waits to acquire the lock of an object.

Cooperation between threads: There are simply three methods and a little trick which makes thread communication possible. First let's see all the three methods listed below:

S.N.	Methods with Description
------	--------------------------

1. **public void wait()**
Causes the current thread to wait until another thread invokes the notify() method on this object.
2. **public void notify()**
Wakes up a single thread that is waiting on this object's monitor.
3. **public void notifyAll()**
Wakes up all the threads that called wait() on the same object.

These methods have been implemented as final methods in Object, so they are available in all the classes. All three methods can be called only from within synchronized context.

This example shows how two thread can communicate using wait() and notify() method. You can create a complex system using the same concept.

```
class Chat {
    boolean flag = false;

    public synchronized void Question(String msg) {
        if(flag) {
            try {
                wait();
            } catch (InterruptedException e) {
                e.printStackTrace();
            }
            System.out.println(msg);
            flag = true;
            notify();
        }
    }

    public synchronized void Answer(String msg) {
        if(!flag) {
            try {
                wait();
            } catch (InterruptedException e) {
                e.printStackTrace();
            }
            System.out.println(msg);
            flag = false;
            notify();
        }
    }
}
```

```

}

class T1 implements Runnable {
    Chat m;
    String[] s1 = { "Hi", "How are you?", "I am also doing fine!" };

    public T1(Chat m1) {
        this.m = m1;
        new Thread(this, "Question").start();
    }

    public void run() {
        for (int i = 0; i < s1.length; i++) {
            m.Question(s1[i]);
        }
    }
}

class T2 implements Runnable {
    Chat m;
    String[] s2 = { "Hi", "I am good, what about you?", "Great!" };

    public T2(Chat m2) {
        this.m = m2;
        new Thread(this, "Answer").start();
    }

    public void run() {
        for (int i = 0; i < s2.length; i++) {
            m.Answer(s2[i]);
        }
    }
}

public class TestThread {
    public static void main(String[] args) {
        Chat m = new Chat();
        new T1(m);
        new T2(m);
    }
}
```

|
When above program is complied and executed, it produces following result.

Hi
Hi
How are you?
I am good, what about you?
I am also doing fine!
Great!

Q.6. Given two different array of size M and N in sorted ascending write a JAVA program to merge them into a single sorted array with condition that merged array should be in ascending order.

Ans. Steps to merge two sorted arrays:

1. If the first array is empty (i.e. arr1.length <= 0), then copy the elements of the arr2 to the result array return the result
2. If the second array is empty (i.e arr2.length <= 0), then copy all the elements of the array arr1 to the result array. return the result
3. Compare the element in the arr1 with element in the arr2 and copy the element to result i.e. if the arr1[i] < arr2[j], copy arr1[i] to result, and increase i , otherwise copy arr2[j] to result, and increase j
4. Copy the remaining elements either in arr1 OR in arr2 to result, return result

```
package com.javaonline;

class Merge2SortedArrays
{
    public static void main(String[] args) {
        int arr1[]={4,6,9,20,56};
        int arr2[]={1,7,25,45,70};
        int[] result=merge(arr1, arr2);
        for (int j=0;j<result.length;j++)
            System.out.print(result[j]+ " ");
    }

    static int[] merge(int[] arr1, int[] arr2)
    {
        int m=arr1.length;
        int arr1_Length=m;
        int n=arr2.length;
        int arr2_Length=n;
        int[] result = new int[arr1_Length + arr2_Length];
        int i=0, j = 0;

        for(int k = 0 ; k < (arr1_Length + arr2_Length);k++)
        {
            //If arr1 is empty, copy the elements of the array arr2 to the result array .
            if (arr1[m-1] == -1)
                result[k] = arr2[j];
            else if (arr2[n-1] == -1)
                result[k] = arr1[i];
            else if (arr1[i] < arr2[j])
                result[k] = arr1[i];
            else
                result[k] = arr2[j];
            if (i < arr1_Length)
                i++;
            if (j < arr2_Length)
                j++;
        }
        return result;
    }
}
```

//When i equals the length of array arr1 , copy the remaining elements in the array arr2 to result

if (i >= arr1_Length) //for step1 & 4

{

result[k] = arr2[j];

j++;

}

//If arr2 is empty, copy the elements of the array arr1 to the result array .

//When j equals the length of array arr2 , copy the remaining elements in the array arr1 to result

else if (j >= arr2_Length) // For step 2 & 4

{

result[k] = arr1[i];

i++;

}

else

{

if (arr1[i] < arr2[j]) // step 3

{

result[k] = arr1[i];

i++;

}

else

{

result[k] = arr2[j];

j++;

}

}

return result;

}

}

Output:

1 4 6 7 9 20 25 45 56 70

Q.7. How to declare and initialize a string in JAVA and also explain the difference string handling functions with suitable example. (12.5)

Ans. String is probably the most commonly used class in java library. String class is encapsulated under Java.lang package. In java, every string that you create is actually an object of type String.

One important thing to notice about string object is that string objects are immutable that means once a string object is created it cannot be altered.

An array of characters works same as java string. For example:

```
1. char[] ch={'J','a','V','a','T','p','o','T','n','t'};
```

```
2. String s=new String(ch);
```

How to create String object?

There are two ways to create String object:

1. By string literal

2. By new keyword

(1) String Literal

Java String literal is created by using double quotes. For Example:

1. String s="welcome"; Each time you create a string literal, the JVM checks the string constant pool first. If the string already exists in the pool, a reference to the pooled instance is returned. If string doesn't exist in the pool, a new string instance is created and placed in the pool. For example:

```
1. String s1="Welcome";
```

```
2. String s2="Welcome" //will not create new instance
```

2. By new keyword

```
1. String s=new String("Welcome");//creates two objects and one reference variable
```

In such case, JVM will create a new string object in normal(non pool) heap memory and the literal "Welcome" will be placed in the string constant pool. The variable s will refer to the object in heap(non pool).

Java String class methods

String Length:

The length() method, which returns the number of characters contained in the string object.

charAt()

charAt() function returns the character located at the specified index.

```
String str = "studytonight";
```

```
System.out.println(str.charAt(2));
```

Output : u

substring()

substring() method returns a part of the string. substring() method has two forms,

```
public String substring(int begin),
```

```
public String substring(int begin, int end);
```

The first argument represents the starting point of the substring. If the substring() method is called with only one argument, the substring returned, will contain characters from specified starting point to the end of original string.

toLowerCase() method returns string with all uppercase characters converted to lowercase.

```
String str = "ABCDEF";
```

```
System.out.println(str.toLowerCase());
```

Output : abcdef

valueOf()

Overloaded version of valueOf() method is present in String class for all primitive data types and for type Object.

NOTE : valueOf() function is used to convert **primitive data types** into **String**.

But for objects, valueOf() method calls **toString()** function.

toString()

toString() method returns the string representation of the object used to invoke this method. **toString()** is used to represent any Java Object into a meaningful string representation. It is declared in the **Object class**, hence can be overridden by any java class. (**Object class** is super class of all java classes.)

Q.8. Write short note on any two:

(6.25x2 = 12.5)

(a) Development of client server application.

Ans. For this type of application we employ the use of **sockets**. A socket is the one end-point of a two way communication link between two program running over the network. One can run the two programs on the same computer. To distinguish different services a numbering convention uses integers numbers called port numbers are used. A socket is a complex data structure that contains an internet address and a port number.

A network connection is initiated by a client program when it creates a socket for the communication with the server.

1. When the server receives a connection request on its specific server port, it creates a new socket for it and binds a port number to it.

2. It sends the new port number to client to inform it the connection is established.

3. The server goes on new by listening on two ports:

- it waits for new incoming connection requests on its specific port, and
- it reads and writes messages on established connection (on new port) with the accepted client.

The server communicates with the client by needing from and writing to the new port.

A simple client/server application.

The Client

This is a simple client which reads a line from the standard input and stands it to the echo server. The client keeps on reading from the socket till it receives the message "OK" from the server, once it receives the "OK" message then it breaks the server, once it receives the "OK" message then it breaks.


Q. 8. (b) AWT component.

Ans. Java AWT Components:

Java AWT (Abstract Windowing Toolkit) is an API to develop GUI or window-based application in java.

Java AWT components are platform-dependent i.e. components are displayed according to the view of operating system. AWT is heavyweight i.e. its components uses the resources of system.

The **java.awt** package provides classes for AWT api such as **TextField**, **Label**, **TextArea**, **RadioButton**, **CheckBox**, **Choice**, **List** etc.

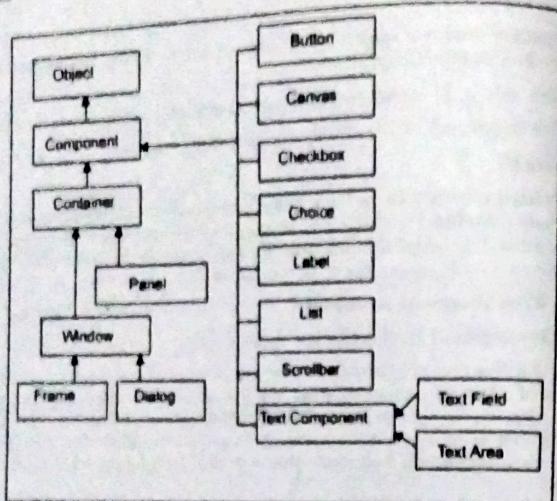

Container: The Container is a component in AWT that can contain another components like buttons, textfields, labels etc. The classes that extends Container class are known as container such as Frame, Dialog and Panel.

Window: The window is the container that have no borders and menu bars. You must use frame, dialog or another window for creating a window.

Panel: The Panel is the container that doesn't contain title bar and menu bars. It can have other components like button, textfield etc.

Frame: The Frame is the container that contain title bar and can have menu bars. It can have other components like button, textfield etc.

Java AWT Example: To create simple awt example, you need a frame. There are two ways to create a frame in AWT.

- * By extending Frame class (inheritance)
- * By creating the object of Frame class (association)

Simple example of AWT by inheritance

```

1. import java.awt.*;
2. class First extends Frame{
3.     First(){
4.         Button b=new Button("click me");
5.         b.setBounds(30,100,80,30)// setting button position
6.
7.         add(b);//adding button into frame
8.         setSize(300,300); //frame size 300 width and 300 height
9.         setLayout(null); //no layout manager
10.        setVisible(true); //new frame will be visible, by default not visible
11.    }
12. public static void main(String args[]){
13.     First f=new First();
14. }
```

Q.8. (c) Organization of JVM.

Ans. Refer Q. 2. (d) First Term Examination 2015.

FIRST TERM EXAMINATION FIFTH SEMESTER B.TECH. [SEPTEMBER 2016] JAVA PROGRAMMING [ETCS-307]

M.M. : 30

Time : 1.5 hrs.

Note: Attempt any three questions including Q. No. 1 which is compulsory.

Q.1. (a) Explain all possible uses of final keyword in java.

Ans. The final keyword in java is used to restrict the user. The java final keyword can be used in many context. Final can be:

- Variable
- Method
- Class

The final keyword can be applied with the variables, a final variable that have no value is called blank final variable or uninitialized final variable. It can be initialized in the constructor only. The blank final variable can be static also which will be initialized in the static block only.

Q.1. (b) Explain the difference between interface and abstract class.

Ans.

OOPS Interface vs Abstract class

Interface	Abstract class
Interface support multiple inheritance	Abstract class does not support multiple inheritance
Interface does not contains data member	Abstract class contains Data member
Interface does not contains constructors	Abstract class contains constructors
An interface only contain incomplete member (signature of member)	An abstract class contains both incomplete (abstract) and complete member
An interface cannot have access modifiers by default everything is assumed as public	An abstract class can contain access modifier for the sub, functions, properties
Member of interface can not be static	Only complete Member of abstract class can be static

Q.1. (c) What are access specifiers and explain access scope of a protected method?

Ans: There are two types of modifiers in java, access modifiers and non-access modifiers. The access modifiers in java specifies accessibility (scope) of a data member, method, constructor or class.

There are 4 types of java access modifiers:

- Private
- Default
- Protected
- Public

Protected access modifier

The protected access modifier is accessible within package and outside package but through inheritance only.

The protected access modifier can be applied on the data member, method constructor. It can't be applied on the class.

Example of protected access modifier

In this example, we have created the two packages pack and mypack. The pack package is public, so can be accessed from outside the package. But msg method this package is declared as protected, so it can be accessed from outside the class through inheritance.

```

1. //Save by A.java
2. package pack;
3. public class A{
4.     protected void msg(){System.out.println("Hello");}
5. }
1. //Save by B.java
2. package mypack;
3. import pack.*;
4.
5.     class B extends A{
6.     public static void main(String args[]){
7.         B obj = new B();
8.         obj.msg();
9.     }
10.    }
Output: Hello

```

Q.1. (d) List java's primitive datatypes along with their size and default values.

Ans. Primitive Data Types

There are eight primitive datatypes supported by Java. Primitive datatypes are predefined by the language and named by a keyword.

Type	Size in Bytes	Range
Byte	1 byte	-128 to 127
Short	2 bytes	-32,768 to 32,767
Int	4 bytes	-2,147,483,648 to 2,147,483,647
Long	8 bytes	-9,223,372,036,864,775,808 to 9,223,372,036,864,775,807
Float	4 bytes	approximately ±3.40282347E+38F (6-7 significant decimal digits) Java implements IEEE 754 standard
Double	8 bytes	approximately ±1.79769313486231570E+308 (15 significant decimal digits)
Char	2 byte	0 to 65,536 (unsigned)

Boolean not precisely defined* true or false

Q.1. (e) Explain the use of this and super in java classes.

Ans: In java, this is a reference variable that refers to the current object.

Usage of java this keyword

1. this can be used to refer current class instance variable.
2. this can be used to invoke current class method (implicitly).
3. this() can be used to invoke current class constructor.
4. this can be passed as an argument in the method call.
5. this can be passed as argument in the constructor call.
6. this can be used to return the current class instance from the method.

The super keyword in java is a reference variable which is used to refer immediate parent class object.

Whenever you create the instance of subclass, an instance of parent class is created implicitly which is referred by super reference variable.

Usage of java super Keyword

1. super can be used to refer immediate parent class instance variable.
2. super can be used to invoke immediate parent class method.
3. super() can be used to invoke immediate parent class constructor.

Q.2. (a) What is a package and list five java packages along with two classes each.

Ans: A java package is a group of similar types of classes, interfaces and sub-packages. Package in java can be categorized in two form, built-in package and user-defined package.

There are many built-in packages such as java, lang, awt, javax, swing, net, io, util, sql etc.

Simple example of java package

The package keyword is used to create a package in java.

```

1. //Save as Simple.java
2. package mypack;
3. public class Simple{
4.     public static void main(String args[]){
5.         System.out.println("Welcome to package");
6.     }
7. }


```

five java packages along with two classes:

1. Lang : Number ,Object
2. Awt : TextField,TextArea
3. Net: Inet Address,Socket
4. Io: DataInputStream and Buffered Reader
5. Util: Date,Scanner

Q.2. (b) Explain JVM architecture.

Ans: JVM (Java Virtual Machine) is an abstract machine. It is a specification that provides runtime environment in which java bytecode can be executed. JVM is available for many hardware and software platforms (i.e. JVM is platform dependent).

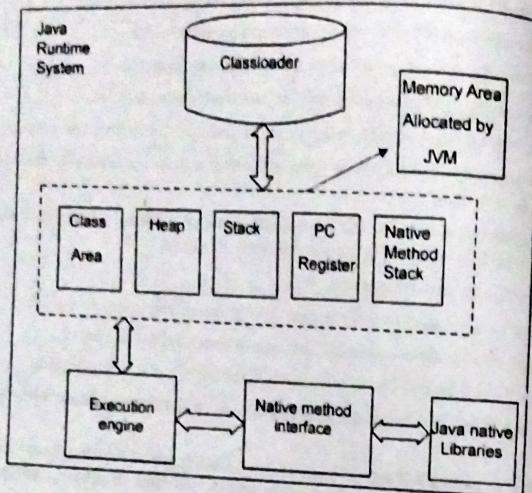

1. **Classloader:** Classloader is a subsystem of JVM that is used to load class files.

2. **Class(Method) Area:** Class(Method) Area stores per-class structures such as the runtime constant pool, field and method data, the code for methods.

3. **Heap:** It is the runtime data area in which objects are allocated.

4. **Stack:** Java Stack stores frames. It holds local variables and partial results, plays a part in method invocation and return.

Each thread has a private JVM stack, created at the same time as thread. A new frame is created each time a method is invoked. A frame is destroyed when its method invocation completes.

5. **Program Counter Register:** PC (program counter) register. It contains the address of the Java virtual machine instruction currently being executed.

6. **Native Method Stack:** It contains all the native methods used in the application.

7. **Execution Engine**

It contains:

1. A virtual processor

2. **Interpreter:** Read bytecode stream then execute the instructions.

3. **Just-In-Time(JIT) compiler:** It is used to improve the performance. JIT compiles parts of the byte code that have similar functionality at the same time, hence reduces the amount of time needed for compilation. Here the term compiler refers to a translator from the instruction set of a Java virtual machine (JVM) to the instruction set of a specific CPU.

Q.2. (c) Write a program to show how to create user defined exception by extending Exception Class.

Ans: class MyException extends Exception {

```
String s1;
MyException(String s2) {
    s1 = s2;
}
@Override
public String toString() {
    return ("Output String = " + s1);
}

public class NewClass {
    public static void main(String args[]) {
        try {
            throw new MyException("Custom message");
        } catch(MyException exp) {
            System.out.println(exp);
        }
    }
}
```

Q.3. (a) What is sandbox model in java.

Ans: A security measure in the Java development environment. The sandbox is a set of rules that are used when creating an applet that prevents certain functions when the applet is sent as part of a Web page. When a browser requests a Web page with applets, the applets are sent automatically and can be executed as soon as the page arrives in the browser. If the applet is allowed unlimited access to memory and operating system resources, it can do harm in the hands of someone with malicious intent. The sandbox creates an environment in which there are strict limitations on what system resources the applet can request or access. Sandboxes are used when executable code comes from unknown or untrusted sources and allow the user to run untrusted code safely. The Java sandbox relies on a three-tiered defense. If any one of these three elements is compromised, the security model is completely compromised and vulnerable to attack.

Byte code verifier — This is one way that Java automatically checks untrusted code before it is allowed to run. When a Java source program is compiled, it piles down to platform-independent Java byte code, which is verified before it can be run. This helps to establish a base set of security guarantees.

Applet class loader — All Java objects belong to classes, and the applet class loader determines when and how an applet can add classes to a running Java environment. The applet class loader ensures that important elements of the Java environment are not replaced by code that an applet tries to install.

Security manager — The security manager is consulted by code in the Java library whenever a dangerous operation is about to be carried out. The security manager has the option to veto the operation by generating a security exception.

Q.3. (b) Explain difference between StringBuffer and StringTokenizer example?

Ans: The `java.lang.StringBuffer` class is a thread-safe, mutable sequence of characters. Following are the important points about `StringBuffer`:

- A string buffer is like a String, but can be modified.
- It contains some particular sequence of characters, but the length and content of the sequence can be changed through certain method calls.
- They are safe for use by multiple threads.
- Every string buffer has a capacity.

Class Declaration

Following is the declaration for `java.lang.StringBuffer` class—

```
public final class StringBuffer
    extends Object
    implements Serializable, CharSequence
```

Class constructors

S.N.	Constructor and Description
1.	StringBuffer() This constructs a string buffer with no characters in it and an initial capacity of 16 characters.
2.	StringBuffer(CharSequence seq.) This constructs a string buffer that contains the same characters as specified <code>CharSequence</code> .
3.	StringBuffer(int capacity) This constructs a string buffer with no characters in it and the specified initial capacity.
4.	StringBuffer(String str) This constructs a string buffer initialized to the contents of the specified string.

The `java.util.StringTokenizer` class allows an application to break a string into tokens.

- This class is a legacy class that is retained for compatibility reasons. Its use is discouraged in new code.
- Its methods do not distinguish among identifiers, numbers, and quoted strings.
- This class's methods do not even recognize and skip comments.

Class declaration

Following is the declaration for `java.util.StringTokenizer` class:

```
public class StringTokenizer
    extends Object
    implements Enumeration<Object>
```

S.N.	Constructor and Description
1.	StringTokenizer(String str) This constructor creates a string tokenizer for the specified string.
2.	StringTokenizer(String str, String delim) This constructor constructs a string tokenizer for the specified string, using the specified delimiter.
3.	StringTokenizer(String str, String delim, boolean returnDelims) This constructor constructs a string tokenizer for the specified string, using the specified delimiter and returning the delimiters.

Q.3. (c) Explain applet life cycle and write a program to create an applet with moving banner.

Ans: An **applet** is a Java program that runs in a Web browser. An applet can be a fully functional Java application because it has the entire Java API at its disposal.

Life Cycle of an Applet


Four methods in the Applet class are:

- **Init:** This method is intended for whatever initialization is needed for your applet. It is called after the param tags inside the applet tag have been processed.
- **Start:** This method is automatically called after the browser calls the init method. It is also called whenever the user returns to the page containing the applet after having gone off to other pages.
- **Stop:** This method is automatically called when the user moves off the page on which the applet sits. It can, therefore, be called repeatedly in the same applet.
- **Destroy:** This method is only called when the browser shuts down normally. Because applets are meant to live on an HTML page, you should not normally leave resources behind after a user leaves the page that contains the applet.
- **Paint:** Invoked immediately after the start() method, and also any time the applet needs to repaint itself in the browser. The paint() method is actually inherited from the `java.awt`.

A "Hello, World" Applet

```
import java.applet.*;
import java.awt.*;
public class HelloWorldApplet extends Applet{
    public void paint (Graphics g){
        g.drawString ("Hello World",25,50);
    }
    import java.awt.*;
    import java.applet.*;
    public class SampleBanner extends Applet implements Runnable{
        String str = "This is a simple Banner";
        Thread t;
        boolean b;
        public void init(){

```

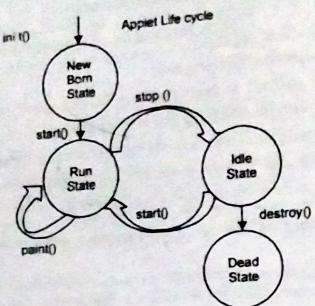

```

setBackground(Color.gray);
setForeground(Color.yellow);

public void start(){
    t = new Thread(this);
    b = false;
    t.start();
}

public void run(){
char ch;
for(;;)
try{
    repaint();
    Thread.sleep(250);
    ch = str.charAt(0);
    str = str.substring(1, str.length());
    str = str + ch;
}
catch(InterruptedException e){}
}

public void paint(Graphics g){
g.drawRect(1,1,300,150);
g.setColor(Color.yellow);
g.fillRect(1,1,300,150);
g.setColor(Color.red);
g.drawString(str,1,150);
}
  
```

Q.4. (a) Explain ways of doing multithreading in java.**Ans.** Refer Q.2. (b) of End Term Examination 2015.**Q.4. (b) What is need of synchronization and how it is done in java?****Ans.** Synchronization in java is the capability to control the access of multiple threads to any shared resource.

Java Synchronization is better option where we want to allow only one thread to access the shared resource.

The synchronization is mainly used to

1. To prevent thread interference.
2. To prevent consistency problem.

Types of Synchronization

There are two types of synchronization

1. Process Synchronization
2. Thread Synchronization

Here, we will discuss only thread synchronization.

Thread Synchronization

There are two types of thread synchronization mutual exclusive and inter-thread communication.

1. Mutual Exclusive

1. Synchronized method.
2. Synchronized block.
3. static synchronization.
2. Cooperation (Inter-thread communication in java)

Q.4. (c) Explain concept of inner class and anonymous inner class with example?**Ans. Java Anonymous inner class:**

A class that have no name is known as anonymous inner class in java. It should be used if you have to override method of class or interface. Java Anonymous inner class can be created by two ways:

1. Class (may be abstract or concrete).
2. Interface

Java anonymous inner class example using class

1. **abstract class Person{}**
2. **abstract void eat();**
3. **4. class TestAnonymousInner{**
5. **public static void main(String args[]){**
6. **Person p=new Person();**

```

7. void eat(){System.out.println("nice fruits");}
8. ;
9. pest();
10. }

11. 
```

Java Inner Class contains

1. Java Inner classes
2. Advantage of inner class
3. Difference between nested class and inner class

Java inner class or nested class is a class i.e. declared inside the class or interface. We use inner classes to logically group classes and interfaces in one place so that it can be more readable and maintainable.

Additionally, it can access all the members of outer class including private members and methods.

Syntax of inner class

```

1. class Java_Outer_class{
2.   //code
3.   class Java_Inner_Class{
4.     //code
5.   }
6. }
```

Advantage of java inner classes

There are basically three advantages of inner classes in java. They are as follows:

- (1) Nested classes represent a special type of relationship that is it can access the members (data members and methods) of outer class including private.
- (2) Nested classes are used to develop more readable and maintainable code because it logically group classes and interfaces in one place only.
- (3) Code Optimization: It requires less code to write.

END TERM EXAMINATION [DECEMBER 2016]

FIFTH SEMESTER [B.TECH]

JAVA PROGRAMMING [ETCS-307]

M.M. : 75

Time : 3 hrs.

Note: Attempt any five questions including Q.No 1 which is compulsory

Q.1. (a) Define Constructor. Write various type of constructors.

Ans. Constructor in java is a special type of method that is used to initialize the object.

Java constructor is invoked at the time of object creation. It constructs the values i.e. provides data for the object that is why it is known as constructor.

Rules for creating java constructor

There are basically two rules defined for the constructor.

1. Constructor name must be same as its class name
2. Constructor must have no explicit return type

Types of java constructors

There are three types of constructors:

1. Default constructor (no-arg constructor)
2. Parameterized constructor
3. Copy constructor

1. Default Constructor: Default Constructor is also called as Empty Constructor which has no arguments and It is Automatically called when we creates the object of class but Remember name of Constructor is same as name of class and Constructor never declared with the help of Return Type. means we cant Declare a Constructor with the help of void Return Type, if we never Pass or Declare any Arguments then this called as the Copy Constructors.


2. Parameterized Constructor: This is another type Constructor which has some arguments and same name as class name but it uses some arguments So For this We have to create object of Class by passing some arguments at the time of creating object with the name of class. When we pass some arguments to the Constructor then this will automatically pass the Arguments to the Constructor and the values will retrieve by the Respective Data Members of the Class.

3. Copy Constructor: This is also another type of Constructor. In this Constructor we pass the object of class into the another Object of Same Class. As name Suggests you Copy, means Copy the values of one Object into the another Object of Class .This is used for Copying the values of class object into another object of class So we call them as Copy Constructor and For Copying the values We have to pass the name of object whose values we wants to Copying and When we are using or passing an Object to a Constructor then we must have to use the and Ampersand or Address Operator.

Q.1. (b) What is meant by bytecode in java ?

Ans. Bytecode is nothing but the intermediate representation of Java source code which is produced by the Java compiler by compiling that source code. This byte code is a machine independent code. It is not an completely a compiled code but it is an intermediate code somewhere in the middle which is later interpreted and executed by

JVM Bytecode is a machine code for JVM. But the machine code is platform specific whereas bytecode is platform independent that is the main difference between them. It is stored in .class file which is created after compiling the source code. Most developers although have never seen byte code (nor have ever wanted to see it!) One way to view the byte code is to compile your class and then open the .class file in a hex editor and translate the bytecodes by referring to the virtual machine specification. A much easier way is to utilize the command-line utility javap. The Java SDK from Sun includes the javap disassembler, that will convert the byte codes into human-readable mnemonics.

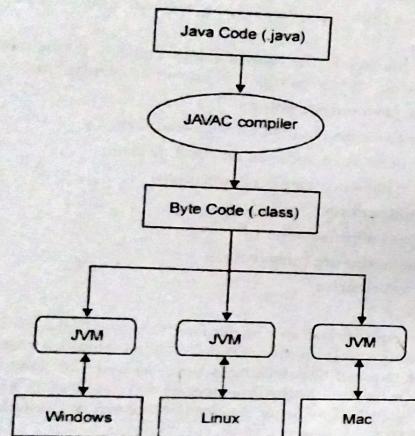

Q.1. (c) Explain about creation of classes and objects in java with example.

Ans: Object in Java

An entity that has state and behavior is known as an object e.g. chair, bike, marker, pen, table, car etc. It can be physical or logical (tangible and intangible). The example of intangible object is banking system.

An object has three characteristics:

State: represents data (value) of an object.

Behavior: represents the behavior (functionality) of an object such as deposit, withdraw etc.

Identity: Object identity is typically implemented via a unique ID. The value of the ID is not visible to the external user. But, it is used internally by the JVM to identify each object uniquely.

For Example: Pen is an object. Its name is Reynolds, color is white etc. known as its state. It is used to write, so writing is its behavior.

Object is an instance of a class. Class is a template or blueprint from which objects are created. So object is the instance(result) of a class.

Class in Java

A class is a group of objects which have common properties. It is a template or blueprint from which objects are created. It is a logical entity. It can't be physical.

A class in Java can contain:

1. fields
2. methods
3. constructors
4. blocks
5. nested class and interface

Syntax to declare a class:

```
class<class_name>{
field;
method;
}
```

Q.1. (d) Program on thread.

Ans. Java Thread Example by extending Thread class

```
1. class Multi extends Thread{
2.     public void run(){
3.         System.out.println("thread is running... ");
4.     }
5.     public static void main(String args[]){
6.         Multi t1=new Multi();
7.         t1.start();
8.     }
9. }
```

Output:thread is running...

Java Thread Example by implementing Runnable interface

```
1. Class Multi3 implements Runnable{
2.     Public void run(){
3.         System.out.println("thread is running... ");
4.     }
5.
6.     Public static void main(String args[]){
7.         Multi3 m1 = new Multi3();
8.         Thread t1 = new Thread(m1);
9.         t1.start();
10.
11.    }
12. }
```

Output:thread is running...

Q.1. (e) Write short note on buffered Streams.

Ans. Buffered input streams read data from a memory area known as a *buffer*, native input API is called only when the buffer is empty. Similarly, buffered output streams write data to a buffer, and the native output API is called only when the buffer is full.

A program can convert an unbuffered stream into a buffered stream using a wrapping idiom we've used several times now, where the unbuffered stream object is passed to the constructor for a buffered stream class. Here's how you might modify constructor invocations in the CopyCharacters example to use buffered I/O:

```
inputStream = new BufferedReader(new FileReader("xanadu.txt"));
outputStream = new BufferedWriter(new FileWriter("characteroutput.txt"));
```

There are four buffered stream classes used to wrap unbuffered streams: *BufferedReader*, *InputStream* and *BufferedOutputStream* create buffered byte streams, while *BufferedReader* and *BufferedWriter* create buffered character streams.

Q.2. (a) Write a program to create vector with seven elements*****

Ans: Below example shows how to copy or create a vector with another collection object. In the code we have created an *ArrayList* and by using *addAll()* method, we can copy another collection object.

Code:

```
package com.java2novice.vector;
import java.util.ArrayList;
import java.util.List;
import java.util.Vector;
public class MyVectorNewCollection {
    public static void main(String a[])
    {
        Vector<String>vct = new Vector<String>();
        //adding elements to the end
        vct.add("First");
        vct.add("Second");
        vct.add("Third");
        vct.add("Random");
        System.out.println("Actual vector." +vct);
        List<String> list = new ArrayList<String>();
        list.add("one");
        list.add("two");
        vct.addAll(list);
        System.out.println("After Copy." +vct);
    }
}
```

Output:

Actual vector: [First, Second, Third, Random]

After Copy: [First, Second, Third, Random, one, two]

Q.2. (b) Explain the following methods related to thread (i) wait() (ii) sleep()

Ans. Sleep(): It is a static method on Thread class. It makes the current thread into the "Not Runnable" state for specified amount of time. During this time, the thread keeps the lock (monitors) it has acquired.

Wait(): It is a method on Object class. It makes the current thread into the "Not Runnable" state. Wait is called on a object, not a thread. Before calling wait() method, the object should be synchronized, means the object should be inside synchronized block. The call to wait() releases the acquired lock.

	Sleep	Wait
1. Class belongs	java.lang.Thread	java.lang.Object
2. Context	Called from any context	Only synchronized context
2. Locking	Does not release the lock for specified time or until interrupt	Releases the lock
4. Wake up Condition	When time expires or due to interruption	Awake by call to notify (or notifyAll) method
5. Execution	Execution of sleep will pause the current running thread not the object on which it is called.	Thread wait() continues till a specific condition holds true

Q.3. (a) Describe the levels of access protection available for packages.

Ans. Java provides a number of access modifiers to set access levels for classes, variables, methods and constructors.

The four access levels are:

1. Visible to the package, the default. No modifiers are needed.
 2. Visible to the class only (private).
 3. Visible to the world (public).
 4. Visible to the package and all subclasses (protected).
- Default access modifier means we do not explicitly declare an access modifier for a class, field, method, etc., A variable or method declared without any access control modifier is available to any other class in the same package.
 - If you want only objects in the same class to be able to get or set the value of a field or invoke a method, declare it private.
 - If you want any object at all to be able to call a method or change a field, declare it public.
 - If you want access restricted to subclasses and members of the same package, declare it protected.


Q.3. (b) What do you mean by Exception handling? Explain the use of various keywords used for exception handling with suitable example.

Ans. An exception (or exceptional event) is a problem that arises during the execution of a program. When an Exception occurs the normal flow of the program is disrupted and the program/Application terminates abnormally, which is not recommended, therefore, these exceptions are to be handled.

An exception can occur for many different reasons. Following are some scenarios where an exception occurs.

- A user has entered an invalid data.
- A file that needs to be opened cannot be found.
- A network connection has been lost in the middle of communications or the Java has run out of memory.

The Exception class has two main subclasses, IOException class and RuntimeException Class.

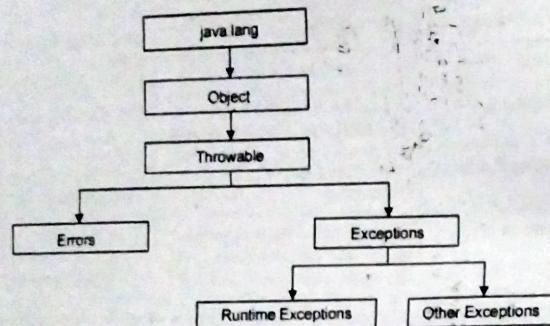

Java try block

Java try block is used to enclose the code that might throw an exception. It must be used within the method.

Java try block must be followed by either catch or finally block.

Syntax of java try-catch

1. try{}
2. //code that may throw exception
3. }catch(Exception_class_Name ref){}

Syntax of try-finally block

1. try{}
2. //code that may throw exception
3. }finally{}

Java catch block

Java catch block is used to handle the Exception. It must be used after the try block only.

The Throws/Throw Keywords

If a method does not handle a checked exception, the method must declare it using the throws keyword. The throws keyword appears at the end of a method's signature. You can throw an exception, either a newly instantiated one or an exception that you just caught, by using the throw keyword.

Difference between throws and throw keywords, throws is used to postpone the handling of a checked exception and throw is used to invoke an exception explicitly.

The following method declares that it throws a RemoteException.

Example

```

import java.io.*;
public class className{
    public void deposit(double amount) throws RemoteException{
        // Method implementation
        throw new RemoteException();
    }
    // Remainder of class definition
}
  
```

Q.4. (a) Explain different methods for changing priorities for threads.

Ans. Java Thread Priority :

1. Logically we can say that threads run simultaneously but practically its not true, only one Thread can run at a time in such a way that user feels that concurrent environment.

2. Fixed priority scheduling algorithm is used to select one thread for execution based on priority.

Example #1 : Default Thread Priority

getPriority() method is used to get the priority of the thread.

```

package com.c4learn.thread;
public class ThreadPriority extends Thread {
    public void run(){
        System.out.println(Thread.currentThread().getPriority());
    }
}
  
```

```

public static void main(String[] args)
throws InterruptedException{
    ThreadPriority t1 = new ThreadPriority();
    ThreadPriority t2 = new ThreadPriority();
    t1.start();
    t2.start();
}
  
```

Output :

5

5

default priority of the thread is 5.

Each thread has normal priority at the time of creation. We can change or modify the thread priority in the following example 2.

Example #2 : Setting Priority

```

package com.c4learn.thread;
public class ThreadPriority extends Thread {
    public void run() {
        String name = Thread.currentThread().getName();
        Integer prio = Thread.currentThread().getPriority();
        System.out.println(name + " has priority " + prio);
    }
}

```

```
public static void main(String[] args)
```

```
throws InterruptedException {

```

```
    ThreadPriority t0 = new ThreadPriority();

```

```
    ThreadPriority t1 = new ThreadPriority();

```

```
    ThreadPriority t2 = new ThreadPriority();

```

```
    t1.setPriority(Thread.MAX_PRIORITY);

```

```
    t0.setPriority(Thread.MIN_PRIORITY);

```

```
    t2.setPriority(Thread.NORM_PRIORITY);

```

```
    t0.start();

```

```
    t1.start();

```

```
    t2.start();
}
}

Output :

```

Thread-0 has priority 1

Thread-2 has priority 5

Thread-1 has priority 10

Explanation of Thread Priority :

1. We can modify the thread priority using the `setPriority()` method.
2. Thread can have integer priority between 1 to 10
3. Java Thread class defines following constants –
4. At a time many thread can be ready for execution but the thread with highest priority is selected for execution
5. Thread have default priority equal to 5.

Thread : Priority and Constant

Thread Priority	Constant
MIN_PRIORITY	1
MAX_PRIORITY	10
NORM_PRIORITY	5

Q.4. (b) Write a code for creating a closeable window using AWT classes to receive following inputs.

UserName,Sex,Qualification,Address,Save Button

```

Ans. import java.awt.*;
import java.applet.*;
import java.awt.event.*;
public class student extends Frame implements ActionListener
{
String msg;
Button b1 = new Button("save");
Label l11 = new Label("Student details",Label.CENTER);
Label l11 = new Label("Name:",Label.LEFT);
Label l12 = new Label("age:",Label.LEFT);
Label l13 = new Label("Sex(M/F):",Label.LEFT);
Label l14 = new Label("Address:",Label.LEFT);
Label l15 = new Label("Course:",Label.LEFT);
Label l16 = new Label("Semester:",Label.LEFT);
Label l17 = new Label("",Label.RIGHT);
TextField t1 = new TextField();
Choice c1 = new Choice();
CheckboxGroup cbg = new CheckboxGroup();
Checkbox ck1 = new Checkbox("Male",false,cbg);
Checkbox ck2 = new Checkbox("Female",false,cbg);
TextArea t2 = new TextArea ("",180,90,TextArea.SCROLLBARS_VERTICAL_ONLY);
Choice course = new Choice();
Choice sem = new Choice();
Choice age = new Choice();
public student()
{
addWindowListener(new myWindowAdapter());
setBackground(Color.cyan);
setForeground(Color.black);
setLayout(null);
add(l11);
add(l11);
add(l12);
add(l13);
add(l14);
add(l15);
add(l16);
add(l17);
}
}

```

```

add(t1);
add(t2);
add(ck1);
add(ck2);
add(course);
add(sem);
add(age);
add(b1);
b1.addActionListener(this);
add(b1);
course.add("BSc c.s");
course.add("BSc maths");
course.add("BSc physics");
course.add("BA English");
course.add("BCOM");
sem.add("1");
sem.add("2");
sem.add("3");
sem.add("4");
sem.add("5");
sem.add("6");
age.add("17");
age.add("18");
age.add("19");
age.add("20");
age.add("21");
l1.setBounds(25,65,90,20);
l2.setBounds(25,90,90,20);
l3.setBounds(25,120,90,20);
l4.setBounds(25,185,90,20);
l5.setBounds(25,260,90,20);
l6.setBounds(25,290,90,20);
l7.setBounds(25,260,90,20);
l11.setBounds(10,40,280,20);
t1.setBounds(120,65,170,20);
t2.setBounds(120,185,170,60);
ck1.setBounds(120,120,50,20);
ck2.setBounds(170,120,60,20);
course.setBounds(120,260,100,20);
sem.setBounds(120,290,50,20);

```

```

age.setBounds(120,90,50,20);
b1.setBounds(120,350,50,30);
}
public void paint(Graphics g)
{g.drawString(msg,200,450);}
public void actionPerformed(ActionEvent ae)
{if(ae.getActionCommand().equals("save"))
{msg="Student details saved";
setForeground(Color.red);}}
}
public static void main(String g[])
{studentstu=new student();
stu.setSize(new Dimension(500,500));
stu.setTitle("student registration");
stu.setVisible(true);}
}
class myWindowAdapter extends WindowAdapter
{public void windowClosing(WindowEvent we)
{
System.exit(0);
}
}

```

Output**Student details**

Name	nikhil
age	19
Ssx(MF)	Male Female
Address	Type address hfhgg
Course	BSc. c.s.
Semester	5

Save

Q.5. (a) What is 'this' Pointer? How does 'this' pointer can be used in java program? Explain with example.

Ans: this keyword in java


There can be a lot of usage of java this keyword. In java, this is a reference variable that refers to the current object.

Usage of java this keyword

Here is given the 6 usage of java this keyword.

1. this can be used to refer current class instance variable.

2. this can be used to invoke current class method (implicitly).
3. this() can be used to invoke current class constructor.
4. this can be passed as an argument in the method call.
5. this can be passed as argument in the constructor call.
6. this can be used to return the current class instance from the method.

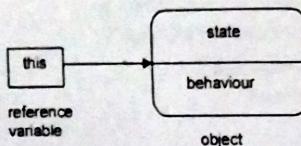

this() : to invoke current class constructor

The this() constructor call can be used to invoke the current class constructor, used to reuse the constructor. In other words, it is used for constructor chaining.

Calling default constructor from parameterized constructor:

```

1. class A{
2.     A(){System.out.println("hello a");}
3.     A(int x){
4.         this();
5.         System.out.println(x);
6.     }
7. }
8. class TestThis5{
9.     public static void main(String args[]){
10.     A a=new A(10);
11. }
  
```

Test it Now

Output:

hello a

10

Q.5. (b) Write the syntax of iteration statement of java.

Ans: Iterative Statements in Java

While loop

While loop is used for iteration. If we don't know how many elements are stored in a list to iterate in advance then it is recommended to use while loop as a best practice in this kind of situation.

Syntax

```

While(-) // boolean type
[...]
  
```

Curly braces are optional but we can write only one statement under while should not be declarative statement.

do-while

do-while will execute loop atleast once.

Syntax

```

do{
    statement;
}
  
```

while(x);

If conditions is false still do-while will execute atleast once.

For loop

If we know the number of iteration in advance then we should go for loop .It is widely used for in java.

Syntax

```

for (initialization; conditional-exp; incrementation){
    // body
}
  
```

Initialization

In this section we write initial value from iteration will be stored . It will be executed only once. We can declare any number of while but same type.

Example

```

int i=10;
String str="java"; // (invalid)
  
```

We can write any valid java statement.

Example

```

for(System.out.println("hello java");i<2;i++)
{
    System.out.println("hello java");
}
  
```

Conditional Expression

In conditional expression we take any valid java expression which should be Boolean type. This is optional if we are not using it then compiler will always place true.

Example

```

int i=0;
for(System.out.println("hello java"); i++ )
{
    System.out.println("hello java")
}
  
```

Increment /Decrement

In this section if condition is true then it will increment/decrement based on given expressions. We can also write System.out.println statement in this section.

Program

```

classFor_Example {
    public static void main(String[] args) {
        int i = 0;
        for (System.out.println("hello java"); i < 3; System.out.println("hello"))
        {
            i++;
            System.out.println("hello java");
        }
    }
}

```

Output

```

hello java
hello java
hello
hello java
hello
hello java
hello

```

for-each loop(Enhanced for loop)

This loop is used to retrieve elements from collections or arrays.

Example

```

String[] str = f.list();
for(String s : str){
    System.out.println(s);
}

```

Q.5. (c) Explain about overloading of methods in java.**Ans. Method Overloading in Java**

If a class has multiple methods having same name but different in parameters, it is known as **Method Overloading**. If we have to perform only one operation, having same name of the methods increases the readability of the program.

Suppose you have to perform addition of the given numbers but there can be a number of arguments, if you write the method such as `a(int,int)` for two parameters, `b(int,int,int)` for three parameters then it may be difficult for you as well as other programmers to understand the behavior of the method because its name differs.

So, we perform method overloading to figure out the program quickly.

Advantage of method overloading

Method overloading *increases the readability of the program*.

Different ways to overload the method

There are two ways to overload the method in java

1. By changing number of arguments
2. By changing the data type

(1) Method Overloading: changing no. of arguments

In this example, we have created two methods, first `add()` method performs addition of two numbers and second `add` method performs addition of three numbers.

In this example, we are creating static methods so that we don't need to create instance for calling methods.

```

1. class Adder{
2.     static int add(int a,int b){return a+b;}
3.     static int add(int a,int b,int c){return a+b+c;}
4. }
5. class TestOverloading1{
6.     public static void main(String[] args){
7.         System.out.println(Adder.add(11,11));
8.         System.out.println(Adder.add(11,11,11));
9.     }
}

```

Test it Now

Output:

```

22
33

```

(2) Method Overloading: changing data type of arguments

In this example, we have created two methods that differs in data type. The first `add` method receives two integer arguments and second `add` method receives two double arguments.

```

1. class Adder{
2.     static int add(int a, int b){return a+b;}
3.     static double add(double a, double b){return a+b;}
4. }
5. class TestOverloading2{
6.     public static void main(String[] args){
7.         System.out.println(Adder.add(11,11));
8.         System.out.println(Adder.add(12.3,12.6));
9.     }
}

```

Test it Now

Output:

```

22
24.9

```

By changing the return type of the method only because of ambiguity. Let's see how ambiguity may occur:

```

1. class Adder{
2.     static int add(int a,int b){return a+b;}
3.     static double add(int a,int b){return a+b;}
4. }
5. class TestOverloading3{
6.     public static void main(String[] args){
7.         System.out.println(Adder.add(11,11));//ambiguity
8.     }
}

```

Test it Now

Output:

Compile Time Error: method add(int,int) is already defined in class Adder

Q.6. (a) Define Inheritance. Give Various forms of inheritance and write a java program on single inheritance.

Ans. Inheritance can be defined as the process where one class acquires the properties (methods and fields) of another. With the use of inheritance the information is made manageable in a hierarchical order.

The class which inherits the properties of other is known as subclass (derived class, child class) and the class whose properties are inherited is known as superclass (base class, parent class).

The idea behind inheritance in java is that you can create new classes that are built upon existing classes. When you inherit from an existing class, you can reuse methods and fields of parent class, and you can add new methods and fields also.

Inheritance represents the IS-A relationship, also known as parent-child relationship.

Why use inheritance in java

1. For Method Overriding (so runtime polymorphism can be achieved).
2. For Code Reusability.

Syntax of Java Inheritance

class Subclass-name extends Superclass-name

```

    |
    //methods and fields
    |
  
```


Various forms of inheritance:

- Single Inheritance
- Multiple Inheritance (Through Interface)
- Multilevel Inheritance
- Hierarchical Inheritance
- Hybrid Inheritance (Through Interface)

Lets see about each one of them one by one.

Single Inheritance in Java

Single Inheritance is the simple inheritance of all. When a class extends another class (Only one class) then we call it as **Single inheritance**. The below diagram represents the single inheritance in java where Class B extends only one class Class A. Here Class B will be the **Sub class** and Class A will be one and only **Super class**.



Single Inheritance

```

1. class Animal{
2.     void eat(){System.out.println("eating...");}
3. }
4. class Dog extends Animal{
5.     void bark(){System.out.println("barking...");}
6. }
  
```

```

7. class TestInheritance{
8.     public static void main(String args[]){
9.         Dog d=new Dog();
10.        d.bark();
11.        d.eat();
12.    }
  
```

Output:

barking...
eating...

Q.6. (b) Define an Applet? What is the use of an Applet? Describe the life cycle of an applet.

Ans: An applet is a Java program that runs in a Web browser. An applet can be a fully functional Java application because it has the entire Java API at its disposal.

Java Applets are usually used to add small, interactive components or enhancements to a webpage. These may consist of buttons, scrolling text, or stock tickers, but they can also be used to display larger programs like word processors or games

Life Cycle of an Applet

Four methods in the Applet class are:


- **init** – This method is intended for whatever initialization is needed for your applet. It is called after the param tags inside the applet tag have been processed.
- **start** – This method is automatically called after the browser calls the init method. It is also called whenever the user returns to the page containing the applet after having gone off to other pages.
- **stop** – This method is automatically called when the user moves off the page on which the applet sits. It can, therefore, be called repeatedly in the same applet.
- **destroy** – This method is only called when the browser shuts down normally. Because applets are meant to live on an HTML page, you should not normally leave resources behind after a user leaves the page that contains the applet.

• **paint** – Invoked immediately after the start() method, and also any time the applet needs to repaint itself in the browser. The paint() method is actually inherited from the java.awt.

A "Hello, World" Applet

```

import java.applet.*;
import java.awt.*;
public class HelloWorldApplet extends Applet
public void paint (Graphics g){
g.drawString("Hello World",25,50);
}
  
```

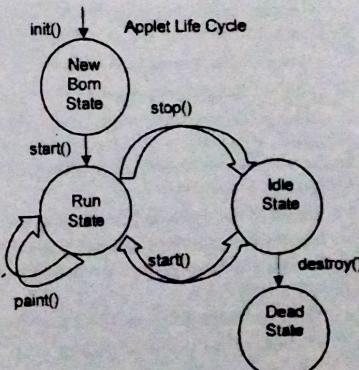

Q.7. (a) Define Container Class. Give a Suitable Example.

Ans. A container class is a data type that is capable of holding a collection of items. Containers hold and organize your Components, but they also contain code for event handling and many 'niceties' such as controlling the cursor image and the application's icon.

Containers:

- Frame
- Window
- Dialog
- Panel

Example:

```
public class Container extends Component
```

Container Methods

Constructors The abstract Container class contains a single constructor to be called by its children. Prior to Java 1.1, the constructor was package private.

```
protected Container()
```

The constructor for Container creates a new component without a native peer. Since you no longer have a native peer, you must rely on your container to provide a display area. This allows you to create containers that require fewer system resources.

For example, if you are creating panels purely for layout management, you might consider creating a LightweightPanel class to let you assign a layout manager to a component group. Using LightweightPanel will speed things up since events do not have to propagate through the panel and you do not have to get a peer from the native environment.

The following code creates the LightweightPanel class:

```
import java.awt.*;
public class LightweightPanel extends Container
{ LightweightPanel()
  { LightweightPanel(LayoutManager lm)
    { setLayout(lm); }
  }
}
```

Grouping A Container holds a set of objects within itself. This set of methods describes how to examine and add components to the set.

```
public int getComponentCount()
public int countComponents()
```

The getComponentCount() method returns the number of components within the container at this level. getComponentCount() does not count components in any child Container (i.e., containers within the current container). countComponents() is the Java 1.0 name for this method.

```
public Component getComponent(int position)
```

The getComponent() method returns the component at the specific position within it. If position is invalid, this method throws the run-time exception **ArrayIndexOutOfBoundsException**.

Q.7. (b) write short note on any Two of the following:**(i) Security Promises of Java**

Ans. Java's security model is focused on protecting users from hostile programs downloaded from untrusted sources across a network. To accomplish this goal, Java

provides a customizable "sandbox" in which Java programs run. A Java program must play only inside its sandbox. It can do anything within the boundaries of its sandbox, but it can't take any action outside those boundaries. The sandbox for untrusted Java applets, for example, prohibits many activities, including:

- Reading or writing to the local disk
- Making a network connection to any host, except the host from which the applet came
- Creating a new process
- Loading a new dynamic library and directly calling a native method

By making it impossible for downloaded code to perform certain actions, Java's security model protects the user from the threat of hostile code.

- The language defines all primitives with a specific size and all operations are defined to be in a specific order of execution. Thus, the code executed in different JVMs will not differ from the specified order of execution.

• The language provides access-control functionality on variables and methods in the object by defining name space management for type and procedure names. This secures the program by restricting access to its critical objects from untrusted code. For example, access is restricted by qualifying the type members as public, protected, private, package, etc.

• The Java language does not allow defining or dereferencing pointers, which means that programmers cannot forge a pointer to the memory or create code defining offset points to memory. All references to methods and instance variables in the class file are done via symbolic names. The elimination of pointers helps to prevent malicious programs like computer viruses and misuse of pointers such as accessing private methods directly by using a pointer starting from the object's pointer, or running off the end of an array.

• The Java object encapsulation supports "programming by contract," which allows the reuse of code that has already been tested.

• The Java language is a strongly typed language. During compile time, the Java compiler does extensive type checking for type mismatches. This mechanism guarantees that the runtime data type variables are compatible and consistent with the compile time information.

• The language allows declaring classes or methods as final. Any classes or methods that are declared as final cannot be overridden. This helps to protect the code from malicious attacks such as creating a subclass and substituting it for the original class and override methods.

• The Java Garbage Collection mechanism contributes to secure Java programs by providing a transparent storage allocation and recovering unused memory instead of deallocating the memory using manual intervention. This ensures program integrity during execution and prevents programmatic access to accidental and incorrect freeing of memory resulting in a JVM crash.

(ii) Wrapper classes


Ans. Normally, when we work with Numbers, we use primitive data types such as byte, int, long, double, etc.

Example:

```
int i = 5000;
float gpa = 13.65;
double mask = 0xaf;
```

However, in development, we come across situations where we need to use objects instead of primitive data types. In order to achieve this, Java provides **wrapper classes**.

All the wrapper classes (Integer, Long, Byte, Double, Float, Short) are subclasses of the abstract class Number.

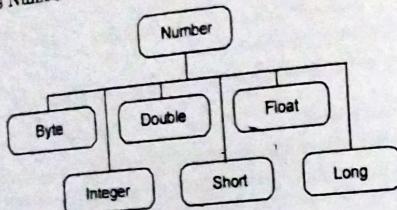

The object of the wrapper class contains or wraps its respective primitive data type. Converting primitive data types into object is called **boxing**, and this is taken care by the compiler. Therefore, while using a wrapper class you just need to pass the value of the primitive data type to the constructor of the Wrapper class. And the Wrapper object will be converted back to a primitive data type, and this process is called unboxing. The **Number** class is part of the `java.lang` package.

Wrapper class Example: Primitive to Wrapper

```

1. public class WrapperExample1{
2. public static void main(String args[]){
3. //Converting int into Integer
4.         int a=20;
5. Integer i=Integer.valueOf(a); //converting int into Integer
6. Integer j=a; //autoboxing, now compiler will write Integer.valueOf(a) internally
7.
8. System.out.println(a+ " "+i+ " "+j);
9.         }
  
```

Output:

20 20 20

Wrapper class Example: Wrapper to Primitive

```

1. public class WrapperExample2{
2. public static void main(String args[]){
3. //Converting Integer to int
4. Integer a=new Integer(3);
5. int i=a.intValue(); //converting Integer to int
6. int j=a; //unboxing, now compiler will write a.intValue() internally
7.
8. System.out.println(a+ " "+i+ " "+j);
9.         }
  
```

Output:

3 3 3

Primitive Type	Wrapper class
Boolean	Boolean
char	Character
byte	Byte
short	Short
int	Integer
long	Long

float

double

(iii) Awt components

Ans: Java AWT (Abstract Window Toolkit) is an API to develop GUI or window-based applications in java. Java AWT components are platform-dependent i.e. its components are using the resources of OS.

The `java.awt` package provides classes for AWT api such as `TextField`, `Label`, `TextArea`, `RadioButton`, `CheckBox`, `Choice`, `List` etc.

Java AWT Hierarchy

Container

The Container is a component in AWT that can contain another components like buttons, textfields, labels etc. The classes that extends Container class are known as container such as Frame, Dialog and Panel.

Window

The window is the container that have no borders and menu bars. You must use frame, dialog or another window for creating a window.

Panel

The Panel is the container that doesn't contain title bar and menu bars. It can have other components like button, textfield etc.

Frame

The Frame is the container that contain title bar and can have menu bars. It can have other components like button, textfield etc.

Useful Methods of Component class

Method Description

`public void add(Component c)` inserts a component on this component.

`public void setSize(int width,int height)` sets the size (width and height) of the component.

`public void setLayout(LayoutManager m)` defines the layout manager for the component.

`public void setVisible(boolean status)` changes the visibility of the component, by default false.

Java AWT Example

To create simple awt example, you need a frame. There are two ways to create a frame in AWT.

By extending Frame class (inheritance)

By creating the object of Frame class (association)

AWT Example by Inheritance

Let's see a simple example of AWT where we are inheriting Frame class. Here, we are showing Button component on the Frame.

```

import java.awt.*;
class First extends Frame{
First(){
Button b=new Button("click me");
b.setBounds(30,100,80,30); // setting button position
add(b); //adding button into frame
setSize(300,300); //frame size 300 width and 300 height
  
```

```

setLayout(null); //no layout manager
setVisible(true); //now frame will be visible, by default not visible
|
public static void main(String args[]){
First f=new First();
}

```

(iv) Remote Method invocation

Ans. The RMI (Remote Method Invocation) is an API that provides a mechanism to create distributed application in java. The RMI allows an object to invoke methods on an object running in another JVM.

The RMI provides remote communication between the applications using two objects *stub* and *skeleton*.

Understanding stub and skeleton

RMI uses stub and skeleton object for communication with the remote object.

A **remote object** is an object whose method can be invoked from another JVM. Let's understand the stub and skeleton objects:

stub

The stub is an object, acts as a gateway for the client side. All the outgoing requests are routed through it. It resides at the client side and represents the remote object. When the caller invokes method on the stub object, it does the following tasks:


1. It initiates a connection with remote Virtual Machine (JVM),
2. It writes and transmits (marshals) the parameters to the remote Virtual Machine (JVM),
3. It waits for the result
4. It reads (unmarshals) the return value or exception, and
5. It finally, returns the value to the caller.

skeleton

The skeleton is an object, acts as a gateway for the server side object. All the incoming requests are routed through it. When the skeleton receives the incoming request, it does the following tasks:

1. It reads the parameter for the remote method
2. It invokes the method on the actual remote object, and
3. It writes and transmits (marshals) the result to the caller.

In the Java 2 SDK, an stub protocol was introduced that eliminates the need for skeletons.

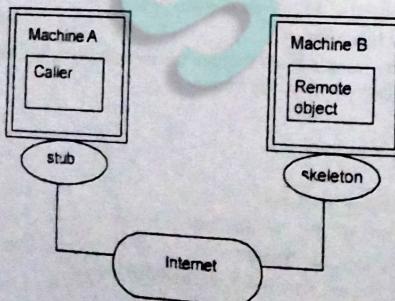

FIRST TERM EXAMINATION [SEPT. 2017]

FIFTH SEMESTER [B.TECH]

JAVA PROGRAMMING [ETCS-307]

Time : 1½ hrs.

M.M. : 30

Note: Attempt Q.no. 1 which is compulsory and any two more questions from remaining then how it will be done?

Q.1. (a) If we want to execute any statement before the call of main() method

Ans. It will be executed in static block.

Static block is executed when the class which contain static block is loaded in to memory and static method is executed when it is called. Mostly static block is used for initialization of static members.

Q.1.(b) Explain Autoboxing and Unboxing with help of example.

Ans. Autoboxing: Automatic conversion of primitive types to the object of their corresponding wrapper classes is known as autoboxing. For example – conversion of int to Integer, long to Long, double to Double etc.

class BoxingExample1

```

public static void main(String args[]){
int a=50;
Integer a2=new Integer(a);//Boxing
Integer a3=5;/Boxing
System.out.println(a2+" "+a3);
}

```

Output:50 5

Unboxing: It is just the reverse process of autoboxing. Automatically converting an object of a wrapper class to its corresponding primitive type is known as unboxing. For example – conversion of Integer to int, Long to long, Double to double etc.

class UnboxingExample1

```

public static void main(String args[]){
Integer i=new Integer(50);
int a=i;
System.out.println(a);
}

```

Output:50

Q.1.(c) What will be output of following program.

String s1 = "Java"

String s2 = "Java"

If (s1.equals(s2))

{

System.out.println("Hello")

(1)

```
Else
System.out.println ("Bye")
```

|
Ans. Hello

The String equals() method compares the original content of the string. It compares values of string for equality.

Q.1.(d). What will be output of the program.

```
String s1 = "Java"
String s2 = "Java"
If (s1 == (s2))
(
System.out.println ("hello")
Else
System.out.println (Bye)
)
```

Ans. Hello

The == operator compares references not values.

Q.1.(e). What is difference between checked and unchecked exception.

Ans. The differences are as follows:

Checked: are the exceptions that are checked at compile time. If some code within a method throws a checked exception, then the method must either handle the exception or it must specify the exception using throws keyword.

Unchecked: are the exceptions that are not checked at compiled time. In C++, exceptions are unchecked, so it is not forced by the compiler to either handle or specify the exception. It is up to the programmers to be civilized, and specify or catch the exceptions.

In Java exceptions under Error and Runtime Exception classes are unchecked exceptions, everything else under throwable is checked.

Q.1.(f). Explain Anonymous inner class with help of example.

Ans. Refer Q.4.(c) First Term September-2016 [Page no- 2016-9].

Q.1.(g) What is difference between abstract class and interface in java?

Ans. Refer Q.1.(b) End Term September-2016 [Page no- 1-2016].

Q.1.(h) Explain applet Tag.

Ans. The <APPLET> Tag

Applets are embedded in HTML documents with the <APPLET> tag. The <APPLET> tag resembles the HTML image tag. It contains attributes that identify the applet to be displayed and, optionally, give the web browser hints about how it should be displayed.

```
<APPLET attribute
attribute ... >
```

<PARAM parameter>

<PARAM parameter>

..</APPLET>

Q.1.(i) Explain the use of "final" keyword with help of example.

Ans. 1. Using final to define constants: If you want to make a local variable, class variable (static field), or instance variable (non-static field) constant, declare it final. A final variable may only be assigned to once and its value will not change and can help avoid programming errors.

Once a final variable has been assigned, it always contains the same value.

```
1. class Bike9(
2. final int speedlimit=90;//final variable
3. void run() .4. speedlimit=400;
5. )
6. public static void main(String args[])
7. Bike9 obj=new Bike9();
8. obj.run();
9. )
10.}//endofclass
```

Output:Compile Time Error

2. Using final to prevent inheritance: If you find a class's definition is complete and you don't want it to be sub-classed, declare it final. A final class cannot be inherited, therefore, it will be a compile-time error if the name of a final class appears in the extends clause of another class declaration; this implies that a final class cannot have any subclasses.

It is a compile-time error if a class is declared both final and abstract, because the implementation of such a class could never be completed.

```
final class XYZ{
}
class ABC extends XYZ{
void demo (){
System.out.println("My Method")
}
public static void main(String args[])
}
```

Output:

The type ABC cannot subclass the final class XYZ

3. Using final to prevent overriding: When a class is extended by other classes, its methods can be overridden for reuse. There may be circumstances when you want to

prevent a particular method from being overridden, in that case, declare that method final. Methods declared as final cannot be overridden.

```

class XYZ{
    final void demo(){
        System.out.println("XYZ Class Method");
    }
}

class ABC extends XYZ{
    void demo(){
        System.out.println("ABC Class Method");
    }
}

public static void main( String args[])
{
    ABC obj= new ABC();
    obj.demo();
}

```

The above program would throw a compilation error.

Q.1.(j) What do you mean by Dynamic Method Dispatch.

Ans. Refer Q.4.(c) End Term December-2017

Q.2 Write down program to create user defined Exception. Explain following with help of example. (a) Throw (b) Throws (c) Finally.

Ans. This example shows how to create user defined exception by extending Exception Class.

```

class MyException extends Exception{
    String s1;
    MyException(String s2){
        s1 = s2;
    }

    public String toString(){
        return "Output String = "+s1;
    }
}

public class NewClass{
    public static void main( String args[])
    {
        try{
            throw new MyException("Custom message");
        }catch( MyException exp){
            System.out.println(exp);
        }
    }
}

```

The above code sample will produce the following result.
Output String = Custom message

(a) Throw Keyword: The throw keyword in Java is used to explicitly throw an exception from a method or any block of code. We can throw either checked or unchecked exception. The throw keyword is mainly used to throw custom exceptions.

Syntax:

throwInstance

Example:

```

throw new ArithmeticException("/ by zero");
class ThrowExcep

```

```

static void fun()
{

```

```

    try
    {

```

```

        throw new NullPointerException("demo")
    }

```

```

    catch(NullPointerException e)
    {

```

```

        System.out.println("Caught inside fun().");
        throw e; // rethrowing the exception
    }
}

```

```

public static void main( String args[])
{

```

```

    try
    {

```

```

        fun();
    }

```

```

    catch(NullPointerException e)
    {

```

```

        System.out.println("Caught in main.");
    }
}

```

Output:

Caught inside fun().
Caught in main.

(b) **Throws Keyword:** Throws is a keyword in Java which is used in the signature of method to indicate that this method might throw one of the listed type exceptions. The caller to these methods has to handle the exception using a try-catch block.

Syntax:

`type method_name(parameters) throws exception_list`

exception_list is a comma separated list of all the exceptions which a method might throw.

```
public class Example1{
    int division(int a, int b) throws ArithmeticException{
        int t = a/b;
        return t;
    }

    public static void main(String args[]){
        Example1 obj = new Example1();
        try{
            System.out.println(obj.division(15,0));
        }
        catch(ArithmaticException e){
            System.out.println("You shouldn't divide number by zero");
        }
    }
}
```

Output:

You shouldn't divide number by zero


(c) **Finally Keyword:** Finally block is a block that is used to execute important code such as closing connection, stream etc.

Java finally block is always executed whether exception is handled or not.

Java finally block follows try or catch block.

```
class TestFinallyBlock{
    public static void main(String args[]){
        try{
            int data=25/5;
            System.out.println(data);
        }
        catch(NullPointerException e){System.out.println(e);}
        finally{System.out.println("finally block is always executed");}
        System.out.println("rest of the code...");
```

Ans. JVM (Java Virtual Machine) is an abstract machine. It is a specification that provides runtime environment in which Java bytecode can be executed. JVMs are available for many hardware and software platforms (i.e. JVM is platform dependent).

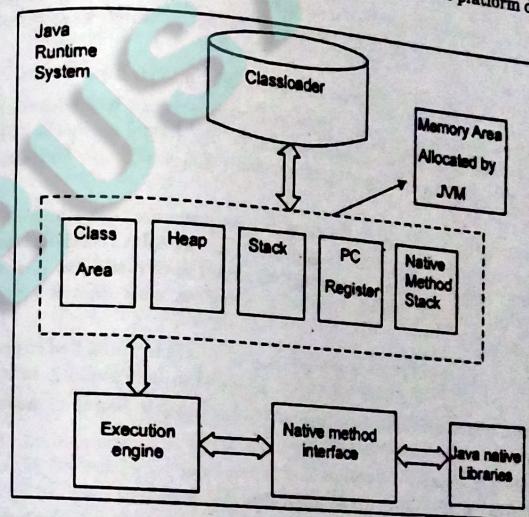

1. **Classloader:** Classloader is a subsystem of JVM that is used to load class files.

2. **Class (Method) Area:** Class(Method) Area stores per-class structures such as the runtime constant pool, field and method data, the code for methods.

3. **Heap:** It is the runtime data area in which objects are allocated.

4. **Stack:** Java Stack stores frames. It holds local variables and partial results, and plays a part in method invocation and return.

Each thread has a private JVM stack, created at the same time as thread. A new frame is created each time a method is invoked. A frame is destroyed when its method invocation completes.

5. **Program Counter Register:** PC (program counter) register. It contains the address of the Java virtual machine instruction currently being executed.

6. **Native Method Stack:** It contains all the native methods used in the application.

7. **Execution Engine It contains:**

1. A virtual processor

2. Interpreter: Read bytecode stream then execute the instructions.

3. Just-In-Time(JIT) compiler: It is used to improve the performance. JIT compiler parts of the byte code that have similar functionality at the same time, and hence reduces the amount of time needed for compilation. Here the term compiler refers to a translator from the instruction set of a Java virtual machine (JVM) to the instruction set of a specific CPU.

Java class file format: Compiled Java is typically distributed in a very compact format called Class files. It is the assembler code for a virtual stack-oriented

Java-friendly CPU (Central Processing Unit) chip. Such chips do exist, but most of the time they are simulated with interpreters, JIT (Just In Time), Hotspots or AOT (Ahead Of Time) compilation on the target machines which have quite different architectures.

Class files are usually compressed and bundled into jar files.

Each class file is marked with a class file format version, which lets you know what JDK (Java Development Kit) it was compiled for. At offset 6 in the class file is a 4 byte short that gives the major version number. You can display for the classes in a jar with JarCheck.

A Java class file is a file (with the .class filename extension) containing Java bytecode that can be executed on the Java Virtual Machine (JVM). A Java class file is produced by a Java compiler from Java programming language source files (Java files) containing Java classes. If a source file has more than one class, each class is compiled into a separate class file.

JVMs are available for many platforms, and a class file compiled on one platform will execute on a JVM of another platform. This makes Java platform-independent.

Q.4. How Garbage Collection in java works? Explain Sandbox model in JVM as an Emulator comment on it.

Ans. Java Garbage Collection

In Java, garbage means unreferenced objects.

Garbage Collection is process of reclaiming the runtime unused memory automatically. In other words, it is a way to destroy the unused objects.

To do so, we were using free() function in C language and delete() in C++. But in Java it is performed automatically. So, Java provides better memory management.

Advantage of Garbage Collection

It makes Java memory efficient because garbage collector removes unreferenced objects from heap memory.

It is automatically done by the garbage collector(a part of JVM) so we don't have to make extra efforts.

gc() method

The gc() method is used to invoke the garbage collector to perform cleanup process. The gc() is found in System and Runtime classes.

public static void gc();

sandbox model in java.

A security measure in the Java development environment. The sandbox is a set of rules that are used when creating an applet that prevents certain functions when the applet is sent as part of a Web page. When a browser requests a Web page with applets

the applets are sent automatically and can be executed as soon as the page arrives in the browser. If the applet is allowed unlimited access to memory and operating system resources, it can do harm in the hands of someone with malicious intent. The sandbox creates an environment in which there are strict limitations on what system resources the applet can request or access. Sandboxes are used when executable code comes from unknown or untrusted sources and allow the user to run untrusted code safely.

The Java sandbox relies on a three-tiered defense. If any one of these three elements fails, the security model is completely compromised and vulnerable to attack.

- Byte code verifier** — This is one way that Java automatically checks untrusted outside code before it is allowed to run. When a Java source program is compiled, it compiles down to platform-independent Java byte code, which is verified before it can run. This helps to establish a base set of security guarantees.

- Applet class loader** — All Java objects belong to classes, and the applet class loader determines when and how an applet can add classes to a running Java environment. The applet class loader ensures that important elements of the Java run-time environment are not replaced by code that an applet tries to install.

- Security manager** — The security manager is consulted by code in the Java library whenever a dangerous operation is about to be carried out. The security manager has the option to veto the operation by generating a security exception.

Java typically interpret instead of compile? The main advantage of compilation is that you end up with raw machine language code that can be efficiently executed on your machine. However, it can only be executed on one type of machine architecture (Intel Pentium, PowerPC). A primary advantage of compiling to an intermediate language like Java bytecode and then interpreting is that you can achieve *platform independence*: you can interpret the same class file on differently types of machine architectures. However, interpreting the bytecode is typically slower than executing pre-compiled machine language code. A second advantage of using the Java bytecode is that it acts as a buffer between your computer and the program. This enables you to download an untrusted program from the Internet and execute it on your machine with some assurances. Since you are running the Java interpreter (and not raw machine language code), you are protected by a layer of security which guards against malicious programs. It is the combination of Java and the Java bytecode that yield a platform-independent and secure environment, while still embracing a full set of modern programming abstractions.

END TERM EXAMINATION [DEC. 2017]

FIFTH SEMESTER [B.TECH]

JAVA PROGRAMMING [ETCS-307]

Time : 3 hrs.

Note: Attempt any five questions including Q.no. 1 which is compulsory.

M.M. : 75

Q.1. Answer the following:

Q.1. (a) Give a brief overview on Java packages. Write necessary code snippets. (5)

Ans. Refer Q.2.(a). First Term September-2016 [Page no. 2016-3].

Q.1.(b). State the difference between inner class and anonymous class? (5)

Ans. Java Inner Classes

Java inner class or nested class is a class which is declared inside the class or interface.

We use inner classes to logically group classes and interfaces in one place so that it can be more readable and maintainable.

Additionally, it can access all the members of outer class including private data members and methods.

Syntax of Inner class

```
class Java_Outer_class{
    //code
    class Java_Inner_class{
        //code
    }
}
```

Advantage of java inner classes

There are basically three advantages of inner classes in java. They are as follows:

1. Nested classes represent a special type of relationship that is it can access all the members (data members and methods) of outer class including private.

2. Nested classes are used to develop more readable and maintainable code because it logically group classes and interfaces in one place only.

3. Code Optimization: It requires less code to write.

Anonymous class

A class that have no name is known as anonymous inner class in java. It should be used if you have to override method of class or interface. Java Anonymous inner class can be created by two ways:

1. Class (may be abstract or concrete).
2. Interface

Example :

```
abstract class Person{
    abstract void eat();
```

I.P. University-(B.Tech)-Akash Books

2017-11

```
class TestAnonymousInner{
    public static void main(String args[]){
        Person p=new Person(){
            void eat(){System.out.println("nice fruits");}
        };
        p.eat();
    }
}
```

Output:

nice fruits

Q.1. (c) What are access specifiers? Discuss them in the context of Java.

Ans. Access Specifiers In Java: Java Access Specifiers (also known as Visibility Specifiers) regulate access to classes, fields and methods in Java. These Specifiers determine whether a field or method in a class, can be used or invoked by another method in another class or sub-class. Access Specifiers can be used to restrict access

Types Of Access Specifiers :

In java we have four Access Specifiers and they are listed below.

- | | |
|--------------|--------------------------|
| 1. Public | 2. Private |
| 3. Protected | 4. Default(no specifier) |

We look at these Access Specifiers in more detail:

Access Modifiers	Default	private	protected	public
Accessible inside the class	yes	yes	yes	yes
Accessible within the subclass inside the same package	yes	no	yes	yes
Accessible outside the package	no	no	no	yes
Accessible within the subclass outside the package	no	no	yes	yes

Public Specifiers : Public Specifiers achieves the highest level of accessibility. Classes, methods, and fields declared as public can be accessed from any class in the Java program, whether these classes are in the same package or in another package.

Example :

```
public class Demo { // public class
    public x, y, size; // public instance variables
}
```

Private specifiers : Private Specifiers achieves the lowest level of accessibility. private methods and fields can only be accessed within the same class to which the methods and fields belong. private methods and fields are not visible within subclasses and are not inherited by subclasses.

```

Example :
public class Demo { // public class
    private double x, y; // private (encapsulated) instance variables
    public set(int x, int y) { // setting values of private fields
        this.x = x;
        this.y = y;
    }
    public get() { // setting values of private fields
        return Point(x, y);
    }
}

```

Protected specifiers : Methods and fields declared as protected can only be accessed by the subclasses in other package or any class within the package of the protected members' class. The protected access specifier cannot be applied to class and interface members' class.

Default(no specifier): When you don't set access specifier for the element, it will follow the default accessibility level. There is no default specifier keyword. Classes, variables, and methods can be default accessed. Using default specifier we can access class, method, or field which belongs to same package, but not from outside this package.

Example :

```

class Demo
{
    inti; (Default)
}

```

Q.1.(d) What is interface and mention its use.

Ans. An interface in java is a blueprint of a class. It has static constants and abstract methods.

The interface in java is a mechanism to achieve abstraction. There can be only abstract methods in the java interface not method body. It is used to achieve abstraction and multiple inheritance in Java.

Java Interface also represents IS-A relationship. It cannot be instantiated just like abstract class.

Use of interface:

There are mainly three reasons to use interface. They are given below.

- It is used to achieve abstraction.
- By interface, we can support the functionality of multiple inheritance.
- It can be used to achieve loose coupling.

Declare interface: Interface is declared by using interface keyword. It provides total abstraction; means all the methods in interface are declared with empty body and are public and all fields are public, static and final by default. A class that implements interface must implement all the methods declared in the interface.

Syntax:

1. interface <interface_name>{
2. // declare constant fields

3. // declare methods that abstract
4. // by default.
5. }

Q.1.(e) What is the difference between vector and array? Give suitable example.

Ans. Differences between a Vector and an Array:

A vector is a dynamic array, whose size can be increased, whereas an array size can not be changed.

- Reserve space can be given for vector, whereas for arrays can not.
- A vector is a class whereas an array is not.
- Vectors can store any type of objects, whereas an array can store only homogeneous values.

Advantages of Arrays:

- Arrays supports efficient random access to the members.
- It is easy to sort an array.
- They are more appropriate for storing fixed number of elements

Disadvantages of Arrays:

- Elements can not be deleted
- Dynamic creation of arrays is not possible
- Multiple data types can not be stored

Advantages of Vector:

- Size of the vector can be changed
- Multiple objects can be stored
- Elements can be deleted from a vector

Disadvantages of Vector:

- A vector is an object, memory consumption is more.

Java program that uses Vector

```

import java.util.Vector;
public class Program {
    public static void main(String[] args) {

```

// Add two values to Vector.

```

        Vector<Integer> v = new Vector<>();

```

```

        v.add(100);

```

```

        v.add(1000);

```

// Display values.

```

        for (int value : v) {

```

```

            System.out.println(value);

```

```

        }

```

```

    }

```

Output

100

1000

Java program that converts Vector, array

```
import java.util.Vector;
public class Program {
    public static void main(String[] args) {
        // Add ArrayList to Vector.
        Vector<String> v = new Vector<>();
        v.add("one");
        v.add("two");
        v.add("three");
        // ... Convert Vector into String array.
        String[] array = v.toArray(new String[v.size()]);
        String[] result = v.toArray(array);
        for (String value : result) {
            System.out.println(value);
        }
    }
}
```

Output

```
one
two
three
```

Q.2.(a) Write a program to create two threads so one thread will print multiples of 5 where as second thread will print multiples of 7 between 1 to 70 numbers.

Ans. When a thread invokes a synchronized method, it automatically acquires the lock for that object and releases it when the thread completes its task.

//example of java synchronized method

```
class Mul{
    synchronized void printMul(int n)//synchronized method
    {
        for(int i=1;i<=70;i++)
        {
            if((i%n)==0)
                System.out.println(i);
            try{
                Thread.sleep(400);
            }catch(Exception e)
            {
                System.out.println(e);
            }
        }
    }
}

class MyThread1 extends Thread{
    Mul t;
    MyThread1(Mul t){
        this.t=t;
    }
}
```

```
}
public void run()
{
    t.printMul(5);
}

class MyThread2 extends Thread{
    Mul t;
    MyThread2(Mul t){
        this.t=t;
    }
    public void run()
    {
        t.printMul(7);
    }
}

public class TestSynchronization2{
    public static void main(String args[])
    {
        Mul obj = new Mul(); //only one object
        MyThread1 t1=new MyThread1(obj);
        MyThread2 t2=new MyThread2(obj);
        t1.start();
        t2.start();
    }
}

Output: 5
10
15
20
25
30
35
40
45
50
55
60
65
70
7
14
21
28
35
```

42
49
56
63
70

Q.2.(b). How is synchronization achieved in Java,
Ans. Synchronization in java is achieved by following ways:

1. Synchronized method.
2. Synchronized block.

Example of Synchronized Method in Java

Using synchronized keyword along with method is easy just apply synchronized keyword in front of the method. What we need to take care is that static synchronized method locked on class object lock and nonstatic synchronized method locks on current object (this). So it's possible that both static and nonstatic java synchronized methods running in parallel. This is the common mistake a naive developer do while writing Java synchronized code.

```
public class Counter {
    private static int count = 0;

    public static synchronized int getCount() {
        return count;
    }

    public synchronized void setCount(int count) {
        this.count = count;
    }
}
```

In this example of Java, the synchronization code is not properly synchronized because both getCount() and setCount(), are not getting locked on the same object and can run in parallel which may result in the incorrect count. Here getCount() will lock in Counter class object while setCount() will lock on current object (this). To make this code properly synchronized in Java you need to either make both method static or nonstatic or use Java synchronized block instead of java synchronized method.

Example of Synchronized Block in Java

Using synchronized block in java is also similar to using synchronized keyword in methods. Only important thing to note here is that if object used to lock synchronized block of code, Singleton.class in below example is null then Java synchronized block will throw a NullPointerException.

```
public class Singleton {
    private static volatile Singleton _instance;
```

```
public static Singleton getInstance() {
    if (_instance == null) {
        synchronized (Singleton.class) {
            if (_instance == null)
                _instance = new Singleton();
        }
    }
    return _instance;
}
```

This is a classic example of double checked locking in Singleton. In this example of Java synchronized code, we have made the only critical section (part of the code which is creating an instance of singleton) synchronized and saved some performance.

Q.3.(a) Distinguish between:

(i) InputStream and Reader classes

Ans. InputStreams are used to read bytes from a stream . It grabs the data byte by byte without performing any kind of translation. So they are useful for binary data such as images, video and serialized objects.

Readers on the other hand are character streams so they are best used to read character data. If the information you are reading is all text, then the Reader will take care of the character decoding for you and give you unicode characters from the raw input stream. If you are reading any type of text, this is the stream to use.

Let's see an example of How to use FileInputStream and FileReader in Java. You can provide either a File object or a String, containing location of file to start reading character data from File.

```
import java.awt.Color;
import java.io.FileInputStream;
import java.io.FileReader;
import java.io.IOException;
```

```
public class HowToReadFileInJava {
    public static void main(String args[]) {
        // Example 1 - Reading File's content using FileInputStream
        try (FileInputStream fis = new FileInputStream("data.txt")) {
            int data = fis.read();
            while (data != -1) {
                System.out.print(Integer.toHexString(data));
                data = fis.read();
            }
        } catch (IOException e) {
            System.out.println("Failed to read binary data from File");
            e.printStackTrace();
        }
    }
}
```

```
// Example 2 - Reading File data using FileReader in Java
try (FileReader reader = new FileReader("data.txt")) {
    int character = reader.read();
    while (character != -1) {
        System.out.print((char) character);
        character = reader.read();
    }
} catch (IOException e) {
    System.out.println("Failed to read character data from File");
    e.printStackTrace();
}
```

Output:

```
4157532d416d617a6f6e205765622053657276696365da474f4f472d478
f676c65da4150504c2d4170706c65da47532d476f6c646d616e205361636873
```

AWS-Amazon Web Service

GOOG-Google

APPL-Apple

GS-Goldman Sachs

Q.3.(a)(ii) OutputStream and Writer classes

Ans. The OutputStream class is an abstract class that defines methods to write stream of bytes sequentially. Java provides subclasses of the OutputStream class for writing to files and byte arrays, among other things. It is also easy to define a subclass of OutputStream that writes to another kind of destination.

The Writer class is an abstract class that defines methods to write to a stream of characters sequentially.

OutputStream: The OutputStream class is the abstract superclass of all other byte output stream classes. It defines three write() methods for writing to a raw stream of bytes:

```
write(int b)
write(byte[] b)
write(byte[] b, int off, intlen)
```

Some OutputStream subclasses may implement buffering to increase efficiency. OutputStream provides a method, flush(), that tells the OutputStream to write buffered output to the underlying device, which may be a disk drive or a network.

Because the OutputStream class is abstract, you cannot create a "pure" OutputStream. However, the various subclasses of OutputStream can be used interchangeably. For example, methods often take OutputStream parameters. This means that such a method accepts any subclass of OutputStream as an argument.

Writer: The Writer class is the abstract parent class of all other character output stream classes. It defines nearly the same methods as OutputStream, except that the write() methods deal with characters instead of bytes:

```
write(int c)
write(char[] cbuf)
write(char[] cbuf, int off, intlen)
write(String str)
write(String str, int off, intlen)
```

Writer also includes a flush() method that forces any buffered data to be written to the stream.

Writer is designed so that write(int) and write(char[]) both call write(char[], int, int). Thus, when you subclass Writer, you only need to define the write(char[], int, int) method.

Q.3.(b) Write a program to copy the content of one file to another in Java using buffered streams. (6.5)

Ans. This example shows how to copy contents of one file into another file using read & write methods of BufferedWriter class.

```
import java.io.*;

public class Main{
    public static void main(String[] args) throws Exception{
        BufferedWriter out1 = new BufferedWriter(new FileWriter("srcfile"));
        out1.write("string to be copied\n");
        out1.close();

        InputStream in = new FileInputStream(new File("srcfile"));
        OutputStream out = new FileOutputStream(new File("destnfile"));
        byte[] buf = new byte[1024];
        int len;

        while((len = in.read(buf)) > 0){
            out.write(buf, 0, len);
        }

        in.close();
        out.close();

        BufferedReader in1 = new BufferedReader(new FileReader("destnfile"));
        String str;
        while((str = in1.readLine()) != null)){
            System.out.println(str);
        }

        in1.close();
    }
}
```

Result

The above code sample will produce the following result.
string to be copied

Q.4.(a). How is event handling done in Java? Define an exception called "StringNotFoundException" that is thrown when a string is not equal to "JavaProgram".

Ans. Event Handling is the mechanism that controls the event and decides what should happen if an event occurs. This mechanism have the code which is known as event handler that is executed when an event occurs. Java Uses the Delegation Event Model to handle the events. This model defines the standard mechanism to generate and handle the events. Let's have a brief introduction to this model.

Steps to handle events:

1. Implement appropriate interface in the class.
2. Register the component with the listener.

Example of Event Handling

```
import java.awt.*;
import java.awt.event.*;
import java.applet.*;
import java.applet.*;
import java.awt.event.*;
import java.awt.*;

public class Test extends Applet implements KeyListener
{
    String msg="";
    public void init()
    {
        addKeyListener(this);
    }

    public void keyPressed(KeyEvent k)
    {
        showStatus("KeyPressed");
    }

    public void keyReleased(KeyEvent k)
    {
        showStatus("KeyReleased");
    }

    public void keyTyped(KeyEvent k)
    {
```

```
msg=msg+k.getKeyChar();
repaint();
```

```
}
```

```
public void paint(Graphics g)
{
```

```
g.drawString(msg,20,40);
}
```

```
}
```

HTML code :

```
<applet code= "Test" width=300, height=100 >
```

String Not Found Exception:

```
public class StringNotFoundException extends Exception
public StringNotFoundException(String message) {
```

```
super(message);
```

```
}
```

And the following example shows the way a custom exception is used is nothing different than built-in exception:

```
1.  public class StringManager {
2.
3.      public Student find(String stringID) throws StringNotFoundException {
4.          if (stringID.equals("123456")) {
5.              return new String();
6.          } else {
7.              throw new StringNotFoundException(
8.                  "Could not find student with ID" + studentID);
9.          }
10.     }
11. }
```

And the following test program handles that exception:

```
1.  public class StringTest {
2.      public static void main(String[] args) {
3.          StringManager manager = new StringManager();
4.
5.          try {
6.
7.              String s = manager.find("0000001");
8.
9.          } catch (StringNotFoundException ex) {
10.              System.out.print(ex);
11. }
```

22-2017

12.

13.

Run this program and you will see this output:
 1StringNotFoundException: Could not find student with ID 0000001

Q.4.(b) What is meant by bytecode in Java and class file format.


Ans. Java class file format: Compiled Java is typically distributed in a compact format called Class files. It is the assembler code for a virtual stack-oriented Java-friendly CPU (Central Processing Unit) chip. Such chips do exist, but most of the time they are simulated with interpreters, JIT (Just In Time), Hotspots or AOT (Ahead Of Time) compilation on the target machines which have quite different architecture. Class files are usually compressed and bundled into jar files.

Each class file is marked with a class file format version, which lets you know what JDK (Java Development Kit) it was compiled for. At offset 6 in the class file is a 4 byte short that gives the major version number. You can display for the classes in a jar with JarCheck.

A Java class file is a file (with the class filename extension) containing Java bytecode that can be executed on the Virtual Machine (JVM). A Java class file is produced by Java compiler from Java programming language sources files (Java files) containing Java classes, if a source file has more than one class, each class is compiled into separate class file.

JVMs are available for many platforms, and a class file compiled on one platform will execute on a JVM of another platform. This makes JAVA platform-independent.

BYTE CODE: Bytecode is nothing but the intermediate representation of Java source code which is produced by the Java compiler by compiling that source code. The byte code is an machine independent code. It is not an completely a compiled code but is an intermediate code somewhere in the middle which is later interpreted and executed by JVM. Bytecode is a machine code for JVM. But the machine code is platform specific whereas bytecode is platform independent that is the main difference between them. It is stored in class file which is created after compiling the source code. Most developers although have never seen byte code (nor have ever wanted to see it!) One way to view byte code is to compile your class and then open the .class file in a hex editor and transcribe the bytecodes by referring to the virtual machine specification.

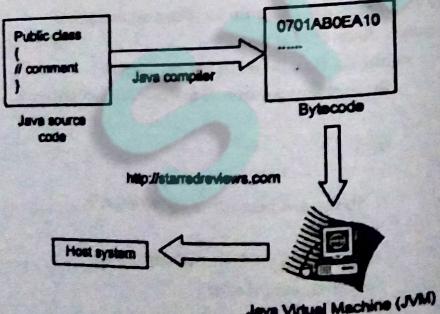

Q.4.(c) What is dynamic method dispatch?

Ans. Dynamic Method Dispatch: Dynamic method dispatch is a technique by which call to a overridden method is resolved at runtime, rather than compile time. When an overridden method is called by a reference, then which version of overridden method is to be called is decided at runtime according to the type of object it refers. Dynamic method dispatch is performed by JVM not compiler.

Dynamic method dispatch allows java to support overriding of methods and perform runtime polymorphism. It allows subclasses to have common methods and can redefine specific implementation for them. This lets the superclass reference respond differently to same method call depending on which object it is pointing.

```
Baseb=newBase();
```

```
Derivedd=newDerived();
```

```
b=newDerived(); //Base class reference refer to derived class object that is upcasting
```

When parent class reference variable refers to a child class object than its called upcasting and using this technique dynamic method dispatch perform.

We can not use derived class reference to refer to a base class object.

For example:

```
class Student {  
publicvoid show(){System.out.println("Student details.");}  
}
```

```
publicclassCollegeStudentextends Student {  
publicvoid show()  
System.out.println("College Student details.");  
}  
publicstaticvoid main(Stringargs[]){
```

```
  Student obj=newCollegeStudent();  
  obj.show();  
}
```

Output:

College Student details.

School Student details.

Q.5.(a) What is 'this' pointer? How can 'this' pointer be used in Java program to handle instance variable hiding?

Ans. There can be a lot of usage of java this keyword. In java, this is a reference variable that refers to the current object.

Usage of this keyword

1. This can be used to refer current class instance variable.
2. This can be used to invoke current class method (implicitly)

24-2017

3. This() can be used to invoke current class constructor.
 4. This can be passed as an argument in the method call.
 5. This can be passed as argument in the constructor call.
 6. This can be used to return the current class instance from the method.

Using 'this' keyword, handling current class instance variables hiding
class Test

```

int a;
int b;
Test(int a, int b)
{
    this.a = a;
    this.b = b;
}
void display()
{
    System.out.println("a = " + a + " b = " + b);
}

public static void main(String[] args)
{
    Test object = new Test(10, 20);
    object.display();
}

```

Output:

a = 10 b = 20

Q.5.(b) Discuss atleast three methods available in Component class.

Ans. Commonly used Methods of Component class

The methods of Component class are widely used in java swing that are given below

Method	Description
public void add(Component c)	add a component on another component.
public void setSize(int width,int height)	sets size of the component.
public void setLayout(LayoutManager m)	sets the layout manager for the component.
public void setVisible(boolean b)	sets the visibility of the component. It is by default false.

Example:

1. import javax.swing.*;

```

2. public class FirstSwingExample {
3.     public static void main(String[] args) {
4.         JFrame f=new JFrame();//creating instance of JFrame
5.         JButton b=new JButton("click");//creating instance of JButton
6.         b.setBounds(130,100,100,40);//x axis, y axis, width, height
7.         f.add(b);//adding button in JFrame
8.         f.setSize(400,500);//400 width and 500 height
9.         f.setLayout(null);//using no layout managers
10.        f.setVisible(true);//making the frame visible
11.    }
12. }

```

Q.5.(c) How is an applet program different from an application? (6.5)

Ans.

Applet	Application
<p>Small-Program</p> <p>Used to run a program on client Browser</p> <p>Applet is portable and can be executed by supported browser.</p> <p>Applet applications are executed in a Restricted Environment</p> <p>Applets are created by extending the Java, applet, Applet</p> <p>Applet application has 5 methods which will be automatically invoked on occurrence of specific event</p>	<p>Large Program</p> <p>Can be executed on stand alone computer system</p> <p>Need JDK, JRE, JVM installed on JAVA client machine</p> <p>Application can access all the resources of the computer</p> <p>Applications are created by writing public static void main(String[] S) method.</p> <p>Application has a single start point which is main methods</p>

Example:

```

import java.awt.*;
import Java, applet.*;
Public class MyClass extends Applet
{
    public void init () {}
    public void start () {}
    public void stop () {}
    public void destroy () {}
    public void paint (Graphics g) {}
}

```

Public class MyClass

```

{
public static void main (string args []) {}
}

```

Q.6.(a) Explain briefly any two layout managers in Java.

Ans. The various Layout manager are the following:

- Flow Layout
- Grid Layout,
- Border Layout
- Card Layout

Flow Layout: Flow Layout is the default Layout manager. Flow Layout implements a simple layout style, which is similar to how words flow in a text editor.

Border Layout: It has narrow, fixed-width components at the edges and one large once in the center. The four sides one referred to as north, south, east and west. The middle area is called the center.

Grid Layout: Grid Layout lays out components in a two-dimensional grid.

Card Layout: The Card Layout class is unique among the other layout managers in that it stores several different layouts.


Q.6.(b) What do you understand by delegation event model? Write a program to illustrate key event handling in Java.

Ans. Java's delegation event model

The event model is based on the Event Source and Event Listeners. Event Listener is an object that receives the messages / events. The Event Source is any object which creates the message / event. The Event Delegation model is based on - The Event Classes, The Event Listeners, Event Objects.

There are three participants in event delegation model in Java;

- Event Source - The class which broadcasts the events
- Event Listeners — The classes which receive notifications of events
- Event Object — The class object which describes the event.

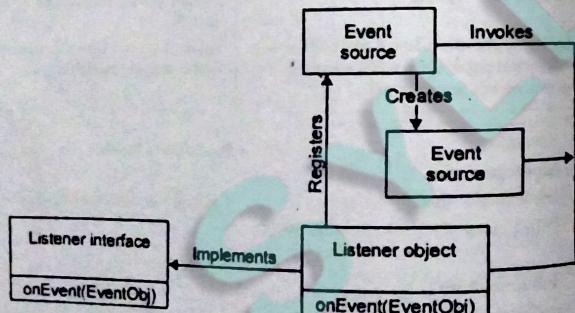


Key Event Handling:

```
import java.awt.*;
import java.awt.event;
```

```
import java.applet.*;
public class Key extends Applet
implements KeyListener
{
int X=20,Y=30;
String msg= "KeyEvents-->";
public void init()
{
addKeyListener(this);
}
public void keyPressed(KeyEvent k)
{
showStatus("Key Down");
repaint();
}
public void keyReleased(KeyEvent k)
{
showStatus("Key Up");
}
public void keyTyped(KeyEvent k)
{
msg+=k.getKeyChar();
repaint();
}
public void paint(Graphics g)
{
g.drawString(msg,X,Y);
}
}
```

Output:

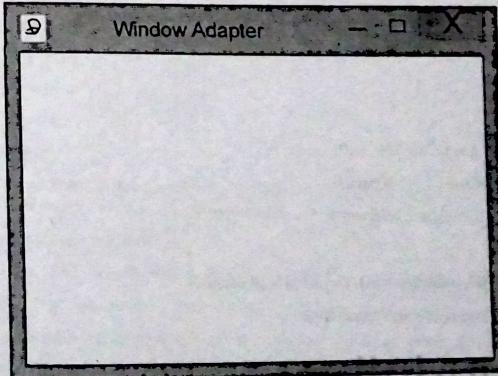

Q.7.(a) How are adapter classes different from listener interfaces? Support your answer with suitable example.

Ans. Java adapter classes provide the default implementation of listener interfaces. If you inherit the adapter class, you will not be forced to provide the implementation of all the methods of listener interfaces. So it saves code.

The adapter classes are found in `java.awt.event`, `java.awt.dnd` and `javax.swing.event` packages. The Adapter classes with their corresponding listeners are given below.


Adapter class	Listener interface
WindowAdapter	WindowListener
KeyAdapter	KeyListener
MouseAdapter	MouseListener
MouseMotionAdapter	MouseMotionListener
FocusAdapter	FocusListener
ComponentAdapter	ComponentListener

WindowAdapter Example

```

1. import java.awt.*;
2. import java.awt.event.*;
3. public class AdapterExample{
4.     Frame f;
5.     AdapterExample(){
6.         f=new Frame("Window Adapter");
7.         f.addWindowListener(new WindowAdapter(){
8.             public void windowClosing(WindowEvent e){
9.                 f.dispose();
10.            }
11.        });
12.        f.setSize(400,400);
13.        f.setLayout(null);
14.        f.setVisible(true);
15.    }
16.    public static void main(String[] args){
17.        new AdapterExample();
18.    }
  
```

Output:

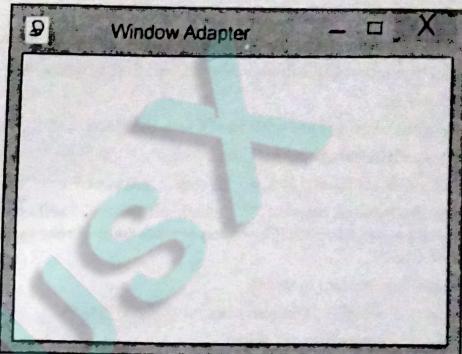

Q.7.(b) What is JDBC Connection? Explain steps to get Database connection in a simple Java program. (6.5)

Ans. JDBC is an acronym for Java Database Connectivity. It's an advancement for ODBC (Open Database Connectivity). JDBC is a standard API specification developed in order to move data from frontend to backend. This API consists of classes and interfaces written in Java. It basically acts as an interface (not the one we use in Java) or channel between your Java program and databases i.e. it establishes a link between the two so that a programmer could send data from Java code and store it in the database for future use.

Java Database Connectivity with 5 Steps

There are 5 steps to connect any java application with the database using JDBC. These steps are as follows:

- o Register the driver class
- o Creating connection
- o Creating statement
- o Executing queries
- o Closing connection

1. Register the driver class: The `forName()` method of `Class` class is used to register the driver class. This method is used to dynamically load the driver class.

Syntax of `forName()` method

```
1. public static void forName(String className) throws ClassNotFoundException
```

Example to register the OracleDriver class

Here, Java program is loading oracle driver to establish database connection.

```
1. Class.forName("oracle.jdbc.driver.OracleDriver");
```

2. Create the connection object: The `getConnection()` method of `DriverManager` class is used to establish connection with the database.

Syntax of `getConnection()` method

```
1. public static Connection getConnection(String url) throws SQLException
2. public static Connection getConnection(String url, String name, String password)
throws SQLException
```

Example to establish connection with the Oracle database

```
1.Connection con=DriverManager.getConnection(
2."jdbc:oracle:thin:@localhost:1521:xe","system","password");
```

3. Create the Statement object: The `createStatement()` method of `Connection` interface is used to create statement. The object of statement is responsible to execute queries with the database.

Syntax of `createStatement()` method

```
1. public Statement createStatement() throws SQLException
```

Example to create the statement object

```
1.Statement stmt=con.createStatement();
```

4. Execute the query: The `executeQuery()` method of `Statement` interface is used to execute queries to the database. This method returns the object of `ResultSet` that can be used to get all the records of a table.

Syntax of `executeQuery()` method

```
1. public ResultSet executeQuery(String sql) throws SQLException
```

Example to execute query

```
1. ResultSet rs=stmt.executeQuery("select * from emp");
2.
3. while(rs.next()){
4. System.out.println(rs.getInt(1)+ " "+rs.getString(2));
5. }
```

5. Close the connection object: By closing connection object `statement` and `ResultSet` will be closed automatically. The `close()` method of `Connection` interface is used to close the connection.

Syntax of `close()` method

```
1. public void close() throws SQLException
```

Example to close connection

```
1. con.close();
```

Q.8. Write note on any two of the following.

(12)

Q.8.(a) Buffered Streams

Ans. In case of 'byte' and 'character' streams every byte or piece of data that is being read or write requires direct support from underlying OS because of not having an intermediate buffer included. This makes a extensive use of memory and resources. On the other hand Buffered streams works as a wrapper to hold unbuffered streams and make it possible to store bunch of data or bytes in buffers (memory). The underlying OS

resource are needed only when the buffer is full or empty and not on every instance of read or write.

The native input API is called only when the buffer is empty. Similarly, buffered output streams write data to a buffer, and the native output API is called only when the buffer is full. Unbuffered streams can be converted to buffered streams by wrapping them in a constructor of `Buffered Stream` class.

Example program converting 'byte Stream' to 'Buffered byte Stream'

```
package com.beingjavaguys.core;
import java.io.BufferedInputStream;
import java.io.BufferedOutputStream;
import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.FileOutputStream;
import java.io.IOException;
/**
 * @author Naresh Chauhan
 */
public class BufferedIOStream {
    public static void main(String args[]) throws IOException {
        BufferedInputStream bis = null;
        BufferedOutputStream bos = null;
        try {
            bis = new BufferedInputStream(new FileInputStream(
                "files/source.txt"));
            bos = new
                BufferedOutputStream(new FileOutputStream(
                    "files/destination.txt"));
            int data;
            while ((data = bis.read()) != -1) {
                System.out.println(data);
                bos.write(data);
            }
        } catch (FileNotFoundException e) {
            e.printStackTrace();
        } finally {
            if (bis != null)
                bis.close();
            if (bos != null)
                bos.close();
        }
    }
}
```

```
bos.close();
```

```
}
```

```
}
```

```
}
```

Q.8.(b) Remote Method Invocation

Ans. Refer Q.7.(b). (iv). End Term Examination December-2016 [Page no -32-2016]

Q.8.(c) Object Serialization

Ans. To *serialize* an object means to convert its state to a byte stream so that the byte stream can be reverted back into a copy of the object. A Java object is *serializable* if its class or any of its superclasses implements either the `java.io.Serializable` interface or its subinterface, `java.io.Externalizable`. *Deserialization* is the process of converting the serialized form of an object back into a copy of the object.

For example, the `java.awt.Button` class implements the `Serializable` interface, so you can serialize a `java.awt.Button` object and store that serialized state in a file. Later, you can read back the serialized state and deserialize into a `java.awt.Button` object.

The Java platform specifies a default way by which serializable objects are serialized. A (Java) class can override this default serialization and define its own way of serializing objects of that class. The Object Serialization Specification describes object serialization in detail.

When an object is serialized, information that identifies its class is recorded in the serialized stream. However, the class's definition ("class file") itself is not recorded. It is the responsibility of the system that is deserializing the object to determine how to locate and load the necessary class files.

Binding a Serializable Object: You can store a serializable object in the directory if the underlying service provider supports that action, as does Oracle's LDAP service provider.

The following example invokes `Context.bind` to bind an AWT button to the name "cn=Button". To associate attributes with the new binding, you use `DirContext.bind`. To overwrite an existing binding, use `Context.rebind` and `DirContext.rebind`.

```
// Create the object to be bound
```

```
Button b = new Button("Push me");
```

```
// Perform the bind
```

```
ctx.bind("cn=Button", b);
```

You can then read the object back using `Context.lookup`, as follows.

```
// Check that it is bound
```

```
Button b2 = (Button)ctx.lookup("cn=Button");
```

```
System.out.println(b2); /
```

Running this example produces the following output:-

```
# javaSerObj
```

```
java.awt.Button@button0,0,0x0,invalid,label=Push me]
```

FIRST TERM EXAMINATION [SEPT. 2018] FIFTH SEMESTER [B.TECH] JAVA PROGRAMMING [ETCS-307]

M.M. : 30

Time : 1.5 hrs.

Note: Q. No. 1 is compulsory. Attempt any three more Questions from the rest.

Q.1. Attempt the following questions:-

(a) What are the primitive data types available in Java? List its size and default values. (2)

Ans. Primitive Data Types

There are eight primitive datatypes supported by Java. Primitive datatypes are predefined by the language and named by a keyword.

Type	Size in Bytes	Range
Byte	1 byte	- 128 to 127
Short	2 bytes	-32, 768 to 32, 767
Int	4 bytes	-2, 147, 483, 648 to 2, 147, 483, 647
Long	8 bytes	-9, 223, 372, 036, 854, 775, 808 to 9, 223, 372, 036, 854, 775, 807
Float	4 bytes	approximately $\pm 3.402823447E+38F$ (6-7 significant decimal digits) Java implements IEEE 754 standard
Double	8 bytes	approximately $\pm 1.79769313486231570E+303$ (15 significant decimal digits)
Char	2 byte	0 to 65, 536 (unsigned)

Boolean not precisely defined* true or false

Q. 1. (b) What are the different SandBox Models in Java?

(2)

Ans. Java Built-in Security Model


With the JDK 1.0 sandbox security model, all Java applications (excluding Java applets) executed locally can have full access to the resources available to the JVM. Application code downloaded from remote resources, such as Java applets, will have access only to the restricted resources provided within its sandbox.

Java 2 Security Model

Java 2 security architecture are as follows:

- Policy-driven restricted access control to JVM resources.
- Rules-based class loading and verification of byte code.
- System for signing code and assigning levels of capability.
- Policy-driven access to Java applets downloaded by a Web browser.

all code—regardless of whether it is run locally or downloaded remotely—can be subjected to a security policy configured by a JVM user or administrator. All code is configured to use a particular domain (equivalent to a sandbox) and a security policy that dictates whether the code can be run on a particular domain or not.

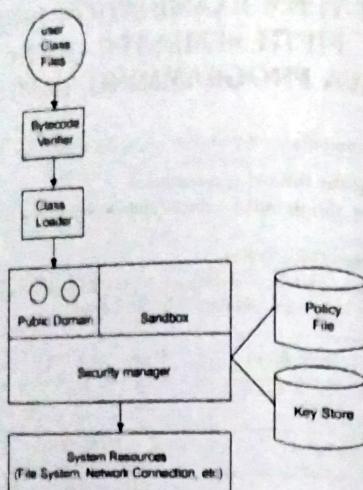

Java 2 Security architecture and basic elements

Q. 1. (c) Explain the use of key word - super. Also write its syntax.

Ans. The super keyword refers to the objects of immediate parent class

Use of super keyword

(1) To access the data members of parent class when both parent and child class have member with same name. When you have a variable in child class which is already present in the parent class then in order to access the variable of parent class, you need to use the super keyword.

(2) To explicitly call the no-arg and parameterized constructor of parent class

When we create the object of sub class, the new keyword invokes the constructor of child class, which implicitly invokes the constructor of parent class. So the order of execution when we create the object of child class is: parent class constructor is executed first and then the child class constructor is executed.

(3) To access the method of parent class when child class has overridden that method

When a child class overrides a method of parent class, then the call to the method from child class object always call the child class version of the method. However by using super keyword like this `super.method_name` you can call the method of parent class (the method which is overridden).

Q. 1. (d) Differentiate among String, StringBuffer and StringBuilder.

Ans. Difference between StringBuffer, String, and StringBuilder in Java:

(1) The String object is immutable in Java but StringBuffer and StringBuilder are mutable objects.

(2) StringBuffer is synchronized while StringBuilder is not which makes

StringBuilder faster than StringBuffer.

(3) Concatenation operator "+" is internally implemented using either StringBuffer or StringBuilder.

(4) Use String if you require immutability, use StringBuffer in java if you need mutable + thread-safety and use StringBuilder in Java if you require mutable + without thread-safety.

(5) String Buffer is thread Safe but String Builder is not thread Safe.

Q. 1. (e) Define Constructor and its types.

Ans. Constructor in Java is a special type of method that is used to initialize the object.

Java constructor is invoked at the time of object creation. It constructs the values i.e. provides data for the object that is why it is known as constructor.

Rules for creating java constructor

There are basically two rules defined for the constructor.

1. Constructor name must be same as its class name
2. Constructor must have no explicit return type

Types of java constructors

There are three types of constructors:

1. Default constructor (no-arg constructor)
2. Parameterized constructor
3. Copy constructor

Q. 2. (a) Explain the basic parts of the Java Virtual Machine.

Ans. Refer Q. 3. First Term Examination September-2017.

Q. 2. (b) Define inheritance and its types. Also write a program using it.

Ans. Inheritance can be defined as the process where one class acquires the properties (methods and fields) of another. With the use of inheritance the information is made manageable in a hierarchical order.

The class which inherits the properties of other is known as subclass (derived class, child class) and the class whose properties are inherited is known as superclass (base class, parent class).

Inheritance represents the IS-A relationship, also known as parent-child relationship.

Why use inheritance in java

1. For Method Overriding (so runtime polymorphism can be achieved).
2. For Code Reusability.

Syntax of Java Inheritance

class Subclass-name extends Superclass-name

{

//methods and fields

}

Various forms of inheritance:

- * Single Inheritance

- Multiple Inheritance (Through Interface)
- Multilevel Inheritance
- Hierarchical Inheritance
- Hybrid Inheritance (Through Interface)

Single Inheritance in Java: Single Inheritance is the simple inheritance of all. When a class extends another class (Only one class) then we call it as Single inheritance. The below diagram represents the single inheritance in java where Class B extends only one class Class A. Here Class B will be the Sub class and Class A will be one and only Super class.

Single Inheritance

```

1. class Animal{
2.     void eat(){System.out.println("eating...");}
3. }
4. class Dog extends Animal{
5.     void bark(){System.out.println("barking...");}
6. }
7. class TestInheritance{
8.     public static void main(String args[]){
9.         Dog d=new Dog();
10.        d.bark();
11.    }
12. }

```

Output:
barking...
eating...

Q. 2. (e) Write a program to demonstrate method overloading. (2)

Ans. Method Overloading in Java: If a class has multiple methods having same name but different in parameters, it is known as Method Overloading. If we have to perform only one operation, having same name of the methods increases the readability of the program.


Suppose you have to perform addition of the given numbers but there can be any number of arguments, if you write the method such as `(int,int)` for two parameters, and `(int,int,int)` for three parameters then it may be difficult for you as well as other programmers to understand the behavior of the method because its name differs.

So, we perform method overloading to figure out the program quickly.

Advantage of method overloading

Method overloading increases the readability of the program.

- There are two ways to overload the method in java
1. By changing number of arguments
 2. By changing the data type



(1) Method Overloading: changing no. of arguments

In this example, we have created two methods, first add() method performs addition of two numbers and second add method performs addition of three numbers.

In this example, we are creating static methods so that we don't need to create instance for calling methods.

```

1. class Adder{
2.     static int add(int a,int b){return a+b;}
3.     static int add(int a,int b,int c){return a+b+c;}
4. }
5. class TestOverloading1{
6.     public static void main(String[] args){
7.         System.out.println(Adder.add(11,11));
8.         System.out.println(Adder.add(11,11,11));
9.     }
}

```

Test it Now

Output:

22

33

(2) Method Overloading: changing data type of arguments

In this example, we have created two methods that differs in data type. The first add method receives two integer arguments and second add method receives two double arguments.

```

1. class Adder{
2.     static int add(int a, int b){return a+b;}
3.     static double add(double a, double b){return a+b;}
4. }
5. class TestOverloading2{
6.     public static void main(String[] args){
7.         System.out.println(Adder.add(11,11));
8.         System.out.println(Adder.add(12.3,12.6));
9.     }
}

```

Test it Now

Output:

22

24.9

By changing the return type of the method only because of ambiguity. Let's see how ambiguity may occur:

```

1. class Adder{
2.     static int add(int a,int b){return a+b;}
3.     static double add(int a,int b){return a+b;}
4. }
5. class TestOverloading3{
6.     public static void main(String[] args){
7.         System.out.println(Adder.add(11,11));//ambiguity
8.     }
}


```

Test it Now**Output:**

Compile Time Error: method add(int,int) is already defined in class Adder

Q 3 (a) What is an applet? Describe Applet Skeleton. Write a "HelloWorld" Program using Applet.

Ans. An **applet** is a Java program that runs in a Web browser. An applet can be a fully functional Java application because it has the entire Java API at its disposal. (4)

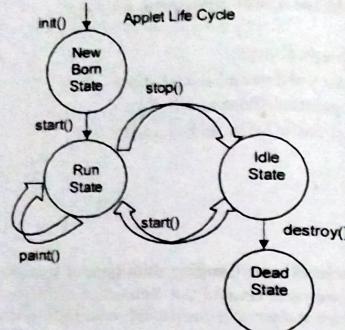

Java Applets are usually used to add small, interactive components or enhancements to a webpage. These may consist of buttons, scrolling text, or stock tickers, but they can also be used to display larger programs like word processors or games.

Life Cycle of an Applet

Five methods in the Applet class are:

- **init** – This method is intended for whatever initialization is needed for your applet. It is called after the param tags inside the applet tag have been processed.
- **start** – This method is automatically called after the browser calls the init method. It is also called whenever the user returns to the page containing the applet after having gone off to other pages.
- **stop** – This method is automatically called when the user moves off the page on which the applet sits. It can, therefore, be called repeatedly in the same applet.
- **destroy** – This method is only called when the browser shuts down normally. Because applets are meant to live on an HTML page, you should not normally leave resources behind after a user leaves the page that contains the applet.
- **paint** – Invoked immediately after the start() method, and also any time the applet needs to repaint itself in the browser. The paint() method is actually inherited from the java.awt.

A "Hello, World" Applet

```

import java.applet.*;
import java.awt.*;
public class HelloWorldApplet extends Applet
  
```

```

public void paint(Graphics g){
    g.drawString("Hello World", 25, 50);
}
  
```

Q. 3. (b) Describe Various access Scope in Java with Example. (4)**Ans.** Refer Q.1.(c) End Term Examination December-2017.**Q. 3. (c) Write a program to demonstrate auto-boxing and auto-unboxing.**

Ans. **Autoboxing:** Automatic conversion of primitive types to the object of their corresponding wrapper classes is known as autoboxing. For example – conversion of int to Integer, long to Long, double to Double etc.

```

class BoxingExample1{
    public static void main(String args[]){
        int a=50;
        Integer a2=new Integer(a);//Boxing
        Integer a3=5;//Boxing
        System.out.println(a2+" "+a3);
    }
}
  
```

Output:50 5

Unboxing: It is just the reverse process of autoboxing. Automatically converting an object of a wrapper class to its corresponding primitive type is known as unboxing. For example – conversion of Integer to int, Long to long, Double to double etc.

```

class UnboxingExample1{
    public static void main(String args[]){
        Integer i=new Integer(50);
        int a=i;
        System.out.println(a);
    }
}
  
```

Output:50

Q. 4. (a) What is Customized Exception? Write a program to show it (4)

Ans. If you are creating your own Exception that is known as custom exception or user-defined exception. Java custom exceptions are used to customize the exception according to user need.

By the help of custom exception, you can have your own exception and message. Example:

```

class MyException extends Exception
  
```

```

public MyException(String s)
  
```

```

// Call constructor of parent Exception
  
```

```

super(s);

}

// A Class that uses above MyException
public class Main

{
    // Driver Program
    public static void main(String args[])
    {
        try
        {
            // Throw an object of user defined exception
            throw new MyException("jamesbonds");
        }
        catch (MyException ex)
        {
            System.out.println("Caught");
            // Print the message from MyException object
            System.out.println(ex.getMessage());
        }
    }
}

Output:
Caught
jamesbonds

```

Q. 4. (b) Distinguish between abstract class and interface. Write a program by using interface. (4)

Ans. OOPS interface vs Abstract class

Interface	Abstract class
Interface support multiple inheritance	Abstract class does not support multiple inheritance
Interface does not contains data member	Abstract class contains Data member
Interface does not contains constructors	Abstract class contains constructors
An interface only contain incomplete member (signature of member)	An abstract class contains both incomplete (abstract) and complete member
An interface cannot have access modifiers by default everything is assumed as public	An abstract class can contain access modifier for the subs, functions, properties
Member of interface can not be static	Only complete Member of abstract class can be static

Program using interface is given below:

```

interface Pet{
    public void test();
}

```

```

class Dog implements Pet{
    public void test(){}
    System.out.println("Interface Method Implemented");
}

public static void main(String args[]){
    Pet p = new Dog();
    p.test();
}

```

Q. 4. (c) Explain Scanner Class with examples.

Ans. Java Scanner class comes under the java.util package. Java has various ways to read input from the keyboard, the java.util.Scanner class is one of them.

The Java Scanner class breaks the input into tokens using a delimiter that is whitespace by default. It provides many methods to read and parse various primitive values.

Java Scanner class is widely used to parse text for string and primitive types using a regular expression.

```

import
java.util.*;
class l1{
    public static void main(String[] args){
        Scanner s1=new Scanner(System.in);
        System.out.println("Enter an integer");
        int a;
        a=s1.nextInt();
        System.out.println("The entered integer is "+n);
    }
}

```

Output

Enter an integer

14

The entered integer is 14

**END TERM EXAMINATION [NOV-DEC. 2018]
FIFTH SEMESTER [B.TECH]
JAVA PROGRAMMING [ETCS-307]**

Time : 3 hrs. M.M.: 75
Note: Attempt five questions in all including Q. No. 1 which is compulsory. Select one question from each unit.

Q.1. Attempt all parts from the following:
(a) What is the use of throw and throws keyword in exception handling?

(2.5)
Ans. This example shows how to create user defined exception by extending Exception Class.

```
class MyException extends Exception{
    String s1;
    MyException(String s2){
        s1 = s2;
    }
    public String toString(){
        return("Output String = " + s1);
    }
}

public class NewClass{
    public static void main(String args[]){
        try{
            throw new MyException("Custom message");
        } catch(MyException exp){
            System.out.println(exp);
        }
    }
}
```

The above code sample will produce the following result.

Output String = Custom message

(a) **Throw Keyword:** The throw keyword in Java is used to explicitly throw an exception from a method or any block of code. We can throw either checked or unchecked exception. The throw keyword is mainly used to throw custom exceptions.

Syntax:

```
throw instance
Example:
throw new ArithmeticException("by zero");
class ThrowExcep
```

```
static void fun()
{
    try
    {
        throw new NullPointerException("demo")
    } catch(NullPointerException e)
    {
        System.out.println("Caught inside fun().");
        throw e; // rethrowing the exception
    }
}

public static void main(String args[])
{
    try
    {
        fun();
    } catch(NullPointerException e)
    {
        System.out.println("Caught in main.");
    }
}
```

Output:

Caught inside fun().

Caught in main.

(b) **Throws Keyword:** Throws is a keyword in Java which is used in the signature of method to indicate that this method might throw one of the listed type exceptions. The caller to these methods has to handle the exception using a try-catch block.

Syntax:

```
type method_name(parameters) throws exception_list
exception_list is a comma separated list of all the exceptions which a method might
throw.
```

```
public class Example1{
    int division(int a, int b) throws ArithmeticException{
        int t = a/b;
        return t;
    }
}
```

```

public static void main(String args[])
{
    Example1 obj = new Example1();
    try
    {
        System.out.println(obj.division(15.0));
    }
    catch(ArithmeticException e)
    {
        System.out.println("You shouldn't divide number by zero");
    }
}

```

Output:

You shouldn't divide number by zero

Q. 1. (b) List the name of packages used in java.

(2.5)

Ans. A java package is a group of similar types of classes, interfaces and sub-packages. Package in java can be categorized in two form, built-in package and user-defined package.

There are many built-in packages such as java, lang, awt, javax, swing, net, io, util, sql etc.

Simple example of java package

The package keyword is used to create a package in java.

```

1. //save as Simple.java
2. package mypack;
3. public class Simple{
4.     public static void main(String args[])
5.     {
6.         System.out.println("Welcome to package");
7.     }
}

```

five java packages along with two classes:

1. Lang : Number, Object
2. Awt : TextField, TextArea
3. Net: Inet Address, Socket
4. Io: DataInputStream and BufferedReader
5. Util: Date, Scanner

Q. 1. (c) What is type code in java?

(2.5)

Ans. Type code occurs when, instead of a separate data type, you have a set of numbers or strings that form a list of allowable values for some entity. Often these specific numbers and strings are given understandable names via constants, which is the reason for why such type code is encountered so much.

Type Code objects are used:

- In the Dynamic Invocation Interface — to indicate the types of the actual arguments or the type of the return value.

NamedValue objects are used to represent arguments and return values. One of their components is an Any object, which in turn has as one of its components a Type Code object.

- By an Interface Repository to represent the type specifications that are part of many OMG IDL declarations

One of the most common reasons for type code is working with databases, when a database has fields in which some complex concept is coded with a number or string.

For example, you have the class User with the field user_role, which contains information about the access privileges of each user, whether administrator, editor, or ordinary user. So in this case, this information is coded in the field as A, E, and U respectively.

By replacing type code with classes, we allow type hinting for values passed to methods and fields at the level of the programming language.

For example, while the compiler previously didn't see difference between your numeric constant and some arbitrary number when a value is passed to a method, now when data that doesn't fit the indicated type class is passed, you're warned of the error inside your IDE.

Q. 1. (d) Explain run time polymorphism. How it is different from compile time polymorphism? (2.5)

Ans. Runtime Polymorphism in Java

Runtime polymorphism or Dynamic Method Dispatch is a process in which a call to an overridden method is resolved at runtime rather than compile-time.

In this process, an overridden method is called through the reference variable of a superclass. The determination of the method to be called is based on the object being referred to by the reference variable.

Upcasting

If the reference variable of Parent class refers to the object of Child class, it is known as upcasting. For example:

1. class A{}
2. class B extends A{}
1. A a=new B(); //upcasting

Run time polymorphism (late or dynamic binding)	Compile time polymorphism (early or static binding)
(1) Dynamic binding means that the selection of the appropriate function is done at run time	(1) Static binding simply means that an object is bound its function call at compile time.
(2) This requires the use of pointer to objects	(2) This does not require the use of pointer to object
(3) Dynamic/late binding is not helpful to achieve greater efficiency.	(3) Static Early binding is helpful to achieve greater efficiency.

Q. 1. (e) Explain all keywords of public static void main (string args) in brief.

Ans. The point from where the program starts its execution or simply the entry point of Java programs is the **main()** method. (2.5)

Every word in the public static void main statement has got a meaning to the JVM.
1. Public: It is an Access modifier, which specifies from where and who can access the method. Making the **main()** method public makes it globally available.

2. Static: It is a keyword which is when associated with a method, makes it a class related method. The **main()** method is static so that JVM can invoke it without instantiating the class. This also saves the unnecessary wastage of memory which would have been used by the object declared only for calling the **main()** method by the JVM.

3. Void: It is a keyword and used to specify that a method doesn't return anything. As **main()** method doesn't return anything, its return type is **void**. As soon as the **main()** method terminates, the java program terminates too.


4. main: It is the name of Java main method. It is the identifier that the JVM looks for as the starting point of the java program. It's not a keyword.

5. String[] args: It stores Java command line arguments and is an array of type `java.lang.String` class. Here, the name of the String array is `args` but it is not fixed and user can use any name in place of it.

Q. 1. (f) Give the hierarchy of java exception.

Ans. Exception: A Java Exception is an object that describes the exception that occurs in a program. When an exceptional events occurs in java, an exception is said to be thrown. The code that's responsible for doing something about the exception is called an **exception handler**.

Exception are categorized into 3 category

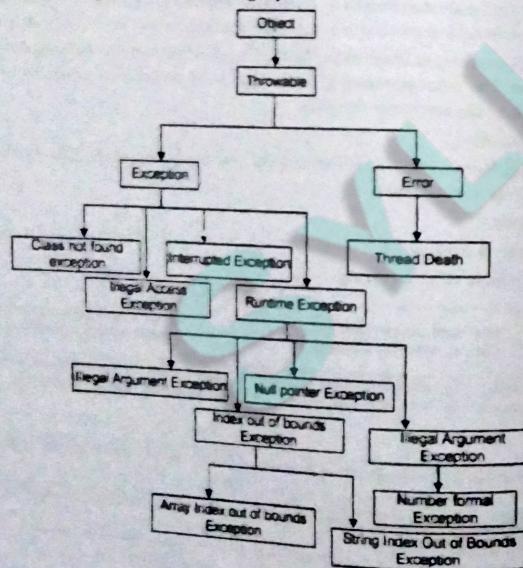

- Checked Exception:** The exception that can be predicted by the programmer. **Example :** File that need to be opened is not found. These type of exceptions must be checked at compile time.

- Unchecked Exception:** Unchecked exceptions are the class that extends `RuntimeException`. Unchecked exception are ignored at compile time. **Example :** `ArithmaticException`, `NullPointerException`, `Array Index out of Bound exception`. Unchecked exceptions are checked at runtime.

- Error:** Errors are typically ignored in code because you can rarely do anything about an error. **Example :** If stack overflow occurs, an error will arise. This type of error is not possible handle in code.

Q. 1. (g) Explain the keyword final in all context.

Ans. Refer Q 1.(i) First Term Examination September-2017.

Q. 1. (h) Why java is called strongly typed language.

Ans. Java is a strongly typed programming language because every variable must be declared with a data type. A variable cannot start off life without knowing the range of values it can hold, and once it is declared, the data type of the variable cannot change.

Examples:

The following declaration is allowed because the variable has "hasDataType" is declared to be a boolean data type:

`boolean hasDataType;`

For the rest of its life, `hasDataType` can only ever have a value of true or false.

Q. 1. (i) Why multiple inheritances are not permitted in java?

Ans. Java doesn't support multiple inheritance

(1) First reason is **ambiguity around Diamond problem**, consider a class A has `foo()` method and then B and C derived from A and has there own `foo()` implementation and now class D derive from B and C using multiple inheritance and if we refer just `foo()` compiler will not be able to decide which `foo()` it should invoke. This is also called Diamond problem because structure on this inheritance scenario is similar to 4 edge diamond, see below

```

A foo()
  / \
  / \
  foo() B   C foo()
    \ /
    \ /
      D
        foo()
  
```

(2) Second and more convincing reason to me is that **multiple inheritances does complicate the design and creates problem during casting, constructor chaining etc** and given that there are not many scenario on which you need multiple inheritance its wise decision to omit it for the sake of simplicity. Also java avoids this ambiguity by supporting single inheritance with interfaces. Since interface only have method declaration and doesn't provide any implementation there will only be just one implementation of specific method hence there would not be any ambiguity.

Q. 1. (j) Explain the advantages of Unicode over ASCII?

(2.5)


Ans. Unicode's advantages

Advantage	Explanation
Simplified application development	When an application component uses Unicode, all symbols needed by the application for reading and writing character data reside in a single code page. This simplifies application development enormously.
Ease of migration of existing code	UTF-8 includes the traditional ASCII characters in its first 127 positions and assigns each of these characters its traditional ASCII value. This simplifies adapting existing ASCII applications to Unicode.
Ease of providing shared access to data	OpenEdge clients that use incompatible code pages can easily read and write a single UTF-8 database. OpenEdge automatically converts the code page as data passes between the client and the database.
Ease of worldwide deployment	UTF-8 databases and r-code files are multi-lingual. They can be deployed worldwide.
Interoperability	Active-X and Java clients are Unicode based. They can communicate with UTF-8 databases and AppServers.

UNIT-I**Q. 2. (a) Explain JVM Architecture.**

(7.5)

Ans. JVM (Java Virtual Machine) is an abstract machine. It is a specification that provides runtime environment in which java bytecode can be executed. JVMs are available for many hardware and software platforms (i.e. JVM is platform dependent).

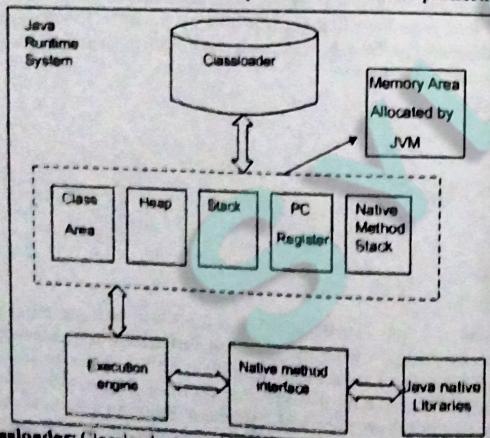

1. **Classloader:** Classloader is a subsystem of JVM that is used to load class files.
2. **Class(Method) Area:** Class(Method) Area stores per-class structures such as the runtime constant pool, field and method data, the code for methods.

3. **Heap:** It is the runtime data area in which objects are allocated.

4. **Stack:** Java Stack stores frames. It holds local variables and partial results, and plays a part in method invocation and return.

Each thread has a private JVM stack, created at the same time as thread.

A new frame is created each time a method is invoked. A frame is destroyed when its method invocation completes.

5. **Program Counter Register:** PC (program counter) register. It contains the address of the Java virtual machine instruction currently being executed.

6. **Native Method Stack:** It contains all the native methods used in the application.

7. **Execution Engine**


It contains:

1. Virtual processor
2. Interpreter: Read bytecode stream then execute the instructions.
3. Just-In-Time(JIT) compiler: It is used to improve the performance. JIT compiles parts of the byte code that have similar functionality at the same time, and hence reduces the amount of time needed for compilation. Here the term compiler refers to a translator from the instruction set of a Java virtual machine (JVM) to the instruction set of a specific CPU.

Q. 2. (b) Java is platform independent. Justify this statement. (5)

Ans. The meaning of platform independent is that, the java source code can run on all operating systems.

A program is written in a language which is a human readable language. It may contain words, phrases etc which the machine does not understand. For the source code to be understood by the machine, it needs to be in a language understood by machines, typically a machine-level language. So, here comes the role of a compiler. The compiler converts the high-level language (human language) into a format understood by the machines. Therefore, a compiler is a program that translates the source code for another program from a programming language into executable code.

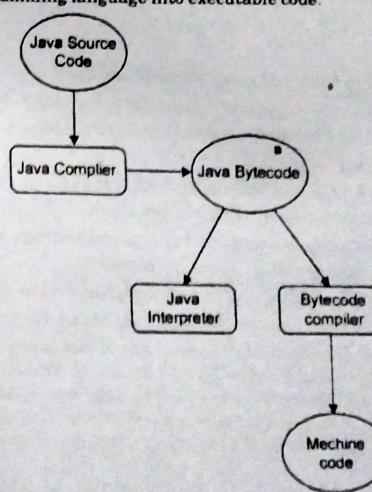

This executable code may be a sequence of machine instructions that can be executed by the CPU directly, or it may be an intermediate representation that is interpreted by a virtual machine. This intermediate representation in Java is the **Java Byte Code**.

Java is platform independent but JVM is platform dependent

In Java, the main point here is that the JVM depends on the operating system – so if you are running Mac OS X you will have a different JVM than if you are running Windows or some other operating system. This fact can be verified by trying to download the JVM for your particular machine – when trying to download it, you will given a list of JVM's corresponding to different operating systems, and you will obviously pick whichever JVM is targeted for the operating system that you are running. So we can conclude that JVM is platform dependent and it is the reason why Java is able to become "Platform Independent".

Q. 3. (a) Explain Characteristics of Java.

Ans. Characteristics of java: There is given many features of java. They are also known as java buzzwords. The Java Features given below are simple and easy to understand. (5)

1. Simple
2. Object-Oriented
3. Platform independent
4. Secured
5. Robust
6. Portable
7. Dynamic
8. Interpreted
9. Multithreaded
10. Distributed

Simple :

- Java is Easy to write and more readable and eye catching.
- Java has a concise, cohesive set of features that makes it easy to learn and use.
- Most of the concepts are drew from C++ thus making Java learning simpler.

Object-oriented

Object-oriented means we organize our software as a combination of different types of objects that incorporates both data and behaviour.

Object-oriented programming (OOPS) is a methodology that simplify software development and maintenance by providing some rules.

Object Oriented Programming Language must have the following characteristics.

- (1) Encapsulation (2) Polymorphism (3) Inheritance (4) Abstraction

Platform-independent: Java Language is platform-independent due to its hardware and software environment. Java code can be run on multiple platforms e.g. windows, Linux, sun Solaris, MacOs etc. Java code is compiled by the compiler and converted into byte code. This byte code is a platform independent code because it can be run on multiple platforms i.e. Write Once and Run Anywhere(WORA).

Secure:

- Java program cannot harm other system thus making it secure.

- Java provides a secure means of creating Internet applications.

- Java provides secure way to access web applications.

Java is secured because:

- No explicit pointer

- Programs run inside virtual machine sandbox.

Robust: Java was created as a strongly typed language. Data type issues and problems are resolved at compile-time, and implicit casts of a variable from one type to another are not allowed.

Memory management has been simplified java in two ways. First Java does not support direct pointer manipulation or arithmetic. This make it possible for a java program to overwrite memory or corrupt data.

- Java encourages error-free programming by being strictly typed and performing run-time checks.

Portable

The feature of java "write once -run any where" make java portable. Many type of computers and operating systems are used for programs. By porting an interpreter for the Java Virtual Machine to any computer hardware/operating system, one is assured that all code compiled for it will run on that system. This forms the basis for Java's portability.

Dynamic

Because it is interpreted , Java is an extremely dynamic language. At runtime, the java environment can extends itself by linking in classes that may be located on remote servers on a network(for example, the internet).

At runtime, the java interpreter performs name resolution while linking in the necessary classes.

Interpreted:

- Java supports cross-platform code through the use of Java bytecode.
- Bytecode can be interpreted on any platform by JVM.

Multi-threaded: A thread is like a separate program, executing concurrently. We can write Java programs that deal with many tasks at once by defining multiple threads. The main advantage of multi-threading is that it shares the same memory. Threads are important for multi-media, Web applications etc.

Distributed: Java facilitates the building of distributed application by a collection of classes for use in networked applications. By using java's URL (Uniform Resource Locator) class, an application can easily access a remote server. Classes also are provided for establishing socket-level connections

Q. 3. (b) Explain Garbage Collection in Java.

Ans. Refer Q.4. First Term Examination september-2017. (7.5)

UNIT-II

Q. 4. (a) Write a program in Java to add digits of a given number (i.e. 3661 will be 16). (5)

Ans. Source Code:

```
import java.util.Scanner;
public class JavaProgram
{
    public static void main(String args[])
    {
        Scanner s = new Scanner(System.in);
        System.out.println("Enter a number");
        int n = s.nextInt();
        int sum = 0;
        while(n > 0)
        {
            int r = n % 10;
            sum = sum + r;
            n = n / 10;
        }
        System.out.println("Sum of digits is " + sum);
    }
}
```

20-2018


Fifth Semester, Java Programming

```

intnum, rem=0, sum=0, temp;
Scanner scan = new Scanner(System.in);
System.out.print("Enter a Number :");
num = scan.nextInt();
temp = num;
while(num>0)
{
    rem = num%10;
    sum = sum+rem;
    num = num/10;
}
System.out.print("Sum of Digits of " +temp+ " is"+sum);
}

```

When the above Java Program is compile and executed, it will produce the following output:

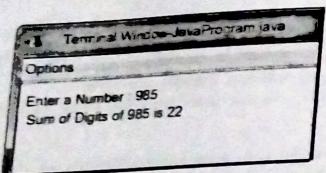

Q. 4. (b) Write a class distance with int feet and double inch as data members. Show constructor overloading. Also, add method to add two distance objects.

Ans. Source Code:

```

import java.util.*;
//class Distance to read, print and add distance
class Distance
{
private int feet;
private int inches;
public void getDistance()
{
Scanner sc=new Scanner(System.in);
System.out.print("Enter feet:");
feet=sc.nextInt();
System.out.print("Enter inches:");
inches=sc.nextInt();
}
public void showDistance()

```

```

        System.out.println("Feet:" + feet + "\tInches:" + inches);
    }
    public void addDistance(Distance D1, Distance D2)
    {
        inches=D1.inches+D2.inches;
        feet=D1.feet+D2.feet+(inches/12);
        inches=inches%12;
    }
    public class AddTwoDistance
    {
        public static void main(String []s)
        {
            try
            {
                Distance D1=new Distance();
                Distance D2=new Distance();
                Distance D3=new Distance();
                System.out.println("Enter first distance:");
                D1.getDistance();
                //read second distance
                System.out.println("Enter second distance:");
                D2.getDistance();
                //add distances
                D3.addDistance(D1,D2);
                //print distance
                System.out.println("Total distance is:");
                D3.showDistance();
            } catch (Exception e)
            {
                System.out.println("Exception occurred :" + e.toString());
            }
        }
    }

```

Output

```

Enter first distance:
Enter feet: 20
Enter inches: 10
Enter second distance:
Enter feet: 20
Enter inches: 10
Total distance is:
Feet: 41
Inches: 8

```

Q. 5. (a) Differentiate between a class and abstract class. (5)

Ans. Abstract Class: An abstract class is a type of class in Java that is declared by the abstract keyword. An abstract class cannot be instantiated directly, i.e. object of such class cannot be created directly using new keyword. An abstract class can be instantiated either by concrete subclass, or by defining all the abstract method along with the new statement.

Concrete Class: A concrete class in Java is a type of subclass, which implements all the abstract method of its super abstract class which it extends to. It also has implementations of all methods of interfaces it implements.

Abstract Class	Concrete Class
An abstract class is declared using abstract modifier.	A concrete class is not declared using abstract modifier.
An abstract class cannot be directly instantiated using the new keyword.	A concrete class can be directly instantiated using the new keyword.
An abstract class may or may not contain abstract methods.	A concrete class cannot contain an abstract method.
An abstract class cannot be declared as final.	A concrete class can be declared as final.
Interface implementation is not possible	Interface implementation is possible.

Examples:

```
abstract class DemoAbstractClass {
    abstract void display();
}

public class JavaApplication1 {
    public static void main(String[] args) {
        DemoAbstractClass AC = new DemoAbstractClass();
        void display() {
            System.out.println("Hi.");
        }
    }
    AC.display();
    System.out.println("How are you?");
}
}
```

Output:

Hi.

How are you?

```
abstract class DemoAbstractClass {
    abstract void display();
}

class ConcreteClass extends DemoAbstractClass
}
```

```
void display()
{
    System.out.println("Hi.");
}

public class JavaApplication1 {
    public static void main(String[] args) {
        ConcreteClass C = new ConcreteClass();
        C.display();    System.out.println("How are you?");
    }
}
```

Output:

Hi.

How are you?

Q. 5. (b) What is applet? Write hierarchy of Applet class. Define life cycle of an Applet. Write a program for any applet application. (7.5)

Ans. Refer Q.3.(a) First Term Examination December-2018.

UNIT-III

Q. 6. (a) Write an application which shows two input text boxes namely input-1 and input-2 and two buttons with captions + and - respectively. Use action event to print the sum and difference of two inputs on a third textbox on click of + and - buttons respectively. (7.5)

Ans. Source Code:


1. import java.awt.*;
2. import java.awt.event.*;
3. public class TextFieldExample extends Frame implements ActionListener{
4. TextField tf1,tf2,tf3;
5. Button b1,b2;
6. TextFieldExample(){
7. tf1=new TextField("input-1");
8. tf1.setBounds(50,50,150,20);
9. tf2=new TextField("input-2");
10. tf2.setBounds(50,100,150,20);
11. tf3=new TextField();
12. tf3.setBounds(50,150,150,20);
13. tf3.setEditable(false);
14. b1=new Button("+");
15. b1.setBounds(50,200,50,50);
16. b2=new Button("-");
17. b2.setBounds(120,200,50,50);
18. b1.addActionListener(this);

```

19. b2.addActionListener(this);
20. add(tf1);add(tf2);add(tf3);add(b1);add(b2);
21. setSize(300,300);
22. setLayout(null);
23. setVisible(true);
24. }
25. public void actionPerformed(ActionEvent e) {
26.     String s1=tf1.getText();
27.     String s2=tf2.getText();
28.     int a=Integer.parseInt(s1);
29.     int b=Integer.parseInt(s2);
30.     int c=0;
31.     if e.getSource()==b1){
32.         c=a+b;
33.     }else if e.getSource()==b2{
34.         c=a-b;
35.     }
36.     String result=String.valueOf(c);
37.     tf3.setText(result);
38. }
39. public static void main(String[] args) {
40.     new TextFieldExample();
41. }
42. }

```

Output:

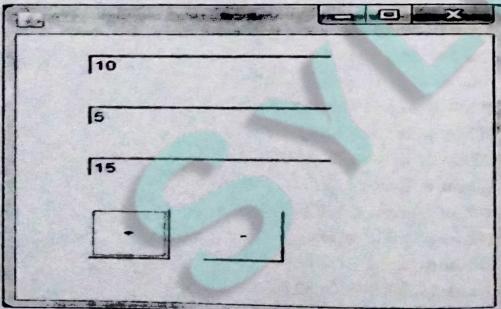

Q. 6. (b) Explain thread synchronization.

Ans. Refer Q.2 (b) End Term Examination December-2017.

(5)

Q. 7. (a) Explain multithreading with an example.

Ans. Java is multithreaded programming language which means we develop multithreaded program using Java. A multithreaded program contains two or more parts that can run concurrently and each part can handle different task at the same time making optimal use of the available resources specially when your computer has multiple CPUs

By definition multitasking is when multiple processes share common processing resources such as a CPU. Multithreading extends the idea of multitasking into individual threads. Each of the threads can run in parallel. The OS divides processing time not only among different applications, but also among each thread within an application.

Multithreading enables you to write in way where multiple activities can proceed concurrently in the same program.

Example on creating a thread by deriving from the thread class

public class Derived extends Thread

{
 public void run ()

{
 /* Your implementation of the
 thread here
 */
 }

}

Derived derivedThread = new Derived();
/* this call will create a new independent thread
called derivedThread, and will start its processing

*/
derivedThread.start();

Q. 7. (b) Explain different type of layouts in java AWT.

(5)

Ans. Several AWT and Swing classes provide layout managers for general use:

BorderLayout

BoxLayout

CardLayout

FlowLayout

GridBagLayout


GridLayout

GroupLayout

SpringLayout


Examples

Border Layout

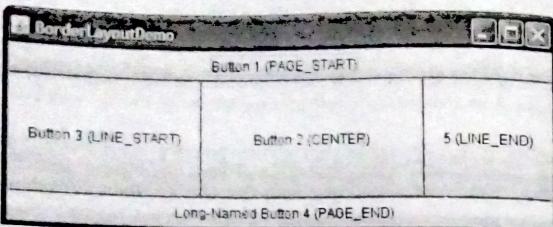

Every content pane is initialized to use a BorderLayout. (As Using Top-Level Containers explains, the content pane is the main container in all frames, applets, and dialogs.) A BorderLayout places components in up to five areas: top, bottom, left, right, and center. All extra space is placed in the center area. Tool bars that are created using JToolBar must be created within a BorderLayout container, if you want to be able to drag and drop the bars away from their starting positions. For further details, see How to Use BorderLayout.

BoxLayout




The BoxLayout class puts components in a single row or column. It respects the components' requested maximum sizes and also lets you align components. For further details, see How to Use BoxLayout.

CardLayout



The CardLayout class lets you implement an area that contains different components at different times. A CardLayout is often controlled by a combo box, with the state of the combo box determining which panel (group of components) the CardLayout displays. An alternative to using CardLayout is using a tabbed pane, which provides similar functionality but with a pre-defined GUI. For further details, see How to Use CardLayout.

FlowLayout

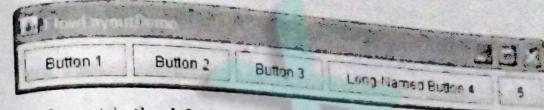

FlowLayout is the default layout manager for every JPanel. It simply lays out components in a single row, starting a new row if its container is not sufficiently wide. Both panels in CardLayoutDemo, shown previously, use FlowLayout. For further details, see How to Use FlowLayout.

UNIT-IV

Q. 8. (a) Explain different types of JDBC drivers. Write the steps involved in JDBC application with an example. (7.5)

Ans. Refer Q. 7.(b) End Term Examination December-2017

JDBC Driver is a software component that enables java application to interact with the database.

There are 4 types of JDBC drivers:

1. JDBC-ODBC bridge driver
2. Native-API driver (partially java driver)
3. Network Protocol driver (fully java driver)
4. Thin driver (fully java driver)

(1) JDBC-ODBC bridge driver

The JDBC-ODBC bridge driver uses ODBC driver to connect to the database. The JDBC-ODBC bridge driver converts JDBC method calls into the ODBC function calls. This is now discouraged because of thin driver.

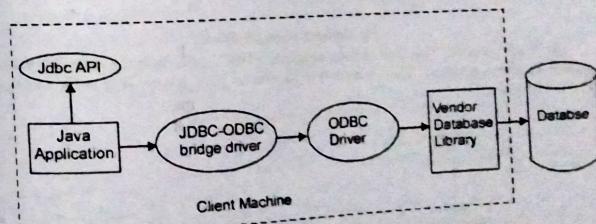


Fig. JDBC-ODBC Bridge Drive

(2) Native-API driver

The Native API driver uses the client-side libraries of the database. The driver converts JDBC method calls into native calls of the database API. It is not written entirely in java.

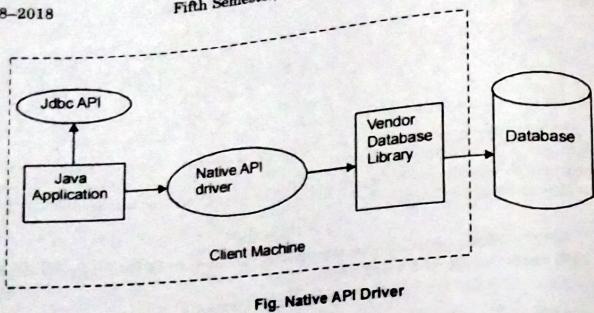


Fig. Native API Driver

(3) Network Protocol driver

The Network Protocol driver uses middleware (application server) that converts JDBC calls directly or indirectly into the vendor-specific database protocol. It is fully written in java.

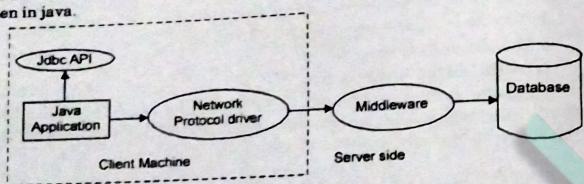


Fig. Network Protocol Driver

(4) Thin driver: The thin driver converts JDBC calls directly into the vendor-specific database protocol. That is why it is known as thin driver. It is fully written in Java language.

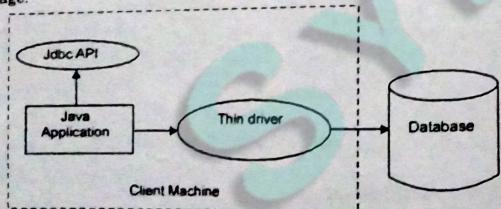


Fig. Thin Driver

Q. 8. (b) Write a program to read content of one file and write it in another file.

(5)

Ans. The below code would copy the content of "My inputFile.txt" to the "My outputFile.txt" file. If "My outputFile.txt" doesn't exist then the program would create the file first and then it would copy the content.

Source Code:

```

import java.io.File;
import java.io.FileInputStream;
import java.io.FileOutputStream;
import java.io.IOException;
public class CopyExample
{
    public static void main(String[] args)
    {
        FileInputStream instream = null;
        FileOutputStream outstream = null;
        try{
            File infile = new File("C:\\\\My inputFile.txt");
            File outfile = new File("C:\\\\My outputFile.txt");
            instream = new FileInputStream(infile);
            outstream = new FileOutputStream(outfile);
            byte[] buffer = new byte[1024];
            int length;
            while ((length = instream.read(buffer)) > 0){
                outstream.write(buffer, 0, length);
            }
            instream.close();
            outstream.close();
            System.out.println("File copied successfully!!!");
        }catch(IOException ioe){
            ioe.printStackTrace();
        }
    }
}

```

Output:


File copied successfully!!

Q. 9. (a) Draw the Architecture of JDBC-ODBC Bridge and steps for executing of a JDBC ODBC based JAVA Program. Write a program in java to represent JDBC-ODBC connectivity by insert a data 'name' 'id' and 'marks' fields in a table 'student' of database 'student DB'

(7.5)

Ans. JDBC-ODBC Bridge Driver: In a Type 1 driver, a JDBC bridge is used to access ODBC drivers installed on each client machine. Using ODBC, requires configuring on your system a Data Source Name (DSN) that represents the target database.

When Java first came out, this was a useful driver because most databases only supported ODBC access but now this type of driver is recommended only for experimental use or when no other alternative is available.

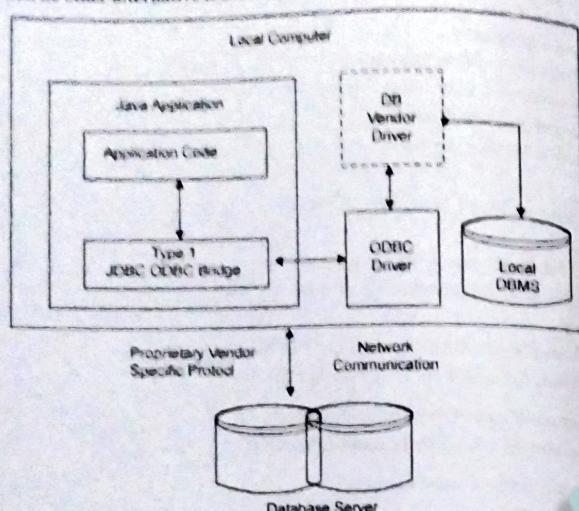**Source Code:**

```

import java.sql.*;
import java.util.*;
class Main
{
    public static void main(String args[])
    {
        //Creating the connection
        String url = "jdbc:oracle:thin:@localhost:1521:xe";
        String user = "system";
        String pass = "12345";

        //Entering the data
        Scanner k = new Scanner(System.in);
        System.out.println("enter name");
        String name = k.next();
        System.out.println("enter ID");
        intID = k.nextInt();
    }
}
  
```

//Inserting data using SQL query

```

String sql = "insert into student
values('"+name+"','"+ID+"','"+marks+"')";
Connection con=null;
try
{
    DriverManager.registerDriver(new oracle.jdbc.OracleDriver());
}
  
```

//Reference to connection interface

```

con = DriverManager.getConnection(url,user,pass);
  
```

```

Statement st = con.createStatement();
intm = st.executeUpdate(sql);
if(m == 1)
  
```

```

System.out.println("inserted successfully "+sql);
else
  
```

```

System.out.println("insertion failed");
con.close();
  
```

catch(Exception ex)

```

System.err.println(ex);
  
```

Q. 9. (b) What are Java collections? Give some methods of Collection interface. (5)

Ans. A Collection is a group of individual objects represented as a single unit. Java provides Collection Framework which defines several classes and interfaces to represent a group of objects as a single unit.


The Collection interface (`java.util.Collection`) and Map interface (`java.util.Map`) are the two main "root" interfaces of Java collection classes.

Advantages of Collection Framework:

1. Consistent API : The API has a basic set of interfaces like Collection, Set, List, or Map. All classes (ArrayList, LinkedList, Vector, etc) that implement these interfaces have some common set of methods.

- 2 Reduces programming effort. A programmer doesn't have to worry about the design of Collection, and he can focus on its best use in his program.
- 3 Increases program speed and quality. Increases performance by providing high-performance implementations of useful data structures and algorithms.

Hierarchy of Collection Framework

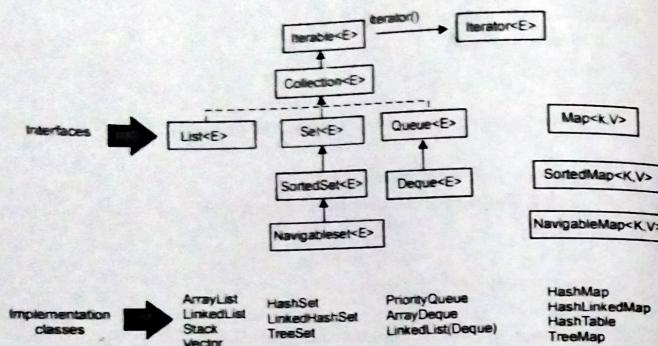

There are many methods declared in the Collection interface. They are as follows:

No.	Method	Description
1	public boolean add (E e)	It is used to insert an element in this collection.
2	public boolean addAll(Collection <? extends E> c)	It is used to insert the specified collection elements in the invoking collection.
3	public boolean remove (Object element)	It is used to delete an element from the collection
4	public boolean removeAll (Collection<?> c)	It is used to delete all the elements of the specified collection from the invoking collection
5	default boolean removeIf(Predicate <? super E>filter)	It is used to delete all the elements of the collection that the specified predicate.

FIRST TERM EXAMINATION [SEPT.-2019] FIFTH SEMESTER [B.TECH.] JAVA PROGRAMMING [ETCS-307]

Time : 1½ hrs.

M.M. : 30

Note: Attempt Q.No. 1 and any two more Questions from remaining.

Q.1.(a) Can main() method in Java return any data?

Ans. The main method with public static as modifiers, void return type and String arguments if you change anything, JVM doesn't consider as the entry point method and prompts an error at run time.

Therefore, you cannot change the return type of main method from void, at the same time you cannot return any value from a method with void type.

Q.1.(b) Methods that have same name, but different parameter list and different definition is known as _____ (METHOD OVERLOADING) (1)

Q.1.(c) Does importing a package imports its sub-packages as well in Java?

Ans. Packages that are inside another package are the subpackages. These are not imported by default, they have to be imported explicitly. Also, members of a subpackage have no access privileges, i.e., they are considered as different package for protected and default access specifiers.

No you will have to import the subpackages explicitly. Importing com.MyTest.* will import classes in the package MyTest only. It will not import any class in any of its subpackage.

Q.1.(d) What is the difference between an Inner Class and a Sub-Class? (2)

Ans. There are big differences between inner classes and subclasses.

- inner classes are in the same file, whereas subclasses can be in another file, maybe in another package. • You cannot get an instance of an inner class without an instance of the class that contains it. • inner classes have the methods they want, whereas subclasses have the methods of their parent class. Subclasses can of course define additional methods, but they'll always have those of their parent.

Q.1.(e) What is open sandbox model?

Q.1.(f) What is the difference between 'throw' and 'throws'? (2)

Ans. Refer Q.1(a) of End Term 2018 (Pg. No. 10-2018)

Q.2.(a) Write a program to show the multiple inheritance concept using interfaces. What is partial implementation of interface in Java? (5)

Q.2.(b) What is difference between JDK, JRE and JVM? How Java is platform dependent in case of JRE? (5)

Q.3.(a) What is difference between using buffer and string tokenized? Explain with the help of program.

Ans. Refer Q.3 (b) of First Term 2016 (Pg. No. 6-2016)

Q.3.(b) How is final different from finally and finalized? (2)

Q.3.(c) Find error in the following code:

class Derived

```

  public void getDetails()
  {
  }
```

```

    |
    |     Systems.out.println("Derivedclass");
    |
    public class Test-extends Derived
    {
        protected void getDetails()
        {
            System.out.println("Test class");
        }
        public static void mainString (largs)
        {
            Derived obj = new Test(); it line xyz
            obj.getDetails();
        }
    }

```

- (a) Error in Test class (b) Compilation error due to line xyz
 (c) Error in Derived class (d) Compilation error due to access modifier

Ans: (d)

Explanation: The overriding method can not have more restrictive access modifier.

Q.4.(a) What is the difference between checked and Unchecked Exception? Give example of both type of Exception. How Error is different from Exception? (5)

Ans. Refer Q.1(e) of First Term 2017 (Pg. No. 2-2017)

Q.4.(b) What are Applets? How do you get the value of a parameter specified in the APPLET tag from within the appletic code? (5)

END TERM EXAMINATION [DEC.-2019]

Time : 3 hrs.

M.M. : 75

Note: Attempt any five questions including Q.No. 1 which is compulsory. Select one question from each unit. Assume suitable data if any.

Q.1.(a) Differentiate between abstract classes and interfaces. (5)

Ans. Refer Q.4(b) of First Term 2018 (Pg. No. 8-2018)

Q.1.(b) Differentiate between different nested classes. What are adapter classes? (5)

Q.1.(c) What is synchronization in threads? Why it is required. (5)

Q.1.(d) Differentiate between multiprocessing and multithreading. (5)

Basis for Comparison	Multiprocessing	Multithreading
Basic	Multiprocessing adds CPUs to increase computing power.	Multithreading creates multiple threads of a single process to increase computing power.
Execution	Multiple processes are executed concurrently.	Multiple threads of single process are executed concurrently.

Creation	Creation of a process is time-consuming and resource intensive.	Creation of a thread is economical in both sense time and resource.
Classification	Multiprocessing can be symmetric or asymmetric.	Multithreading is not classified.

Q.1.(e) Is JVM an interpreter or emulator or both? Discuss.

UNIT-I

Q.2.(a) Discuss the limitations of Java Virtual Machine.

Ans. Java Virtual Machine has notable advantages, it comes with many disadvantages also.

1. Platform specific features : Java cannot be used without Java Runtime Environment being installed on your system. So in order to start coding in Java, firstly you need to install the latest version of Java Virtual Machine.

Because of JVM running on several Operating Systems, there is a possibility that JVM does not have a feature that is specific to that particular operating system. Therefore, there can be any feature that does not look the same way as it did on some other operating system.

2. Speed : In a Java Virtual Machine, the code is first converted into bytecode and then the bytecode is converted into the machine code for the system to finally run it.

Therefore, this is the reason why the Java Virtual Machine tends to work slower and hence making a Java code run slower when compared to its equivalent C or C++ code. The compilation to bytecode that helps the code to run on any platform eventually turns out to be a disadvantage when performance is concerned.

Java bytecode is system neutral and optimization of the same according to any specific hardware set is not possible. The reason behind this is that for a code to get optimize system specific features are the necessity and since the bytecode is system neutral it is not possible to optimize it.

A Java code is completely dependent on the Java Virtual Machine which makes it platform dependent and itself is platform dependent. Thus, before proceeding towards Java development one should have the basic idea of what is a Java Virtual Machine.

Q.2.(b) Explain the concepts of class area and heap in JVM. (6)

Q.3.(a) What is sandbox model? How has it evolved over a period of time to the present state? (6)

Q.3.(b) Explain different types of class loaders in java. What are the differences and similarities in different types? (6.5)

UNIT II

Q.4.(a) What is a constructor? Explain constructor overloading with a program. (6.5)

Ans. Refer Q.1(a) of End Term 2016 (Pg. No.11-2016)
Constructor Overloading : A constructor is just like a method but without return type. It can also be overloaded like Java methods.

Constructor overloading in Java is a technique of having more than one constructor with different parameter lists. They are arranged in a way that each constructor performs a different task. They are differentiated by the compiler by the number of parameters in the list and their types.

1. class Student5{
2. int id;

```

3. String name;
4. int age;
5. Student5(int i, String n) {
6. id = i;
7. name = n;
8. }
9. Student5(int i, String n, int a) {
10. id = i;
11. name = n;
12. age=a;
13. }
14. void display(){System.out.println(id+" "+name+" "+age);}
15. public static void main(String args[]){
16. Student5 s1 = new Student5(111,"Karan");
17. Student5 s2 = new Student5(222,"Aryan",25);
18. s1.display();
19. s2.display();
20. }
21. }

```

Q.4.(b) Explain differences between abstract class and interfaces. (5)

Ans. Refer Q.4(b) of First Term 2018 (Pg. No. 8-2018)

Q.4.(c) Explain two uses of keyword 'final'. (1)

Ans. Refer Q.1(i) of First Term 2017 (Pg. No. 3-2017)

Q.5.(a) Explain the concept of dynamic method dispatch. Illustrate it with program. (6.5)

Ans. Refer Q.4(c) of End Term 2017 (Pg. No. 23-2017)

Q.5.(b) Explain Short Circuit and Shrot Circuit OR with the help of code trgments. (6)

UNIT III

Q.6.(a) What is a thread? Discuss the different states of a thread. (6.5)

Ans. Refer Q.5 of End Term 2015 (Pg. No. 32-2015)

Q.6.(b) Write an applet containing three taxboxes which takes two numbers as input in two textboxes and displays the sum of the numbers in third textbox. (6)

Q.7. What is a layout manager? Explain it's types. (12.5)

Ans. Refer Q.4(a)(i) of Second Term 2015 (Pg. No. 18-2015)

UNIT IV

Q.8.(a) Write program to read a file in Java using Buffered Input Stream. (6.5)

Q.8.(b) Write a program to retrieve data from an Oracle database. (6)

Q.9. What do you mean by driver used in database connectivity. Explain different types of drivers used in Java Database Connectivity. (12.5)

Ans. Refer Q.8(a) of End Term 2018 (Pg. No. 27-2018)