

oops → Constructor (✓)
→ Destructor

* Constructor → It's use to initialize the value to a
Particular object's data members during object

Creation

→ No return type

→ Name same as class name


Eg. Class Student
{ // Data members

String name;


String gender;

int age;

}

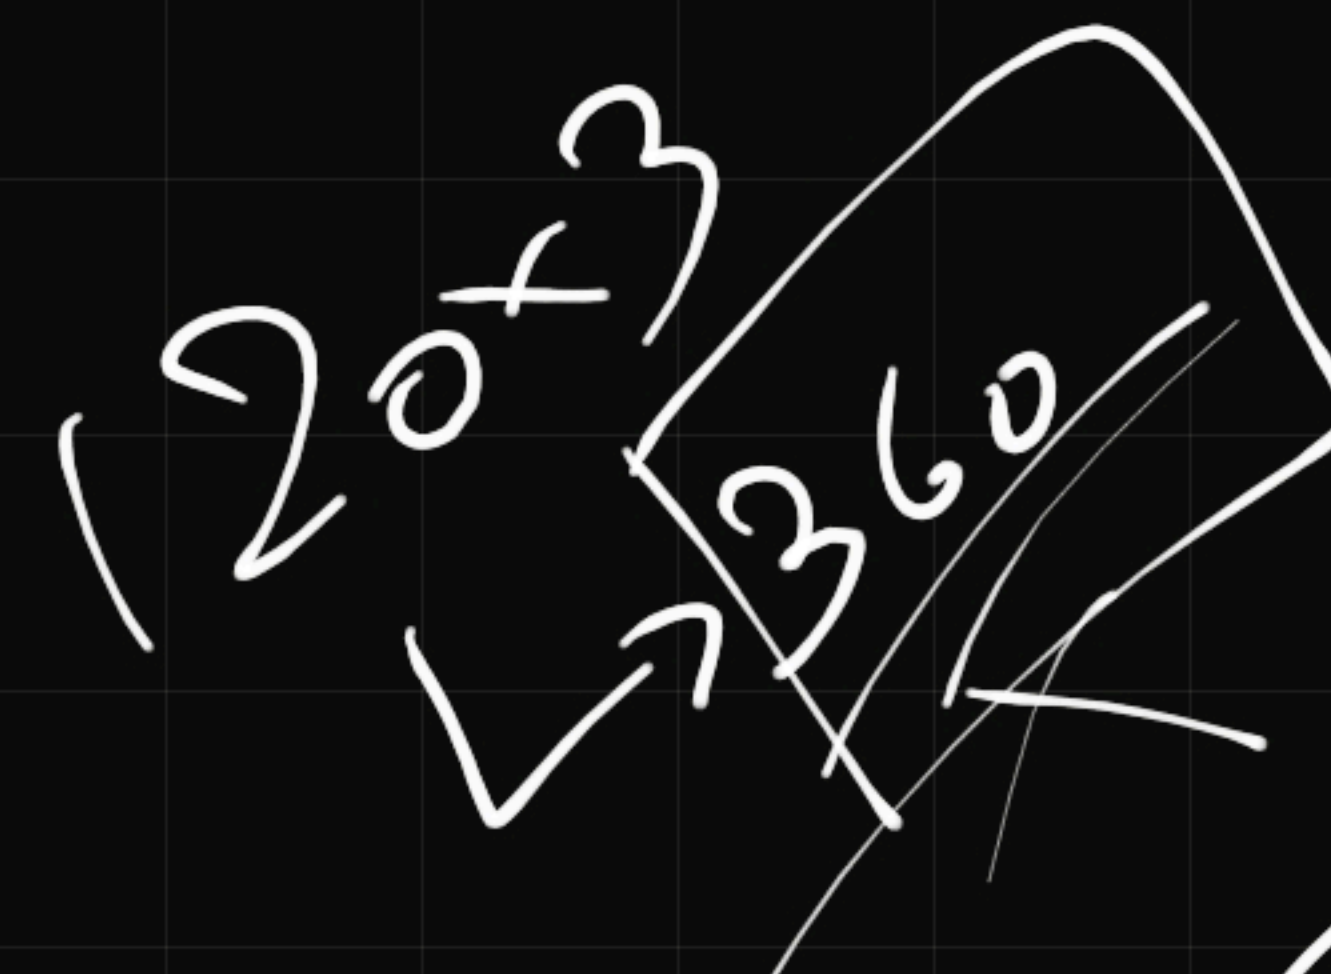

20

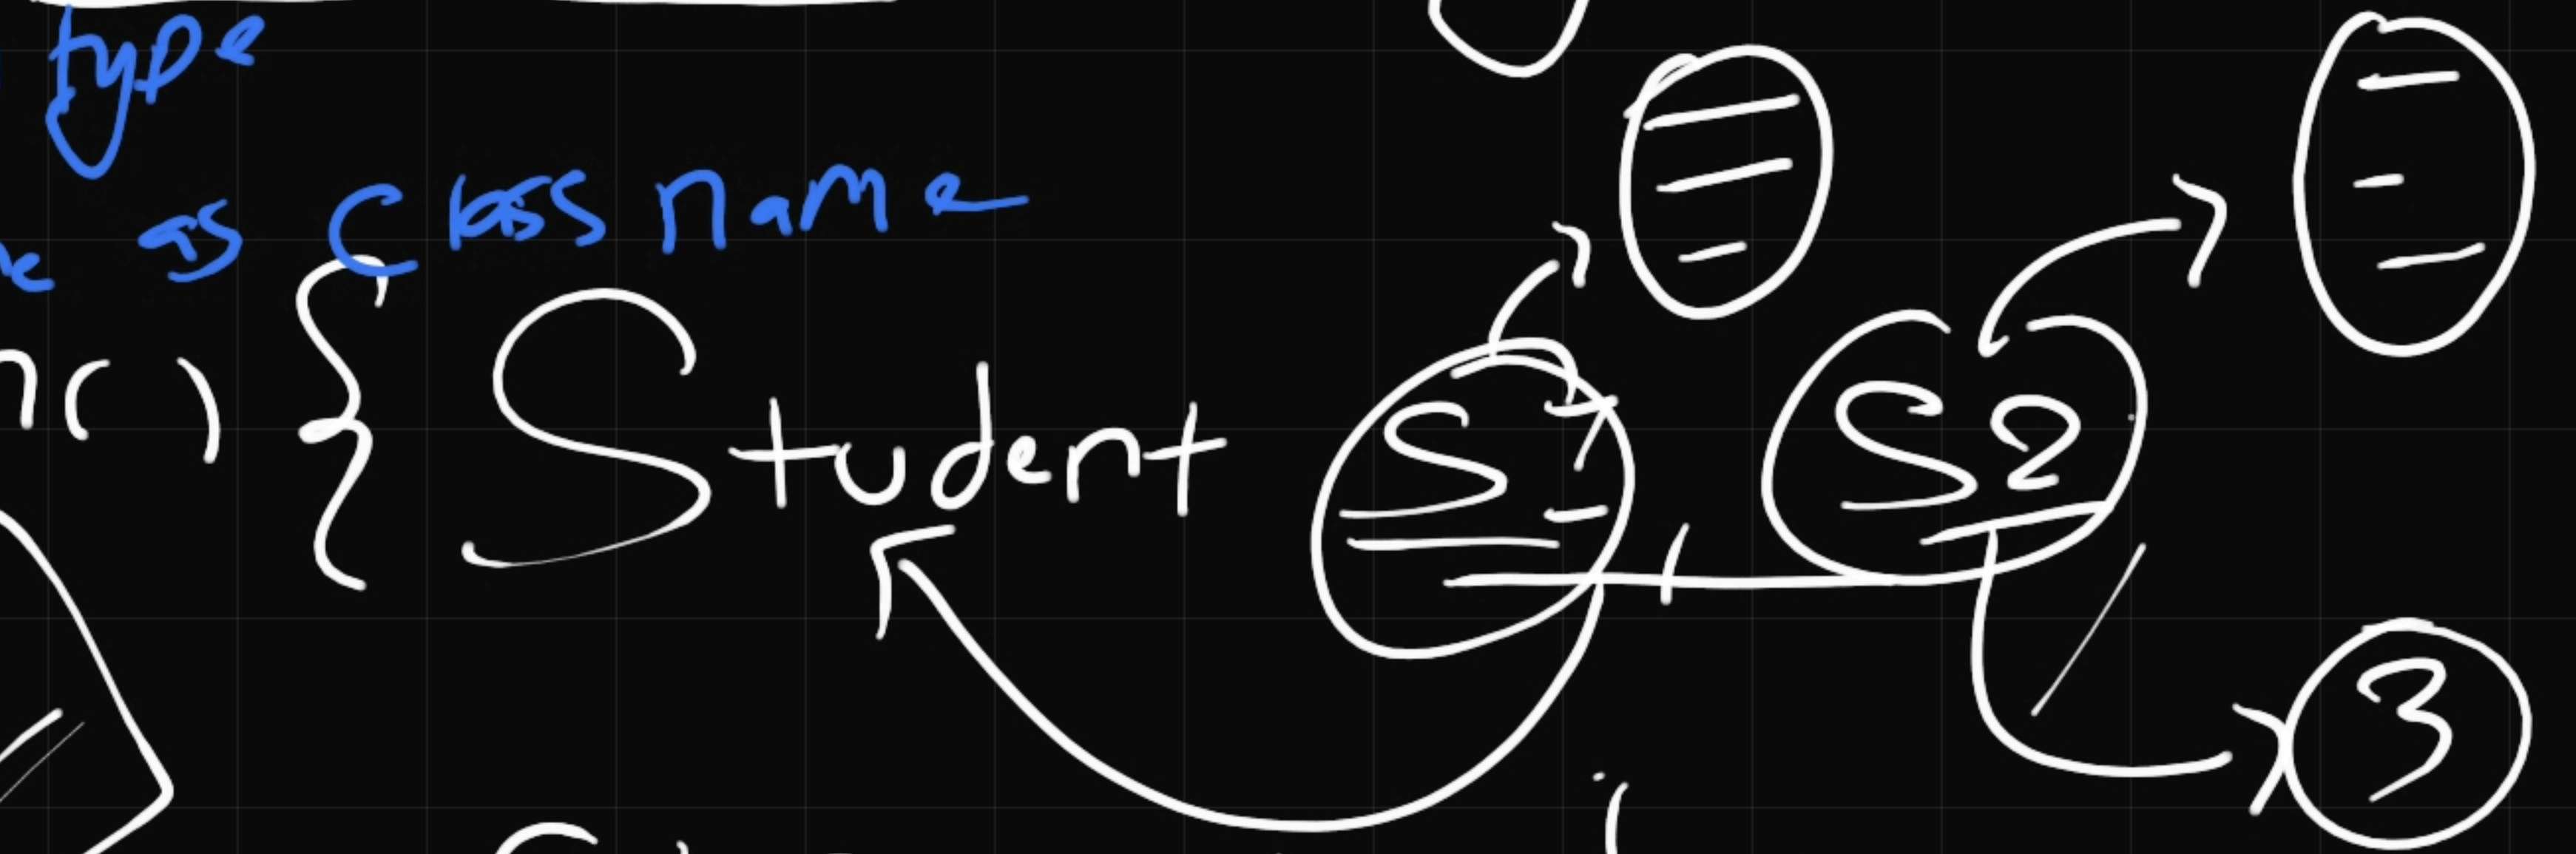

S1. name = "Samir"

S1. gender = "male"

S1. age = 24

S1. 20

3

}

Syntax

Class Student {

Public:

// Data members....

String name;
String gender;
int age;

// Constructor....

Student (String name, String g, int age)
{
 name = name;
 gender = g;
 age = age;
}

};

int main() {

Student s1 ("Sami", "male", 24);

Student s2 ("Parth", "male", 18);

Student s3 ("Vanshi", "female", 20);

Student s120 (

Constructor
Call

120

360

Class Student

name,
gender,
age;

Student (String name, String gender,
int age)

{
this->name = name;
this->gender = gender;
this->age = age;
}

local variable

Constructor {
 -> Default with no argument
 -> Parameterized with argument

Data member
or
local variable

var

Destructor



"It is a kind of function but get call automatically by 'C++ Compiler' when a particular object is about to get destroy because of the block scope"

Eg: int main() { Student s1;

// s2;

→ CreateObject();

}

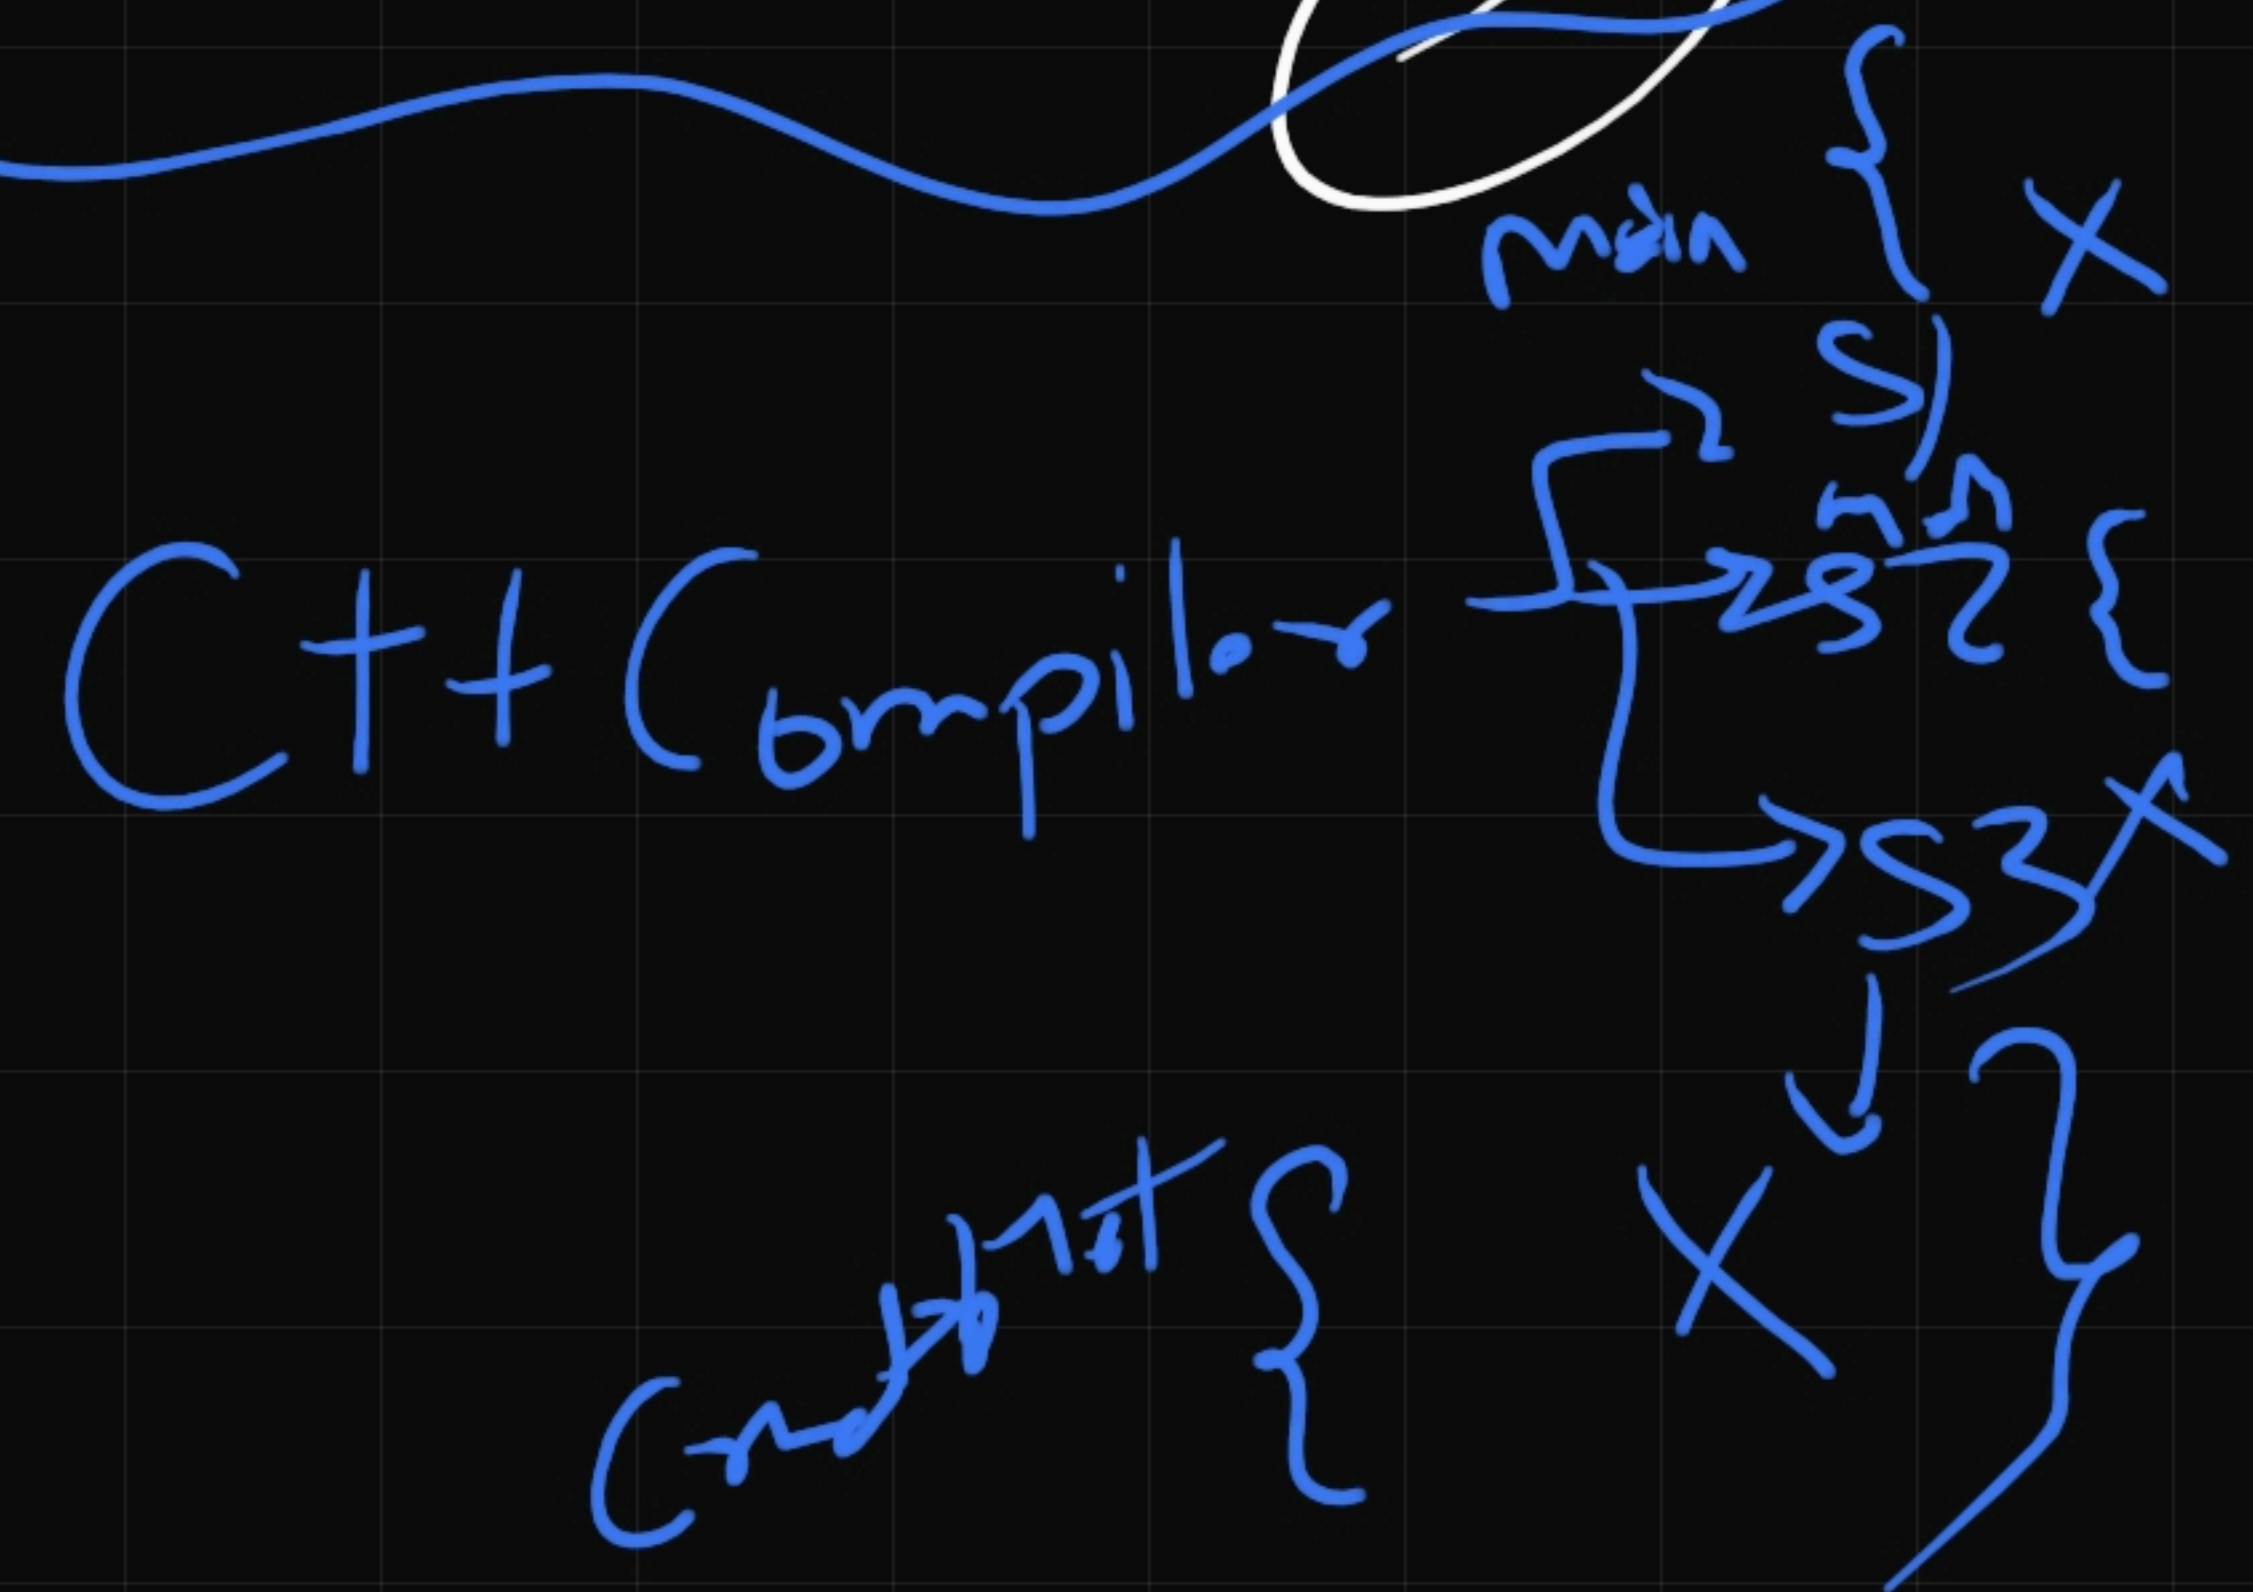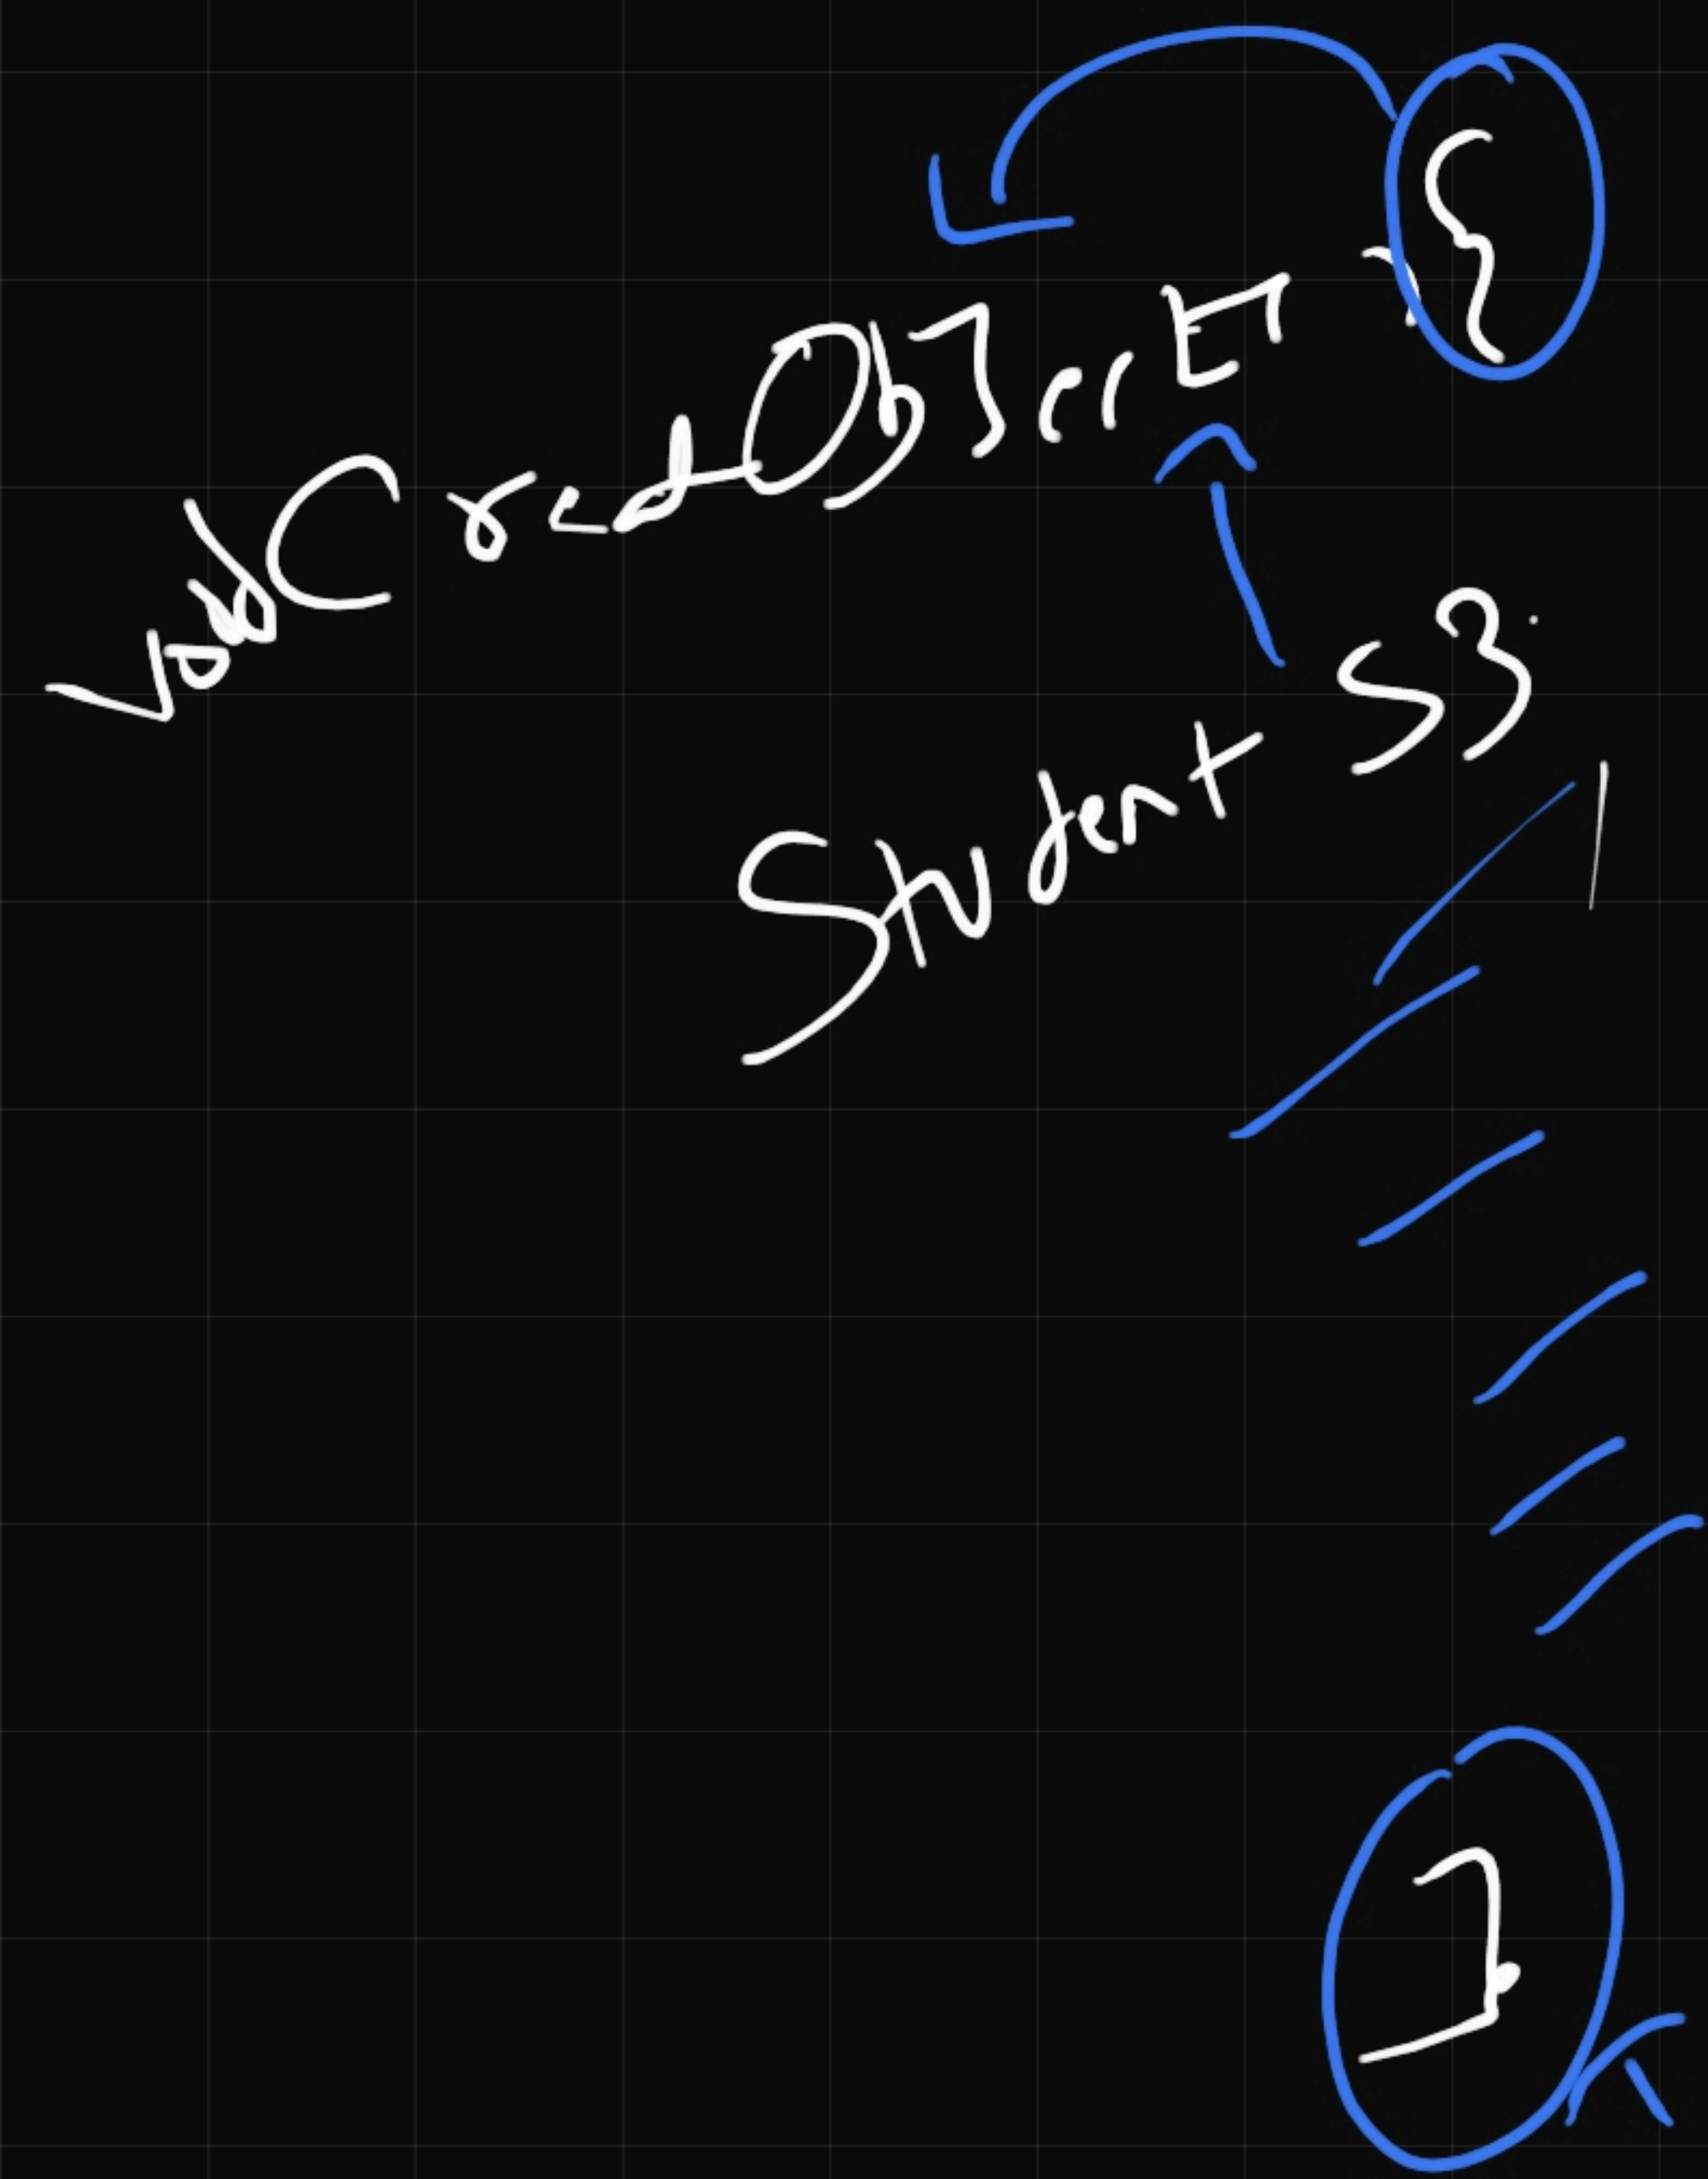

Class Student { Public:

// Data members...

// Constructor...

// Function members...

// Destructor...

→ Only one time

→ C++ Compiler

~ Student { // Set of instance
}

};