

ProtoType

```
package com.example.Scope;

import org.springframework.context.annotation.Scope;
import org.springframework.stereotype.Component;

@Component
@Scope("prototype")
public class prototype {
    int age;
    public void show() {
        System.out.println("Age: " + age);
    }
}
```

```
package com.example.Scope;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;
import org.springframework.context.ApplicationContext;


@SpringBootApplication
public class ScopeApplication {

    public static void main(String[] args) {
        ApplicationContext context =
SpringApplication.run(ScopeApplication.class, args);
        prototype s = context.getBean(prototype.class);
        s.age=22;

        prototype s1 = context.getBean(prototype.class);
        s1.age=23;

        System.out.println(s.age);
        System.out.println(s1.age);
    }
}
```

output

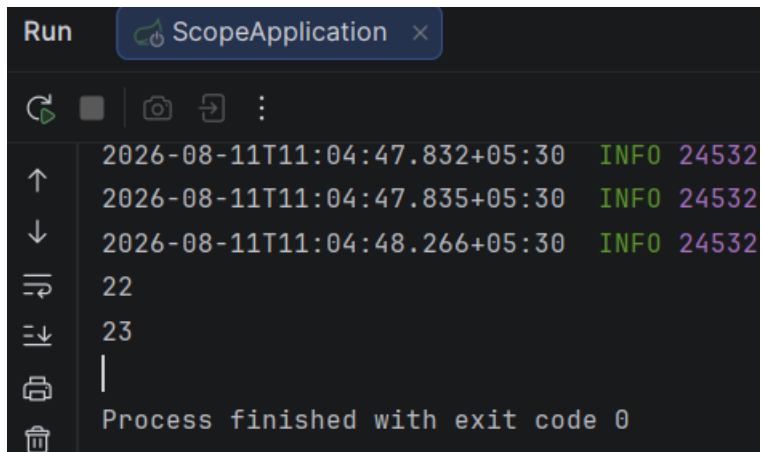

The screenshot shows a 'Run' console window for a project named 'ScopeApplication'. The console displays three log entries, each with a timestamp, the log level 'INFO', and the process ID '24532'. The output lines are: '2026-08-11T11:04:47.832+05:30 INFO 24532', '2026-08-11T11:04:47.835+05:30 INFO 24532', and '2026-08-11T11:04:48.266+05:30 INFO 24532'. Below these, the numbers '22' and '23' are printed on separate lines. The console ends with the message 'Process finished with exit code 0'. On the left side of the console, there is a vertical toolbar with icons for running, stopping, debugging, and other actions.

```
Run ScopeApplication x
2026-08-11T11:04:47.832+05:30 INFO 24532
2026-08-11T11:04:47.835+05:30 INFO 24532
2026-08-11T11:04:48.266+05:30 INFO 24532
22
23
|
Process finished with exit code 0
```