

Singleton

```
package com.example.Scope;

import org.springframework.context.annotation.Scope;
import org.springframework.stereotype.Component;

@Component
public class Singleton {
    int age;
    public void show() {
        System.out.println("Age: "+age);
    }
}
```

```
package com.example.Scope;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;
import org.springframework.context.ApplicationContext;

@SpringBootApplication
public class ScopeApplication {


    public static void main(String[] args) {
        ApplicationContext context =
SpringApplication.run(ScopeApplication.class, args);
        Singleton s = context.getBean(Singleton.class);
        s.age=22;

        Singleton s1 = context.getBean(Singleton.class);
        s1.age=23;

        System.out.println(s.age);
        System.out.println(s1.age);
    }
}
```

output

OutPut

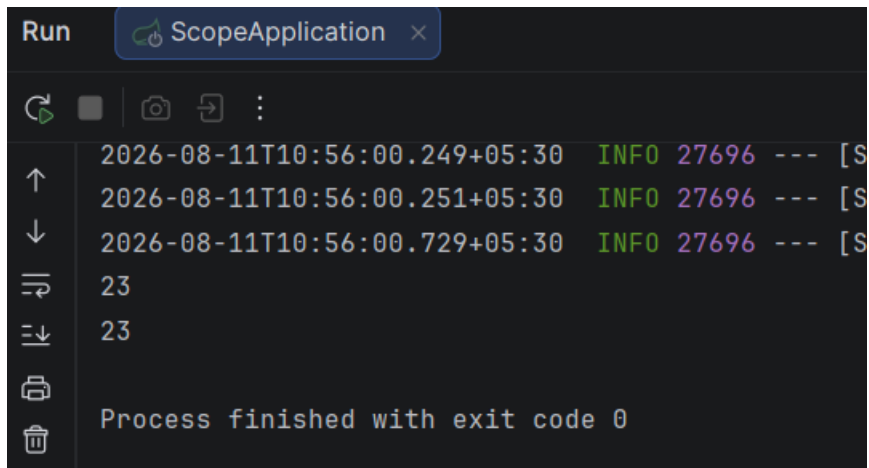

The screenshot shows a 'Run' console window for an application named 'ScopeApplication'. The console displays three log entries, each with a timestamp, log level, PID, and message. The messages are truncated on the right. The log entries are:

- 2026-08-11T10:56:00.249+05:30 INFO 27696 --- [S
- 2026-08-11T10:56:00.251+05:30 INFO 27696 --- [S
- 2026-08-11T10:56:00.729+05:30 INFO 27696 --- [S

Below the log entries, the number '23' is printed twice. At the bottom, a message states 'Process finished with exit code 0'. The console window includes a toolbar with icons for running, pausing, stepping, and other debugging actions.

```
Run ScopeApplication x
2026-08-11T10:56:00.249+05:30 INFO 27696 --- [S
2026-08-11T10:56:00.251+05:30 INFO 27696 --- [S
2026-08-11T10:56:00.729+05:30 INFO 27696 --- [S
23
23
Process finished with exit code 0
```