Level 6 → Level 7: Searching Across the File System

Objective: Find a file owned by a particular user and group with a size of 33 bytes.


Command used:
find / -type f -user bandit7 -group bandit6 -size 33c 2>/dev/null

Procedure:

1. Logged in using the bandit6 account.
2. Used find to search from the root directory.
3. Specified the required file owner, group, and size.
4. Redirected error messages to /dev/null to suppress permission-denied messages.
5. Examined the matching file and retrieved its contents.

Result: Located the file that met the specified ownership and size requirements.

Concept learned: Linux file metadata includes ownership, group membership, and permissions. The 2>/dev/null expression redirects standard error to /dev/null, making search results easier to read.

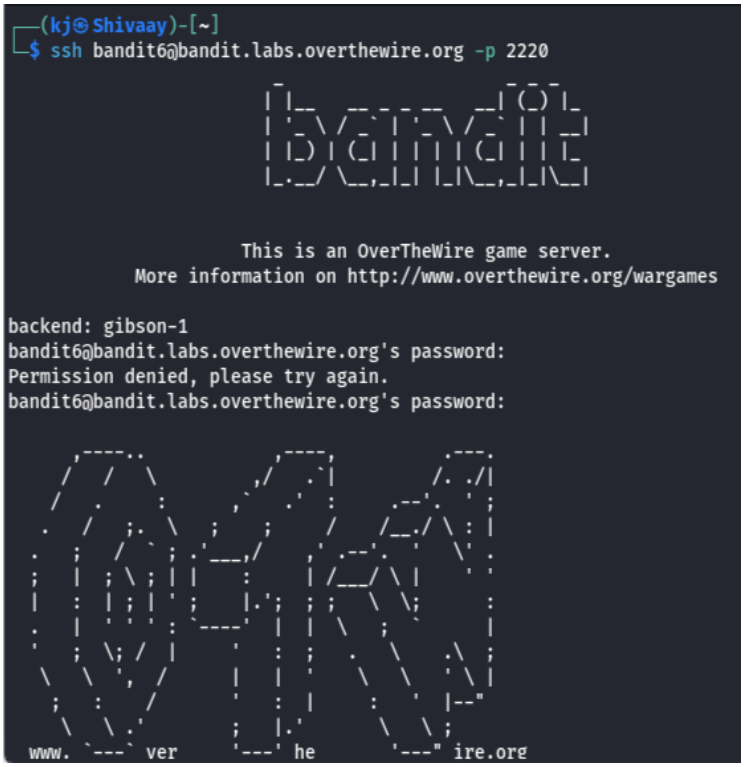


```
bandit6@bandit:~$ ls
bandit6@bandit:~$ ls -a
.  ..  .bash_logout  .bashrc  .profile
bandit6@bandit:~$ find / -type f -user bandit7 -group bandit6 -size 33c 2> /dev/null
/var/lib/dpkg/info/bandit7.password
bandit6@bandit:~$ cat /var/lib/dpkg/info/bandit7.password

bandit6@bandit:~$
```