The 9 Rasas (Navarasa)



Shringara

Love / Beauty



Hasya

Happiness / Laughter



Karuna

Sorrow / Compassion



Raudra

Anger / Fury



Veera

Courage / Heroism



Bhayanaka

Fear



Bibhatsa

Disgust



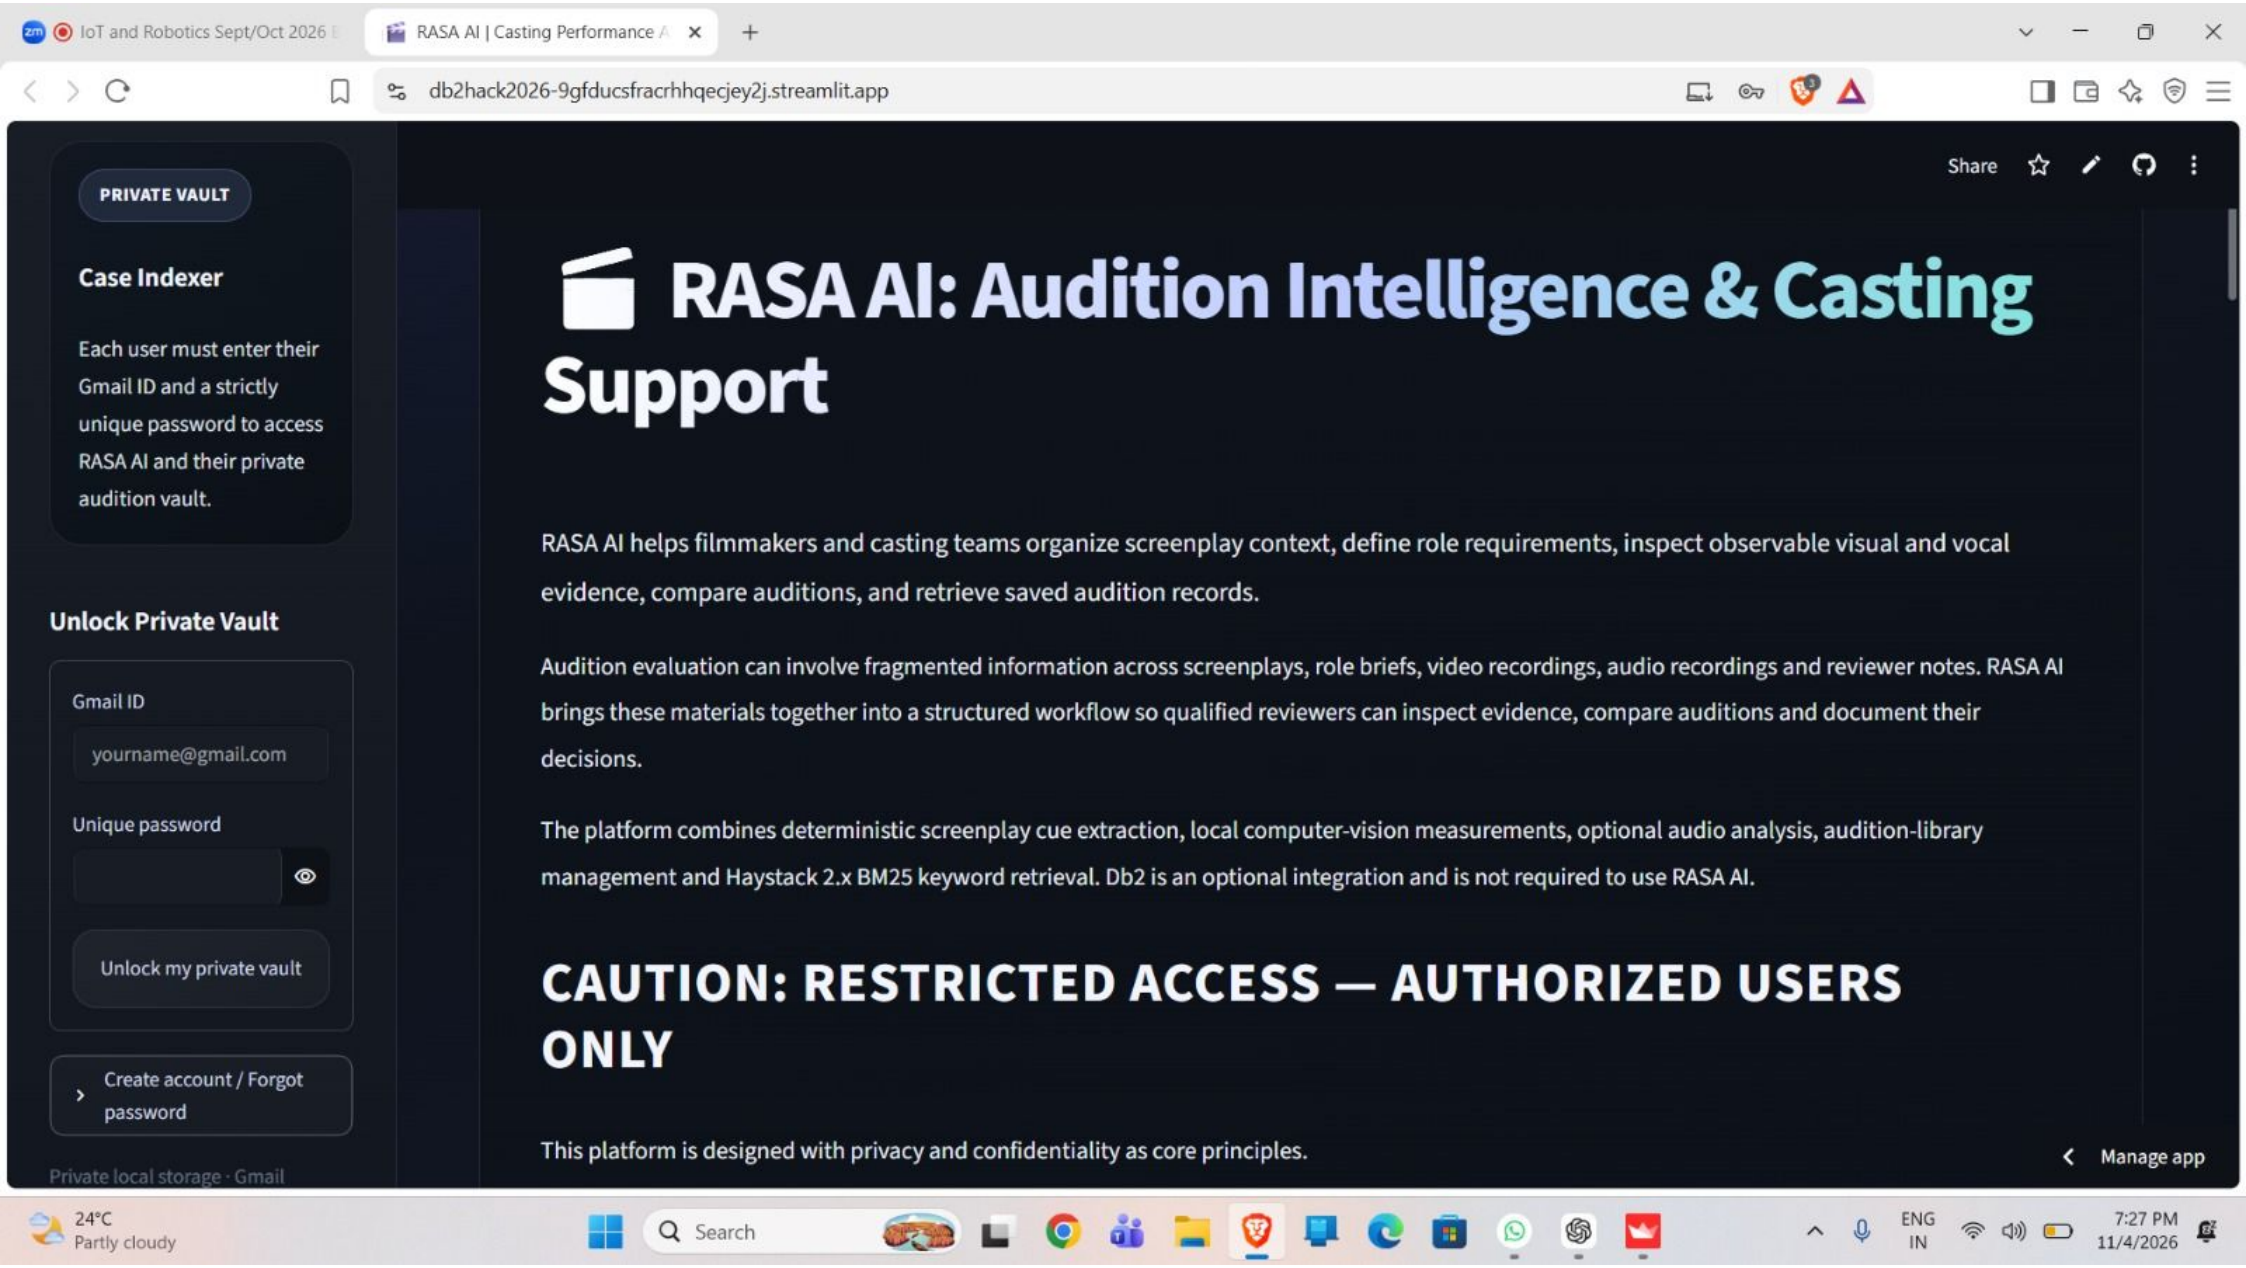
Adbhuta

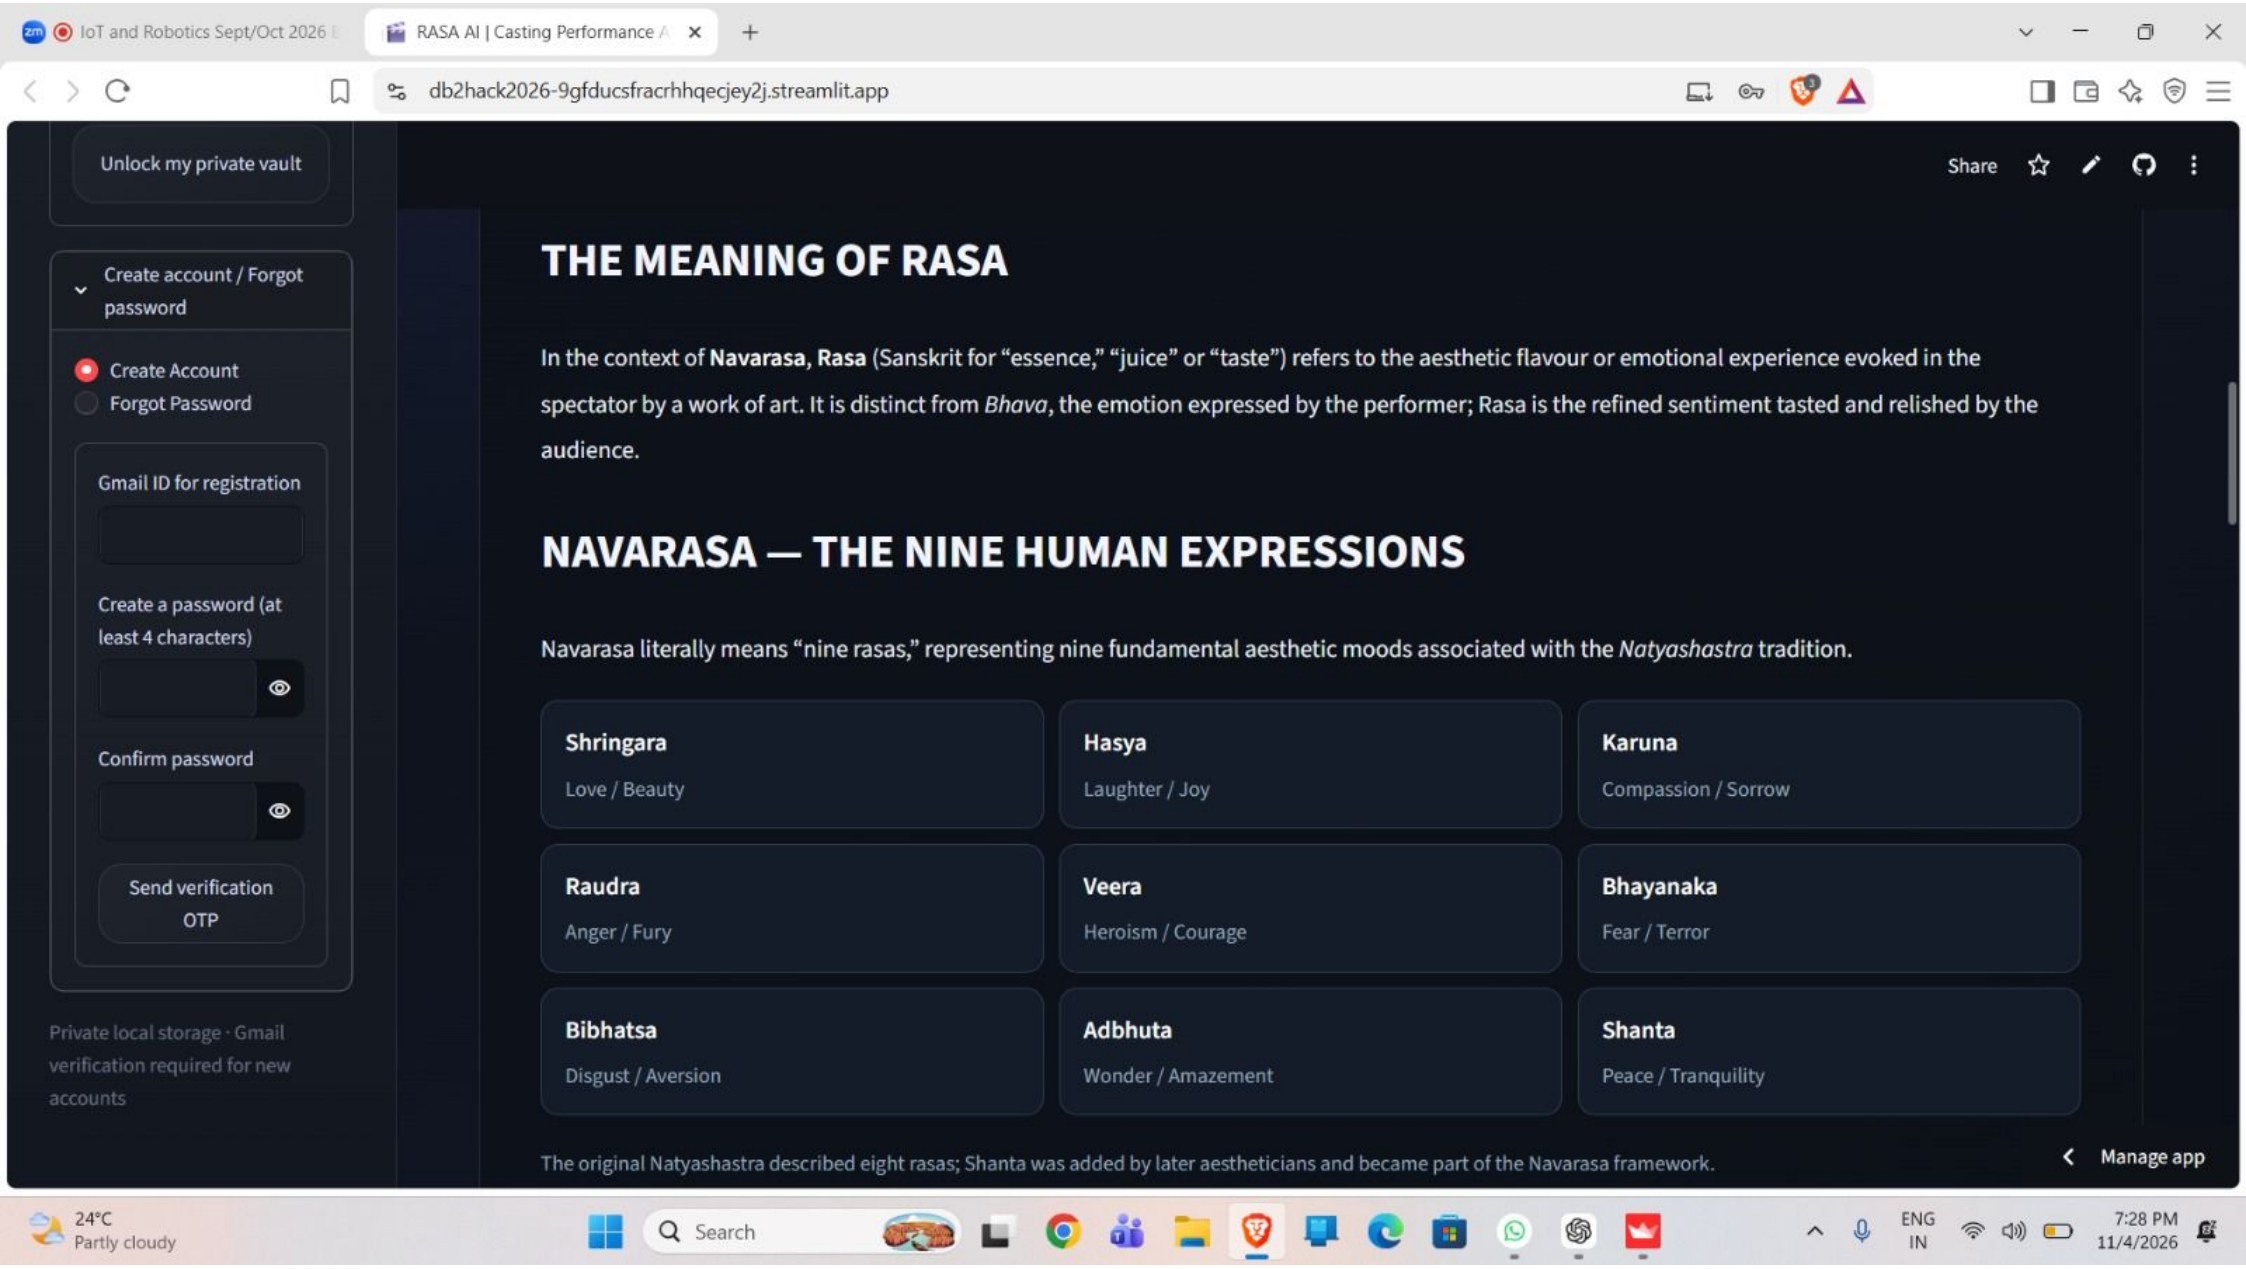
Wonder / Surprise

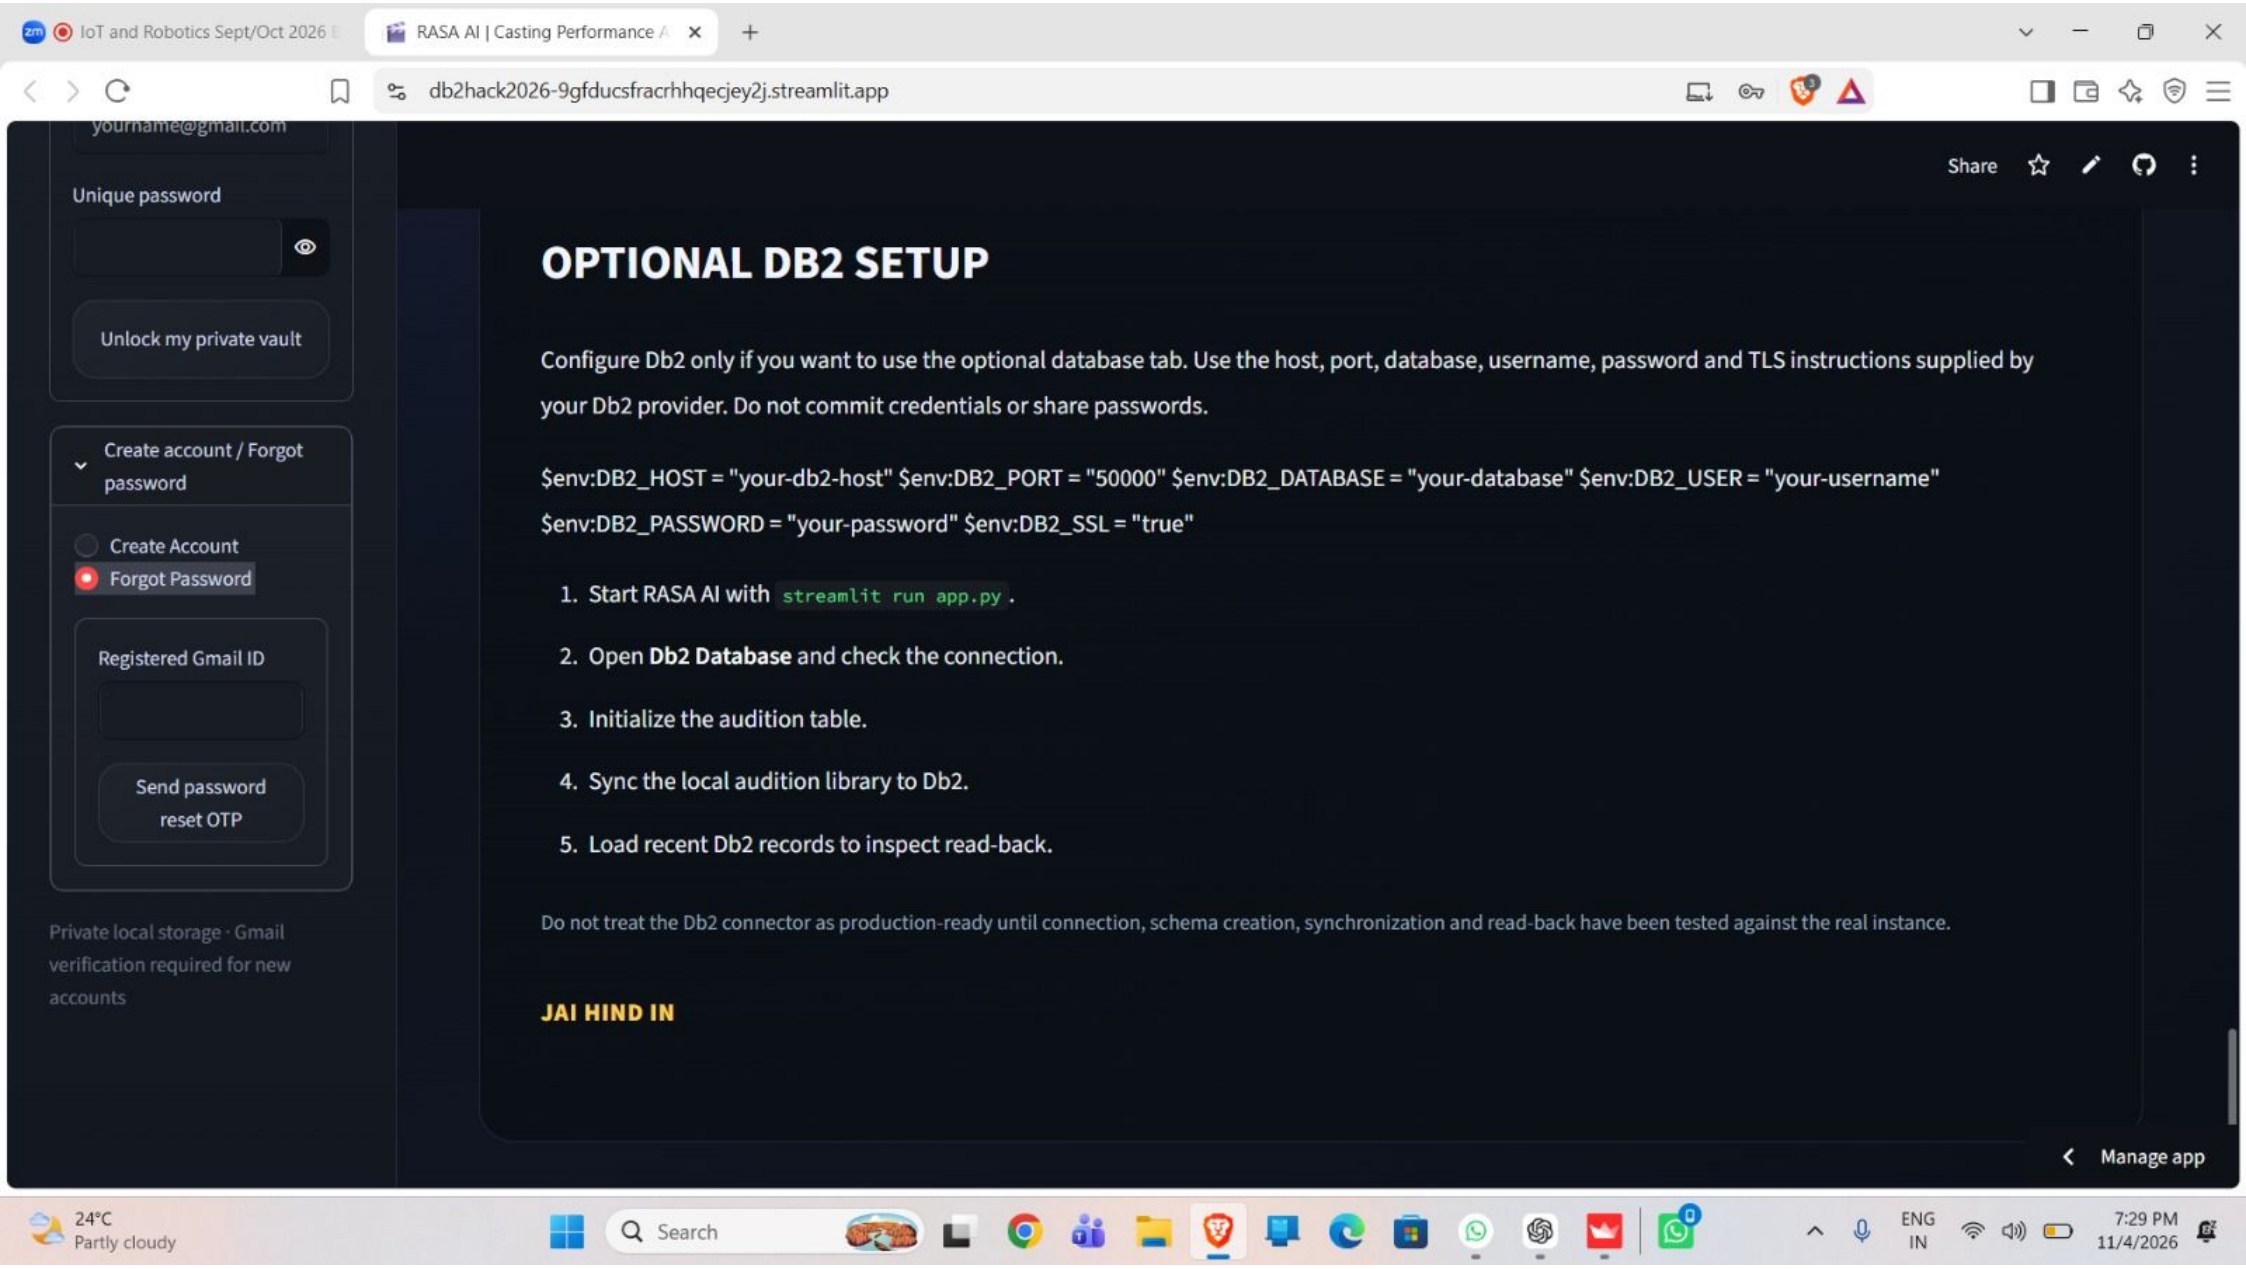


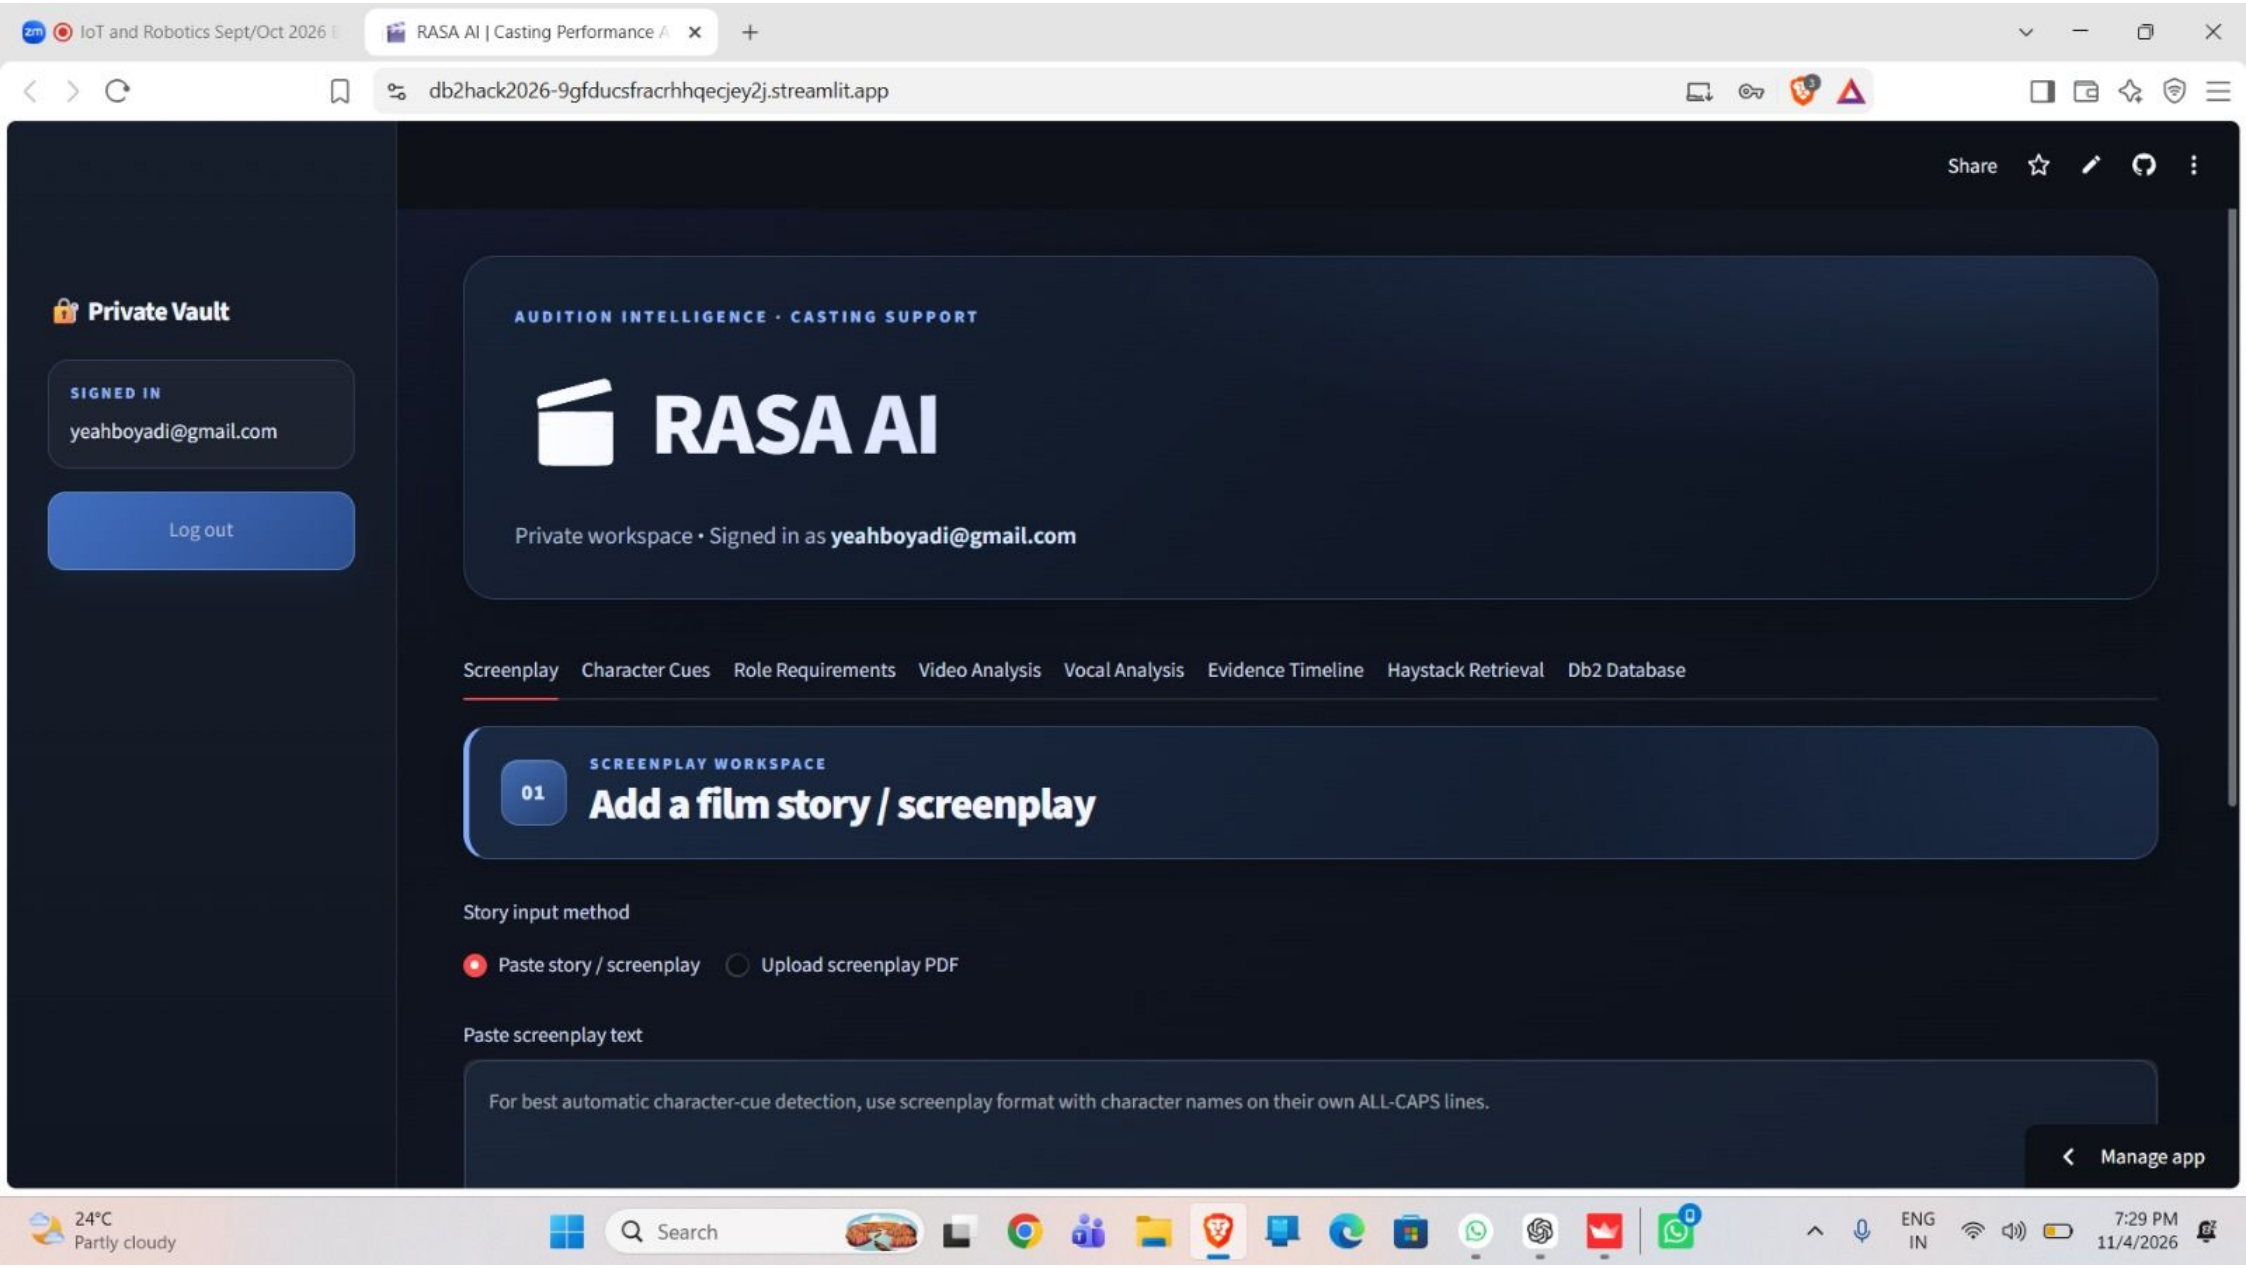
Shanta

Peace / Tranquillity


IoT and Robotics Sept/Oct 2026
RASA AI | Casting Performance
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
PRIVATE VAULT
Case Indexer
Each user must enter their Gmail ID and a strictly unique password to access RASA AI and their private audition vault.
Unlock Private Vault
Gmail ID
yourname@gmail.com
Unique password
Unlock my private vault
Create account / Forgot password
Private local storage · Gmail
Share
RASA AI: Audition Intelligence & Casting Support
RASA AI helps filmmakers and casting teams organize screenplay context, define role requirements, inspect observable visual and vocal evidence, compare auditions, and retrieve saved audition records.
Audition evaluation can involve fragmented information across screenplays, role briefs, video recordings, audio recordings and reviewer notes. RASA AI brings these materials together into a structured workflow so qualified reviewers can inspect evidence, compare auditions and document their decisions.
The platform combines deterministic screenplay cue extraction, local computer-vision measurements, optional audio analysis, audition-library management and Haystack 2.x BM25 keyword retrieval. Db2 is an optional integration and is not required to use RASA AI.
CAUTION: RESTRICTED ACCESS — AUTHORIZED USERS ONLY
This platform is designed with privacy and confidentiality as core principles.
Manage app
24°C
Partly cloudy
Search
ENG
IN
7:27 PM
11/4/2026


IoT and Robotics Sept/Oct 2026
RASA AI | Casting Performance
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Unlock my private vault
Create account / Forgot password
Create Account
Forgot Password
Gmail ID for registration
Create a password (at least 4 characters)
Confirm password
Send verification OTP
Private local storage · Gmail verification required for new accounts
Share
THE MEANING OF RASA
In the context of Navarasa, Rasa (Sanskrit for “essence,” “juice” or “taste”) refers to the aesthetic flavour or emotional experience evoked in the spectator by a work of art. It is distinct from Bhava, the emotion expressed by the performer; Rasa is the refined sentiment tasted and relished by the audience.
NAVARASA — THE NINE HUMAN EXPRESSIONS
Navarasa literally means “nine rasas,” representing nine fundamental aesthetic moods associated with the Natyashastra tradition.
Shringara
Love / Beauty
Hasya
Laughter / Joy
Karuna
Compassion / Sorrow
Raudra
Anger / Fury
Veera
Heroism / Courage
Bhayanaka
Fear / Terror
Bibhatsa
Disgust / Aversion
Adbhuta
Wonder / Amazement
Shanta
Peace / Tranquility
The original Natyashastra described eight rasas; Shanta was added by later aestheticians and became part of the Navarasa framework.
Manage app
24°C
Partly cloudy
Search
ENG
IN
7:28 PM
11/4/2026


IoT and Robotics Sept/Oct 2026
RASA AI | Casting Performance
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
yourname@gmail.com
Unique password
Unlock my private vault
Create account / Forgot password
Create Account
Forgot Password
Registered Gmail ID
Send password reset OTP
Private local storage · Gmail verification required for new accounts
Share
OPTIONAL DB2 SETUP
Configure Db2 only if you want to use the optional database tab. Use the host, port, database, username, password and TLS instructions supplied by your Db2 provider. Do not commit credentials or share passwords.
$env:DB2_HOST = "your-db2-host" $env:DB2_PORT = "50000" $env:DB2_DATABASE = "your-database" $env:DB2_USER = "your-username" $env:DB2_PASSWORD = "your-password" $env:DB2_SSL = "true"
1. Start RASA AI with streamlit run app.py .
2. Open Db2 Database and check the connection.
3. Initialize the audition table.
4. Sync the local audition library to Db2.
5. Load recent Db2 records to inspect read-back.
Do not treat the Db2 connector as production-ready until connection, schema creation, synchronization and read-back have been tested against the real instance.
JAI HIND IN
Manage app
24°C
Partly cloudy
Search
ENG
IN
7:29 PM
11/4/2026


IoT and Robotics Sept/Oct 2026
RASA AI | Casting Performance
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Share
Private Vault
SIGNED IN
yeahboyadi@gmail.com
Log out
AUDITION INTELLIGENCE · CASTING SUPPORT
RASA AI
Private workspace • Signed in as yeahboyadi@gmail.com
Screenplay
Character Cues
Role Requirements
Video Analysis
Vocal Analysis
Evidence Timeline
Haystack Retrieval
Db2 Database
01
SCREENPLAY WORKSPACE
Add a film story / screenplay
Story input method
Paste story / screenplay
Upload screenplay PDF
Paste screenplay text
For best automatic character-cue detection, use screenplay format with character names on their own ALL-CAPS lines.
Manage app
24°C
Partly cloudy
Search
ENG
IN
7:29 PM
11/4/2026

IoT and Robotics Sept/Oct 2026 | RASA AI | Casting Performance

db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app

Share

SCREENPLAY WORKSPACE

01

Add a film story / screenplay

Story input method

Paste story / screenplay | Upload screenplay PDF

Paste screenplay text

For best automatic character-cue detection, use screenplay format with character names on their own ALL-CAPS lines.

Character names (optional; comma-separated)

e.g. MAYA, ARJUN, INSPECTOR RAO

Use this field if the story is prose, or if character names are not formatted as ALL-CAPS screenplay cues.

Parse screenplay with rules

Manage app

24°C
Partly cloudy

Search

ENG
IN

7:29 PM
11/4/2026

IoT and Robotics Sept/Oct 2026 | RASA AI | Casting Performance A

db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app

Share

SCREENPLAY WORKSPACE

01

Add a film story / screenplay

Story input method

Paste story / screenplay | Upload screenplay PDF

Paste screenplay text

ARJUN: Read it yourself.

KAVYA opens the envelope. Her hands begin to tremble.
Scene 2 – Interior, Kitchen – Continuous
RAHUL enters hurriedly, noticing the envelope in KAVYA's hand.

RAHUL: You opened it?

KAVYA: You knew about this?

Character names (optional; comma-separated)

RAHUL ; ARJUN ; KAVYA

Use this field if the story is prose, or if character names are not formatted as ALL-CAPS screenplay cues.

Parse screenplay with rules

Manage app

24°C
Partly cloudy

Search

ENG
IN

7:31 PM
11/4/2026

IoT and Robotics Sept/Oct 2026 | RASA AI | Casting Performance A
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Share

02

DIRECTOR'S CHARACTER BREAKDOWN

Character Performance Intelligence

Analysed **3 character profile(s)** across **0 scene heading(s)**.

Each observation below is tied to screenplay evidence. Shared actions are attributed to each clearly identified participant; unclear actions and ambiguous pronouns remain unassigned.

> 01 · Kavya · 2 supported performance cue(s)

> 02 · Arjun · 3 supported performance cue(s)

> 03 · Rahul · 2 supported performance cue(s)

Analysis method and limitations

- Character dialogue is attributed from standalone screenplay speaker cues.
- Stage directions are attributed when the character is explicitly named; shared blocking and interactions are split into role-specific cues when the participants and action are clear.
- Ambiguous pronouns (for example, 'she', 'he' or 'they') are not guessed or copied between characters.
- Potential characteristics are cautious performance prompts supported by visible screenplay evidence, not personality diagnoses.
- Dialogue content alone is not used to claim a character is brave, dishonest, loving, aggressive or otherwise psychologically defined.
- Review every suggested interpretation against the complete scene before using it in casting.

Manage app
24°C Partly cloudy
Search
ENG IN
7:31 PM 11/4/2026

IoT and Robotics Sept/Oct 2026
RASA AI | Casting Performance
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Share

Kavya

Potential performance characteristics are derived only from the evidence listed below. They are audition considerations, not fixed personality labels.

Potential performance characteristics

Dialogue exchange / scene partner interaction

Dialogue-led performance

Screenplay evidence and director's watchpoints

1. Dialogue exchange / scene partner interaction

SCREENPLAY SPEAKER-CUE SEQUENCE; DIALOGUE MEANING NOT EVALUATED

"Kavya has dialogue speaker turns in the same screenplay as Arjun, Rahul; review listening, response timing and turn-taking."

Director's watchpoint: Does the performer listen and respond at the appropriate conversational beat while maintaining clear turn-taking?

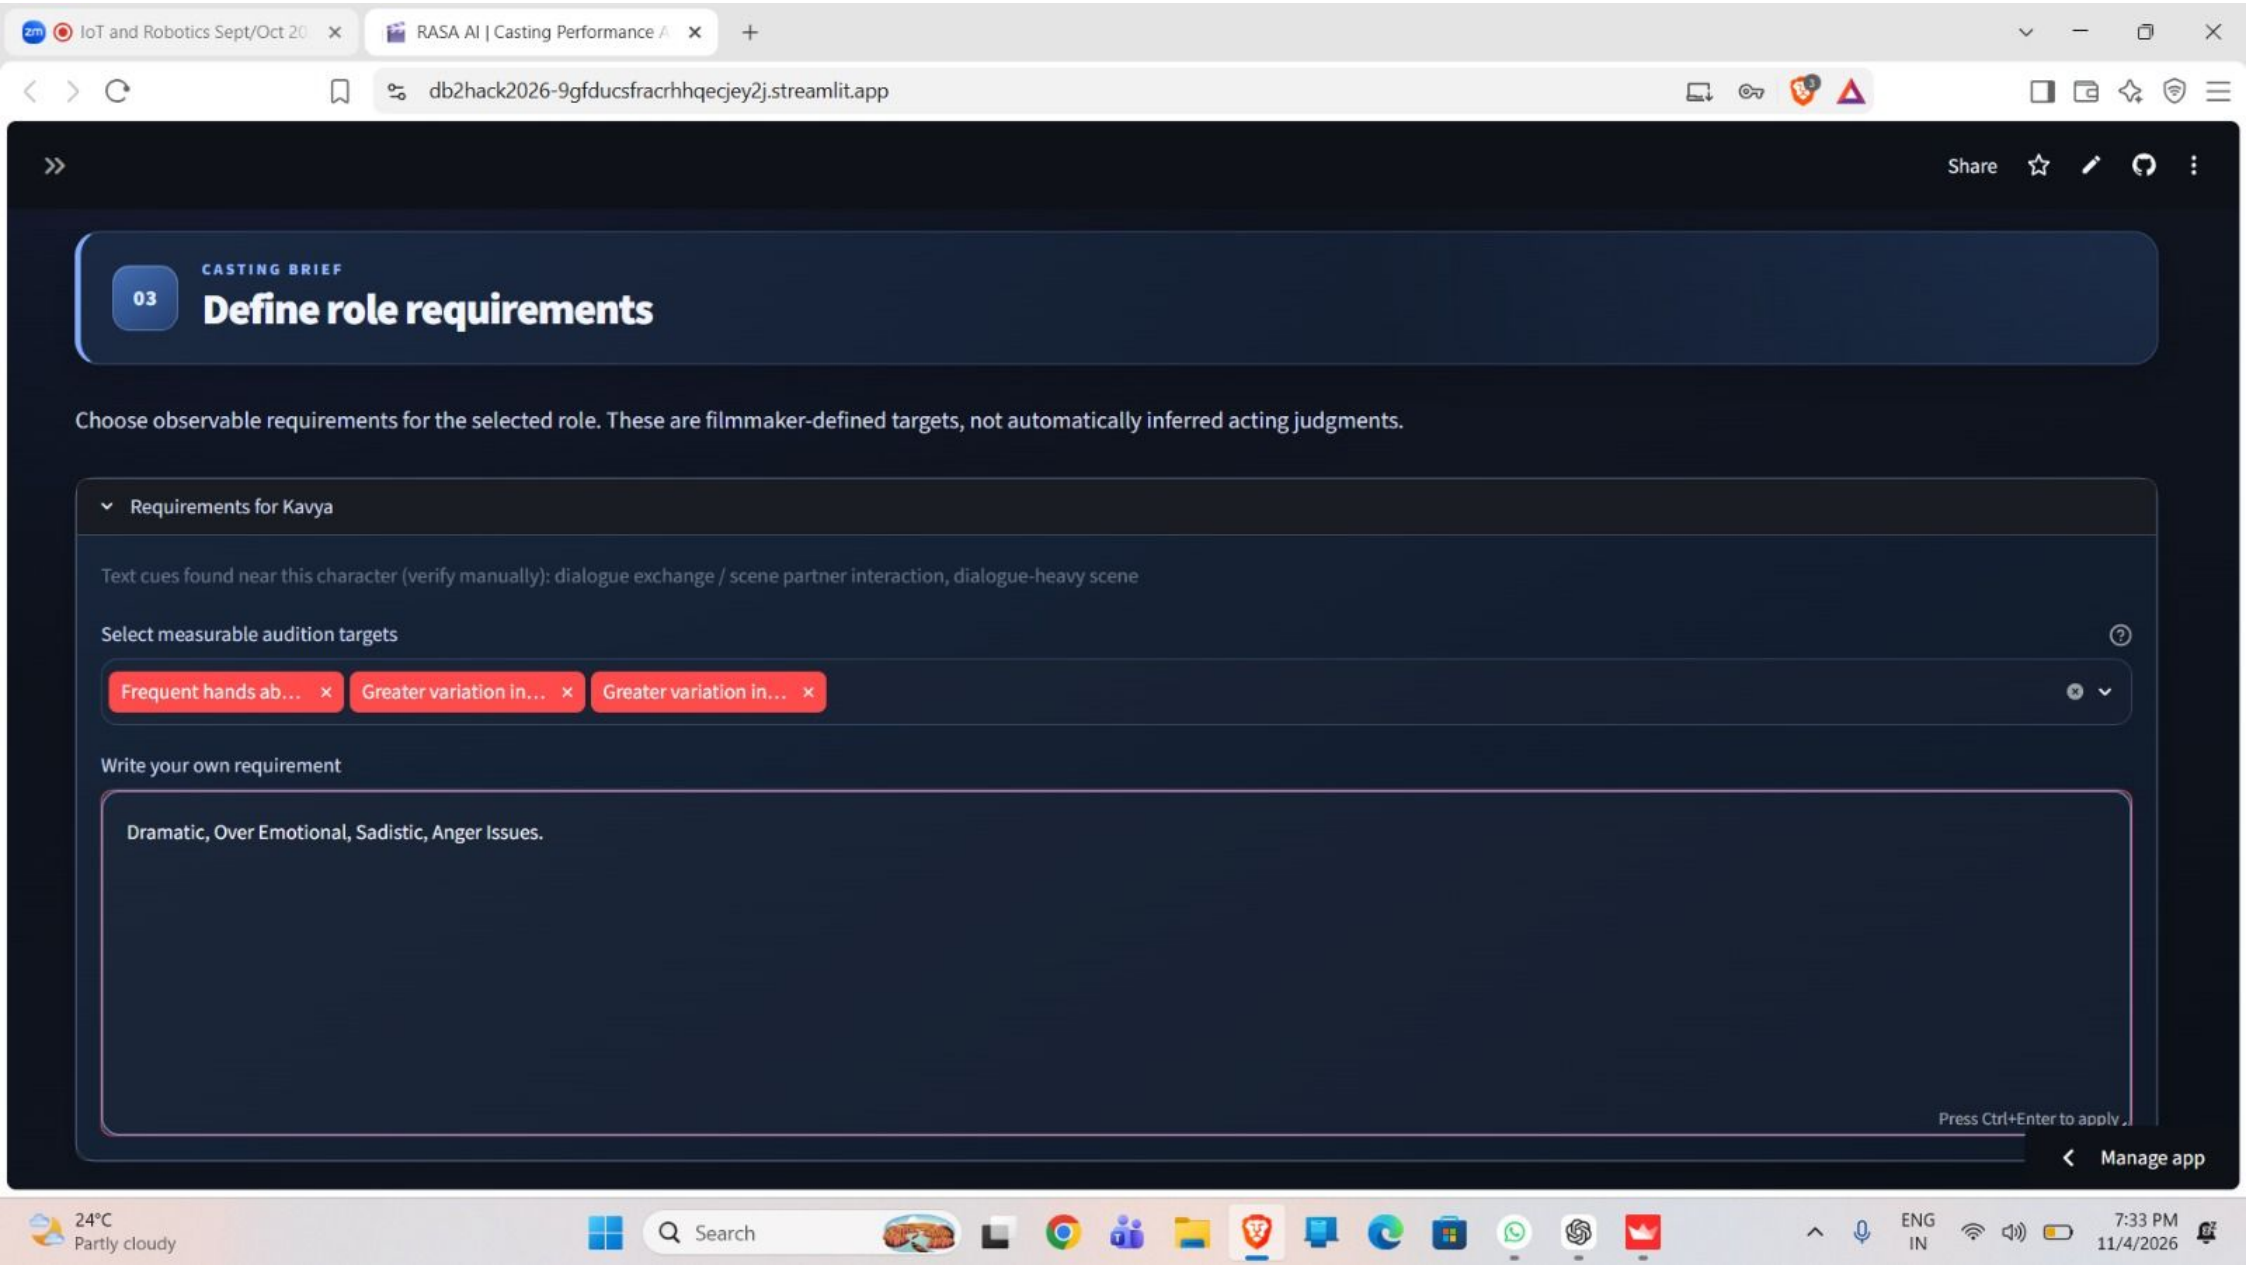
Suggested audition exercise: Rehearse the exchange with a scene partner. Review listening, pauses, interruption timing and response handoffs without judging the dialogue's emotional meaning.

---

2. Dialogue-led performance

SCREENPLAY SPEAKER-CUE STRUCTURE

Manage app
24°C Partly cloudy
Search
ENG IN
7:32 PM 11/4/2026


IoT and Robotics Sept/Oct 20
RASA AI | Casting Performance A
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Share
CASTING BRIEF
03
Define role requirements
Choose observable requirements for the selected role. These are filmmaker-defined targets, not automatically inferred acting judgments.
Requirements for Kavya
Text cues found near this character (verify manually): dialogue exchange / scene partner interaction, dialogue-heavy scene
Select measurable audition targets
Frequent hands ab…
Greater variation in…
Greater variation in…
Write your own requirement
Dramatic, Over Emotional, Sadistic, Anger Issues.
Press Ctrl+Enter to apply
Manage app
24°C
Partly cloudy
Search
ENG
IN
7:33 PM
11/4/2026

IoT and Robotics Sept/Oct 2026 | RASA AI | Casting Performance A
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Share

Character emotion-performance brief

Choose the intended portrayal to create a human-review checklist. This is not an automatic emotion detector and does not diagnose the actor.

What emotional portrayal does the scene call for?

Sadness / grief

Write your own emotional / performance brief

The scene requires a gradual transition from emotional shock and disbelief to deep sadness and grief. ARJUN should portray suppressed pain, trembling expressions, teary eyes, and a breaking voice as he discovers the truth about his father. KAVYA should convey concern, emotional vulnerability, and helplessness. RAHUL should display guilt, hesitation, and regret. The performances should feel natural and realistic, with meaningful pauses, subtle facial expressions, controlled body language, and emotionally intense dialogue delivery. Avoid exaggerated crying or theatrical reactions.

Human-review checklist for: Sadness / grief + director's custom brief

- Review whether facial changes, gaze and posture fit the scene context; do not treat lowered gaze or reduced movement as proof of sadness.
- Check the actor's choices at the relevant dialogue and action beats.
- Consider whether the performance changes appropriately across the scene rather than remaining uniformly still.

Director's custom portrayal brief

Manage app
24°C Partly cloudy
Search
ENG IN
7:34 PM 11/4/2026

IoT and Robotics Sept/Oct 20 | RASA AI | Casting Performance A

db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app

Share

Private workspace · Signed in as **yeahboyadi@gmail.com**

Screenplay | Character Cues | Role Requirements | Video Analysis | Vocal Analysis | Evidence Timeline | Haystack Retrieval | Db2 Database

VISUAL REVIEW

04

Upload an actor audition video

Upload an audition clip with the actor's consent. RasaAI measures body movement and facial geometry. Optional FER mode adds model-estimated facial-expression labels for human review; these are uncertain visual predictions, not proof of internal emotion or acting ability.

Character being auditioned for

Kavya

Actor / audition label

Sarthak Chaturvedi

Choose actor video

Attitude Status.mp4
0.6MB

Audio track extracted from this video is available in the Vocal Analysis tab.

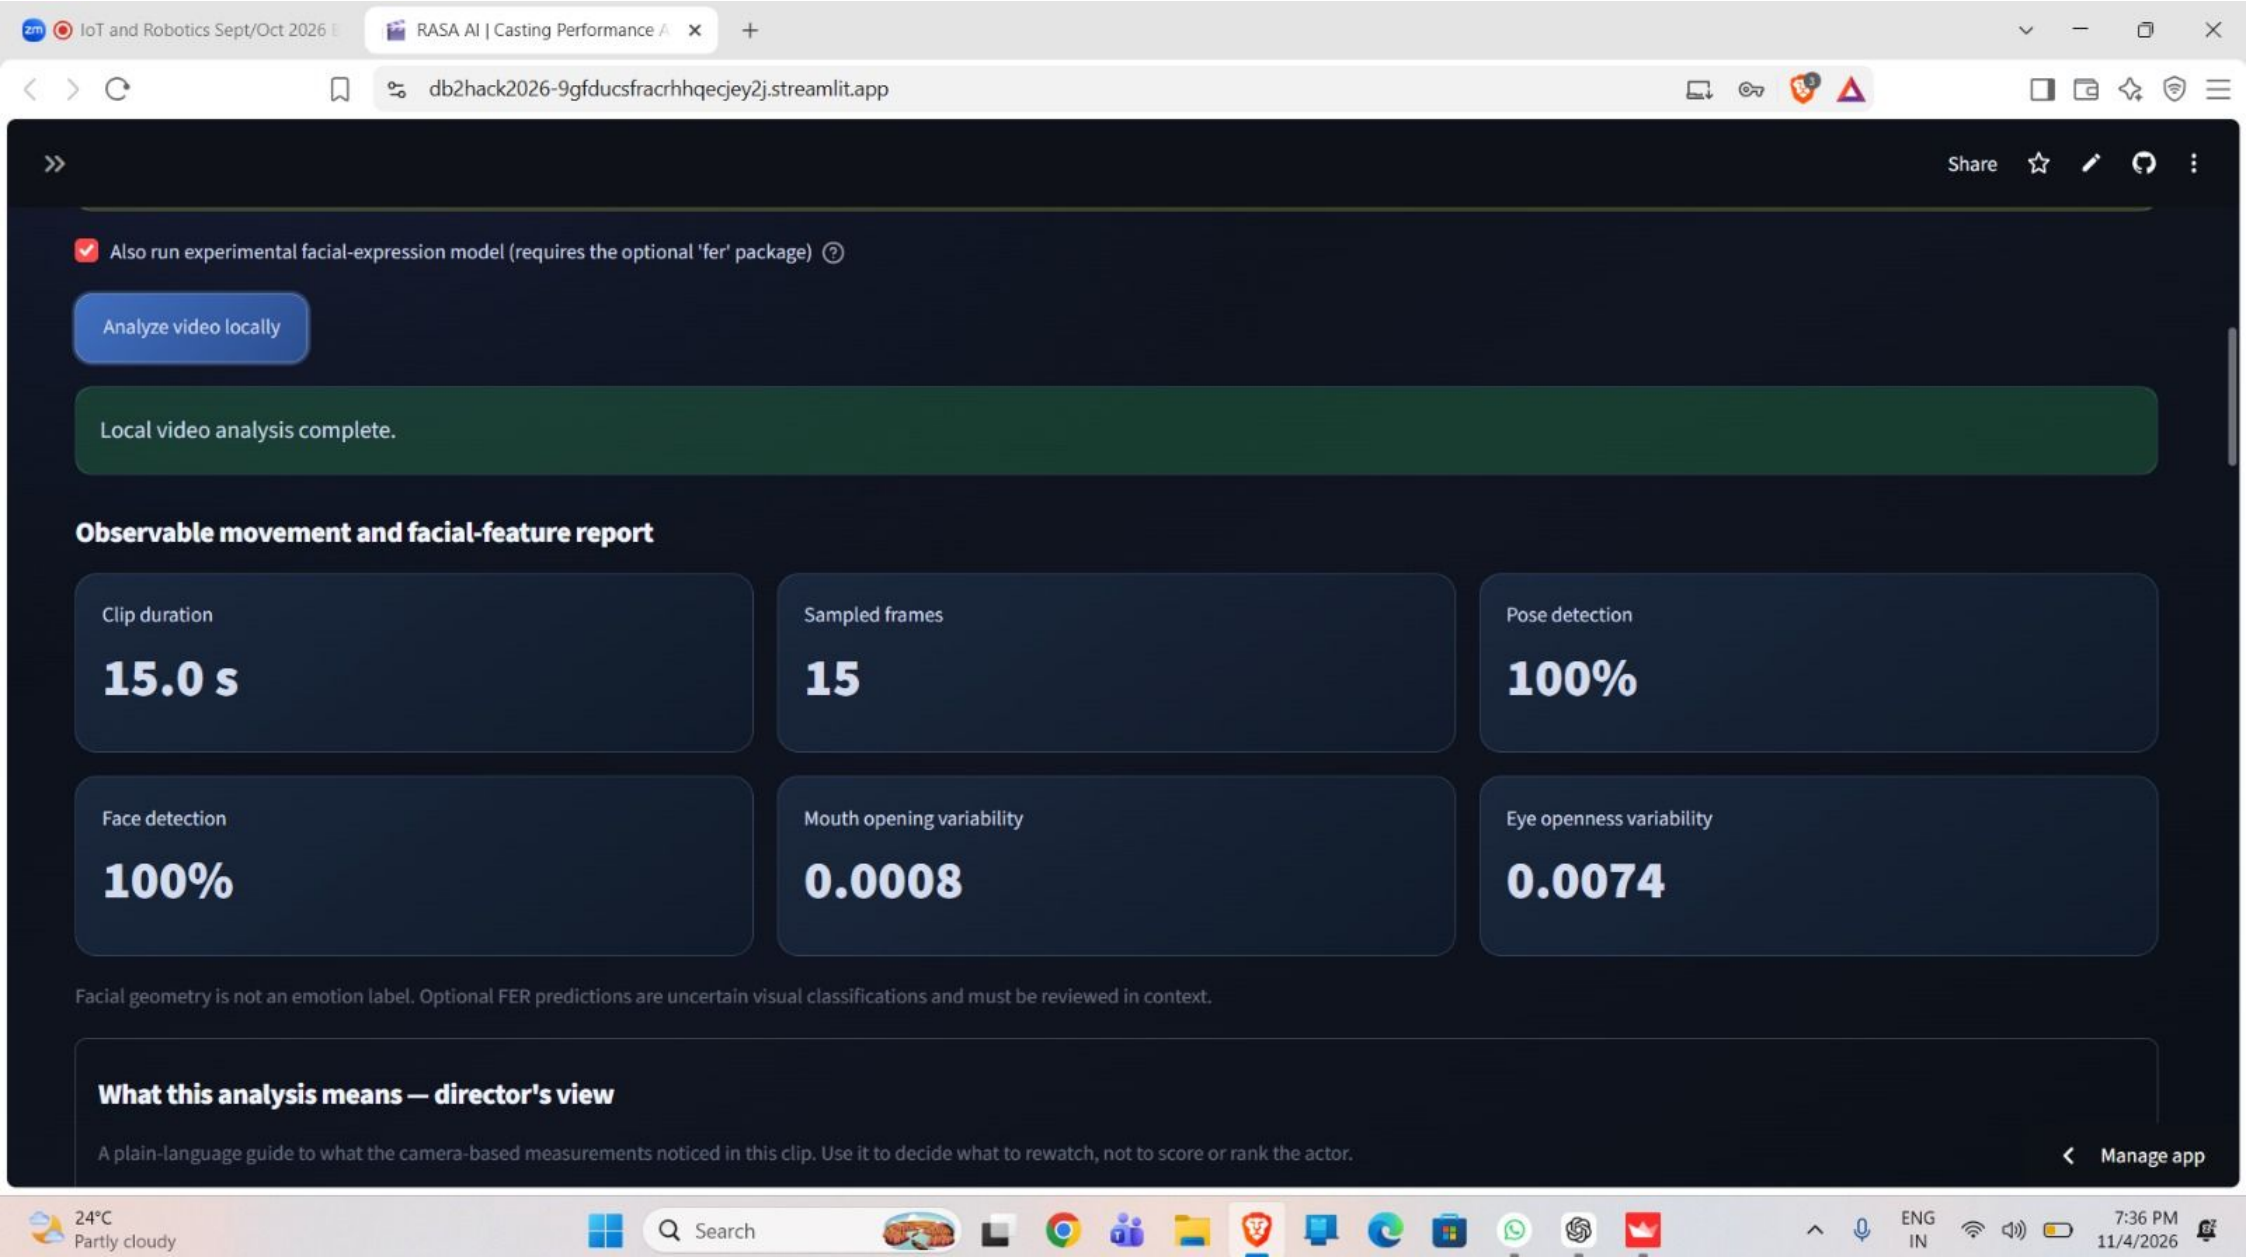
Manage app

24°C
Partly cloudy

Search

ENG
IN

7:34 PM
11/4/2026


IoT and Robotics Sept/Oct 2026
RASA AI | Casting Performance
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Share
Also run experimental facial-expression model (requires the optional 'fer' package)
Analyze video locally
Local video analysis complete.
Observable movement and facial-feature report
Clip duration
15.0 s
Sampled frames
15
Pose detection
100%
Face detection
100%
Mouth opening variability
0.0008
Eye openness variability
0.0074
Facial geometry is not an emotion label. Optional FER predictions are uncertain visual classifications and must be reviewed in context.
What this analysis means — director's view
A plain-language guide to what the camera-based measurements noticed in this clip. Use it to decide what to rewatch, not to score or rank the actor.
Manage app
24°C
Partly cloudy
Search
ENG
IN
7:36 PM
11/4/2026

IoT and Robotics Sept/Oct 2026
RASA AI | Casting Performance
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Share

portrayal. Rewatch the relevant dialogue and scene beats.

› What this analysis cannot tell you

Does the observed expression align with the intended portrayal?

The intended portrayal is **Sadness / grief**, but the model returned no usable expression labels above the 60% review threshold. The result is **inconclusive**, not a mismatch.

Why this is useful in a real casting process

For a small audition: If you are reviewing one or two actors, watching the clips carefully may be all you need. The value of this tool becomes clearer when the volume grows.

For a large audition: When dozens or hundreds of actors apply, it becomes difficult to remember every clip and compare everyone consistently. RASA AI organizes observations, timestamps and review notes so a director can revisit comparable evidence and manage a human-led shortlist—for example, narrowing a large pool to 10 or 5 actors for closer review.

For actors: Auditions can be affected by subjective impressions, inconsistent attention or personal bias. A structured record gives each audition additional observable evidence to review and helps make the process more consistent and explainable. It supports an actor's opportunity to be properly considered; it cannot guarantee a bias-free decision.

Important: The current version helps organize audition evidence and reduce manual review effort; it does not yet automatically select or rank the top 10 or top 5 actors. This is a planned future capability: as RASA AI develops, it can be extended to compare auditions against role-specific requirements and help directors create a data-supported shortlist from a large pool. Any such shortlist should remain explainable and subject to human review, with the director and casting team making the final decision.

Experimental portrayal evidence

Director's intended portrayal: Sadness / grief

Manage app
24°C Partly cloudy
Search
ENG IN
7:36 PM 11/4/2026

IoT and Robotics Sept/Oct 2026 | RASA AI | Casting Performance A

db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app

Share

Experimental portrayal evidence

Director's intended portrayal: Sadness / grief

No facial-expression predictions were recorded. Check face visibility, lighting, and whether the optional FER model ran successfully.


```
{
  "video_file" : "Attitude Status.mp4"
  "actor_label" : "Sarthak Chaturvedi"
  "selected_character" : "Kavya"
  "duration_seconds_estimate" : 15
  "sample_interval_seconds_approx" : 1
  "per_sample_movement_definition" :
  "Mean Euclidean change between sampled visible landmarks after centering coordinates on the shoulder midpoint and dividing by shoulder width. Samples are compared o
  nly when landmark arrays have matching shapes. This reduces sensitivity to camera distance but remains sensitive to camera angle, framing, occlusion, tracking and b
  ody orientation."
  "sampled_frames" : 15
  "frames_with_detected_pose" : 15
  "pose_detection_rate" : 1
  "frames_with_detected_face" : 15
  "face_detection_rate" : 1
  "mean_mouth_opening_ratio" : 0.0042
  "mouth_opening_variability" : 0.0008
  "mean_eye_openness_proxy" : 0.1531
```


Manage app

24°C Partly cloudy

Search

ENG IN

7:36 PM 11/4/2026

Sample observations

timestamp_seconds	pose_detected	movement_since_previous_sample_index	wrist_above_shoulder	shoulder_tilt_index	torso_lateral_offset	face_detected	mouth_opening_ratio	eye_openness_proxy	brow_eye_spacing_p
3	☑	0.0081	☐	0.0023	0.0213	☐	0.0048	0.1591	0.
4	☑	0.0069	☐	0.0021	0.0223	☐	0.0038	0.161	0.
5	☑	0.011	☐	0.0129	0.021	☐	0.0029	0.1515	0.
6	☑	0.0083	☐	0.012	0.0258	☐	0.005	0.1413	0.
7	☑	0.0097	☐	0.0115	0.027	☐	0.0042	0.1441	0.
8	☑	0.0047	☐	0.0122	0.0296	☐	0.0043	0.1596	0.
9	☑	0.0118	☑	0.013	0.0321	☐	0.0032	0.1592	0.
10	☑	0.0062	☑	0.0134	0.0335	☐	0.0048	0.1514	(
11	☑	0.005	☑	0.0138	0.0342	☐	0.0046	0.1396	0.
12	☑	0.0029	☑	0.014	0.0343	☐	0.0045	0.1563	0.

› What each video sample tells the director

Download movement report (JSON)

Multi-audition comparison

Manage app

IoT and Robotics Sept/Oct 20 | RASA AI | Casting Performance A

db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app

Share

Multi-audition comparison

Saved locally in rasaai_audition_library.json. Add each analyzed audition to keep it available after restarting RasaAI. Compare similar clips; these are descriptive measurements, not a talent ranking.

Add this audition to comparison

No auditions have been added for this character yet. Analyze a clip and click **Add this audition to comparison.**

Role requirement evidence comparison

Exploratory rule-based indicators only; thresholds are not trained or validated and should not be interpreted as an actor score.

Role requirement	Measured feature	Observed value	Exploratory threshold	Rule-based observation
Frequent hands above shoulder level	Fraction of sampled frames with a wrist above shoulder	0.533	0.25	Wrist-above-shoulder observation is at or above the exploratory threshold.
Greater variation in eye openness	Not available	None	None	No corresponding measurement is available.
Greater variation in eyebrow-to-eye spacing	Not available	None	None	No corresponding measurement is available.
Dramatic, Over Emotional, Sadistic, Anger Issues.	Not available	None	None	No corresponding measurement is available.

Timestamped observable evidence

Movement timestamps use changes in visible landmark positions, centered on the shoulder midpoint and scaled by shoulder width, between adjacent sampled frames (about one second apart). This partially reduces camera-distance effects; it is still an experimental proxy, not a validated performance measure.

Role requirement	Timestamp evidence

Manage app

24°C Partly cloudy

Search

ENG IN

7:37 PM 11/4/2026

IoT and Robotics Sept/Oct 2026 | RASA AI | Casting Performance A
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Share

Frequent hands above shoulder level	Fraction of sampled frames with a wrist above shoulder	0.533	0.25	Wrist-above-shoulder observation is at or above the exploratory threshold.
Greater variation in eye openness	Not available	None	None	No corresponding measurement is available.
Greater variation in eyebrow-to-eye spacing	Not available	None	None	No corresponding measurement is available.
Dramatic, Over Emotional, Sadistic, Anger Issues.	Not available	None	None	No corresponding measurement is available.

Timestamped observable evidence

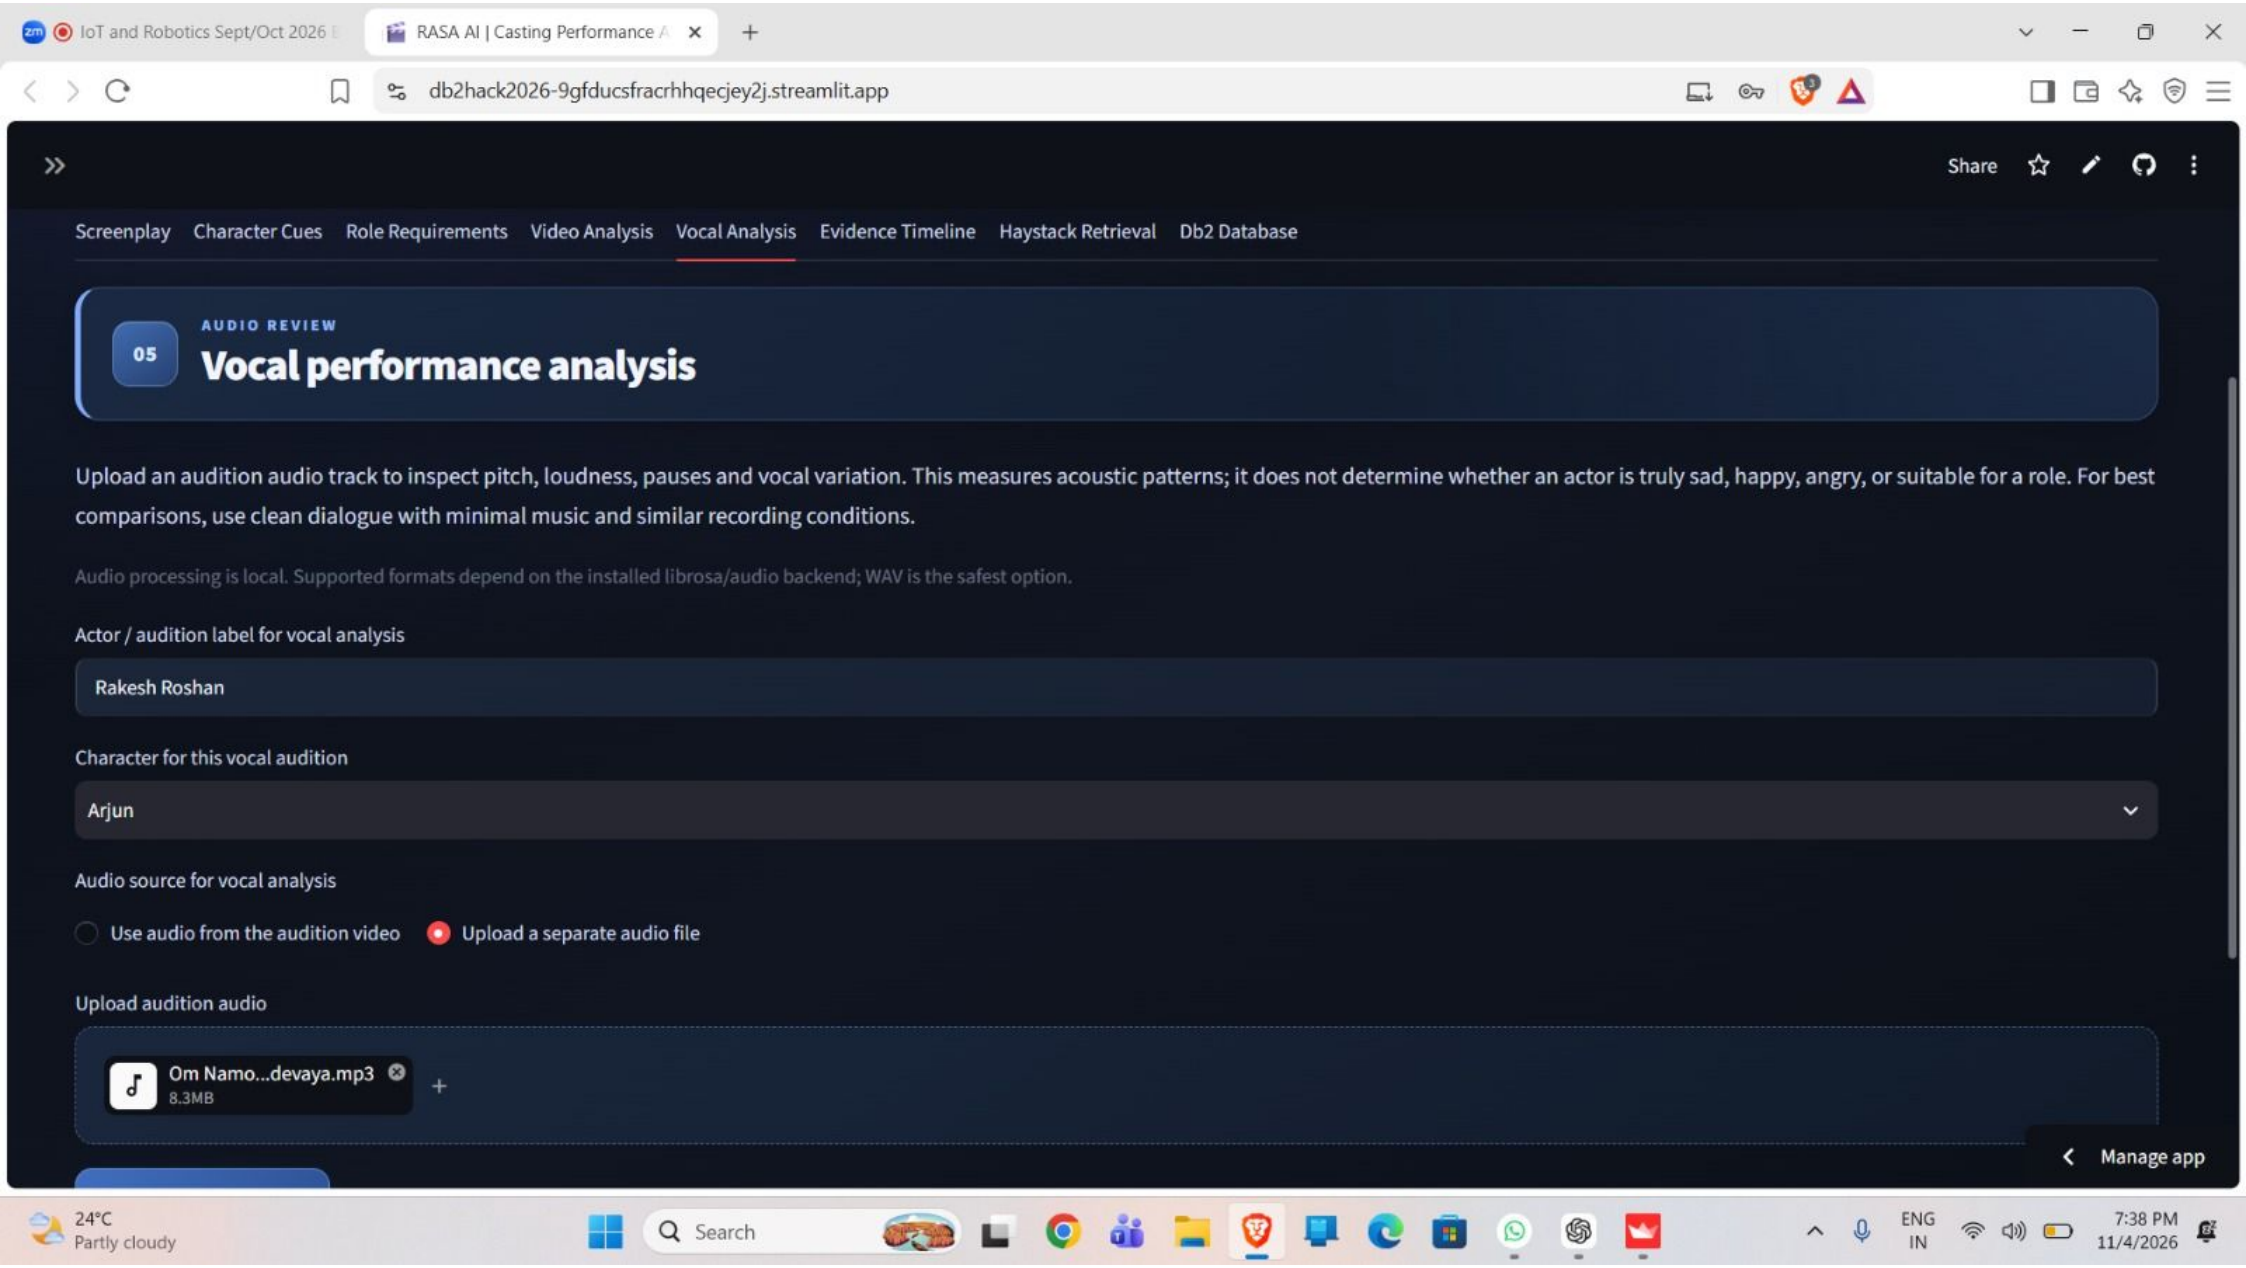
Movement timestamps use changes in visible landmark positions, centered on the shoulder midpoint and scaled by shoulder width, between adjacent sampled frames (about one second apart). This partially reduces camera-distance effects; it is still an experimental proxy, not a validated performance measure.

Role requirement	Timestamp evidence
Frequent hands above shoulder level	Proxy observed at 8 sampled timestamp(s): 0.0s, 1.0s, 9.0s, 10.0s, 11.0s, 12.0s, 13.0s, 14.0s
Greater variation in eye openness	No matching observation found in sampled frames, or pose was not detected.
Greater variation in eyebrow-to-eye spacing	No matching observation found in sampled frames, or pose was not detected.
Dramatic, Over Emotional, Sadistic, Anger Issues.	No matching observation found in sampled frames, or pose was not detected.

These comparisons are sensitive to camera framing, pose visibility, action context and clip differences. Review the timestamped observations yourself; do not use this as an automated casting decision.

Download combined role review (JSON)

Manage app
24°C Partly cloudy
Search
ENG IN
7:37 PM 11/4/2026


IoT and Robotics Sept/Oct 2026
RASA AI | Casting Performance
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Share
Screenplay
Character Cues
Role Requirements
Video Analysis
Vocal Analysis
Evidence Timeline
Haystack Retrieval
Db2 Database
AUDIO REVIEW
05
Vocal performance analysis
Upload an audition audio track to inspect pitch, loudness, pauses and vocal variation. This measures acoustic patterns; it does not determine whether an actor is truly sad, happy, angry, or suitable for a role. For best comparisons, use clean dialogue with minimal music and similar recording conditions.
Audio processing is local. Supported formats depend on the installed librosa/audio backend; WAV is the safest option.
Actor / audition label for vocal analysis
Rakesh Roshan
Character for this vocal audition
Arjun
Audio source for vocal analysis
Use audio from the audition video
Upload a separate audio file
Upload audition audio
Om Namo...devaya.mp3
8.3MB
Manage app
24°C
Partly cloudy
Search
ENG
IN
7:38 PM
11/4/2026

IoT and Robotics Sept/Oct 2026 | RASA AI | Casting Performance A

db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app

Share

Median pitch	Pitch range (P10–P90)	Pitch variability	Energy gaps ≥ 0.35 s
221.3 Hz	110.0–327.7 Hz	103.4 Hz	7


Pitch contour

Director's guide: Read this from left to right as the clip plays. The horizontal line is time; the vertical value is the detected pitch of the voice. A rising line means the voice became higher; a falling line means it became lower. Changes can help you locate shifts in vocal delivery, but they do not tell you which emotion the actor was expressing. Gaps mean pitch could not be detected. Sudden isolated spikes can be tracking errors, background sounds or pitch-detection mistakes—replay those moments before drawing conclusions.



Relative loudness / energy

Director's guide: This line shows how strong the recorded sound is over time. Higher sections are louder in the recording; lower sections are quieter. Use it to find changes in vocal intensity or possible pauses. It is not a calibrated loudness score: music, background noise, microphone distance and recording volume can also raise or lower the line.



Manage app

24°C Partly cloudy

Search

ENG IN

7:39 PM 11/4/2026

IoT and Robotics Sept/Oct 2026 | RASA AI | Casting Performance A

db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app

Share

Relative loudness / energy

Director's guide: This line shows how strong the recorded sound is over time. Higher sections are louder in the recording; lower sections are quieter. Use it to find changes in vocal intensity or possible pauses. It is not a calibrated loudness score: music, background noise, microphone distance and recording volume can also raise or lower the line.



What this vocal analysis means — director's view

A plain-language guide to the voice measurements in this clip. Use these observations to decide what to listen to again, not to score or rank the actor.

- **Voice pitch:** The typical detected pitch in this clip was about **221.3 Hz**. The measured middle range was **110.0–327.7 Hz**. This describes how high or low the voice sounded acoustically; it is not a judgement about whether the voice is attractive, suitable, masculine, feminine, or emotionally correct.
- **Pitch variation:** The measured variation was **103.4 Hz**. This shows how much the detected pitch moved around during the clip. A steadier pitch may sound more even; greater variation may make delivery sound more varied. Neither is automatically better—the scene and character direction matter.
- **Loudness changes:** The recording's energy variation was **0.10431**. The chart shows where the voice or overall audio became louder or softer. This can help locate changes in vocal intensity, but background music, microphone distance and recording volume also affect it.
- **Detectable voiced sound:** About **59%** of the analysed frames contained a pitch the system could detect. This is not the percentage of words spoken or a speech-clarity score.

Manage app

24°C Partly cloudy

Search

ENG IN

7:39 PM 11/4/2026

IoT and Robotics Sept/Oct 2026 | RASA AI | Casting Performance A
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Share

audio_file	duration_seconds	analyzed_duration_seconds	median_pitch_hz	pitch_10th_percentile_hz	pitch_90th_percentile_hz	pitch_standard_deviation_hz	voiced_frame_fraction	mean_rms_en
Om Namo Bhagavate Vasudevaya.mp3	216.94	180	221.3	110	327.7	103.4	0.586	0.1

Download vocal analysis (JSON)

Save vocal analysis to audition library / Haystack

Timestamped vocal evidence

Director's guide: Each row is a moment in the recording. The timestamp tells you where to replay; pitch_hz is the estimated voice pitch at that moment; rms_energy is the relative strength of the recorded sound. 'None' in the pitch column means the system could not find a reliable pitched voice at that instant—it does not automatically mean the actor was silent. Use the rows to locate moments for listening, not as a line-by-line performance score.

time_seconds	pitch_hz	rms_energy
0	None	0.00004
0.02	None	0.00005
0.05	None	0.00006
0.07	None	0.00006
0.09	None	0.00006
0.12	None	0.00006
0.14	None	0.00006
0.16	None	

Manage app
24°C Partly cloudy
Search
ENG IN
7:39 PM 11/4/2026

Dialogue delivery by time segment

Director's guide: This divides the recording into short time windows (for example, 0–5 seconds, 5–10 seconds) so you can compare how the voice changes across the audition. It describes sound patterns only; it does not identify emotions or judge acting quality.

> How to read the columns

Segment length (seconds)

5

start_seconds	end_seconds	median_pitch_hz	pitch_variability_std_hz	mean_rms_energy	energy_variability_std	pitch_frames	energy_frames
0	5	221.3	33.5	0.0076	0.0033	197	216
5	10	221.3	79.1	0.0168	0.0055	192	215
10	15	164.8	27.5	0.1152	0.0593	212	215
15	20	235.8	37.2	0.1342	0.0679	200	216
20	25	164.8	30.8	0.1018	0.0575	136	215
25	30	200.1	37.7	0.1352	0.0696	174	215
30	35	246.9	30.9	0.1669	0.0578	201	216
35	40	162.9	51.4	0.1112	0.0473	170	215
40	45	171.6	51.4	0.151	0.0559	201	215
45	50	217.5	45.2	0.1358	0.06	167	

IoT and Robotics Sept/Oct 2026 | RASA AI | Casting Performance

db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app

Share

Screenplay | Character Cues | Role Requirements | Video Analysis | Vocal Analysis | Evidence Timeline | Haystack Retrieval | Db2 Database

EVIDENCE REVIEW

06

Combined vocal + visual evidence timeline

Align timestamped video observations with nearby vocal measurements for reviewer inspection. This does not infer a person's true emotion or calculate a validated acting score.

Audio offset relative to video (seconds)

0.00

Maximum time difference for matching samples (seconds)

1.00

Video: Attitude Status.mp4 · Audio: aligned using offset 0.00s · Matching tolerance: 1.00s

video_time_seconds	pose_detected	mouth_opening_ratio	eye_openness_proxy	movement_index	shoulder_tilt_index	facial_expression_prediction	expression_model_score	matched_audio_time_seconds	pitch_hz_nearby
0	☑	0.0027	0.1631	None	0.0093	None	None	0	None
1	☑	0.0033	0.1615	0.0112	0.003	None	None	1	221.3
2	☑	0.0052	0.152	0.0088	0.0001	None	None	2	221.3
3	☑	0.0048	0.1591	0.0081	0.0023	None	None	3	221.3
4	☑	0.0038	0.161	0.0069	0.0021	None	None	3.99	221.3
5	☑	0.0029	0.1515	0.011	0.0129	None	None	4.99	

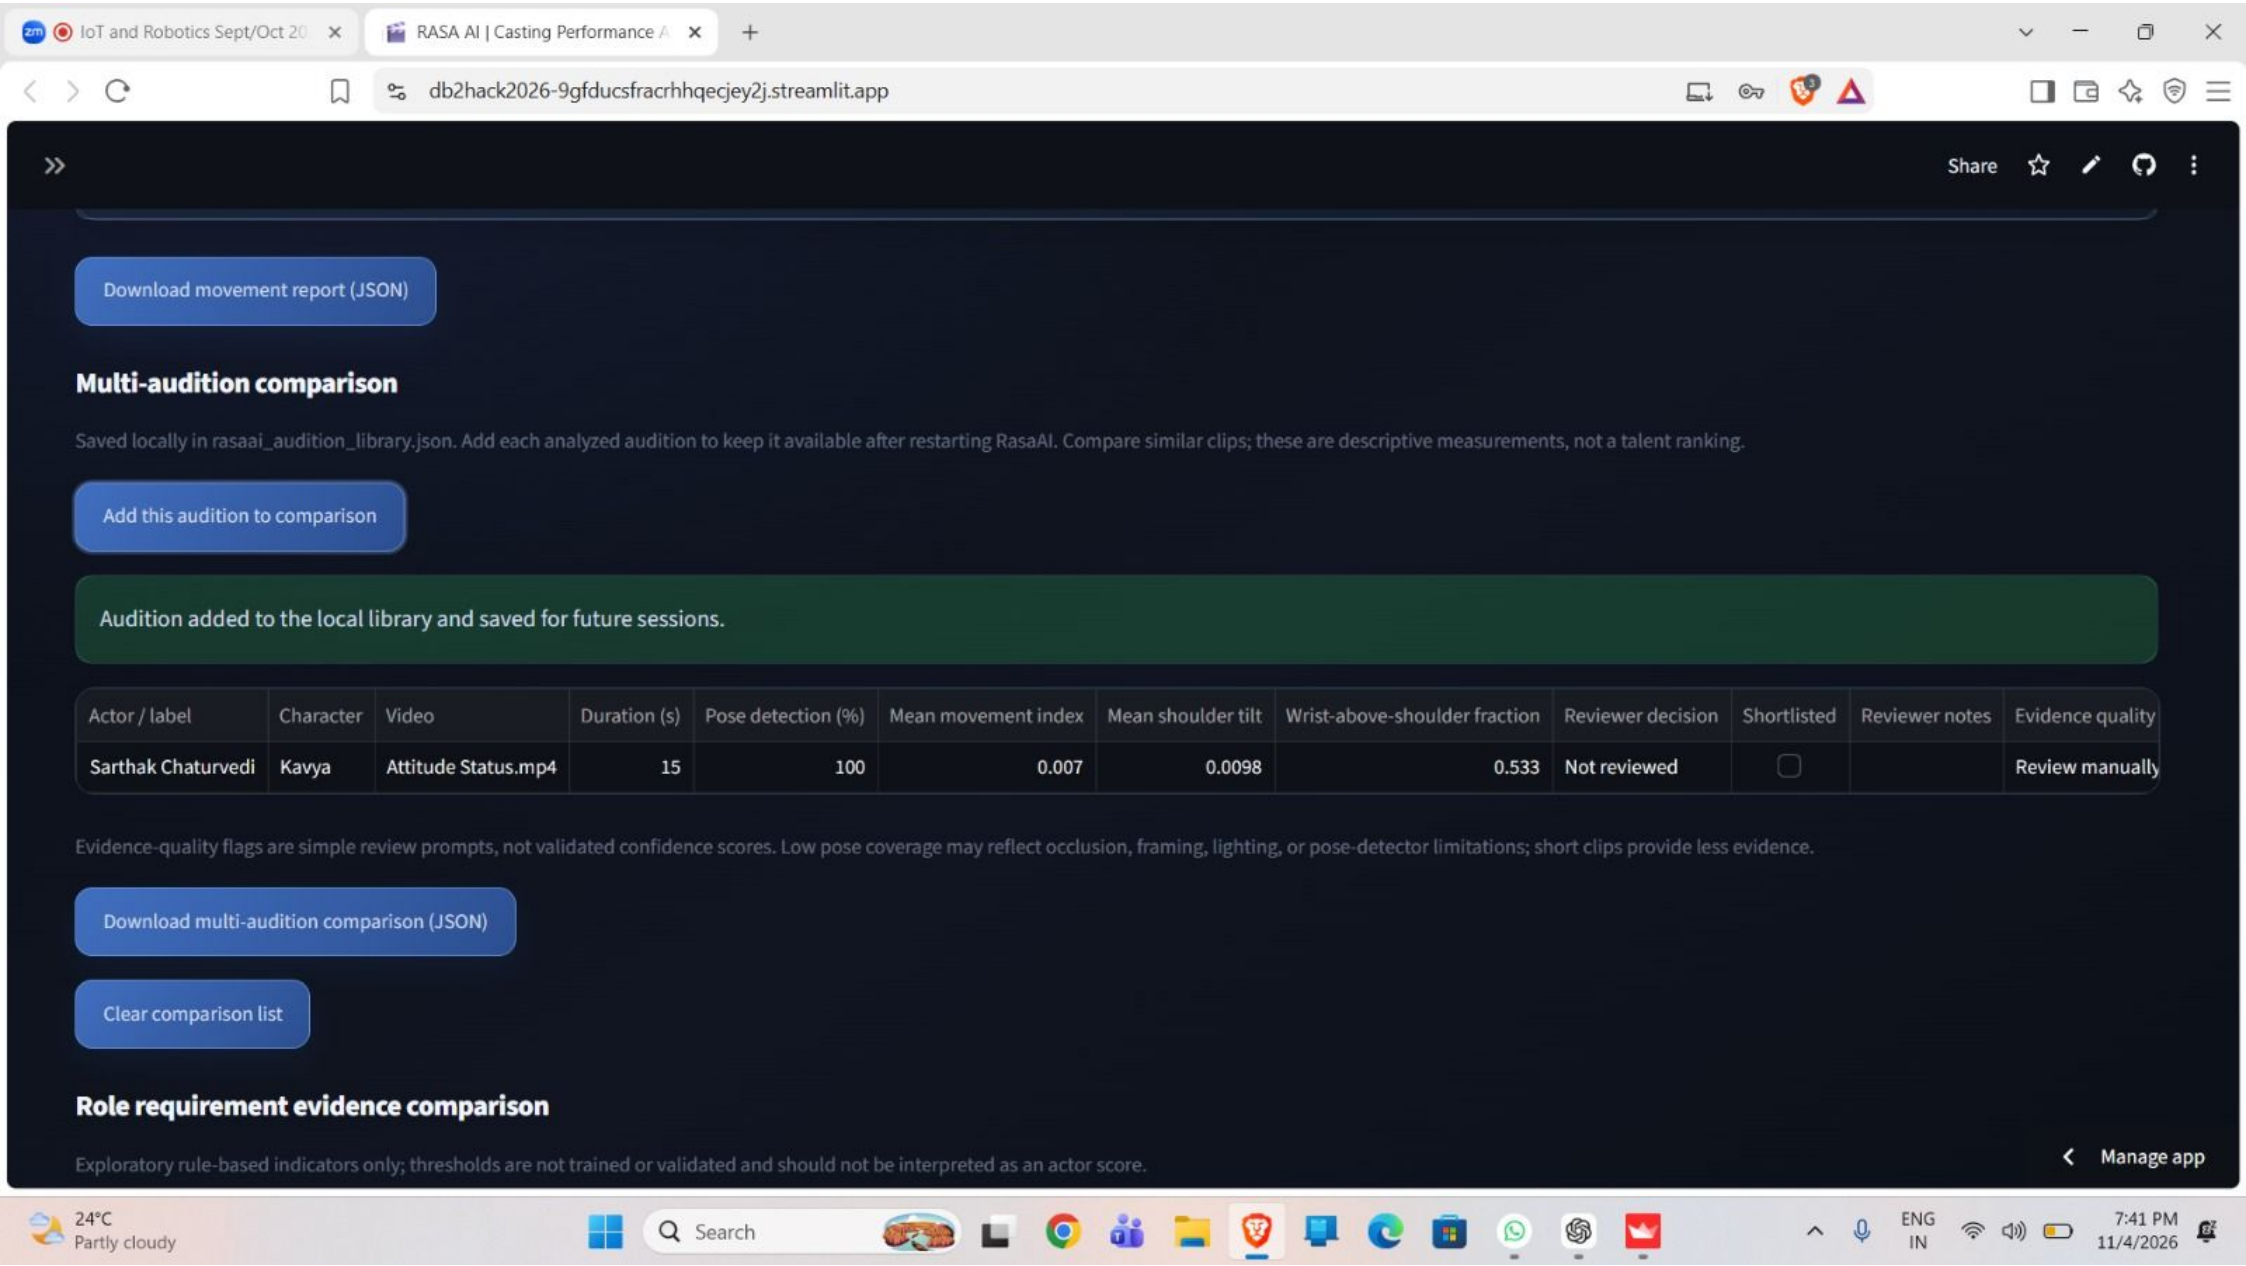
Manage app

24°C Partly cloudy

Search

ENG IN

7:40 PM 11/4/2026


IoT and Robotics Sept/Oct 20
RASA AI | Casting Performance A
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Share
Download movement report (JSON)
Multi-audition comparison
Saved locally in rasaai_audition_library.json. Add each analyzed audition to keep it available after restarting RasaAI. Compare similar clips; these are descriptive measurements, not a talent ranking.
Add this audition to comparison
Audition added to the local library and saved for future sessions.
Actor / label
Character
Video
Duration (s)
Pose detection (%)
Mean movement index
Mean shoulder tilt
Wrist-above-shoulder fraction
Reviewer decision
Shortlisted
Reviewer notes
Evidence quality
Sarthak Chaturvedi
Kavya
Attitude Status.mp4
15
100
0.007
0.0098
0.533
Not reviewed
Review manually
Evidence-quality flags are simple review prompts, not validated confidence scores. Low pose coverage may reflect occlusion, framing, lighting, or pose-detector limitations; short clips provide less evidence.
Download multi-audition comparison (JSON)
Clear comparison list
Role requirement evidence comparison
Exploratory rule-based indicators only; thresholds are not trained or validated and should not be interpreted as an actor score.
Manage app
24°C
Partly cloudy
Search
ENG
IN
7:41 PM
11/4/2026

IoT and Robotics Sept/Oct 2026 | RASA AI | Casting Performance A

db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app

Share

AUDITION LIBRARY

07

Haystack Retrieval

Search saved audition reports using Haystack BM25 keyword retrieval. Results are relevant recorded evidence for human review, not casting recommendations.

Saved audition records available: 1

Character

All characters

Review status

All statuses

Shortlisted only

Search saved audition evidence

Atitude Status

Max results

10

Retrieve auditions

Recent search history (this session)

Retrieved results

Query: Atitude Status

Filters: None

Searched 1 audition(s) matching the filters.

Manage app

24°C
Partly cloudy

Search

ENG
IN

7:42 PM
11/4/2026

IoT and Robotics Sept/Oct 2026 | RASA AI | Casting Performance A

db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app

Share

Found **1** matching audition(s).

1. Sarthak Chaturvedi — Kavya · BM25 score 0.450

Video: Attitude Status.mp4

Analysis type: video

Review status: Not reviewed

Shortlisted: No

Reviewer notes: No reviewer notes

Matching indexed evidence

Actor: Sarthak Chaturvedi
Analysis type: video
Video file: Attitude Status.mp4
Character: Kavya
Review status: Not reviewed
Shortlisted: False
Duration seconds: 15.0
Pose detection rate: 1.0
Face detection rate: 1.0
Mean normalized landmark movement index: 0.007
Mean shoulder tilt index: 0.0098
Mean torso lateral offset: 0.0269

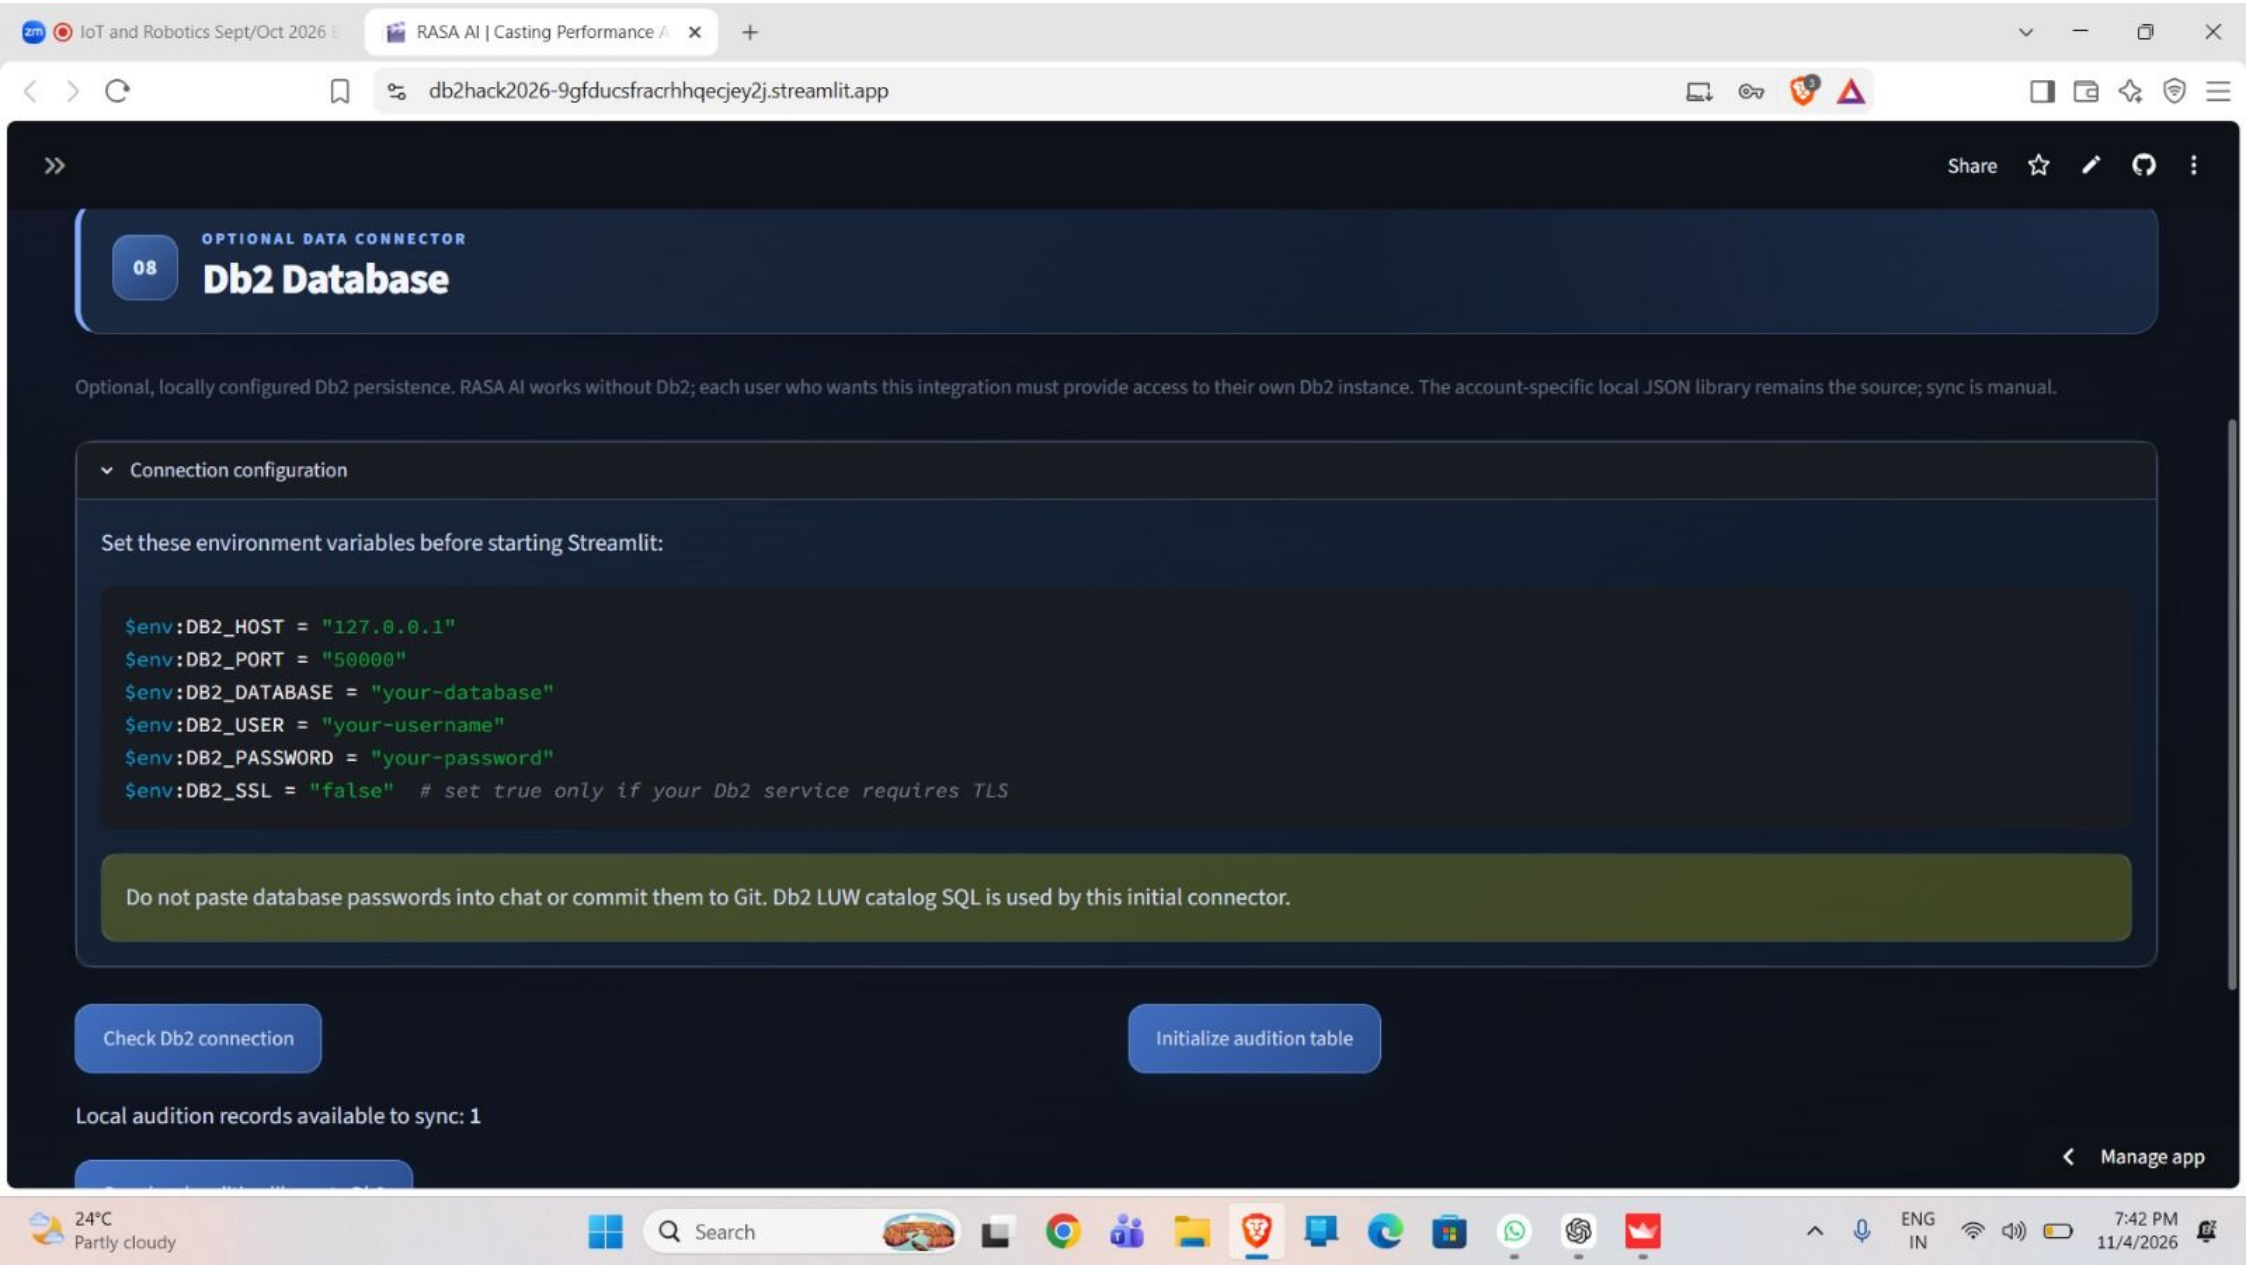
Manage app

24°C
Partly cloudy

Search

ENG
IN

7:42 PM
11/4/2026


IoT and Robotics Sept/Oct 2026
RASA AI | Casting Performance
db2hack2026-9gfducsfracrhhqecjey2j.streamlit.app
Share
OPTIONAL DATA CONNECTOR
08
Db2 Database
Optional, locally configured Db2 persistence. RASA AI works without Db2; each user who wants this integration must provide access to their own Db2 instance. The account-specific local JSON library remains the source; sync is manual.
Connection configuration
Set these environment variables before starting Streamlit:
$env:DB2_HOST = "127.0.0.1"
$env:DB2_PORT = "50000"
$env:DB2_DATABASE = "your-database"
$env:DB2_USER = "your-username"
$env:DB2_PASSWORD = "your-password"
$env:DB2_SSL = "false" # set true only if your Db2 service requires TLS
Do not paste database passwords into chat or commit them to Git. Db2 LUW catalog SQL is used by this initial connector.
Check Db2 connection
Initialize audition table
Local audition records available to sync: 1
Manage app
24°C
Partly cloudy
Search
ENG
IN
7:42 PM
11/4/2026