WellSky® Blood Centers

Administration Guide

Software Version: 2026 R1

Release Date: November 2025

WBCGA2026R1_01

How to Contact Us

WellSky Corporation
11300 Switzer Road
Overland Park, KS 66210

Customer Service: 866.714.9499
Fax: 913.307.1111
Website: www.wellsky.com

Disclaimer

WellSky Corporation provides the WellSky Blood Centers application or licensed software to the customer after extensive planning, designing, and validation of the system. Validation utilizes a range of hardware and data which is necessarily limited. As such, in-house validation of the system can only assure that the system carries out its functions and routines as designed by WellSky. WellSky cannot represent validation of all functioning possibilities and related consequences under ultimate conditions of use. Any warranty or guarantee, explicit or implied, pertains to the level of quality and functionality of the system's software, as planned, designed and validated by WellSky.

The user facility, not WellSky, is responsible for the control, management, and supervision of the facility's use of the Blood Centers application or licensed software, including, but not limited to ensuring that proper controls are in place to validate data, outcomes, and results obtained through its use. The user facility must run sufficient validation tests with appropriate frequency on the software and hardware, and on any modifications or supplements thereof as made available by WellSky, to be certain that the facility's use of the Blood Centers system, in the configuration and under the conditions at the facility, meets the facility's requirements in terms of policy, protocol, assumptions, and expectations, regardless of the participation or assistance of WellSky personnel in the form of suggested/published validation procedures and/or verbal discussions regarding Blood Centers system capabilities, functions, performance, or validation.

WellSky may use data submitted by client and processed through the cloud services for interoperability and transparency between providers, payers, and patients for care coordination; continuity of care; and performance, payment, and claims related activities, including patient matching and claims data sharing with mutual patients of other providers and payers, making the matching patient information visible to these providers and payers. WellSky may aggregate the matching data from providers and payers for the creation, comparison, expansion, amendment, and maintenance of consumer or patient health records necessary for the deployment of features and functionality of the cloud services.

WellSky Corporation
Proprietary and confidential

Revision History

Software Release & Date	Document Number	Content Affected	Description of Change
2026 R1 November 2025	WBCGA2026R1_01	All	Updated the document to reflect the current release version and release date.
2026 R1 November 2025	WBCGA2026R1_01	2.3.6 Registration Holds Mapping (RHOLDS)	In Intended Use section, changed Registration Programs Module (ONSITE) to OnSite Module. Updated the RHOLDS screenshot. In Interdiction Reason References grid, removed 2DONIN24 and added the following: PAUDITHOLD, EQUIPQC, DECCONST.
2026 R1 November 2025	WBCGA2026R1_01	3.5.2 Maintain Staff Details (STAFF)	Moved to this location from User Guide.
2026 R1 November 2025	WBCGA2026R1_01	4.2.9 Maintain Vehicle Details (VEHICLE)	Moved to this location from User Guide.
2026 R1 November 2025	WBCGA2026R1_01	Section 6.2.7, FastTrak Web Configuration (Onsite) (WEBCFG)	Updated the Limitations.

Software Release & Date	Document Number	Content Affected	Description of Change
2026 R1 November 2025	WBCGA2026R1_01	Appendix D - System Parameters	Removed BC_SCAN_ID, DONID, DONORCARD, FCARD2, FKSSN, GELTUBE_PL, HLTCHK, MCARD, MIXTEAMS, MMSG, MO_DMP_EXT, MO_DMP_EXT, OCDAY, OCHR, PBSHW, RECDA, RECDF, RECFIX, RECOV, SENDA, SENDF, SERVF, SSPST, STPRD, STS_IFC, TLOFF, and TMOFF. Added GENDER_LBL, HBS, LMPDRV, and WT_MINIMUM. Updated ALTID_MODE, CNFM_FLD, to remove SSN content. Added a value of 14 to DNLB_DRIVE. Changed DNR_RES value to YES. Added "in OnSite Registration" to ID_VERIFY. Added a numerical value of (24) to PI_ILL_ST. Add F-Goto Find Donor, H-Health History, N-None to REGNXT Description. Added TOUT_IDLE and TOUT_WARN rows to the grid.
2026 R1 November 2025	WBCGA2026R1_01	Appendix E, Donor Master Codes	Added NUKEY. Removed AUTAS, BDRBW, CMPGN, COURY, DEREA, DON, MANAS, PHOTO, SWARN, TDISP, TEST, UNAVL, and ZONE
2026 R1 November 2025	WBCGA2026R1_01	Appendix J, Venipuncture Codes	Updated with a new screenshot and additional information about the screen.
2026 R1 November 2025	WBCGA2026R1_01	Appendix K - Lab Master Codes	Added PABO
2026 R1 November 2025	WBCGA2026R1_01	Appendix P - Distribution Master Codes	Removed DELPT, EBLFL, and PRTPL from grid.

WellSky Corporation
Proprietary and confidential

Contents

Chapter 1 - Introduction 1
1.1 Overview 2
1.2 Identifying Static and Dynamic Data 2
1.3 Logical Sequence of Events 2
1.4 Task Overview 2
1.4.1 Configure Validation Tables 2
1.4.2 Assign User IDs and Functional Access 3
1.4.3 Ensure Passwords are Changed to Protect Application Security 3
1.4.4 Screen Names 3
1.5 Host/System Network 3
1.6 If You Need Support 3
Chapter 2 - Application Administration Tables Access 7
2.1 Common Validation Tables 9
2.2 Common Validation Tables (VALID) 10
2.2.1 Institution Details (INST) 10
2.2.2 Chapter Details (CHAPTER) 13
2.2.3 System Parameters (SYSPARM) 21
2.2.4 Set the Day Light Savings (SETDST) 23
2.2.5 Enhance Manuf. Process Codes (MPROC) 25
2.2.6 Enhance Manuf. Mapping Configuration (EMFCFG) 27
2.2.7 Enhance Manuf. Process Definition (EMFPROC) 32
2.3 Donor Restricted Validation Tables (DVALID) 38
2.3.1 Introduction 38
2.3.2 Application Administration Functions 39
2.3.3 Master Codes (MASTER) 40
2.3.4 Valid Facility Identifiers (FINCD) 43
2.3.5 Donor Interdiction Codes (INTER) 44
2.3.6 Registration Holds Mapping (RHOLDS) 48
2.3.7 Interdiction Upgrade Matrix (INTUP) 52
2.3.8 Define Tests (TESTS) 55

2.3.9 Define Test Results (RESULT) 59
2.3.10 Test Result Override Rules (RESOV) 62
2.3.11 Define Donation Types (DONS) 64
2.3.12 Define Procedure Codes (PROCS) 66
2.3.13 Define Donation Procedures (DONPROC) 69
2.3.14 Define Duration Between Procedures (DBETP) 70
2.3.15 Define Procedure Groups (PROCGRP) 73
2.3.16 Define Max Donations for Proc Groups (MAXDON) 75
2.3.17 Define Eligible Cell & Plasma Loss (LOSS) 77
2.3.18 Define Procedure Exclusions (XCLU) 79
2.3.19 Venipuncture Attributes (VENATRR) 81
2.3.20 Configure Find Donor Block for a Program (DONBLOCK) 83
2.3.21 Associate Nickname to Name (NICK) 89
2.3.22 Equipment QC Parameters (DRVPRF) 90
2.3.23 Don/Proc Consent Definition (DPCONST) 101
2.3.24 Donor Survey Manager 103
2.4 Lab Restricted Validation Tables (LVALID) 123
2.4 Screens and Descriptions 123
2.4.1 Lab Master Codes (LMASTER) 123
2.4.2 Valid Donation Type/Procedure Codes (DONPP) 125
2.4.3 Drives (DRIVES) 127
2.4.4 Group/Sites (SITES) 129
2.4.5 Valid ABO (ABO) 131
2.4.6 Labeling Configuration (LBLCF) 133
2.4.7 Lab Interdiction Codes (LINTER) 142
2.4.8 Assign Interdiction Class (ICLASS) 145
2.4.9 Labeling Interdiction Override: Tech 1 (INTOVER) 146
2.4.10 Labeling Interdiction Override: Tech 2 (INTOVER2) 148
2.4.11 Labeling Interdiction Override Query (INTOVERQ) 149
2.4.12 Donor Interdiction Override: Tech 1 (OVERDON1) 150
2.4.13 Donor Interdiction Override: Tech 2 (OVERDON2) 152

WellSky Corporation
Proprietary and confidential

2.4.14 Donor Interdiction Override Query (OVERDONQ) 153
2.4.15 Donor Decision Codes (DDCODES) 154
2.4.16 Valid ff Flag Values – ISBT (FFVAL) 156
2.5 Distribution Restricted Validation Tables (SVALID) 158
2.5 Screens and Descriptions 158
2.5.1 Define Distribution Master Code Types (CODE) 158
2.5.2 Distribution Master Codes (DMASTER) 160
2.5.3 Antigen Tests (ANTGN) 162
2.5.4 Inventory Product Types (PRODTYP) 163
2.5.5 Valid Product Substitutions (SUB) 166
2.5.6 ABO and Product Compatibility (ABPCOMP) 168
2.5.7 Order Class Codes (ORDCL) 169
2.5.8 Shipping Box Capacity (BOXCAP) 171
2.5.9 Return Reason Codes (REASON) 173
2.5.10 Pool Compatibility Matrix (PSCOMP) 174
2.6 WellSky Restricted Validation Tables (WSKYRVT) 177
Chapter 3 - System Administration 179
3.1 Introduction 180
3.2 Screens and Descriptions 182
3.3 Report Administration 183
3.3.1 Blood Center Report Maintenance 183
3.3.2 WellSky Report Maintenance 187
3.4 Menu Administration 188
3.4.1 Blood Center Menu Administration 188
3.4.2 WellSky Restricted Menu Admin. 194
3.5 User Administration 195
3.5.1 Common User Administration 195
3.5.2 Lab/Distribution User Administration 211
3.5.3 Donor User Administration 216
Chapter 4 - Recruitment Administration 231
4.1 Introduction 232

4.2 Recruitment Administration Functions 233
4.2.1 Define Resource Master List (ALLRES) 233
4.2.2 Define Resource Availability Rules (RESRULE) 235
4.2.3 Define Day Status Codes (DAYSTAT) 238
4.2.4 Create and Maintain Territories (TERINFO) 239
4.2.5 Define Collection Goals by Month (GOALMON) 241
4.2.6 Define Collection Goals by Date Range (GOALDT) 243
4.2.7 Define Default Drive Checklist (DEFCLIST) 246
4.2.8 Define Drive Category Rules (DRULE) 247
4.2.9 Maintain Vehicle Details (VEHICLE) 249
Chapter 5 - Donor Center Administration 253
5.1 Introduction 254
5.2 Donor Center Administration Functions 255
5.2.1 Define Donor Center (FSITE) 255
5.2.2 Enter Time Slots and Capacity (TIMESLOT) 260
5.2.3 Define Flexible Time Slots and Capacity (UCAP) 263
5.2.4 Open Appointment Calendar (OPENSITE) 267
5.2.5 Modify Calendar and Capacity (MODLOAD) 270
Chapter 6 - Registration Administration 275
6.1 Introduction 276
6.2 Registration Administration Functions 277
6.2.1 Define Physical Findings Values (PHYRULE) 277
6.2.2 Create Physical Findings Template (PHYTEMP) 281
6.2.3 Health History Questions Bank (HHQBANK) 283
6.2.4 Define Health History Responses (HHR) 286
6.2.5 Create Health History Template (HHQTEMP) 290
6.2.6 Abbreviated Questionnaire Setup (ADHQ) 301
6.2.7 FastTrak Web Configuration (Onsite) (WEBCFG) 303
6.2.8 Alternate ID Configuration (ALTID) 307
6.2.9 Define HH Response Groups (HHGROUP) 309
Chapter 7 - Notification Administration 313

WellSky Corporation
Proprietary and confidential

7.1 Introduction 314
7.2 Notification Administration Functions 314
7.2.1 Define Notification Letters (DEFLET) 314
7.2.2 Associate Letter to Interdiction (INTERLET) 324
7.2.3 View Letter Templates (VDRVWLT2) 325
7.2.4 Valid Notification Letters (VDRNTLTR) 325
Chapter 8 - Donor Communication Administration 327
8.1 Introduction 328
8.2 Donor Communication Administration Functions 328
8.2.1 Define Communication Types (COMTYPE) 328
8.2.2 Define Communication Letters (COMLET) 331
Chapter 9 - WellSky Blood Centers API/Vista Interface 337
9.1 Introduction - Vista Interface 338
9.1.1 Vista Interface Administration Functions 338
9.2 Introduction - WellSky Blood Centers API 342
9.2.1 Convert External Data to Blood Centers Data (APICONV) 342
Chapter 10 - Lab Functions - Component Administration 345
10.1 Screens and Descriptions 347
10.1.1 Attribute Codes (ATTRIB) 347
10.1.2 Smart Manufacture Attribute Configurator (ATRCFG) 351
10.1.3 Valid Catalog Numbers (CATALOG) 353
10.1.4 Lot Details for Bags (LOTS) 357
10.1.5 Valid Filters (FILTERS) 361
10.1.6 Product Codes (PRODUCT) 362
10.1.7 Licensed Products (LICPROD) 370
10.1.8 Default Product Code Attribute –ISBT (PRDTYAT) 373
10.1.9 Product Type Attributes (ISBT/Codabar) (PRDATTR) 375
10.1.10 Valid Attribute Matrix – ISBT (ATTRMAT) 377
10.1.11 Product Type Data - (Codabar/ISBT) (PRDTYPE) 379
10.1.12 Product/Procedure Matrix - Pheresis (PRODPROC) 381
10.1.13 Procedure Attribute/Equipment Matrix (ATTREQUP) 383

10.1.14 Equipment/Product cGMP Matrix (EQUIPROD) 385
10.1.15 Product Conversions (ISBT 'SP'/Codabar) (PRODCONV) 387
10.1.16 'SP' Special Processing Master Codes (FRMASTER) 389
10.1.17 'SP' Processes and Stages (PROCSTAG) 390
10.1.18 'SP' Products and Special Processes (SPPROC) 392
10.1.19 'SP' Antigen Group Definitions (ANTGGRP) 394
10.1.20 'SP' Antigen Rarity Combinations (RARITY) 396
10.1.21 Valid Pool ABO Values (POOLSLD) 397
10.1.22 Attribute Expiration Override - ISBT (OVR) 399
10.1.23 CRYO Methods (CRYOMET) 401
10.1.24 Pre-Printed Product Labels – ISBT (PREPRINT) 403
10.1.25 Configure Interdiction Placement (CIP) 405
10.1.26 Valid Aliquots (VALALI) 407
10.1.27 Valid Product Code Attributes (ATTRPRD) 409
10.1.28 Product Combinations (PRODCOM) 411
10.1.29 Delete Product Combination (DPRODCOM) 413
10.1.30 Product Bags (PRODBAG) 414
Chapter 11 - Lab Functions - Pathogen Reduction 417
11.1 Screens and Descriptions 418
11.1.1 Pathogen Reduction Process Configurator (PRCONFG) 418
Chapter 12 - Lab Functions - Testing Administration 423
12.1 Introduction 424
12.2 Screens and Descriptions 424
12.2.1 Available Tests (TEST) 424
12.2.2 Internal Contract (CONTR) 430
12.2.3 Instrument Tests (INTST) 435
12.2.4 Instrument Test Results (INTSTRS) 436
12.2.5 Valid Remote Testing Labs (VTILABS) 438
12.2.6 Valid Additional Tests: Remote Testing (VADDTST) 440
12.2.7 Horizontal Test File Test Mapping (HTFM) 442
12.3 Multiple Observation Testing Administration (MOTADM) 444

WellSky Corporation
Proprietary and confidential

12.3.1 Valid Multiple Observation Results (VMOR) 444
12.3.2 Multiple Observation Test Types by MFG (MOTTMFG) 445
12.3.3 Multiple Observation Fields (MOF) 447
12.3.4 Multiple Observation Result Matrix (MORM) 449
Chapter 13 - Lab Functions - Confirmatory Administration 453
13.1 Screens and Descriptions 454
13.1.1 Sample Test Linkage (STMAP) 454
13.1.2 Test/Test Series Configuration (TSERIES) 456
13.1.3 Notation Code Configuration (NOTCFG) 461
Chapter 14 - Lab Functions - Equipment Administration 465
14.1 Screens and Descriptions 466
14.1.1 Equipment Master Codes (EQMAST) 466
Chapter 15 - Distribution Functions - Customer Administration 469
15.1 Customer Consignee Product Details (VCUSTPRD) 470
Chapter 16 - Distribution Functions - Product Location Definition 473
16.1 Screens and Descriptions 474
16.1.1 Storage Device Details (DSTORE) 474
16.1.2 Product Storage Definition (PSTORE) 477
16.1.3 Rack Definition (RSTORE) 479
Chapter 17 - Miscellaneous Information 483
17.1 Special Donations Tag Printing 484
17.1.1 Configuration Setup 484
17.1.2 Print Auto/Directed Tie Tags 489
17.1.3 Maintain Special Instructions 498
17.1.4 Print Special Instruction Tie Tags 502
17.1.5 Printer Setup 506
Appendix A - Validation/Administration Tables 509
Appendix B - Chapter Tables 531
Appendix C - Barcodes 535
C.1.1 Equipment (Machine) Barcodes 535
C.1.2 Centrifuge Barcodes 535

C.1.3 Deferral ID Barcodes 535
Appendix D - System Parameters 537
Appendix E - Donor Master Codes 547
Appendix F - Donor Static Interdictions 563
Appendix G - Donor Miscellaneous Static Values 565
G.1.4 Table: Venipuncture Attributes 565
G.1.5 Table: Donor Lists 565
G.1.6 Table: Communication Types 565
G.1.7 Communication Types with associated Communication Codes and code description 566
G.1.8 Table: Define Day Status Codes 569
G.1.9 Table: Define Donation Types 569
G.1.10 Table: List Types (no table entry) 569
G.1.11 Table: Define Procedure Codes 569
G.1.12 Table: Define Procedure Groups 570
G.1.13 Table: Define Resource Master List 'Resc Code' 570
G.1.14 Table: Resource Types (In 'Type' in Define Resource Master List) 571
G.1.15 Table: Define Tests 571
G.1.16 Table: Define Test Results 572
Appendix H - Venipuncture Codes 573
Appendix I - Lab Master Codes 579
Appendix J - Lab Special Processing 597
Appendix K - Equipment 599
Appendix L - Lab Static Attributes 601
Appendix M - Lab Static Interdictions 603
Appendix N - Distribution Master Codes 607
Appendix O - Creating a New Test in Blood Centers 613
Glossary 617
Index 633
Keyboard Templates 659

WellSky Corporation
Proprietary and confidential



Chapter 1 - Introduction

1.1 Overview 2
1.2 Identifying Static and Dynamic Data 2
1.3 Logical Sequence of Events 2
1.4 Task Overview 2
1.5 Host/System Network 3
1.6 If You Need Support 3

1.1 Overview

This guide contains information needed by the administrator of a WellSky Blood Centers installation to customize and maintain the application. To increase awareness of the application structure, WellSky Blood Centers Administrator training should be completed prior to configuration changes.

Although Blood Centers arrives with a set of data populating the administrative (validation/configuration) tables, the Blood Centers Administrator is responsible for customizing the application according to the needs of the organization and for maintaining the custom configuration. This individual is expected to have a thorough knowledge of the following:

- Intended use, blood center requirements, organizational structure of the blood center (for example, recruitment, collection centers/sites, donor eligibility, donor deferral, donor notification, component production and modification, testing, label and release, product management, inventory management).
- Functionality, database structure, appropriate use, and boundaries (limitations) of the current version of Blood Centers.
- All concepts and processes documented in the current version of the user guide for Blood Centers.

1.2 Identifying Static and Dynamic Data

Static data is coded into the system and should not be changed. Change or termination of this data could result in unwanted system responses. Usually, these are code types, system parameters, etc. In some instances, the codes themselves should not be changed. These will be identified. Refer to the appendices to identify such data.

Dynamic data can be added to or terminated in tables as required to meet your business needs.

1.3 Logical Sequence of Events

All configuration tasks include a logical sequence of entry. Each task consists of entering organization-specific values in one or more configuration tables through screens. Because certain configuration tables depend on values defined in other tables, the tasks should be performed in logical sequence.

Guidance for data entry in the configuration tables through screens is provided in this guide. With an understanding of the organization's regulatory and business requirements and the logical sequence of tasks depicted in the following chapters, the Blood Centers Administrator can customize the application for the organization.

1.4 Task Overview

The list below identifies administrative tasks for WellSky Blood Centers.

1.4.1 Configure Validation Tables

- Prior to initial validation.
- As needed to reflect changes in the system parameters.

WellSky Corporation
Proprietary and confidential

1.4.2 Assign User IDs and Functional Access

- Prior to initial validation.
- As needed to reflect changes in users and user status.

1.4.3 Ensure Passwords are Changed to Protect Application Security

- A password can be changed any time.
- The system forces a password change at intervals defined during installation. Additionally, you will be warned a designated number of days before your password is due to expire. The number of days you receive this warning is also configured during installation. Refer to the WellSky Blood Centers Installation Guide for more information.
- You must have the appropriate privileges to change a password:
  - If the Single User Parameter is set to N, you must have DBA privileges to reset a user password.
  - If the Single User Parameter is set to Y, you must have Administrator privileges to initially set a user password. Users can reset their own password as they desire.
- If the administrator changes a user's password, the user will be forced to change that password at next login.

1.4.4 Screen Names

Throughout this guide, screen names appear with their respective keyword (shortcut) in parentheses. Becoming familiar with the menu structure is advised, but the keywords serve as shortcuts to reach any screen from any menu as long as the user has the appropriate access.



NOTE – Access to some functions is reserved for WellSky support.

1.5 Host/System Network

This guide assumes installation of Blood Centers software on a fully-operational host system (Oracle server) and network.

1.6 If You Need Support

For Blood Centers support, contact WellSky Customer Support at 866-714-9499.


Solution Life Cycle

The WellSky® Solution Life Cycle describes the sequence of phases our solutions go through from General Availability (GA) through maturity and decline. The value of identifying the phases and applying timeframes, i.e. actual dates to each phase, allows you to plan your upgrades and migrations without any gaps in support.

To help realize the maximum value from WellSky's applications, customers should install the latest version of your WellSky solution. The latest versions allow customer(s) to benefit from the latest functionality and feature enhancements, are designed to handle modern workloads, and provide access to our most complete technical support and engineering assistance and resources.

WellSky strives to make each version easier to upgrade, and we also have a professional services team to assist with upgrade plans as well. WellSky understands that business constraints may delay customers from upgrading, and that certain customers may need to have the flexibility either to upgrade to new versions or decide to remain on an older version for a while longer. WellSky, at its discretion, may provide customers with additional support offerings that can extend certain limited features of maintenance/support coverage until the customer is able to upgrade.

Milestone	Estimated Schedules
Major Release	Every two (2) years, at a minimum
Minor Release	At least one during the life cycle
Service Packs	One (1) – two (2) per life cycle, according to need during the life cycle

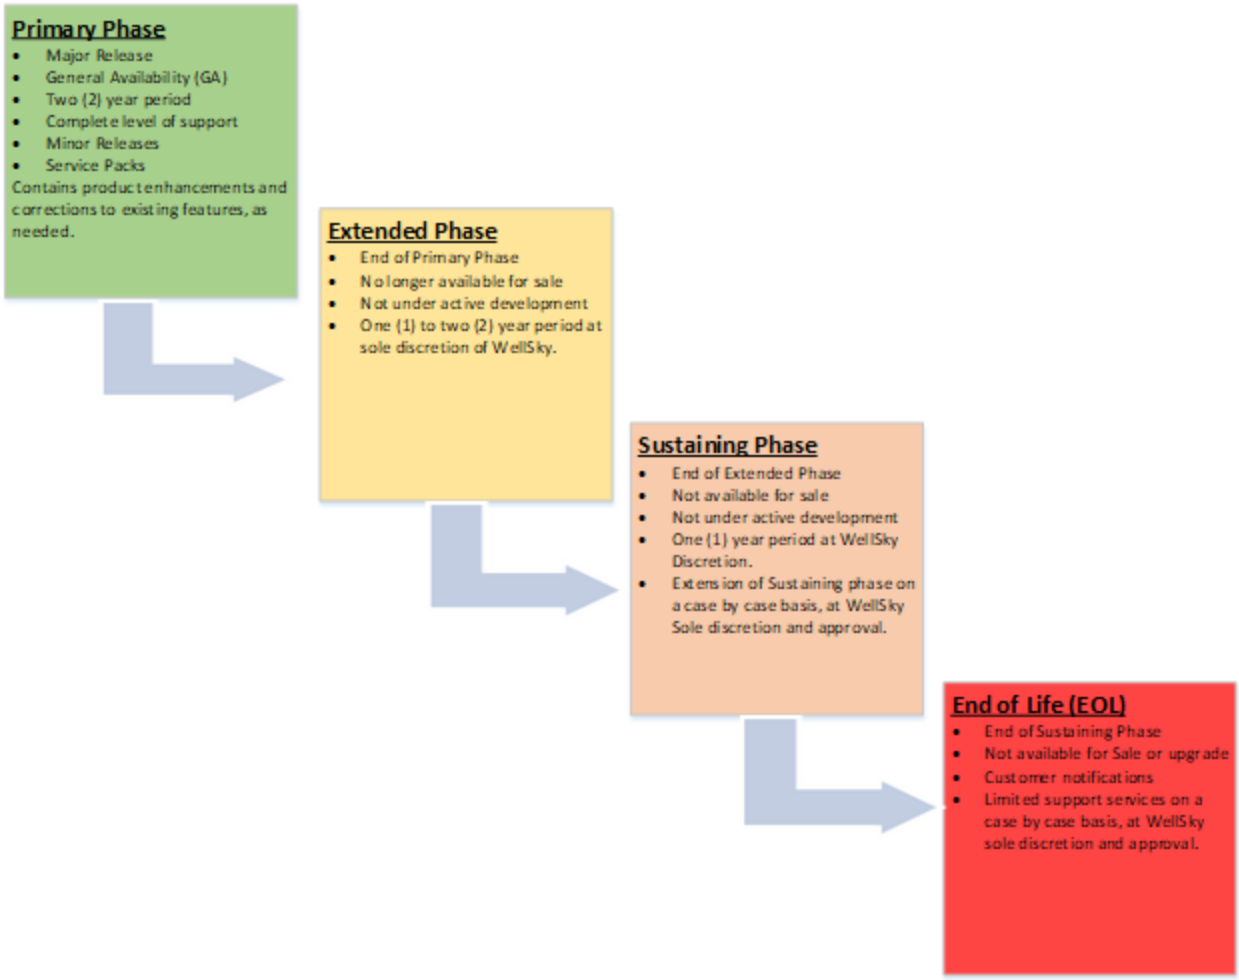
Primary Phase
Major Release
General Availability (GA)
Two (2) year period
Complete level of support
Minor Releases
Service Packs
Contains product enhancements and corrections to existing features, as needed.
Extended Phase
End of Primary Phase
No longer available for sale
Not under active development
One (1) to two (2) year period at sole discretion of WellSky.
Sustaining Phase
End of Extended Phase
Not available for sale
Not under active development
One (1) year period at WellSky Discretion.
Extension of Sustaining phase on a case by case basis, at WellSky Sole discretion and approval.
End of Life (EOL)
End of Sustaining Phase
Not available for Sale or upgrade
Customer notifications
Limited support services on a case by case basis, at WellSky sole discretion and approval.

This Page Intentionally Left Blank

2

Chapter 2 - Application Administration Tables Access

2.1 Common Validation Tables 9
2.2 Common Validation Tables (VALID) 10
2.2.1 Institution Details (INST) 10
2.2.2 Chapter Details (CHAPTER) 13
2.2.3 System Parameters (SYSPARM) 21
2.2.4 Set the Day Light Savings (SETDST) 23
2.2.5 Enhance Manuf. Process Codes (MPROC) 25
2.2.6 Enhance Manuf. Mapping Configuration (EMFCFG) 27
2.2.7 Enhance Manuf. Process Definition (EMFPROC) 32
2.3 Donor Restricted Validation Tables (DVALID) 38
2.3.1 Introduction 38
2.3.2 Application Administration Functions 39
2.3.3 Master Codes (MASTER) 40
2.3.4 Valid Facility Identifiers (FINCD) 43
2.3.5 Donor Interdiction Codes (INTER) 44
2.3.6 Registration Holds Mapping (RHOLDS) 48
2.3.7 Interdiction Upgrade Matrix (INTUP) 52
2.3.8 Define Tests (TESTS) 55
2.3.9 Define Test Results (RESULT) 59
2.3.10 Test Result Override Rules (RESOV) 62
2.3.11 Define Donation Types (DONS) 64
2.3.12 Define Procedure Codes (PROCS) 66
2.3.13 Define Donation Procedures (DONPROC) 69
2.3.14 Define Duration Between Procedures (DBETP) 70
2.3.15 Define Procedure Groups (PROCGRP) 73
2.3.16 Define Max Donations for Proc Groups (MAXDON) 75
2.3.17 Define Eligible Cell & Plasma Loss (LOSS) 77
2.3.18 Define Procedure Exclusions (XCLU) 79

2.3.19 Venipuncture Attributes (VENATRR) 81
2.3.20 Configure Find Donor Block for a Program (DONBLOCK) 83
2.3.21 Associate Nickname to Name (NICK) 89
2.3.22 Equipment QC Parameters (DRVPRF) 90
2.3.23 Don/Proc Consent Definition (DPCONST) 101
2.3.24 Donor Survey Manager 103
2.4 Lab Restricted Validation Tables (LVALID) 123
2.4 Screens and Descriptions 123
2.4.1 Lab Master Codes (LMASTER) 123
2.4.2 Valid Donation Type/Procedure Codes (DONPP) 125
2.4.3 Drives (DRIVES) 127
2.4.4 Group/Sites (SITES) 129
2.4.5 Valid ABO (ABO) 131
2.4.6 Labeling Configuration (LBLCF) 133
2.4.7 Lab Interdiction Codes (LINTER) 142
2.4.8 Assign Interdiction Class (ICLASS) 145
2.4.9 Labeling Interdiction Override: Tech 1 (INTOVER) 146
2.4.10 Labeling Interdiction Override: Tech 2 (INTOVER2) 148
2.4.11 Labeling Interdiction Override Query (INTOVERQ) 149
2.4.12 Donor Interdiction Override: Tech 1 (OVERDON1) 150
2.4.13 Donor Interdiction Override: Tech 2 (OVERDON2) 152
2.4.14 Donor Interdiction Override Query (OVERDONQ) 153
2.4.15 Donor Decision Codes (DDCODES) 154
2.4.16 Valid ff Flag Values – ISBT (FFVAL) 156
2.5 Distribution Restricted Validation Tables (SVALID) 158
2.5 Screens and Descriptions 158
2.5.1 Define Distribution Master Code Types (CODE) 158
2.5.2 Distribution Master Codes (DMASTER) 160
2.5.3 Antigen Tests (ANTGN) 162
2.5.4 Inventory Product Types (PRODTYP) 163
2.5.5 Valid Product Substitutions (SUB) 166
2.5.6 ABO and Product Compatibility (ABPCOMP) 168
2.5.7 Order Class Codes (ORDCL) 169
2.5.8 Shipping Box Capacity (BOXCAP) 171
2.5.9 Return Reason Codes (REASON) 173
2.5.10 Pool Compatibility Matrix (PSCOMP) 174
2.6 WellSky Restricted Validation Tables (WSKYRVT) 177

WellSky Corporation
Proprietary and confidential

2.1 Common Validation Tables

These functions are accessed from the following menu:



2.2 Common Validation Tables (VALID)

2.2.1 Institution Details (INST)

Intended Use

This screen is used to view or modify institution details.


Limitations

WDLY must be used as the institution code.

Prerequisites

Institution details must have been previously entered.

Entering/Viewing Data

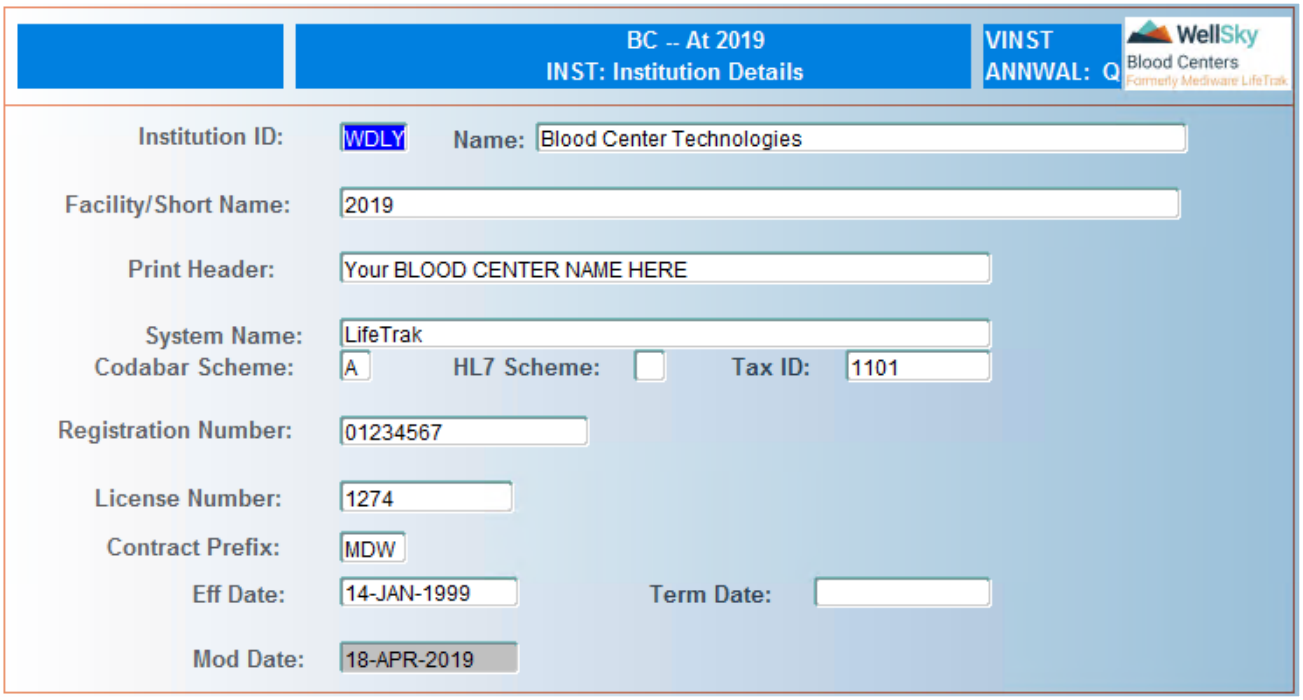

Institution ID


WDLY is static data that must not be changed.

Name

Enter institution name. A maximum of 50 characters is allowed.

Because the DigiTrax label printing software is able to print only 40 characters per line on Codabar ABO labels, a special character must be inserted in the institution name if the name is greater than 40 characters in length; a 'I' (pipe) should be inserted between the words that you want to appear on the first and second lines of the label; the information appearing before the pipe will appear on the first line, and information after the pipe will appear on the second line.

After the name is entered, the following window opens:

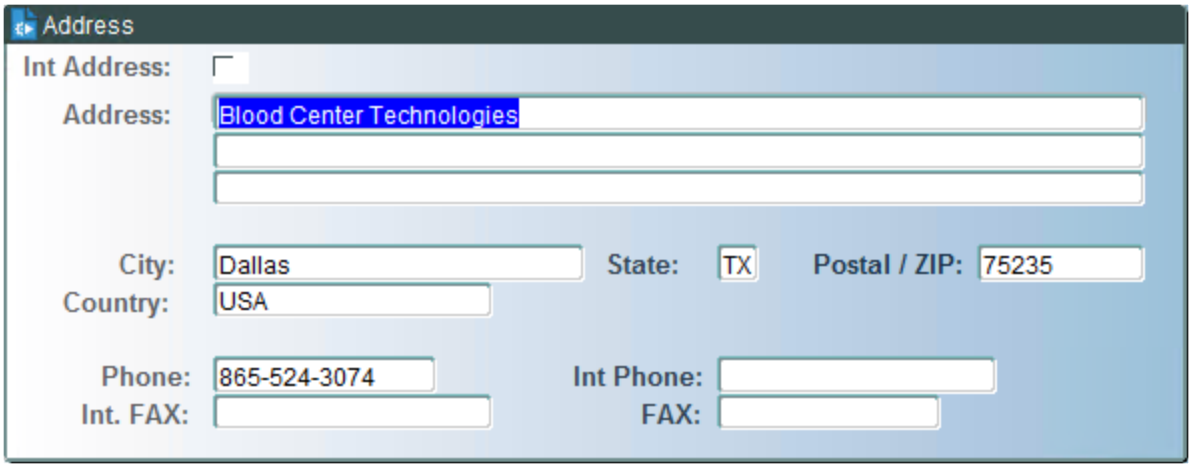

Int Address (check box)

For an international address, click mouse in box. A check mark ( )appears. For a domestic address, leave this box blank (un-checked).

Address

Entry in the first line is required. Enter the facility address. Three lines are available to record the necessary information. A maximum of 50 characters is allowed on each of the three address lines.

For international addresses, use the third line for country-specific designations such as province or state.

City

Entry is required. Enter the city. A maximum of 20 characters is allowed.

State

Entry is required for a domestic address (Int Address box not checked). Enter the state abbreviation or select from LOV. A maximum of 2 characters is allowed.

Postal/Zip

Entry is required. Enter the postal or zip code. A maximum of 15 characters is allowed.

Country

Entry is required. Enter the country. A maximum of 15 characters is allowed.

Phone

Entry is optional. Enter the phone number. A maximum of 10 characters is allowed.

Int Phone

Entry is optional. Enter the internal phone number, beginning with the country code. A maximum of 15 characters is allowed.

Int Fax

Entry is optional. Enter the international Fax number, beginning with the country code. A maximum of 15 characters is allowed.

FAX

Entry is optional. Enter the Fax number. A maximum of 10 characters is allowed.

NOTE – Once all desired information has been entered, press **F12** (Commit) to return to the main institution screen.

Facility/Short Name

Enter a short name for your institution. A maximum of 20 characters is allowed. This will display to the right of 'Blood Centers – At' above the screen title.

Print Header

Enter the name to be printed on report headers. A maximum of 50 characters is allowed.

System Name

This will display in the Application Menu on the first entry screen after log in. It is recommended that `Blood Centers` be entered in this field.

Codabar Scheme

Enter the Codabar scheme currently in use at your institution (A – Alphanumeric or N – Numeric).

HL7 Scheme

Field not used.

Tax ID

Enter the institution tax ID. This entry is for information purposes only. A maximum of 9 characters is allowed.

Registration Number

Enter the institution's FDA registration number. The number should be prepended by a 0 if the institution uses the Codabar numeric scheme or by 1 if the institution uses the Codabar alphanumeric scheme. The number must still be prepended by a 0 or 1 if using ISBT. A maximum of 30 characters is allowed.

WellSky Corporation
Proprietary and confidential

NOTE – The prepended number (either a 0 or a 1) is not printed.

License Number

Enter the institution's FDA license number. A maximum of 30 characters is allowed.

Contract Prefix

This is a required field. Enter a three-character designation that represents the institution. The entered prefix will be prepended to regional sample management contracts and Distribution customer IDs.

NOTE – The contract prefix entered is limited to alphabetical characters; no numbers or symbols are allowed.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Mod Dt

Field automatically populates with the date when modifications were last made.

What to Do Next

Go to Chapter Details (CHAPTER) to synchronize information.

2.2.2 Chapter Details (CHAPTER)

Intended Use

This screen is used to enter or maintain chapter level information.


Limitations

Sets parameters for certain cGMP interdictions to be placed such as BLFA, BLHO and CMTI.

Prerequisites

- Institution details must have been previously entered.
- If you need to create a new chapter ID, contact WellSky Technical Services for assistance before creating the new chapter ID.

Entering/Viewing Data

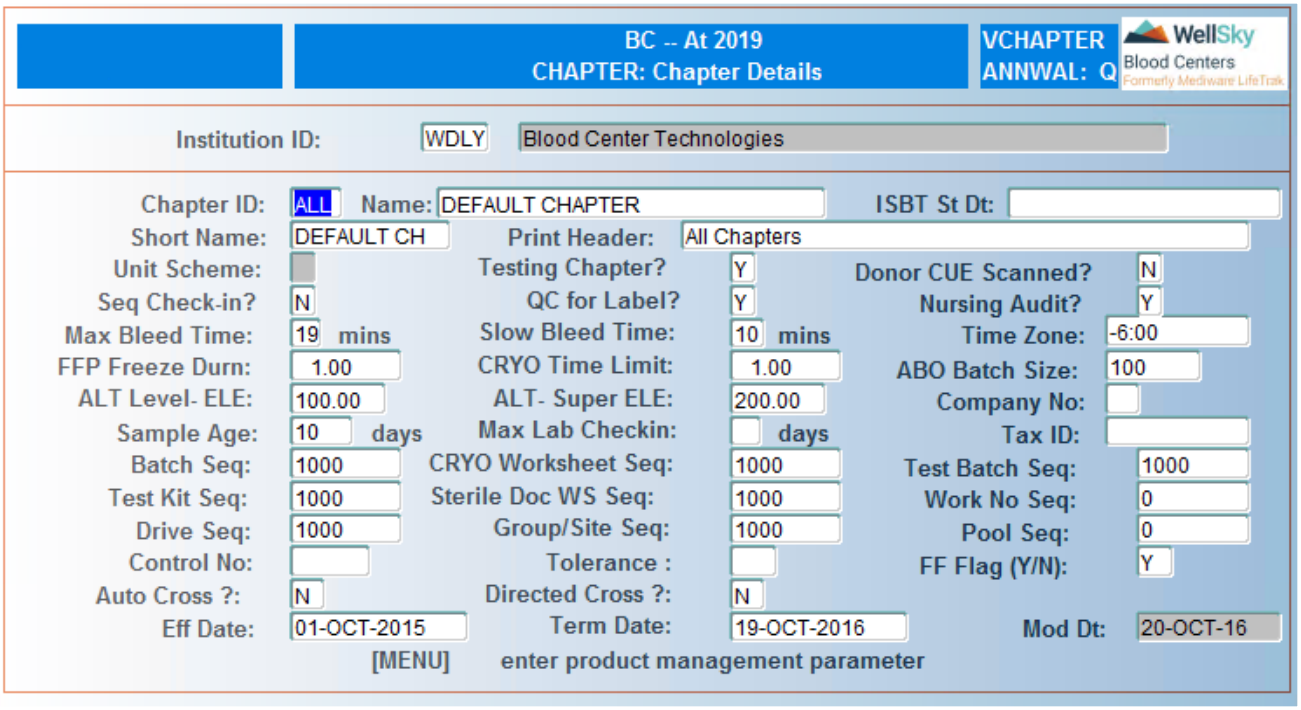

Institution ID

You are not able to navigate to this field. This information is populates the fields in this screen with the information entered in the *Institution* field in Institution Details (INST).

Chapter ID


Enter the Chapter ID. A maximum of 3 characters can be entered.

Important! If you need to create a new chapter ID, contact WellSky Technical Services for assistance before creating the new chapter ID.

Name

Enter the chapter name. A maximum of 50 characters is accepted. After the name is entered, the following window opens:

WellSky Corporation
Proprietary and confidential

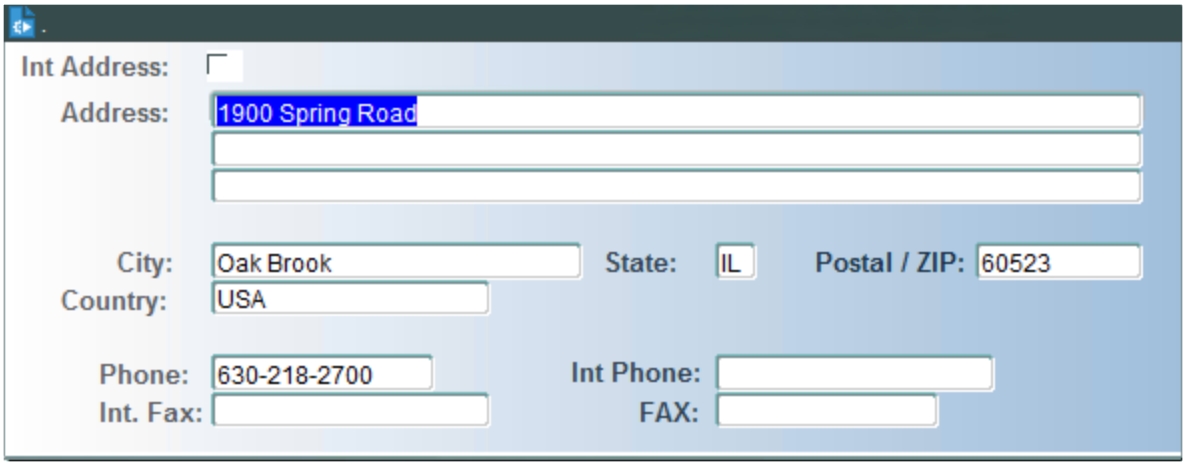

Int Address (check box)

For an international address, click mouse in box. A check mark ( )appears. For a domestic address, leave this box blank (un-checked).

Address

Entry in the first line is required. Enter the facility address. Three lines are available to record the necessary information. Entry is limited to a maximum of 50 characters in each of the address lines.

City

Enter facility city. Entry is limited to a maximum of 20 characters.

State

Enter facility state abbreviation or select from LOV. Entry is limited to a maximum of 2 characters.

Postal/Zip

Enter facility postal or zip code. Entry is limited to a maximum of 15 characters.

Country

Enter country where the requesting facility is located. Entry is limited to a maximum of 15 characters.

Phone

Enter the main number for the facility. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

Int Phone

Enter the international phone number for the facility. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

Int Fax

Enter the international Fax number for the facility. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

Fax

Enter the Fax number for the facility. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

NOTE – Once all desired information has been entered, press **F12** (Commit) to return to the main institution screen.

ISBT St Dt

Enter the ISBT start date and time in DD-MON-YYYY HH:MI format. Leave blank if unknown or not currently in use.

NOTE – If this field is left blank, the "Valid Blood Types" LOV in the Enter Regular Order, Enter Special Order, and Enter Export Order screens will display Codabar format only. Once this field is populated, these LOVs will display both ISBT and Codabar formats.

Short Name

Enter the chapter short name. A maximum of 10 characters is allowed. Refer to the name identified in Institution Details (INST).

Print Header

Enter the name to be printed on report headers. A maximum of 50 characters is allowed. Refer to the information entered in Institution Details (INST).

Unit Scheme

Navigation to this field is not allowed. This field is populated with the Unit Scheme information entered in Institution Details (INST).

Testing Chapter

Enter one of the following:

- `Y` – testing is performed by the chapter.
- `N` – testing is not performed by the chapter.

Donor CUE Scanned

Enter `Y` if the Confidential Unit Exclusion (CUE) is used by the chapter. Enter `N` if the CUE is not used.

NOTE – If the CUE is not used, the CUE is automatically set to 'OK' and further modified through the addition of certain donation type attributes.

WellSky Corporation
Proprietary and confidential

Seq Check-in

Enter `Y`.

> **NOTE –** You should perform the DSCE function before performing the BAGS function. This is due to the capability for selective test scheduling for the unit.

QC for Label

Enter `Y` for Labeling QC. Do not enter N.

Nursing Audit

Enter `Y` for nursing audit (review of donor source cards) for verification in Labeling QC. Do not enter N.

Max Bleed Time

Enter the maximum acceptable bleed time (in minutes) of non-apheresis units.

> **NOTE –** Interdiction BLFA is automatically placed on non-apheresis units having bleed times exceeding this value.

Slow Bleed Time

Enter the slow bleed time (in minutes).

> **NOTE –** Interdiction BLFA or BLHO is automatically placed on non-apheresis components with bleed times greater than or equal to this value but less than or equal to the maximum bleed time.

Time Zone

Entry is required if system is set for Time Zone enabled; otherwise, entry is optional. Enter time zone or select from LOV.

FFP Freeze Durn

Enter the maximum acceptable time (<hours>.<percentage of the hour>) in which fresh frozen plasma products can be frozen.

> **NOTE –** Interdiction CMTI is automatically placed on components with freeze times greater than the value entered in this field.

CRYO Time Limit

This field is not used.

ABO Batch Size

This field is not used.

ALT Level – ELE

Enter the minimum ALT value considered to be elevated. ALT interdiction is automatically placed when the value is greater than or equal to this parameter. Values between 0 and 999.99 are allowed.

ALT – Super ELE

Enter the minimum ALT value considered to be super-elevated. ALTH interdiction is placed automatically when the ALT value is greater than or equal to this parameter. Values between 0 and 999.99 are allowed.

Company No

This field must be populated for the billing interface to execute properly, and the Pack List to print. Any 1- or 2-digit number can be placed in this field.

Sample Age

Enter the maximum testing service sample age that allows linkage to an allogeneic or directed unit. A maximum value of 99 is allowed.

Max Lab Check-in

This field is not used.

Tax ID

Enter the institution tax ID. This entry is for information purposes only. A maximum of 9 characters is allowed.

Batch Seq

This information is set by WellSky.

CRYO Worksheet Seq

This information is set by WellSky.

Test Batch Seq

This information is set by WellSky.

Test Kit Seq

This information is set by WellSky.

Sterile Doc WS Seq

This information is set by WellSky.

Work No Seq

This information is set by WellSky.

Drive Seq

This information is set by WellSky.

WellSky Corporation
Proprietary and confidential

Group/Site Seq
This information is set by WellSky.

Pool Seq
This information is set by WellSky.

Control No
This information is set by WellSky.

Tolerance
Entry in this field is for ISBT unit IDs only. The year portion of the ISBT 128 DINs accept specific years based on the following: If this field is null or contains a "-1", DSCE will accept the current year, previous year, or next year. If this field contains a "0", "1", or "+1", DSCE will accept only the current year.

NOTE – With this configuration, the previous year will be accepted 30 days into the new year and the current year will be accepted 30 days prior to the new year.

FF Flag (Y/N)
Enter one of the following:

- `Y` – validation of the 'ff' flag is required
- `N` – validation is not required

NOTE – This entry is specifically for ISBT unit ID numbers.

Auto Cross
Field not utilized.


Directed Cross
Field not utilized.

Eff Date
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date in DD-MON-YYYY format.

Mod Dt
Field automatically populates with the date modifications were last made. Field is not navigable.

Product Management Parameters
Press **F6** (Menu) to view product management parameters. The following window opens:

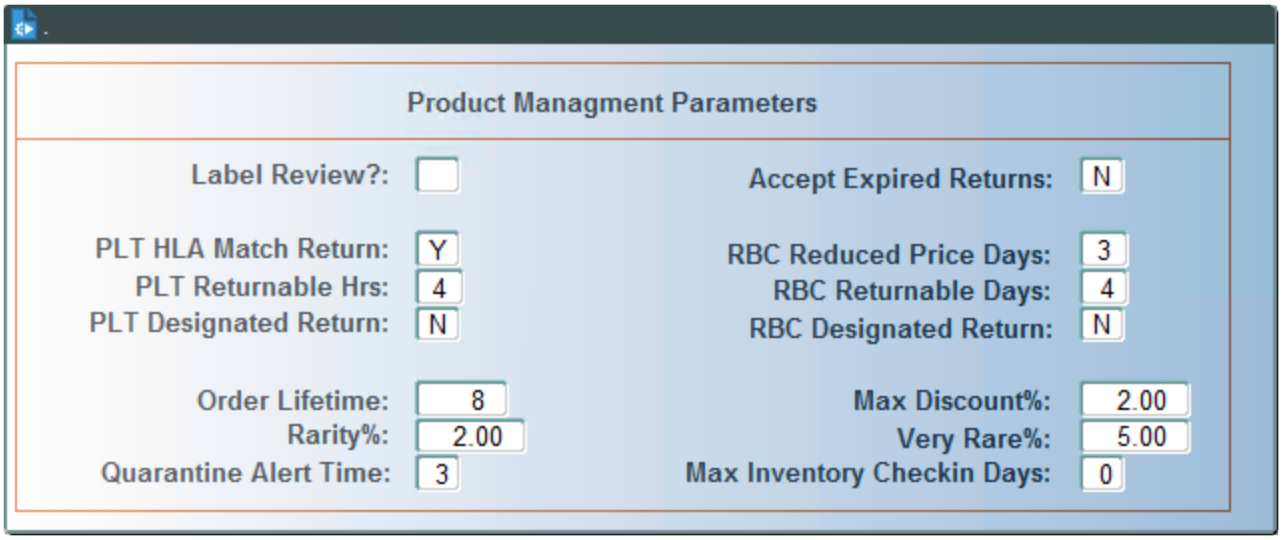

Label Review

Field not utilized.

Accept Expired Returns

Field not utilized.

PLT HLA Match Return

Field not utilized.

RBC Reduced Price Days

Field not utilized.

PLT Returnable Hrs

Field not utilized.

RBC Returnable Days

Field not utilized.

PLT Designated Return

Field not utilized.

RBC Designated Return

Field not utilized.

Order Lifetime

Enter maximum time (hours) that an order can remain as a backorder.

Max Discount

Field not utilized.

WellSky Corporation
Proprietary and confidential

Rarity%
Enter the value (percent) considered rare. Units with antigen rarities less than or equal to this value can only be checked into SP (special) inventory. Refer to the Antigen Rarity Combinations (RARITY).

Very Rare%
Field not utilized.

Quarantine Alert Time
Field not utilized.

Max Inventory Checkin Days
Enter the number of days that an in-date product can be checked-in to inventory before having to use the Offline Check-in function.

What to Do Next
There is no next step for this screen.


2.2.3 System Parameters (SYSPARM)

Intended Use
Maintain system parameters that provide flexibility to the application. WellSky may be required to add new or modify existing system parameters.

Limitations
Each parameter type is coded for specific use within the application and should not be changed. New parameter types should not be added. Some value fields should remain static. Refer to Appendix D: System Parameters.

Prerequisites
Refer to Appendix D: System Parameters.

Accessing the Screen
Access this screen from the Restricted Validation Tables menu or by entering the keyword `SYSPARM`.

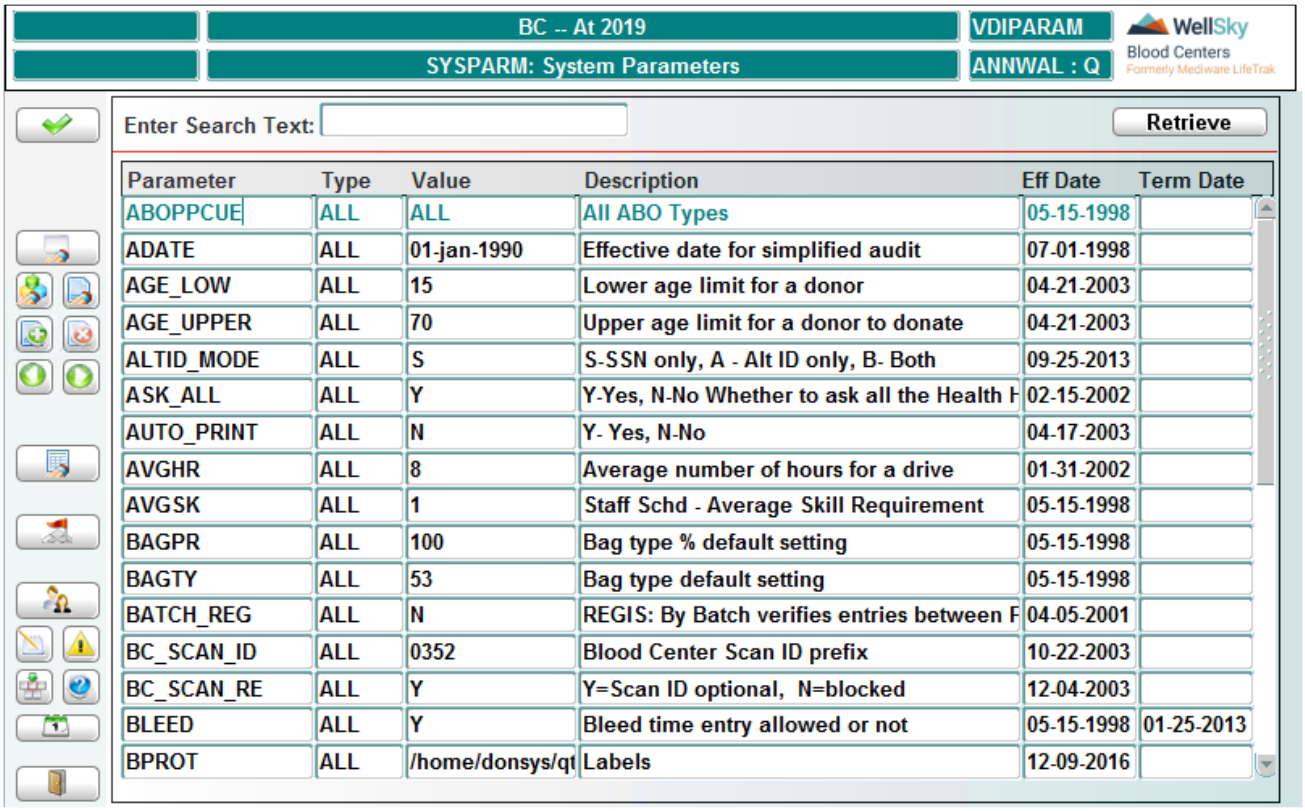

Control Block Fields and Definitions

Enter Search Text

Entry is optional. To limit your search, enter text that matches the parameter description and then click **Retrieve**. All system parameters matching your search criteria display.

To display all system parameters, leave the *Enter Search Text* field blank and click **Retrieve**.

Parameter Codes must remain static.

Detail Block Fields and Descriptions

Type

Enter `ALL` to remain static.

Value

Verify that changing the parameter value is acceptable by referring to Appendix D: System Parameters.

Description

The default description of the code may be modified. Check with WellSky before making changes to static parameters.

WellSky Corporation
Proprietary and confidential

Eff Date

This is the effective date of the parameter. Do not modify.

Term Date

Do not enter a termination date for the parameter.

At Commit

All modifications are saved to the database.

What to Do Next

There is no next step.

2.2.4 Set the Day Light Savings (SETDST)

Intended Use

Use this screen to set the dates and times to enable daylight savings/summer time.

Limitations


None

Prerequisites

Cron jobs must be set to apply DST change.

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `SETDST`.

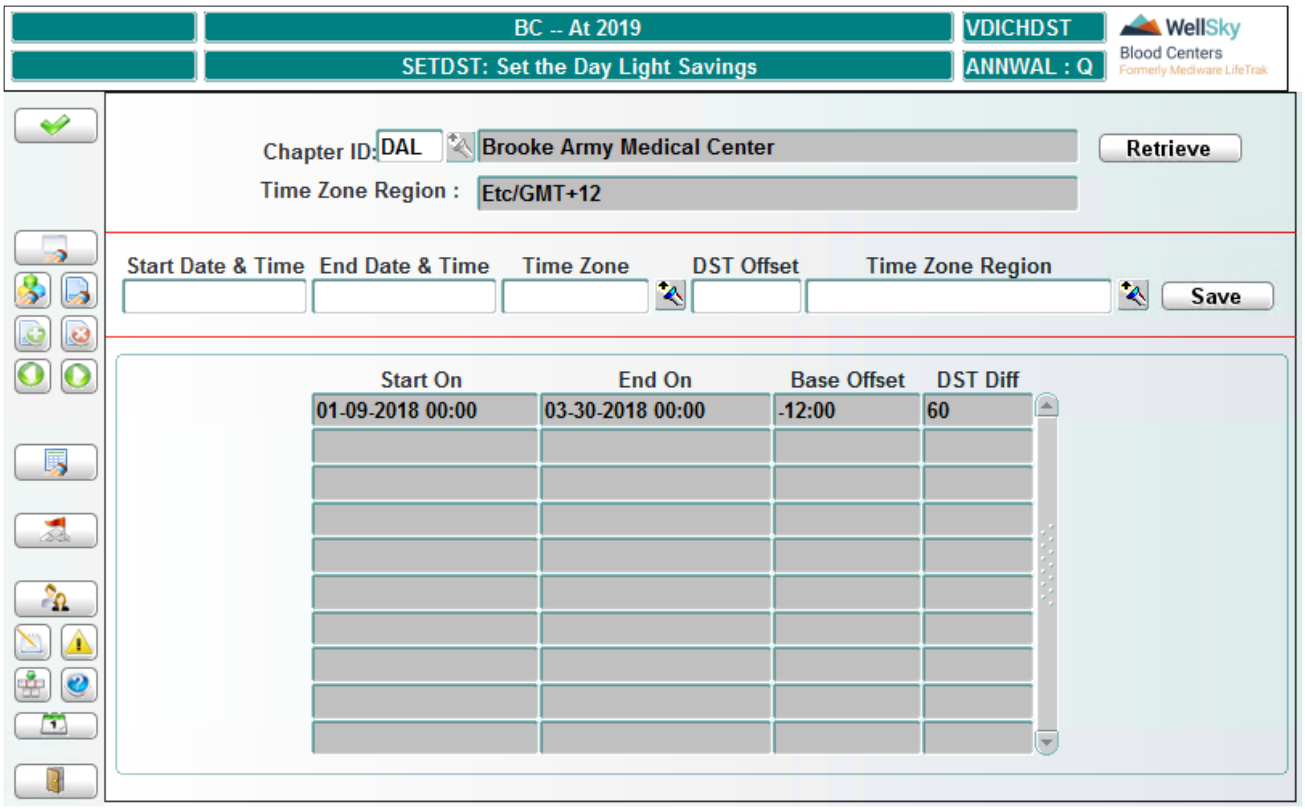

Control Block Fields and Definitions

Chapter ID

Entry is required. Enter the chapter ID or select from the LOV.

Retrieving Data

Click **Retrieve** to display the current setting.

To Set Daylight Savings/Summer Time

Start Date & Time

Entry is required. Enter the time and date when daylight savings/summer time starts.

End Date & Time

Entry is required. Enter the time and date when daylight savings/summer time ends.

Time Zone

Entry is required. Enter the chapter time zone or select from LOV.

DST Offset

Entry is optional. Enter the daylight savings/summer time offset, in minutes.

WellSky Corporation
Proprietary and confidential

Time Zone Region

Enter the time zone region or select from LOV.

Saving Changes

Click **SAVE** to save the changes.

At Commit

All modifications to the data are saved to the database.

What to Do Next

There is no next step.

2.2.5 Enhance Manuf. Process Codes (MPROC)

Intended Use

Use this screen to create a process code that will be used to define parameters in the enhance manufacturing forms. You can also use this screen as a query for previously defined codes.

Limitations

If configuration is changed within the system and any validation table is used in the enhance manufacturing process, the re-validation of that process should be executed.




EXAMPLE – When changing health history questions or answers that are used to perform a process in enhanced manufacturing, the process should go through validation to verify the changes did not impact the outcome.

Prerequisites

Not applicable.

Entering/Viewing Data

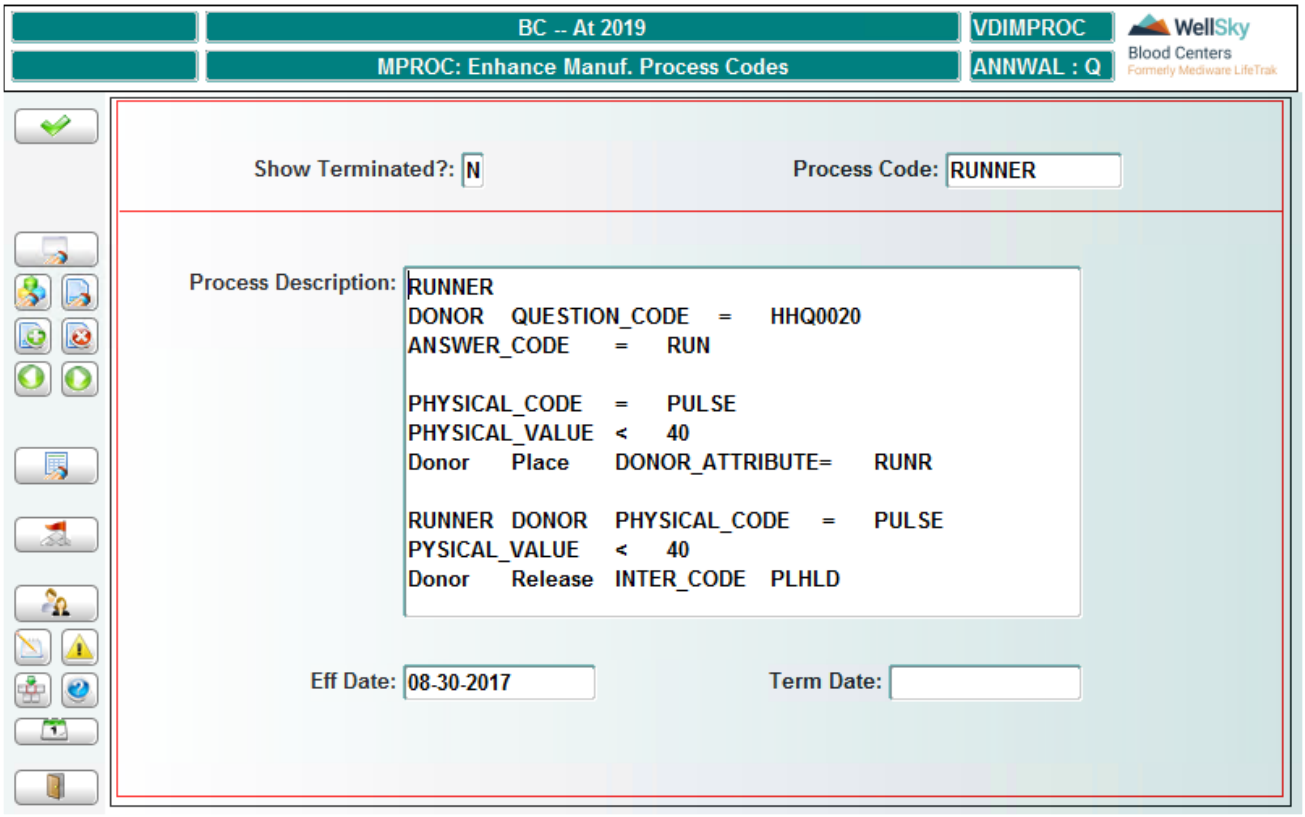

Control Block

Show Terminated?

Enter one of the following:

- `Y` - Display terminated catalog numbers.
- `N` - Display only non-terminated catalog numbers.

Process Code

Enter a process code that describes the process that will be defined in enhance manufacturing. The process code can be a maximum of 10 characters.

Detail Block

Process Description

Enter a description of the enhance manufacturing process. Enter enough details to describe to the person configuring the process in the next validation tables. A maximum of 500 characters can be entered. Use the **Tab** key to move from the *Process Description* box to the *Eff Date* box.

WellSky Corporation
Proprietary and confidential

Eff Date

Enter the effective date in MMDDYYYY format.

Term Date

Enter the termination date inMMDDYYYY format.

Press **F12 (Commit)** to save entries.

At Commit

Entries are saved to the database.

What to Do Next

Enhance Manufacturing Mapping Configuration (EMFCFG)

2.2.6 Enhance Manuf. Mapping Configuration (EMFCFG)

Intended Use

Use this screen to create the specific processes within the enhance manufacturing. These processes could be simple calls to a table and specific column, where clauses, or complex/simple SQL statements.

This screen can also be used in querying defined processes.

Limitations

If configuration is changed within the system and any validation table is used in the enhance manufacturing process, the re-validation of that process should be executed.


> **EXAMPLE –** When changing health history questions or answers that are used to perform a process in enhanced manufacturing, the process should go through validation to verify the changes did not impact the outcome.

Prerequisites

Users should have understanding of the following:

- Tables within the database
- The process to be defined
- SQL statement writing

Entering/Viewing Data

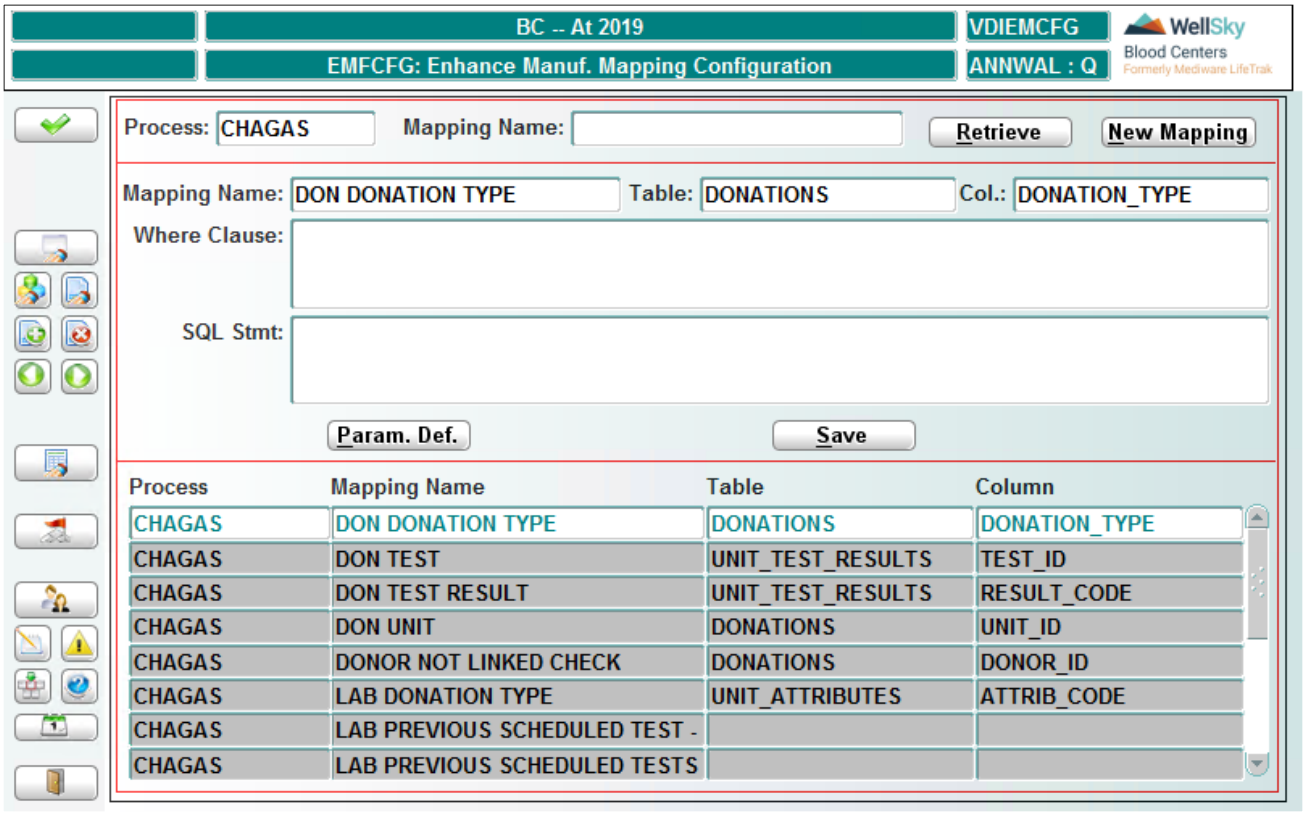

Control Block

Process

Enter the process code, or select it from the LOV. This is a required field.

Mapping Name

Select the mapping name from the LOV, or leave it blank.

- If creating a new mapping, leave the field blank and click **New Mapping**.
- If retrieving existing data, leave the field blank and click **Retrieve**. All mapping names defined for the specified process code will display.

Buttons

Retrieve

Click this button to pull the existing mapping definitions for the process code.

New Mapping

Click this button to create a new mapping description for the process code.

WellSky Corporation
Proprietary and confidential

Mapping Definition Block

Mapping Name

This is a required field. Enter a name that describes what description will be defined.

Table


This is an optional field. Enter a table name within the database. The entered table name must be in the database, otherwise an error message will display.

Col

This is an optional field. Enter a column name that is linked to the specified table. The column name must be in the specified table, otherwise an error message will display.

Where Clause

This is an optional field. Where clause is used when you need to specify something specific within a table, column, or SQL statement.

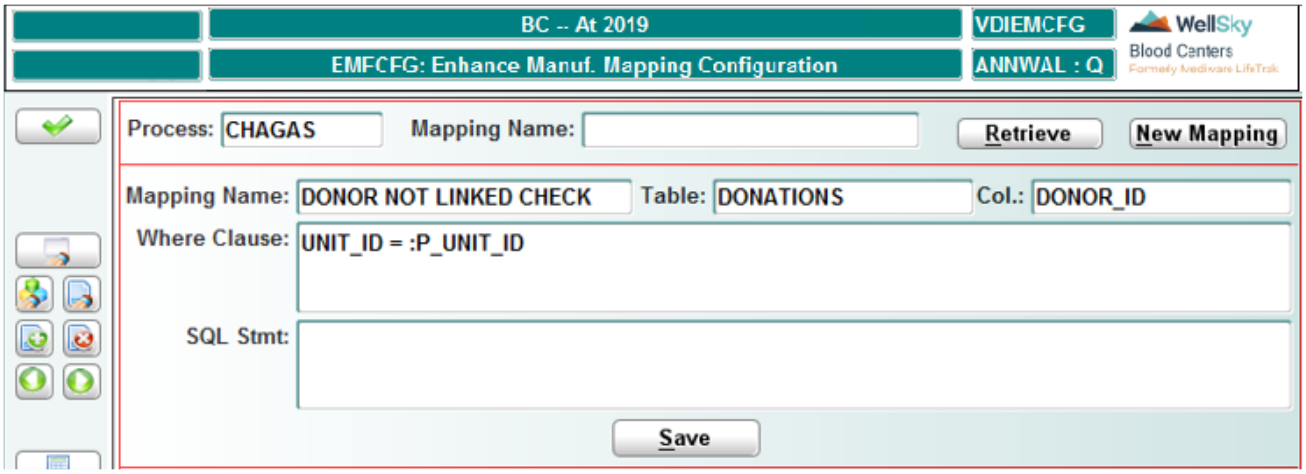

SQL Stmt

Enter a SQL statement for the mapping name. The statements must return a single row with either 1 or 0 as output. A value of 1 indicates PASS, and a 0 indicates FAIL in evaluation of process steps in the EMF Process Definition screen.

The parameters used in the SQL statement are displayed in the EMF Process Definition screen when the mapping name is used. Parameters can be classified into two types: Process parameter and User parameter.

Process Parameter

These are process-specific parameters, and they must be defined in the Parameter Definition window. Values for these parameters are substituted from table triggers based on the table and column information defined in the Parameter Definition window.


Format: :P_<db_colName>

Example: :P_UNIT_ID, P_COLL_DATE, P_CHAPTER_ID

User Parameter

These are user-selectable parameters, and they can be configured in the EMF Process Definition screen.

- **Operator Parameter:** Use this parameter to configure the comparison operator for a SQL statement where clause condition. A few of the commonly used comparison operators are '=', '>', '<', and 'IN'. Values for this parameter are configured in the EMF Process Definition screen based on the process requirement.
  - **Format:** :P_OPER_<db_colName>
  - **Example:** :P_OPER_TEST_ID
- **Value Parameter:** Use this parameter to configure the values the column can accept in the SQL statement where clause condition. Values for this parameter are configured in the EMF Process Definition screen based on the process requirement.
  - **Format:** :P_VALUE_<db_colName>
  - **Example:** :P_VALUE_TEST_ID

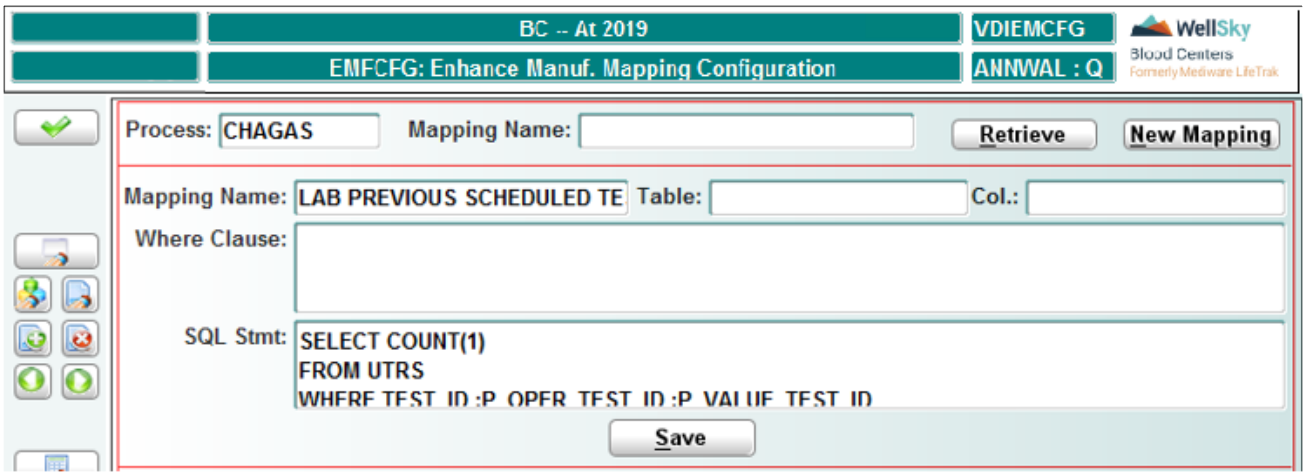

NOTE – It might be easier to write SQL statements outside of the system and copy and paste them to this section in the table. A good starting point to define the statement is to write a syntactically correct statis SQL statement, and then replace the where clause condition column operator and values with the parameters that you want the user to configure.

For example, this mapping SQL is used to check if the test results for a particular test matches the criteria.

- Test ID operator and value are configured as user parameters.
- Result_status_1 operator and value are configured as user parameters.
- Unit_ID, Coll_Date, and Chapter_ID are configured as process parameters.

```
SELECT COUNT(1)
  FROM  UTRS
 WHERE  UNIT_ID = :P_UNIT_ID
   AND  COLL_DATE = :P_COLL_DATE
   AND  CHAPTER_ID = :P_CHAPTER_ID
```


WellSky Corporation
Proprietary and confidential

```
        AND  TEST_ID :P_OPER_TEST_ID :P_VALUE_TEST_ID
        AND  RESULT_STATUS_1 :P_OPER_RESULT_STATUS_1 :P_VALUE_RESULT_
STATUS_1
        AND  CANCEL_FLAG  IS NULL
```

Buttons

Parameter Def.

Click this button to open the Parameter Definition window.

Save

Click this button to commit the mapping description to the process code. It will move the mapping to the bottom detail block.

Parameter Definition Fields

Code

Define process parameter codes here. They must be in the format "P_<db_colName>", e.g. P_UNIT_ID, P_COLL_DATE, P_CHAPTER_ID.

Type

Enter the parameter's data type. Acceptable values are CHAR, DATE, and NUM.

Default Value

Enter a default value for this parameter. This is an optional field, and it is used instead of the defined process parameter.

Reference Table

Enter a table name for the column name the parameter is associated with. The entered table name must be in the database, otherwise an error message will display. Multiple table names can be entered in CSV format.

Reference Column

Specify a reference column name for the parameter that is linked to the table entered. The column name must be in the specified table, otherwise an error message will display.

NOTE – If you need to clear the entry (line), use the Clear Record button in the left tool bar.

Detail Block Display

Process

The process code that was selected in the Control Block displays here.

Mapping Name
The mapping name defined in the Mapping Definition block displays here.

Table
If defined for the mapping description, the table name displays here. This will be blank if a table was not specified in the mapping description area.

Column
If defined for the mapping description, the column name displays here. This will be blank if a table and column were not specified in the mapping description area.

At Commit
Entries are saved to the database.

What to Do Next
Enhance Manufacturing Process Definition (EMFPROC)

2.2.7 Enhance Manuf. Process Definition (EMFPROC)

Intended Use
Use this screen to define the specific definitions for the process code. This screen is used to define specific details for the process code.

Limitations
If configuration is changed within the system and any validation table is used in the enhance manufacturing process, the re-validation of that process should be executed.

> **EXAMPLE –** When changing health history questions or answers that are used to perform a process in enhanced manufacturing, the process should go through validation to verify the changes did not impact the outcome.


Prerequisites
Users should have understanding of the following:

- Tables within the database.
- The process to be defined.

Users should map out all tables, column names, test IDs, result codes, interdictions, etc. prior to starting this process.

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

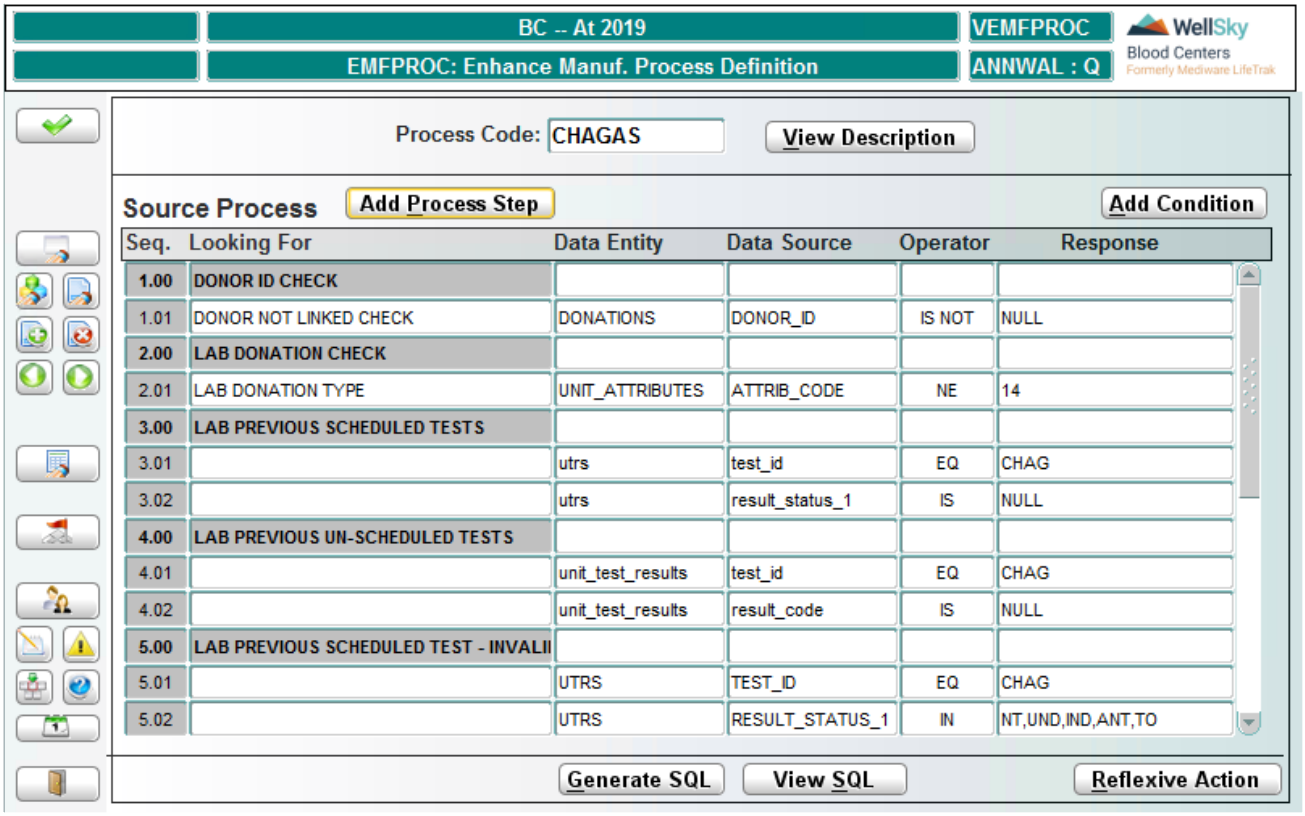

Control Block

Process Code

Enter the process code or select it from the LOV. This is a required field.


Button

View Description

Click this button to view the description that was entered when defining the process code in Enhance Manufacturing Process Codes (MPROC).

Detail Block Source Process

Creating a Step vs. Adding a Condition

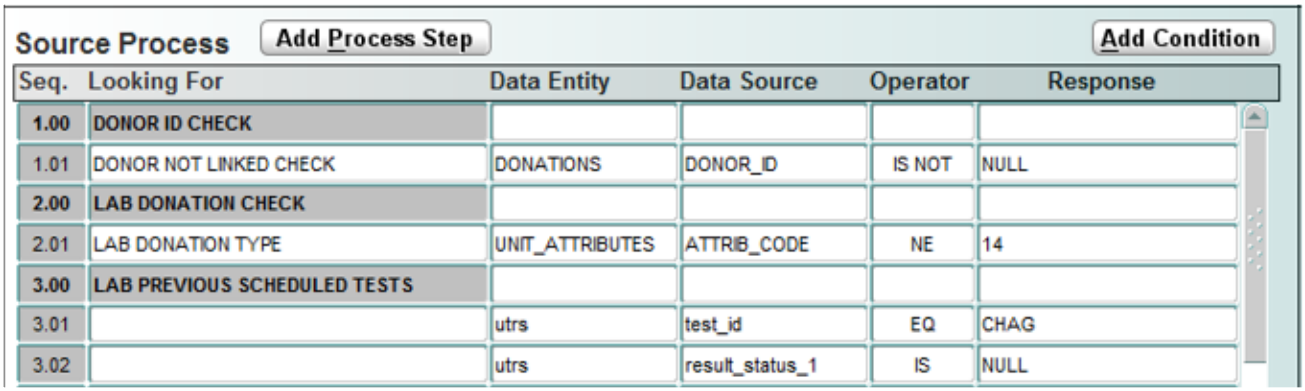

Seq.	Looking For	Data Entity	Data Source	Operator	Response
1.00	DONOR ID CHECK				
1.01	DONOR NOT LINKED CHECK	DONATIONS	DONOR_ID	IS NOT	NULL
2.00	LAB DONATION CHECK				
2.01	LAB DONATION TYPE	UNIT_ATTRIBUTES	ATTRIB_CODE	NE	14
3.00	LAB PREVIOUS SCHEDULED TESTS				
3.01		utrs	test_id	EQ	CHAG
3.02		utrs	result_status_1	IS	NULL

Seq

- Click the **Add Process Step** button to add a whole number (e.g. 1.00, 2.00, 3.00).
- Click the **Add Condition** button to add steps under the main header (e.g. 1.01, 1.02, 2.01, etc.).

Looking For

Click the **Add Process Step** button. The cursor will be in the *Looking for* field.

- If defining a step that is linked to a specific table or column, then add a header name for the definition. This sequence number will be used in action process to determine what should happen when the step is performed, and the condition add the information in the *Data Entity* and *Data Source* fields.
- If you select a parameter that has a SQL statement linked to it, the *Looking For* field will not be defined (blank), but the *Data Entity* and *Data Source* fields will be populated. You will have to select the *Operator* and *Response* field values.
- Information is pulled from the Mapping parameter.
- Parameters that are non-specific will have the *Looking For*, *Data Entity*, and *Data Source* fields populated. You will have to select the *Operator* and *Response* field values.
  - The values for the Operator field are pulled from "Define Operators" (OPER).
  - Response = the actual data you enter to pull in the query (e.g. test ID, zip code, etc.).

Operator

Enter the operator or select it from the LOV. The LOV pulls the information from "Define Operators" (OPER).

Response

Enter data according to what your data source is going to be linked to. This is the actual data to pull into the SQL query (e.g. unit ID, zip code, test ID, etc.).

WellSky Corporation
Proprietary and confidential

Buttons

Generate SQL

Click this button to generate SQL that was defined in the Source Process section.

NOTE – Each time you make a change to any steps or data, you need to click **Generate SQL** in order to incorporate the new steps or the change in data.


View SQL

Click this button to view the SQL that was defined in the Source Process section.

Reflexive Action

Click this button to move to the Reflexive Action window.

Reflexive Action Window

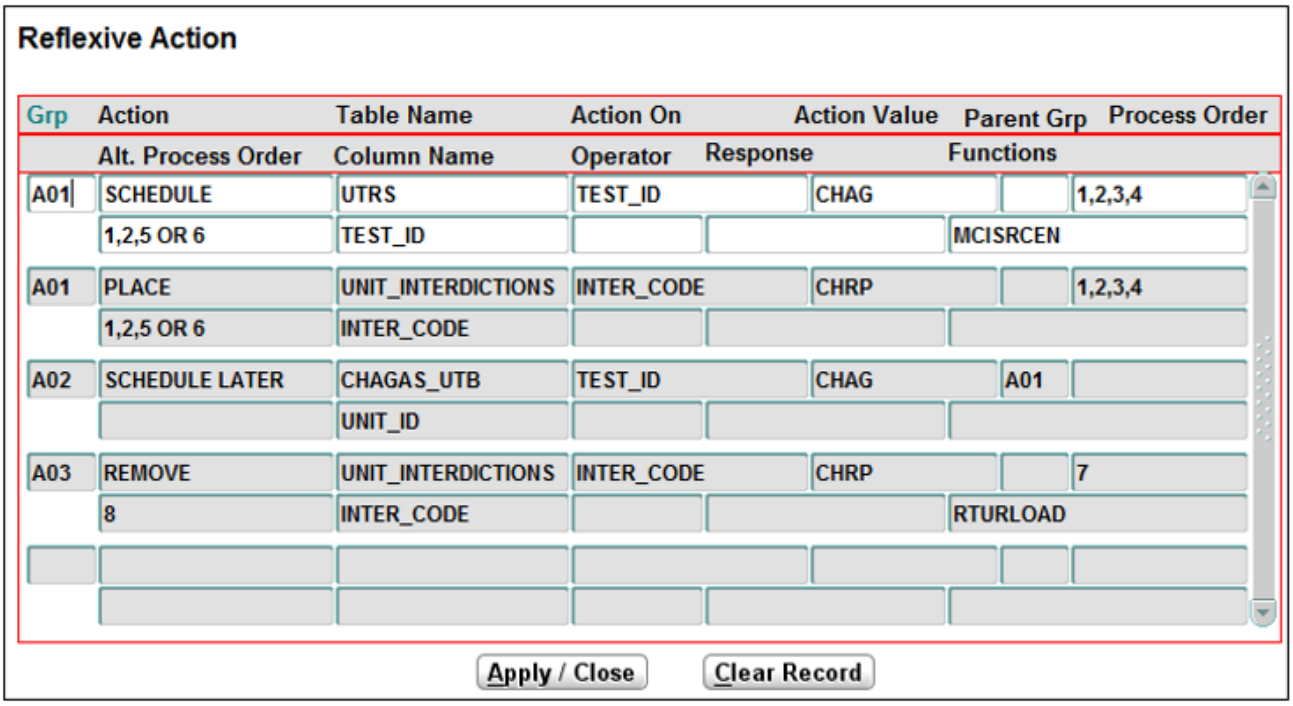

Grp

Enter a code value that will be used to group actions based on steps. The code is limited to three characters.

Action

Enter the action code, or select it from the LOV. The LOV is populated from the Donor master code EMACT. These codes are static.

Table Name

Enter the table name. An LOV is not available for all table names.

NOTE – The Blood Centers Data Dictionary contains the tables and column names for the Blood Centers database.

Action On

Enter the column name that is linked to the table of the value that will be placed.

NOTE – The Blood Centers Data Dictionary contains the tables and column names for the Blood Centers database.

Action Value

Enter the value that is linked to the 'Action On' column.

EXAMPLE – If placing INTER_CODE, then enter an Interdiction code. If placing TEST_ID, enter the Blood Centers test ID.

Parent Grp

Enter the action group code here. If there are multiple actions occurring, and you need one set of codes to be executed prior to that action, list them here.

Process Order

List the sequence numbers that will execute to make this reflexive action occur.

Alt Process Order

Specify if there is a different process order that can occur for the reflexive action to take place.

EXAMPLE – The unit could be checked in before donor registration. Then, you would have a step for donor registration and for unit registration.

Column Name

Enter the column name that is linked to the table name. Valid values are the database column name from the selected database table name OR the value configured in master code EMACT.

EXAMPLE – Code Type: EMACT, **Code:** PLACE|COMPONENT_INTERDICTIONS.**PRODUCT_TYPE**
As per this configuration, the user can select 'PRODUCT_TYPE' in this field if 'PLACE' is selected as the action code, and 'COMPONENT_INTERDICTIONS' is selected as the table name.

NOTE – The Blood Centers Data Dictionary contains the tables and column names for the Blood Centers database.

Operator

Enter the operator, or select it from the LOV. The LOV pulls the information from "Define Operators" (OPER).

WellSky Corporation
Proprietary and confidential

Response

Enter data according to what your data source is going to be linked to. This is the actual data to pull into the SQL query (e.g. unit ID, zip code, test ID, etc.).

Functions

Enter the program name where the function should be triggered.

Buttons

Apply/Close

Click **Apply/Close** to apply changes and close the window.

Clear Record

Click **Clear Record** to remove any information entered in the reflexive action window.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

2.3 Donor Restricted Validation Tables (DVALID)

2.3.1 Introduction

This chapter covers the structure of WellSky Blood Centers validation (configuration) tables to meet the day-to-day regulatory and business requirements of your institution. The set of data received with the Application Administration (ADMINIS) validation (configuration) tables may require modification to meet many of those needs. Unlike the module-specific tables, these tables are used dynamically throughout the application, are considered highly restricted, and require a thorough knowledge of your institution's requirements.

Logical Sequence of Events

Configuration tasks require entry in logical order. Certain configuration tables require values to be defined in other tables. Guidance for precursor table entry and data entry into a table are provided in this chapter. Once defined, other definition may be built upon.

Configure Validation Tables

Validation tables are configured:

- Prior to initial validation.
- As needed to reflect changes in regulatory and business requirements.

Identifying Critical and Static Data

Some of the validation data in Donor can be changed dynamically to meet your regulatory and business needs. Other data is required to remain static due to its impact on or interaction with the application. Most of this data is found in the Restricted Validation Tables (DVALID/LVALID/SVALID) menu and in the WellSky Restricted Validation Tables (WSKYRVT) menu.

System-level parameters used in the application are defined in System Parameters (SYSPARM). These parameters provide flexibility to the application. The value can be modified in many cases (dynamic data), but should not be modified in others (static data). Refer to Appendix D: System Parameters for further information.

Master code types that provide flexibility to the application are defined in Master Codes (MASTER/LMASTER/DMASTER). While system parameters define system-level parameters, individual modules use the master codes. Some of the master codes are dynamic, while others are static. Refer to Appendix E: Donor Master Codes, Appendix K: Lab Master Codes, and Appendix Q: Distribution Master Codes for further information.

Some codes in Interdiction Codes (INTER/LINTER) are static values and should not be changed. Some of the codes are static for report and/or query programs. Check with WellSky if you have questions pertaining to a particular static entry in the Interdiction table. Refer to Appendix F: Donor Static Interdictions and Appendix O: Lab Static Interdictions for further information.


Other miscellaneous static values are listed in Appendix H: Donor Miscellaneous Static Values, Appendix O: Lab Static Interdictions, and Appendix N: Lab Static Attributes. Check with WellSky if you have questions pertaining to a particular static value listed.


WellSky Corporation
Proprietary and confidential

Most of the other validation tables contain data that can be built upon or terminated, depending on your regulatory and business requirements. There are administration tables in Restricted Validation Data Tables (VALID) and in some of the user modules.

2.3.2 Application Administration Functions

These functions are accessed from the following menu:

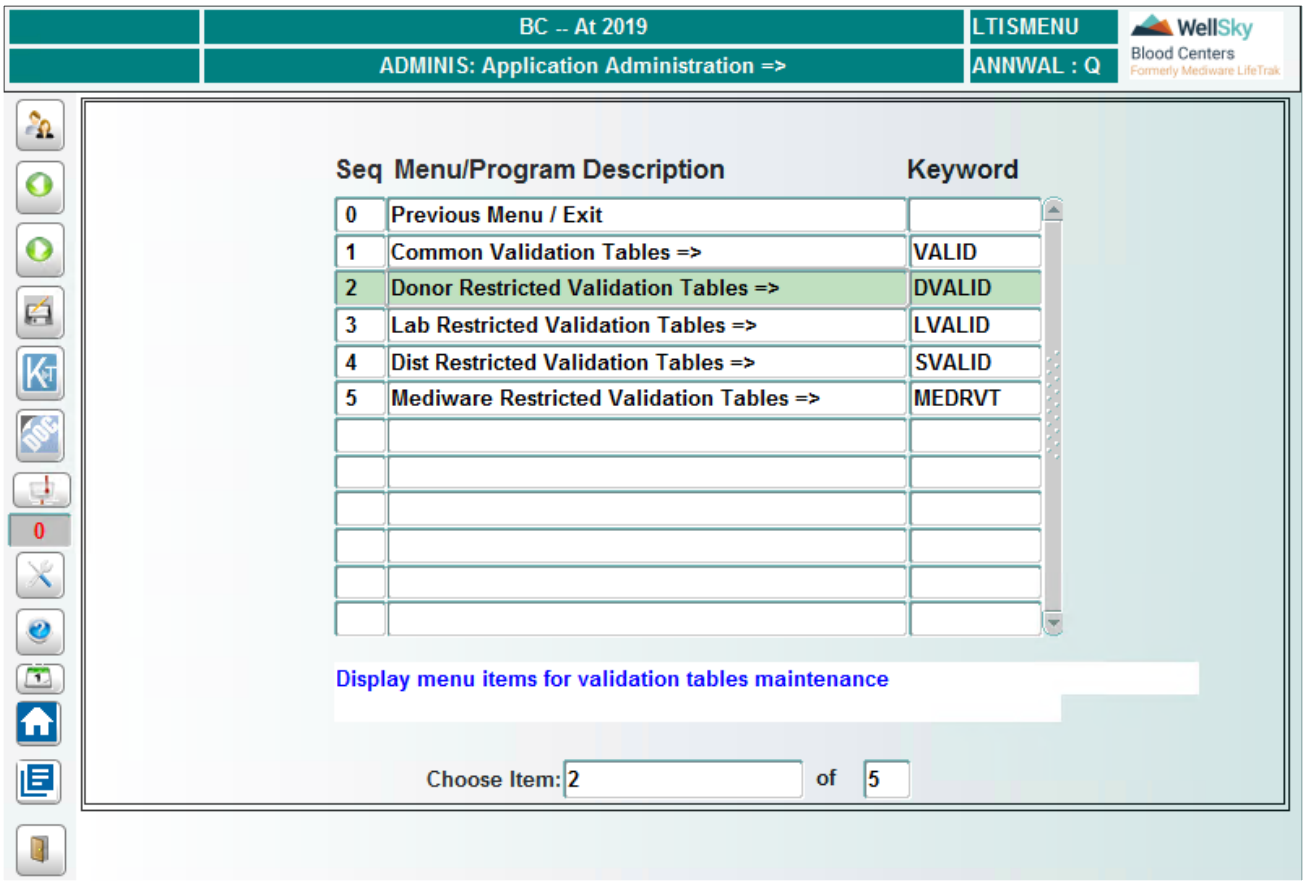

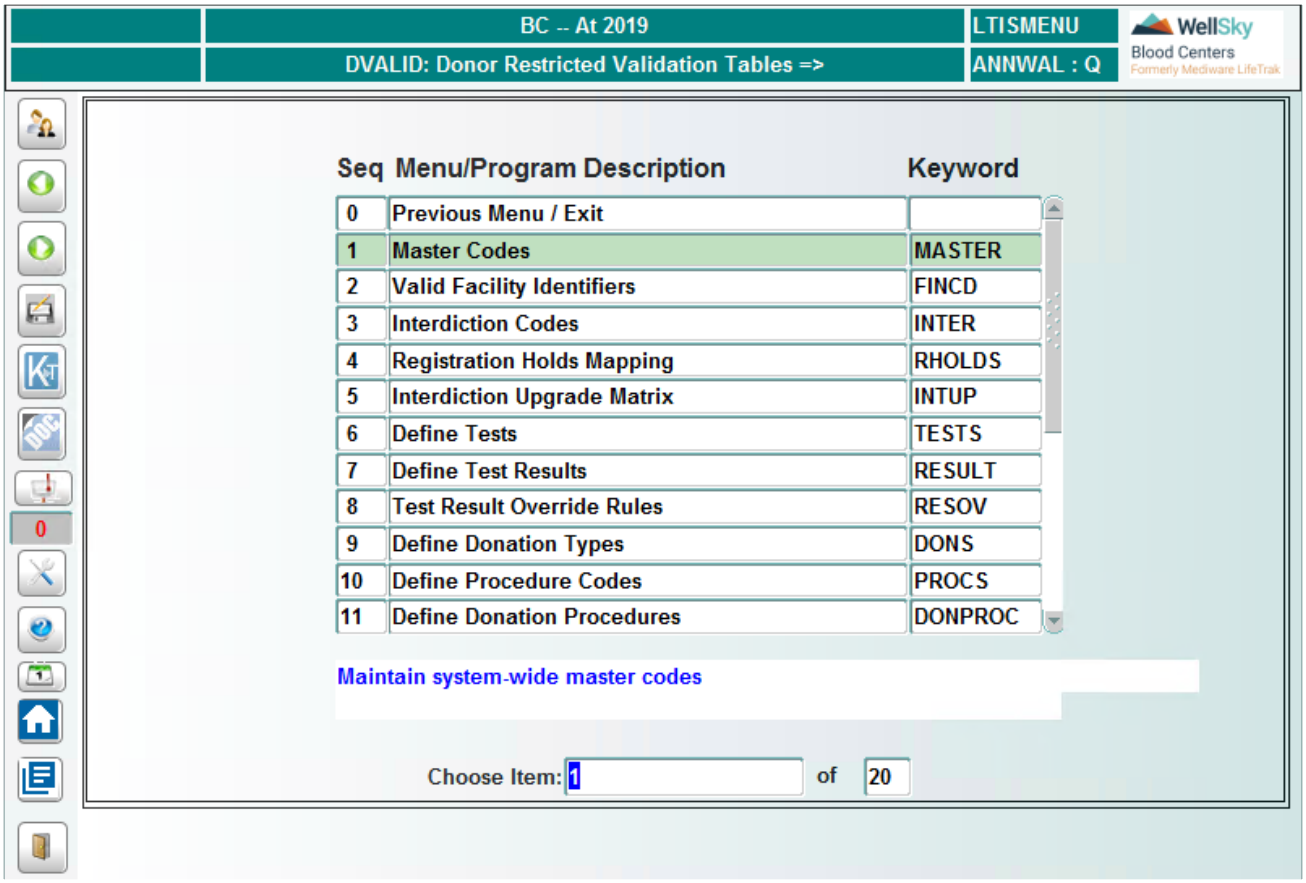

2.3.3 Master Codes (MASTER)

Intended Use

Master Codes are a set of code types used by individual modules to provide flexibility to the application. A table of underlying codes is associated to each code type. The code types are specifically coded within the application. Some Master Codes define valid data for other tables. WellSky may be required to add new or modify existing Master Codes.

Limitations

Each code type is coded for specific use within the application and should not be changed. New code types should not be added. Some underlying code fields should remain static while others can be changed dynamically. Refer to Appendix E: Donor Master Codes.


Prerequisites

Refer to Appendix E: Donor Master Codes.

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `MASTER`.

WellSky Corporation
Proprietary and confidential

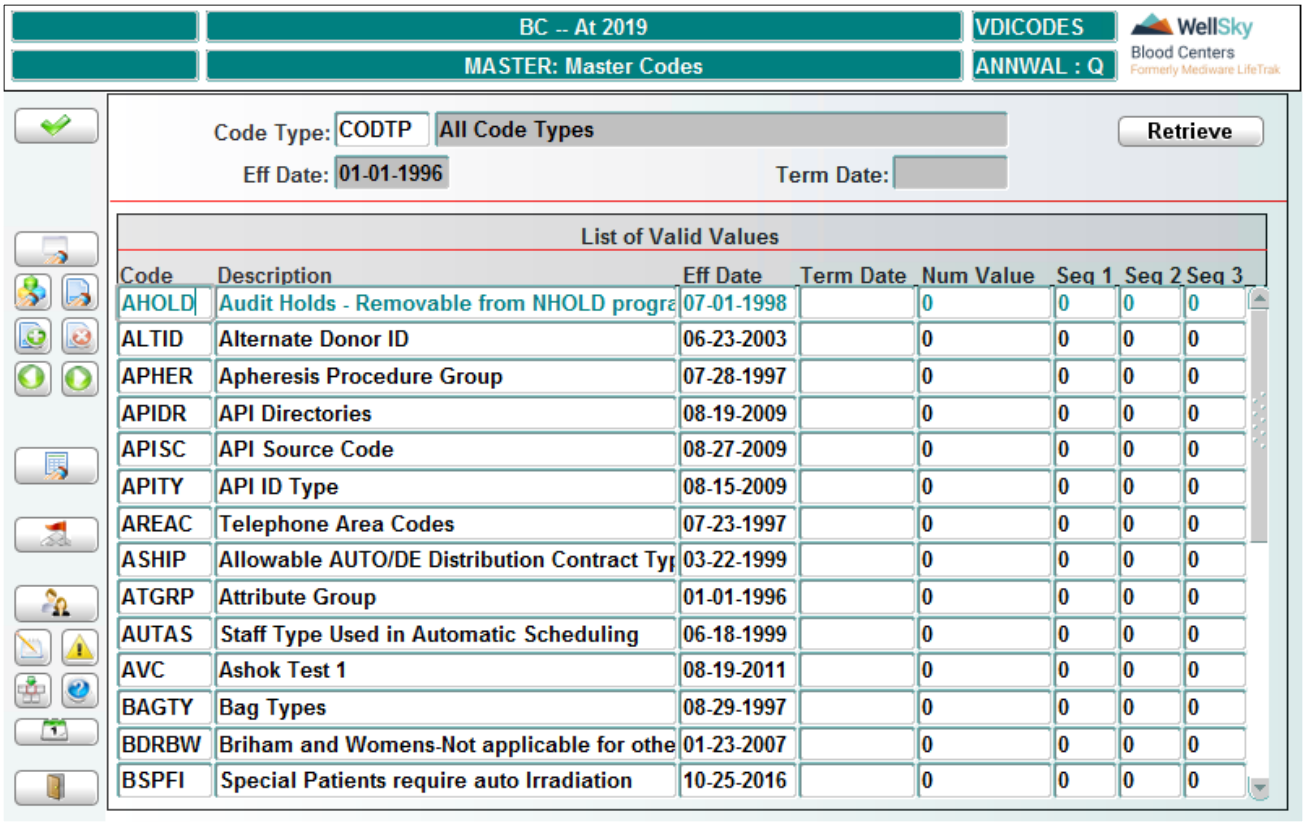


When the screen opens, it displays the code type CODTP (all code types). The code types display in alphabetical order, with description, effective and termination date fields, numeric value and sequence numbers fields. An entry for the numeric value or sequence fields might not display. Use the arrow keys to move among code types.

To Select a Specific Code Type

Use one of the following methods to retrieve a specific code type:

- Double-click the selected code type
- Select the desired code and click **Retrieve**.
- Enter the code type in the *Code Type* field and click **Retrieve**.

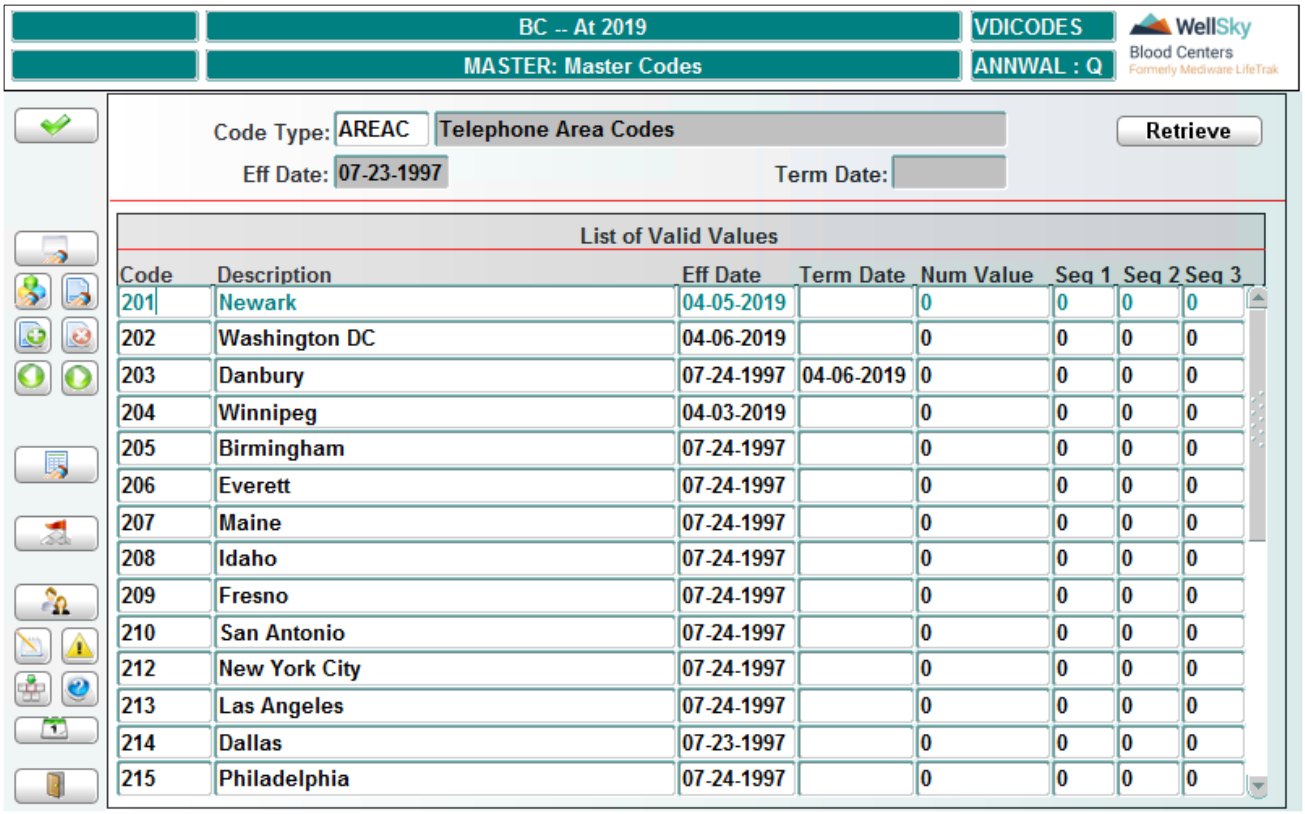

Modifying Data

All code types displayed under CODTP must remain static. At times new code types and underlying codes will be added for new or modified functionality. Existing codes associated to individual code types can be either static or dynamic. Refer to Appendix E: Donor Master Codes to determine if a code can be added to dynamically or terminated. If the code can be modified, complete the following fields:

Code

Enter up to a 5 character code.

Description

Enter up to a 50 character description.

Eff Date

Field automatically populates with the system date. Date can be changed to a future date in MMDDYYYY format.

Term Date

If a code is to be terminated, enter required termination date in MMDDYYYY format.

Num Value (Seq 1 – Seq 3)

Entries to these fields are specific to each code type. Refer to Appendix E: Donor Master Codes prior to entry into these fields.

WellSky Corporation
Proprietary and confidential

At Commit

All data modifications are saved to the database.

What to Do Next

There is no next step.

2.3.4 Valid Facility Identifiers (FINCD)

Intended Use

Use this screen to associate FIN codes to Chapter ID. This screen replaces the ISBT Master Code in Donor.

Limitations


None

Prerequisites

Chapter ID must be defined.

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `FINCD`.

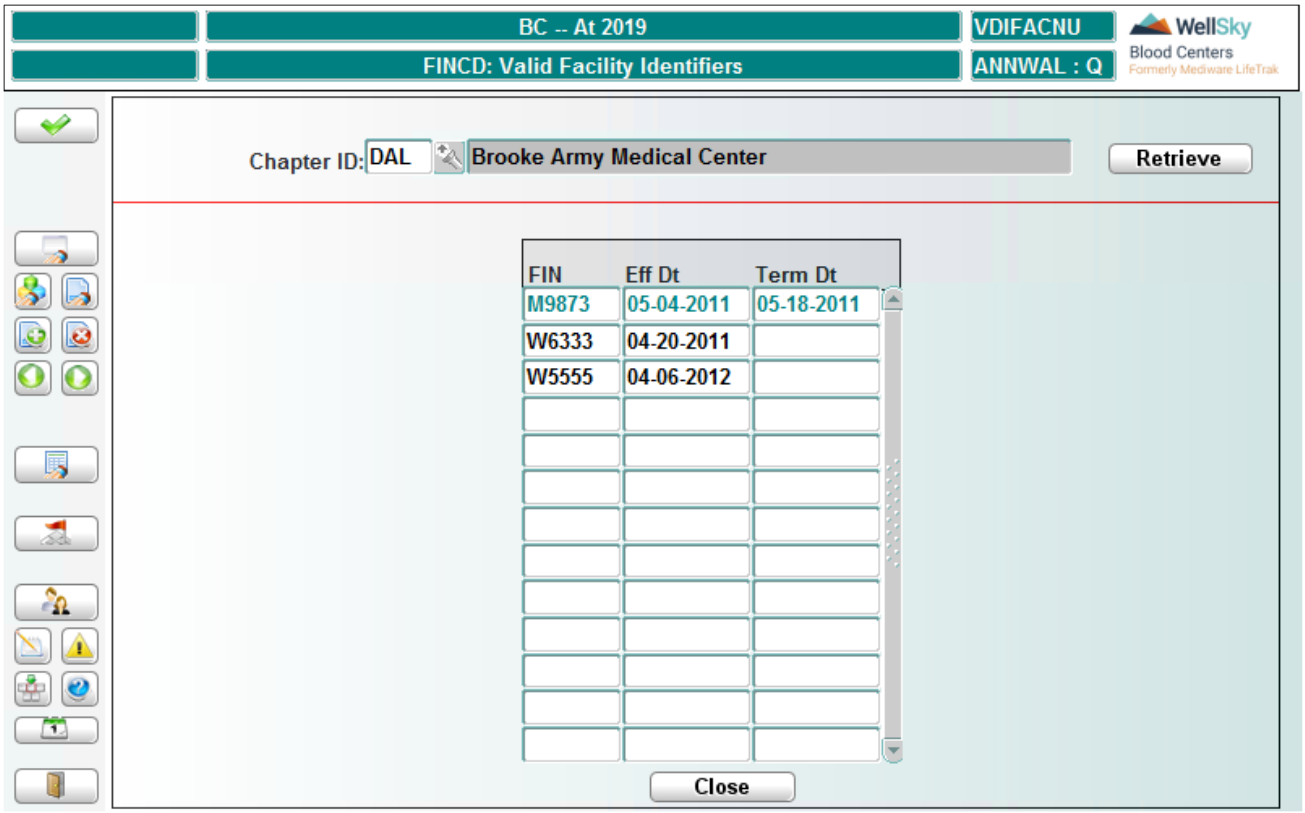

Control Block Fields and Definitions

Chapter ID

Entry is required. Enter Chapter ID or select from the LOV.

Retrieving Data

Click **Retrieve**. The Chapter name automatically displays.

Detail Block Fields and Definitions

FIN

Enter the FIN code.

Eff Date

Enter date FIN code becomes effective.

Term Date

FIN code termination date; do not enter a date.

Closing the Screen

Click **Close** to close the screen.

At Commit

All modifications to the data are saved to the database.

What to Do Next

There is no next step.

2.3.5 Donor Interdiction Codes (INTER)

Intended Use

Use this screen to define interdictions and attributes. Interdictions are used as an alert of a donor's status due to deferrals or potential deferrals (for example, test results, deferral periods). Attributes generally are associated for informational purposes (for example, double red cell donor).

NOTE – To allow users to place a termination date on an attribute using the Place Donor Attribute (DONPATT) screen, you must configure the attribute in one of the following ways:

- The Fixed Deferral Period (FP) field is null, and the minimum and maximum values are *not* defined.
- The FP field is set to N, and the minimum and maximum values *are* defined.

WellSky Corporation
Proprietary and confidential

Limitations

The ability to change interdiction information is highly restricted. Modifications to interdictions could affect whole classes of donors for eligibility and/or deferral purposes. You must have appropriate access defined.


Prerequisites

Each of the following master codes refers to an associated field in the interdiction table:

- INTER – Interdiction types
- LBHLD – Lab and distribution product status from donor interdictions
- PRTYP – Period types for deferrals

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `INTER`.

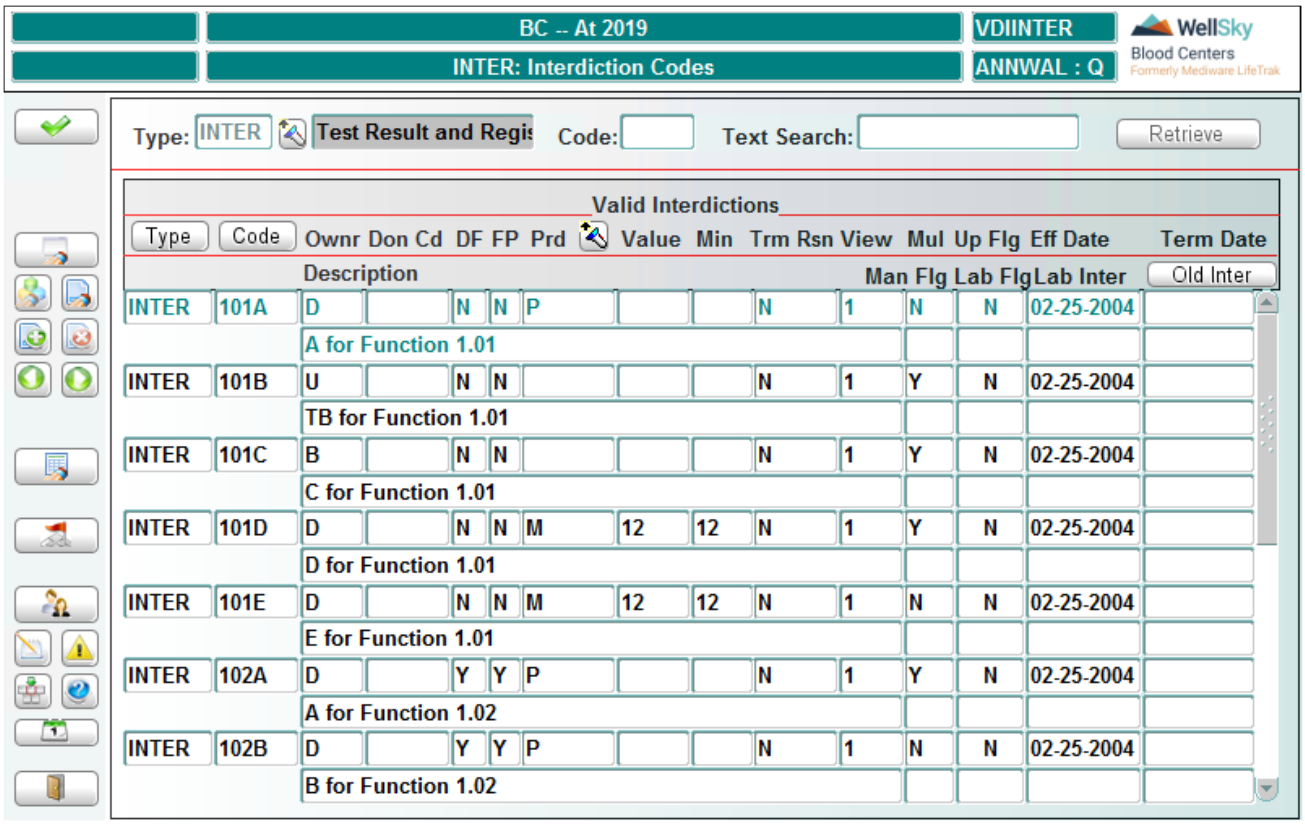

Control Block Fields and Definitions

Type

Entry is optional. Enter the interdiction type or select from the LOV.

Code

Entry is optional. Enter an interdiction code or a partial interdiction code.

Text Search
Entry is optional. Enter search string of interdiction description.

Retrieving Data
Click **Retrieve** to display the interdiction codes that match the search criteria. If no search criteria were entered, all interdictions are retrieved.

To Define a New or Modify an Existing Interdiction Code

Type
Enter interdiction type or select from the LOV. Refer to Master Code INTER.

Code
Enter an interdiction code up to a 5 characters. (This cannot be modified post commit.)

Ownr
For interdiction placement on donor, enter `D`; on unit, enter `U`; both donor and unit, enter `B`.

> **NOTE –** This does not mean that interdiction association is restricted to this. It infers that this interdiction is more applicable to one or the other.

Don Cd
Field not used at this time; suggest no entry, the code serves as the interdiction.

DF
If this interdiction is associated to a deferral period, enter `Y` for yes. This must be set to Y to denote that a donor or unit is deferred for this interdiction. If it is not associated to a deferral period, enter `N` for no.

FP
If interdiction has a fixed deferral period, enter `Y` for yes; `N` for no fixed deferral period.

Prd
Enter the deferral time period or select from LOV. P for indefinite is hard coded; other values are populated through Master Code PRTYP, and designate the unit of measure for the deferral period (for example, days or months).

> **NOTE –** In order to associate a future termination date to a new attribute being added to a donor, the period must be defined.

Value
Enter a numeric value that specifies the deferral time period. This is used with the unit measure designated in the *Prd* field to indicate the deferral time period. For example, if the deferral time period is 365 days, the entry in the Prd field

WellSky Corporation
Proprietary and confidential

would be DAYS, and the entry in the Value field would be 365.

NOTE – In order to associate a future termination date to a new attribute being added to a donor, the value must be defined.

Min

Enter minimum numeric value of deferral time period. This is associated to the deferral time in the *Value* field, but reflects a minimum time frame before a deferral can be released.

Trm Rsn

If a reason is required to terminate the interdiction code at the function level, enter `Y` for yes, or `N` for no.

NOTE – This field must be set to N for all interdiction types defined as DR and INFOR.

View

The level required by the user to place the interdiction when it is assigned to an access class. Refer to Define Access Class (ACCESS).

Mul

If the interdiction is allowed to be placed on the unit/donor more than once, enter `Y` for yes, or `N` for no. Interdictions that go through the interdiction upgrade/downgrade logic must be set to N. Refer to Interdiction Upgrade Matrix (INTUP).

Up Flg

If the interdiction code will go through the upgrade/downgrade logic at placement or release, enter `Y` for yes, or `N` for no. Refer to Interdiction Upgrade Matrix (INTUP). This must not be set to Y if the Mul field is set to Y.

NOTE – The Mul and Up Flg determine whether or not an interdiction must go through the upgrade matrix. The following table illustrates the field settings and the expected processing of interdictions based on the settings.

Mul Flag	Up Flag	Result
N	N	No upgrade process, but one interdiction is active. No multiples allowed.
Y	Y	This combination is not allowed.
N	Y	Will go through the upgrade matrix.
Y	N	No upgrade process. Multiples allowed.

Eff Date

Enter the effective date of the interdiction code in MMDDYYYY format.

Term Date
Enter the termination date for non-use of the interdiction in MMDDYYYY format.

Description
Enter a description for the interdiction code.

Man Flg
If a manual hold can be placed during registration, enter `Y` for yes, or `N` for no.

Lab Flg
Enter a flag or select from the LOV. When present on the donor or unit, this interdiction reacts as indicated in the LOV in critical functions in Lab and/or Distribution. Refer to Master Code LBHLD.

Lab
When this interdiction is present on the donor or unit, enter the corresponding interdiction to be generated in Lab. This interdiction is generated by the nursing_audit_interface (interface of the donation or deferral card review audit).

Old Inter
Enter a corresponding interdiction of conversion to Donor. This is information only, such as from data conversions.

At Commit
All modifications to the data are saved to the database.

What to Do Next
Interdictions may be mapped to test results or other donor functions. Refer to the following screens:

- Registration Holds Mapping (RHOLDS)
- Interdiction Upgrade Matrix (INTUP)
- Define Test Results (RESULT)
- Test Result Override Rules (RESOV)
- Define Physical Findings Values (PHYRULE)
- Define Health History Responses (HHR)
- Associate Letter to Interdiction (INTERLET)

2.3.6 Registration Holds Mapping (RHOLDS)

Intended Use
Use this screen to map registration holds that are placed automatically by unexpected field level entries, or that can be placed manually during the registration process. Most of the interdiction reasons relate to a field in the function of mapping registration holds. The related functions include the following:

WellSky Corporation
Proprietary and confidential

- Register Donation (REGIS)
- Register Deferral (DEFREGIS)
- Update Donation (REGMAINT)
- Update Deferral (DEFMAINT)
- Audit Donation (DONAUDIT)
- Audit Deferral (DEFAUDIT)
- Update Donation Audit (UDONAUD)
- Update Deferral Audit (UDEFAUD)
- Lookup and Registration (WELCOME)
- OnSite Module
- Modify Donor Data (MODKYDAT)
- Add Donor (ADDDONOR)

NOTE – For more information on any of these functions, refer to the WellSky Blood Centers User Guide.

Limitations

Each interdiction reason is coded for specific use within the registration or audit functions and are static values. Codes must not be terminated. Interdiction Codes NODON, DNCUE, NODEF, and DNELG for the Inter Reason fields NODONOR, NOCUE, NODFREASON, and NOTELIG, respectively, are static and must not be changed. Visual audit does not utilize registration holds mapping.


Prerequisites

Each of these holds must be appropriately defined in Interdiction Codes (INTER) type HOLDS, with the exception of DNWLK. DNWLK is an INFOR type interdiction.

Verify deferral period and manual placement allowance of the interdiction.

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `RHOLDS`.

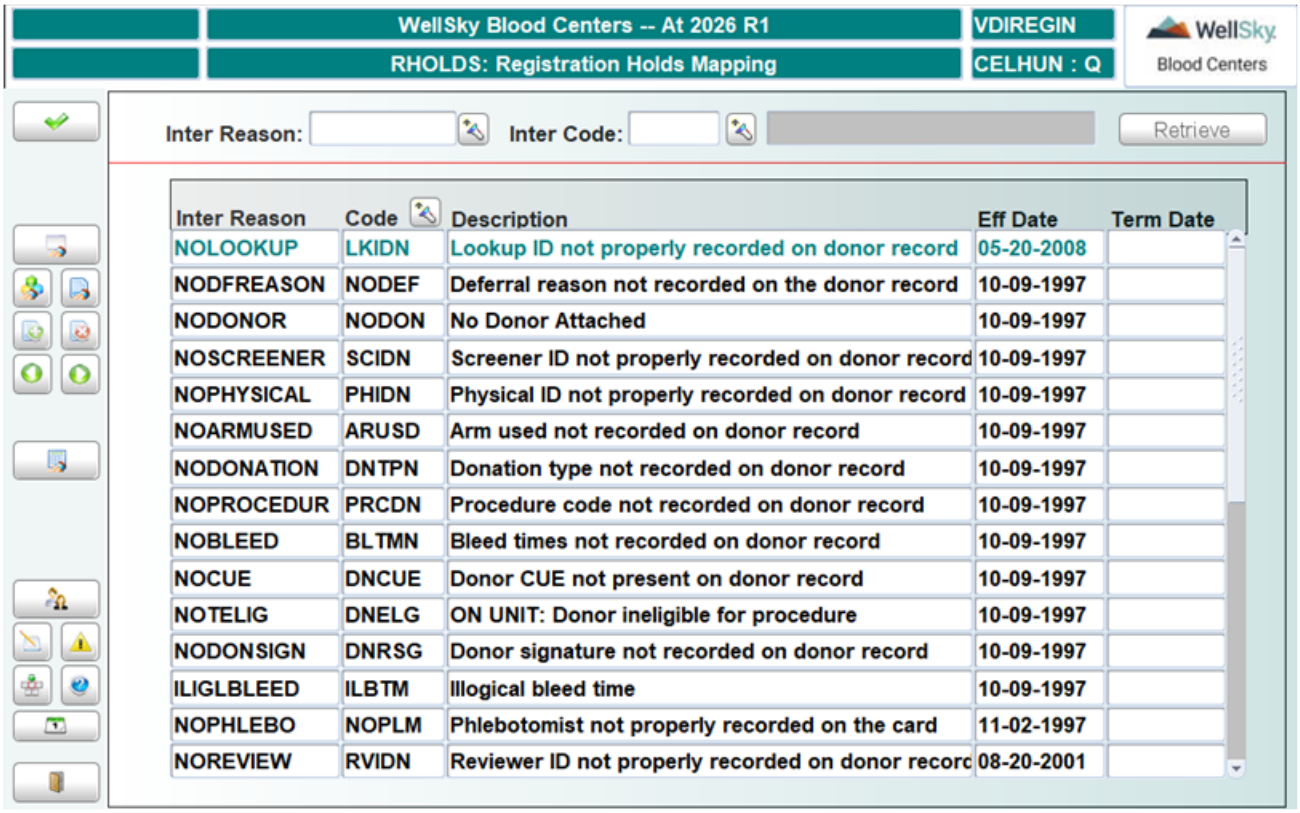

Control Block Fields and Definitions

Inter Reason

Entry is optional. Enter the interdiction reason or select from the LOV.

Inter Code

Entry is optional. Enter the interdiction code or select from the LOV.

Retrieving Data

Click **Retrieve** to display the records that match the search criteria. If no search criteria were entered, all interdiction reasons and codes are retrieved.

To Modify an Existing Registration Hold

Change only the associated HOLDS type interdiction (or INFOR type interdiction for DNWLK) in the Code field.

Do not leave any *Code* field blank. Each field must have an associated interdiction code. Hold interdictions can be defined and mapped according to your requirements with the exceptions of NODON, DNCUE, NODEF and DNELG.

Inter Reason

Static values related to field entries for coding. Refer to *Inter Reason* field references below. All relate to the donor or deferral registration functions with the exception of DNRSG, audit functions.

WellSky Corporation
Proprietary and confidential

Code

Enter interdiction code or select from LOV of HOLD type interdictions.

NOTE – Refer to Limitations for static interdiction association.

Description

Automatically displays from interdiction code description.

Eff Date

Must always have a current effective date.

Term Date

Do not terminate any Inter Reason records.

Interdiction Reason References

The following table defines the interdiction reasons:

Code	Definition
NOLOOKUP	Lookup ID is not properly recorded on the donor record.
NODFREASON	Code NODEF is hard coded for no recorded deferral reason.
NODONOR	Code NODON is hard coded for no donor attached to the donation or deferral record.
NOSCREENER	Historian for the donation or deferral record (*Hist ID* and *Historian ID* fields).
NOPHYSICAL	Physical findings screener for the donation or deferral record (*Phy ID* field).
NOARMUSED	Arm use not recorded for the donation record (*L/R/B/O* field).
NODONATION	Donation type not recorded on the donation or deferral record (*Donation* field).
NOPROCEDUR	Procedure type not recorded on the donation or deferral record (*Procedure* and *Proc* fields).
NOBLEED	Bleed time not entered on the donation record (bleed time canvas).
NOCUE	Code DNCUE is hard coded for no donor CUE present (disregarded if CUE is not enforced at your facility).
NOTELIG	Code DNELG is hard coded for donor eligibility.
NODONSIGN	Verification of donor signature during audit functions (*Sig?* field).
ILIGLBLEED	Illogical bleed time; bleed end time is before bleed start time for donation (bleed time canvas).
NOPHLEBO	Phlebotomist not recorded for donation (*Phlebotomist* field on the bleed time canvas).

Code	Definition
NOREVIEW	Reviewer ID not recorded for the deferral (*Rvw ID* field).
ONOVERRIDE	Donor deferred or not eligible but override to donate.
VOIDUNIT	Unit is voided.
ONWLKOUT	Attribute used when donor walks out during On-Site Registration. Uses interdiction code DNWLK, which is an INFOR type static code for the On-Site module.
PAUDITHOLD	Paperless Nursing Audit Hold code that will be placed for status of HOLD.
UNLINKDEF	If a deferral is unlinked from a donor in On-Site Registration module.
INTRMALE	Male donor interdiction. If you do not want to place gender related interdictions, do not define these codes. If the codes are defined, an interdiction code must be defined for the code and must be a valid interdiction code in the Interdictions table.
INTRFEMALE	Female donor interdiction. If you do not want to place gender related interdictions, do not define these codes. If the codes are defined, an interdiction code must be defined for the code and must be a valid interdiction code in the Interdictions table.
EQUIPQC	Interdiction to be placed when equipment or supplies QC fails in the OnSite Module.
DECCONST	Interdiction to be placed when consent is declined in OnSite Module.

At Commit

All modifications are saved to the database.

What to Do Next

There is no next step.

2.3.7 Interdiction Upgrade Matrix (INTUP)

Intended Use

Use this program to define application response when a donor with an existing interdiction is assigned a related interdiction. The response mapping reflects, if required, the action of placement and release of related interdictions based on criticality and deferral. This placement and release is defined as 'upgrade and downgrade' of interdictions. The general use of this function is associated to test result or transfusion associated interdictions. It functions with interdictions placed both automatically and manually.

All interdictions, once placed, are never deleted. It will always display with the associated insert and release date. Related upgraded and downgraded interdictions display with the same insert and release date.

WellSky Corporation
Proprietary and confidential

Limitations

Interdictions do not upgrade recursively. As an example, if there are two rows in the database like:

	Source Inter	Exist Inter	Action Inter	Inter
1	B	A	C	place
2	C	A	D	place

If a B interdiction is assigned to a donor that has an A interdiction, the donor will actually have the C interdiction placed by the system because of upgrade condition 1. Even though upgrade condition 2 states that a D interdiction will get placed if a C is assigned to the donor with an A interdiction, the D interdiction will not be placed, because the routine is set up to ignore recursive assignments.


Prerequisites

Interdictions must be defined in Interdiction Codes (INTER). The function looks at SURVE and INTER type interdictions. Within that table, the Mul field (multiple placement allowed) must be set to N (no) and the Up Flg field (upgrade flag) must be set to Y (yes). When using this screen to define the upgrade/downgrade logic, consideration must be given to deferral periods defined for the interdictions placed and released.

Applicable interdictions must be mapped to the appropriate test results in Define Test Results (RESULT). Transfusion implicated interdictions are manually placed on the donor, but automatically go through this logic when appropriately mapped.

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `INTUP`.

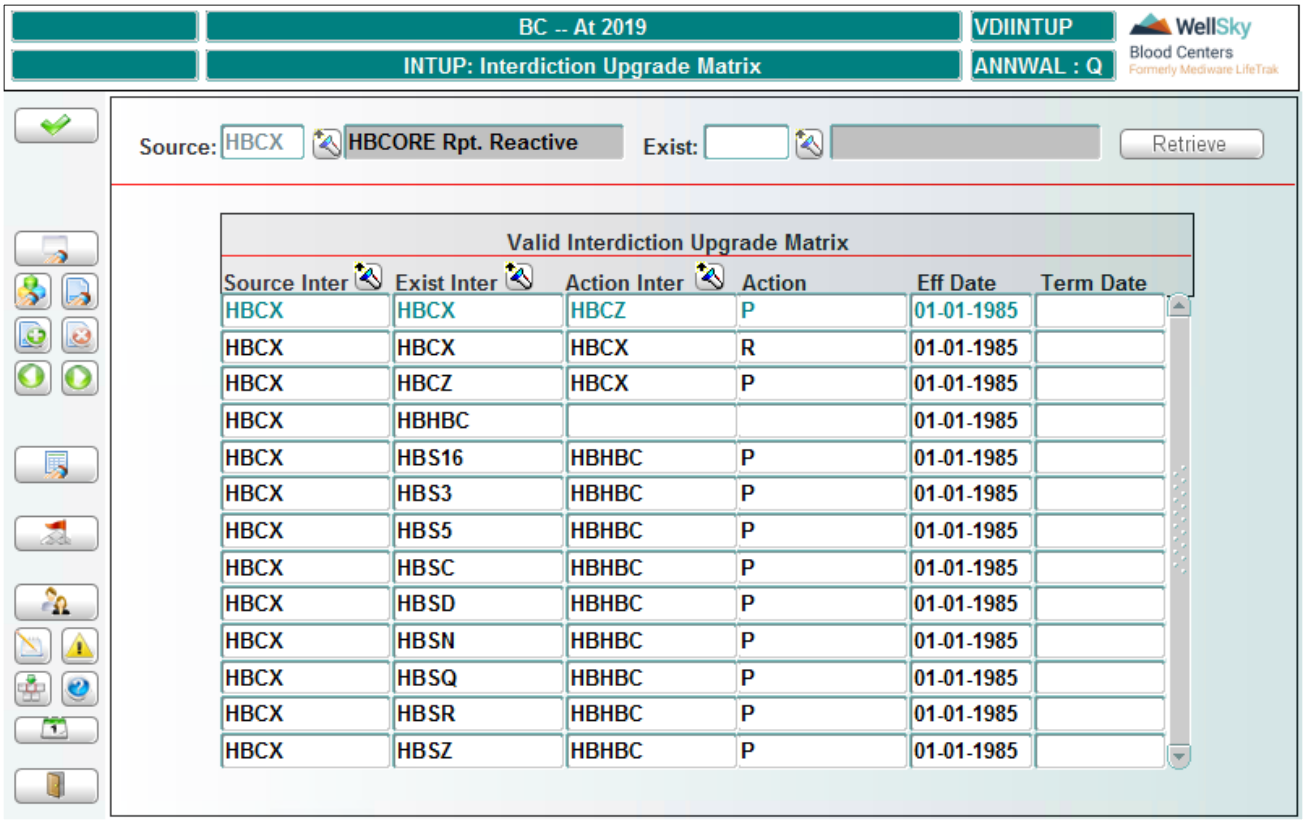

Control Block Fields and Definitions

Source

Entry is optional. This reflects the interdiction being placed to indicate a certain event. Enter an interdiction code or select from the LOV.

Exist

Entry is optional. This reflects an interdiction that already exists on the donor. Enter an interdiction code or select from LOV.

Retrieving Data

Click **Retrieve** to display interdictions matching the search criteria. If no search criteria were entered, all interdictions display.

To Enter a New or Modify an Existing Interdiction Upgrade

Press DOWN to display a blank line to insert a new record.

Source Inter

Entry is required. Enter the source interdiction code or select from the LOV. This represents the interdiction being placed on the donor.

WellSky Corporation
Proprietary and confidential

Exist Inter

Entry is required. Enter the existing interdiction code or select from the LOV. This represents the present interdiction for the donor.

Action Inter

Entry is optional. Enter the resulting action interdiction code or select from the LOV. This can remain null, or be either the source, existing or a new interdiction.

NOTE – If no entry is made, no termination date will be entered. The same interdiction will be applied again and the original effective date will remain on the interdiction for the donor.

Action

Entry is optional. Enter `P` to place Action interdiction or `R` to release it. The interdiction must already exist in order to be released.

Eff Date

Entry is required. Enter the effective date in MMDDYYYY format.

Term Date

Entry is optional. Enter the termination date for non-use of the interdiction upgrade in MMDDYYYY format.

At Commit

Those interdictions, when received, will be placed or released based on the logic defined in this table.

What to Do Next

Refer to or review the following:

- Define Tests (TESTS)
- Define Test Results (RESULT)
- Test Result Override Rules (RESOV)

2.3.8 Define Tests (TESTS)

Intended Use

Use this screen to define new tests or to modify previously defined tests. This table defines all tests that can be associated to a donor record.

The tests defined are used in Define Test Results (RESULT) and Test Result Override Rules (RESOV). The Lab interfaces for donor test results use these programs to identify valid tests, associated results and result override rules.


Limitations

Access to view test results is associated in Define User Access (UACCESS), class TVIEW. User access level is associated to the *V Level* field in this table.

Lab test IDs must match their corresponding Donor test ID for interface purposes.

Refer to the Donation History for Test Results window to view a list of tests and results.

NOTE – Click **Test Results** on the Donor Detail Query (SDONQ) screen to display the Donation History for Test Results window.

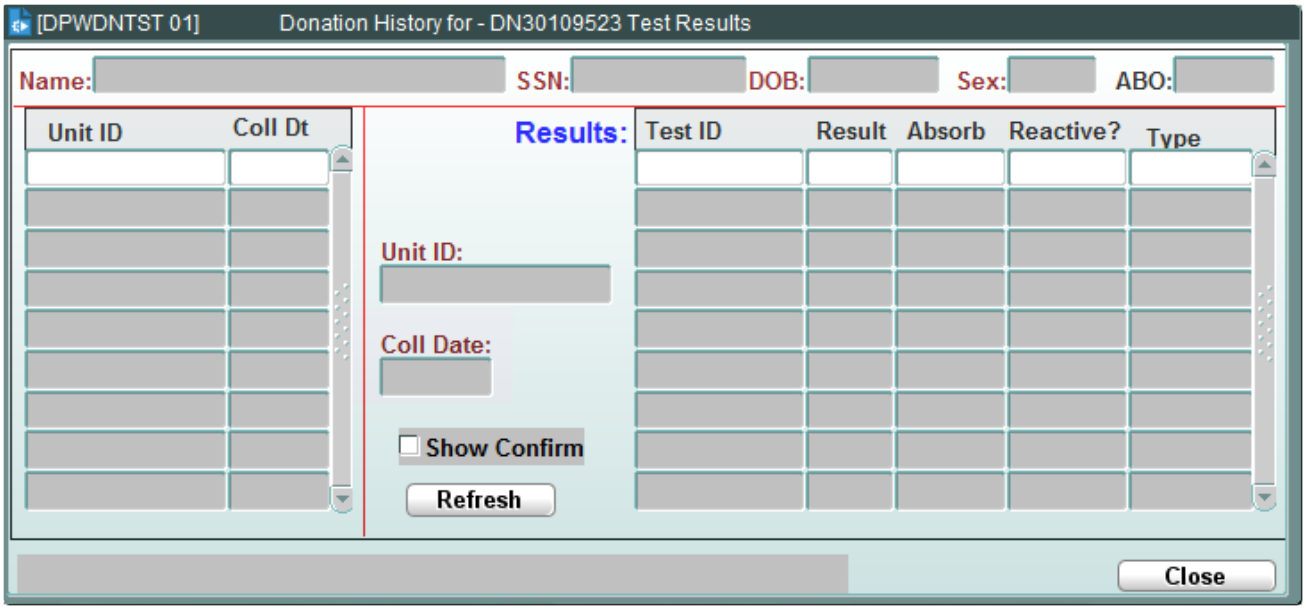


Prerequisites

The test group is defined and active in Master Code TSTGP .

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `TESTS`.

WellSky Corporation
Proprietary and confidential

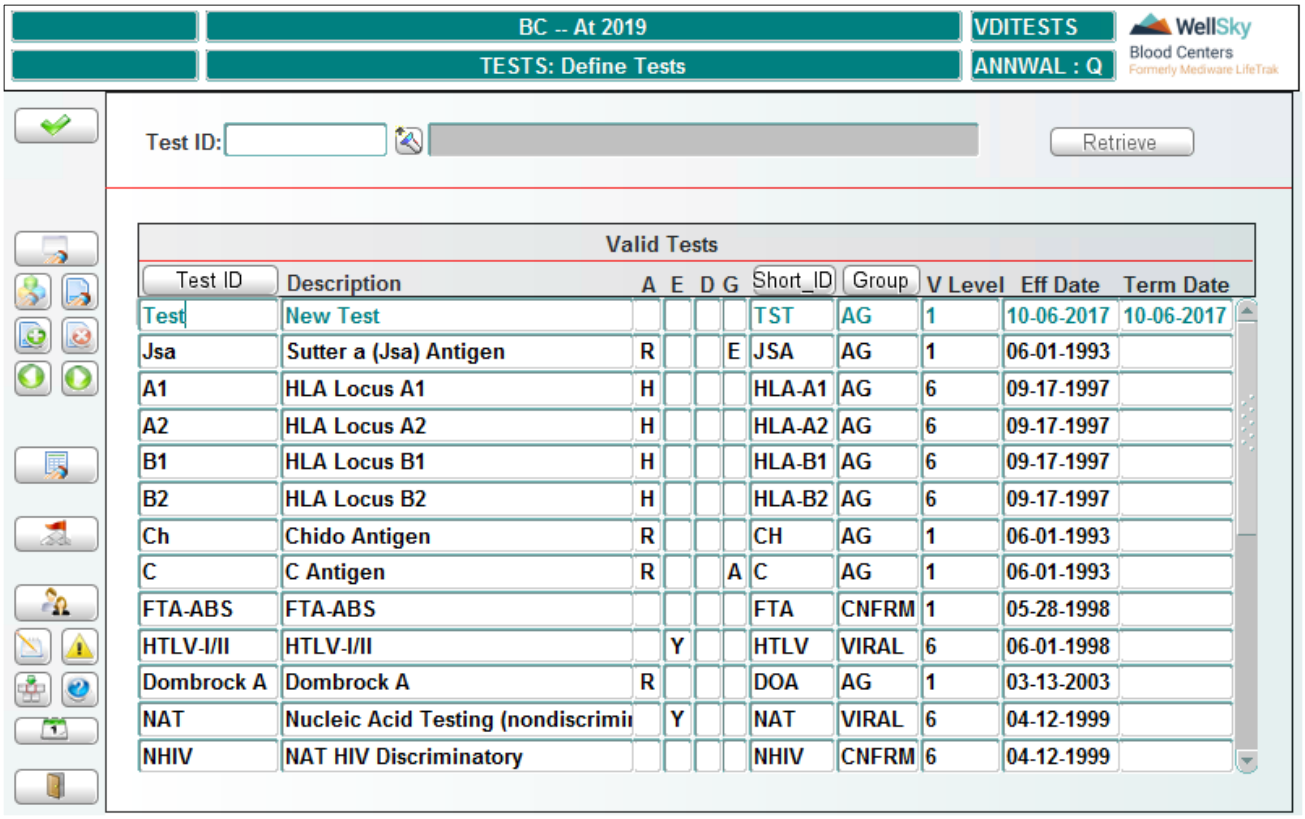

Control Block Fields and Definitions

Test ID

Entry is optional. Enter the test ID or select from the LOV.

Retrieving Data

Click **Retrieve** to display the test IDs selected in the Control block. If no test IDs are selected or entered, all test IDs display.

To Add or Modify an Existing Test

Move to a blank line to create a new test ID. Enter or modify the following:

Test ID

Entry is required. Enter the test ID, up to ten characters.

Description

Entry is required. Enter the long description of the test, up to 50 characters.

A

Enter `H` if HLA antigen, `R` if red cell antigen or `O` for other than HLA or RBC. Red cell antigens are considered in Enter HLA/RBC Request (REQUEST). HLA antigens require entry utilizing the HLA Maintenance Functions (HLAMAIN).

E

Enter Y if the test is a profile test. Enter N or leave field blank if test is not a profile test.

NOTE – Tests with a Y in this field will display in the Test Results window with a P in the Type field. All tests with a blank or N value display with an O in the query.

D

Field not used at this time.

G

This is used to display the antigens in Unit Test Results Query (DPQUNTST). This field must be entered in order for antigens to display. The value of the group can be any value from A to K. Antigen tests that need to display together (for example, S and s) should have the same group.

Short ID

Entry is required. Enter the short identification for the test, up to six characters.

Group

Enter test group or select from the LOV.

NOTE – This field does not affect the association of test results to test result interfaces. The test result interface is driven by the internal profile and test groups defined in Lab.

V Level

Enter view level for the test (1 - 9). Refer to the association of a user and his or her access level to TVIEW in Define User Access (UACCESS). The level in TVIEW must be equal to or above the V Level in this field in order to view the test.

Eff Date

Entry is required. Enter the effective date for the test in MMDDYYYY format.

Term Date

Enter a termination date for non-use of the test in MMDDYYYY format.

At Commit

All changes are saved to the database.

What to Do Next

Refer to or review the following:

WellSky Corporation
Proprietary and confidential

- Define Test Results (RESULT)
- Test Result Override Rules (RESOV)

2.3.9 Define Test Results (RESULT)

Intended Use

Use this screen to define the results for a test and interdictions (or attributes) for that particular result that are automatically associated to a donor record. The Lab interfaces of test results use this table to identify valid tests and their results with associated interdictions acceptable to insert on a donor record from the interface.

Limitations

Test results can be interfaced to Donor without building the test in Donor; however, additional action such as interdiction placement or upgrade must be considered for Donor deferral. The test results should be configured in the MASTER, RESULT and INTER screens. This is especially important if an interdiction is associated with a result.


Prerequisites

Prerequisite entries include the following:

- Tests are defined in Define Tests (TESTS)
- Results are defined in Master Codes RESUL
- Interdictions are defined in Interdiction Codes (INTER)

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `RESULT`.

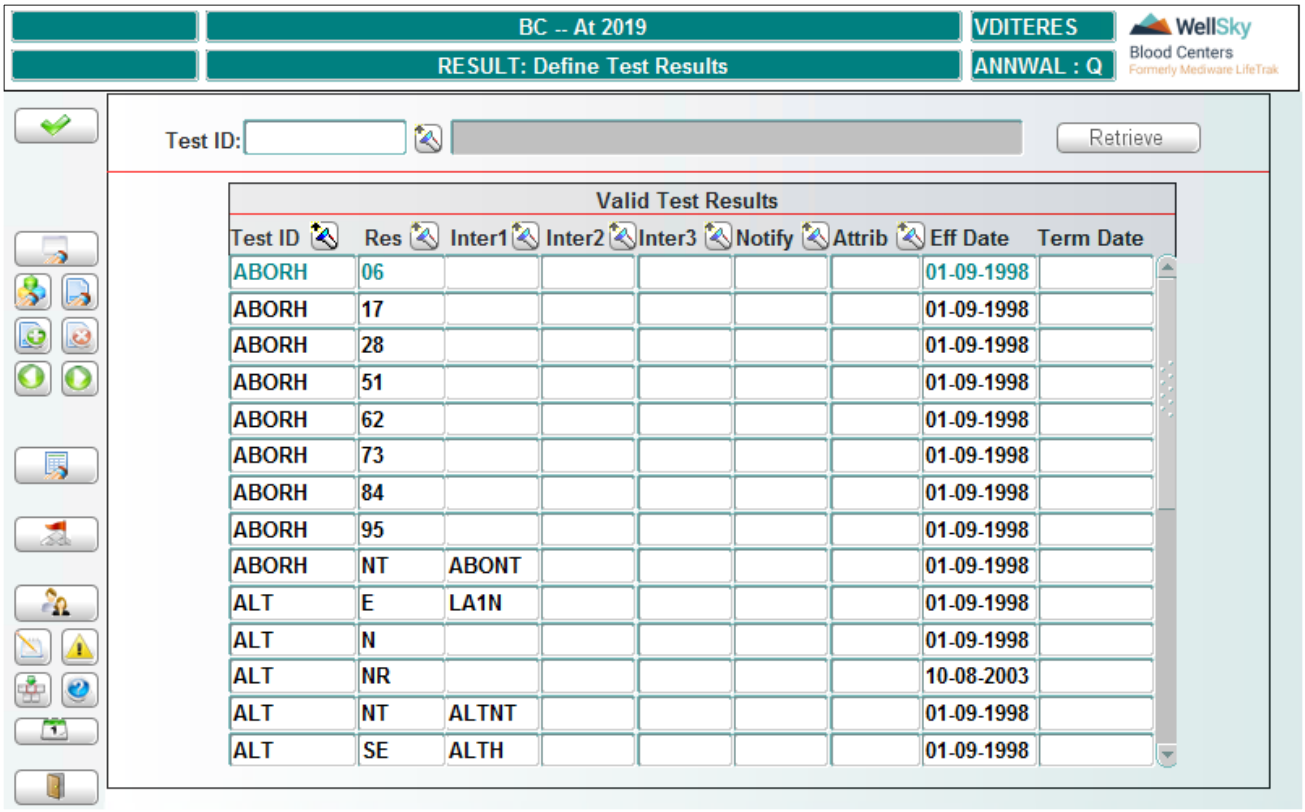

Control Block Fields and Definitions

Test ID

Entry is optional. Enter the test ID or select from the LOV.

Retrieving Data

Click **Retrieve** to display the associated test ID. If no test ID is entered or selected, all test IDs display.

To Add or Modify an Existing Test Result

Test Fields:

Test ID

Entry is required. Enter the test ID or select from the LOV. Refer to Define Tests (TESTS).

Res

Entry is required. Enter a test result code or select from the LOV. Refer to Master Code RESUL.

Interdictions Placed Fields:

The following three fields are associated to interdictions that are placed due to a test result received. Up to three interdictions can be automatically placed for one test result. The interdictions can cause alerts or deferrals as defined by the interdiction in Interdiction Codes (INTER). In the LOV for each field, the interdictions displayed belong

WellSky Corporation
Proprietary and confidential

to either INTER, SURVE or HOLDS type interdictions. These interdictions display in the Donor Interdictions called window and in other functions when placed.

Although not displayed in the LOV, interdictions of other interdiction types can be manually entered in the fields for association to a test result. As an example, an INFOR (informational) type interdiction can be entered such as CMVN. These are considered attributes and display in the Donor Attributes called window and in other functions when placed.

Inter 1

Entry is optional. Enter an interdiction code or select from the LOV. The LOV displays SURVE, INTER, or HOLDS type interdictions. You can manually enter an INFOR or DR type interdiction.

Inter 2

Entry is optional. Enter an interdiction code or select from the LOV. The LOV displays SURVE, INTER, or HOLDS type interdictions. You can manually enter an INFOR or DR type interdiction.

Inter 3

Entry is optional. Enter an interdiction code or select from the LOV. The LOV displays SURVE, INTER, or HOLDS type interdictions. You can manually enter an INFOR or DR type interdiction.

Notify

Field not used at this time. Although there is an LOV for notification letters, the letter association to an interdiction is defined in Associate Letter to Interdiction (INTERLET).

Attrib

Field not used at this time.

Eff Date

Entry is required. Enter the effective date of the test result for the test in MMDDYYYY format.

Term Date

Enter the termination date for non-use of the test result for the test in MMDDYYYY format.

At Commit

All changes are saved to the database.

What to Do Next

Refer to or review the following:

- Test Result Override Rules (RESOV)

2.3.10 Test Result Override Rules (RESOV)

Intended Use

Use this screen to define system reaction when more than one expected test result for a single test is interfaced for a donor unit. This table identifies which test result to accept, whether to overwrite the test result with the new test result, or to reject a test result.

Limitations

The Lab test IDs and their associated results must match their corresponding donor test ID and result. Lab tests and results that do not have 'like' donor tests and results are rejected through the interface. ABORH and CHOL tests cannot be overwritten even with entry in this table. An entry in this table disallows automatic override of test results.

Prerequisites


Prerequisite entries for the associated LOV include the following:

- Results are defined in Master Code RESUL
- Interdictions are defined in Interdiction Codes (INTER)
- Tests are defined in Define Tests (TESTS)
- Test results are defined in Define Test Results (RESULT)

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `RESOV`.

WellSky Corporation
Proprietary and confidential

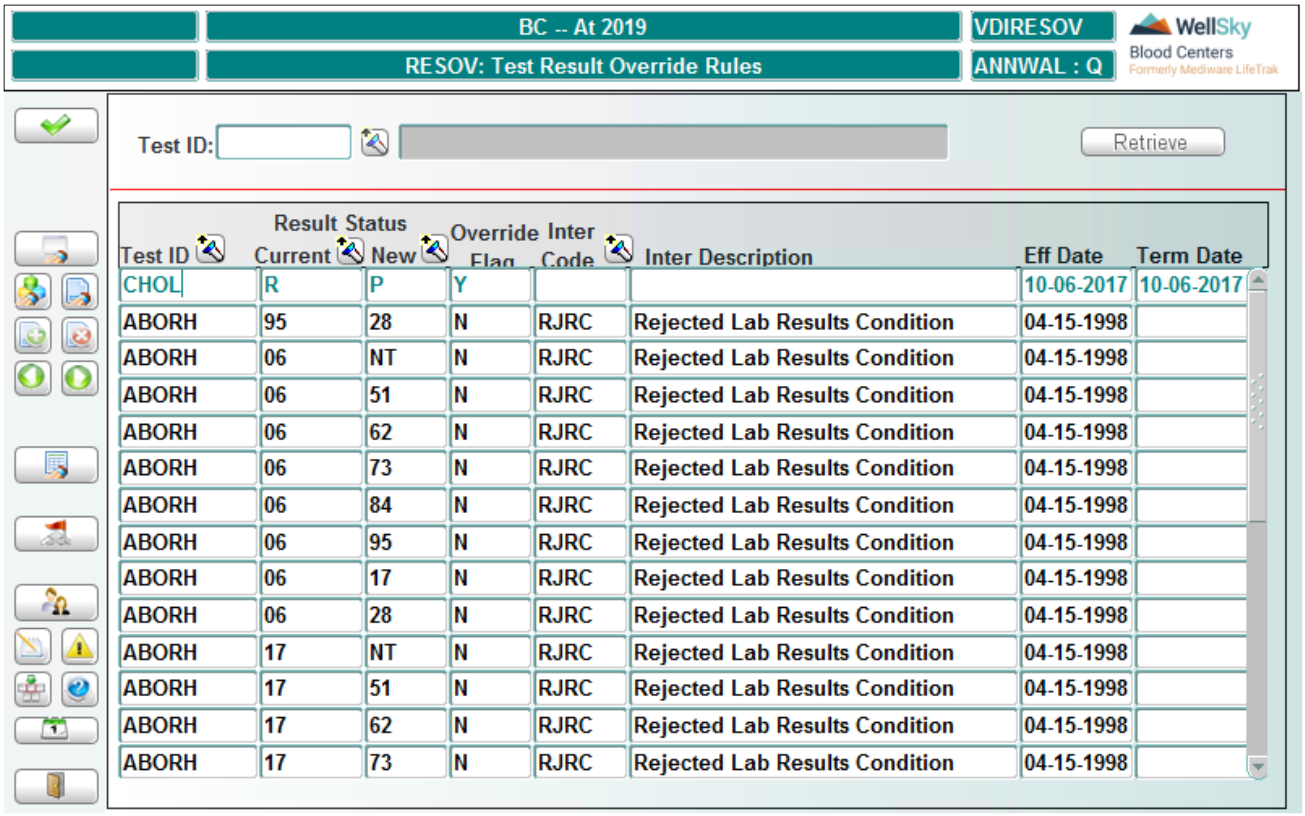

Control Block Fields and Definitions

Test ID

Entry is optional. Enter the test ID or select from the LOV.

Retrieving Data

Click **Retrieve** to display the associated test ID. If no test ID is entered or selected, all test IDs display.

To Add or Modify an Existing Test Result Override Rule

Test ID

Entry is required. Enter the test ID or select from the LOV.

Result Status Current

Entry is required. Enter the result that is currently associated to the unit test or select from the LOV.

Result Status New

Entry is required. Enter the incoming result for the unit test or select from the LOV.

Override Flag

Entry is required. Enter `Y` if the existing result is to be overridden with the incoming result. Enter `N` if the incoming result is to be rejected.

Inter Code

Entry is optional. Enter the override interdiction code or select from the LOV. The *Inter Description* field automatically populates. Generally an interdiction is not associated in this field unless N is entered in the *Override Flag* field.

Eff Date

Entry is required. Enter the effective date of the test result override rule in MMDDYYYY format.

Term Date

Entry is optional. Enter the termination date for non-use of the test result override rule in MMDDYYYY format.

At Commit

All modifications are saved to the database.

What to Do Next

There is no next step.

2.3.11 Define Donation Types (DONS)

Intended Use

Use this screen to define donation types.

Limitations

The donation types 99, AL, AU, DI, SM and TH are static values and should not be terminated. The donation types should have corresponding donation types in Lab.


Prerequisites

None

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `DONS`.

WellSky Corporation
Proprietary and confidential

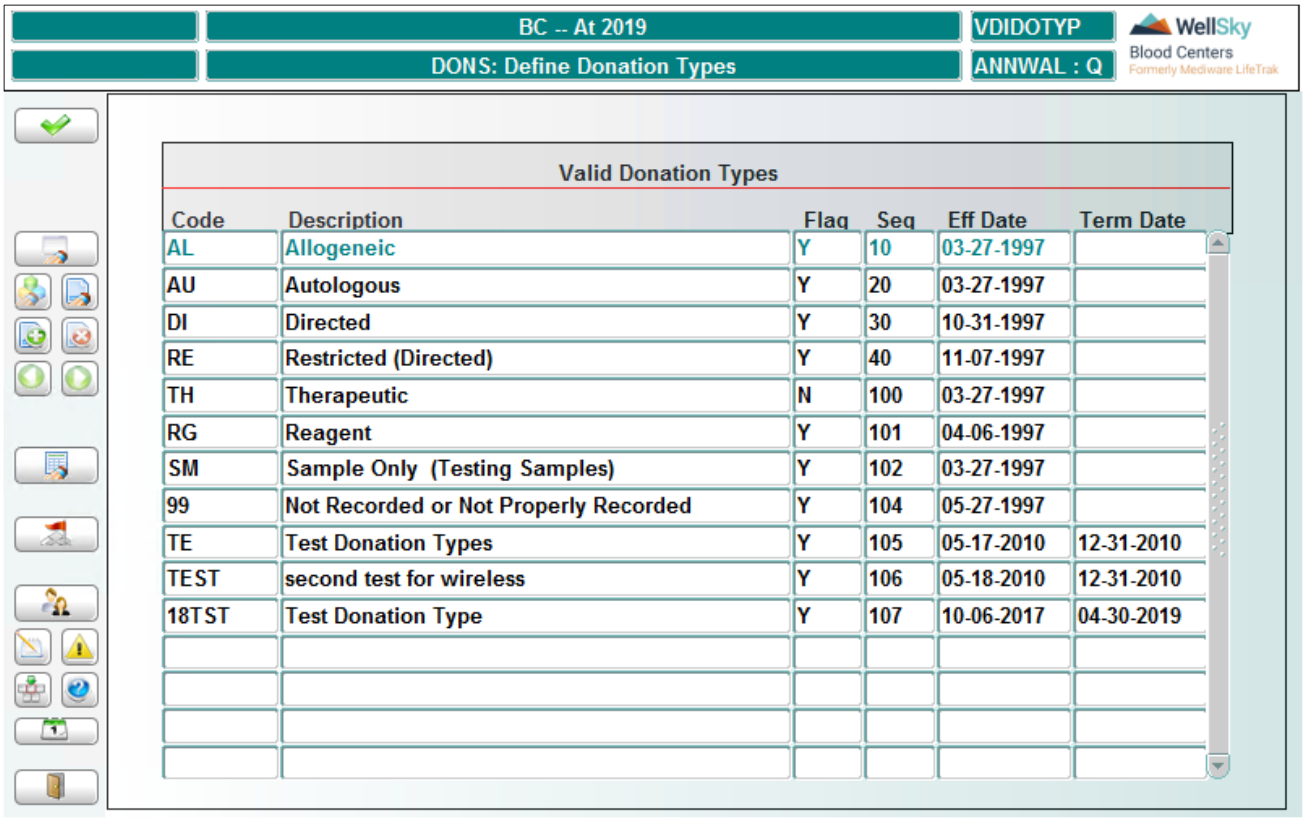

To Add or Modify Data

Code

Entry is required. Enter a donation type code. Although up to five characters are allowed, limit the code to two characters for display purposes in other programs. This field cannot be modified for existing records.

Description

Entry is required. Enter up to a 50-character description for the donation type.

Flag

Entry is required. Enter `Y` if testing is required or expected for the donation type or `N` if testing is not required or expected.

Seq

Entry is optional. Enter the view sort sequence for display in an LOV.

NOTE – The LOV displays a maximum of 100 sequences. If the desired sequence is not available on the LOV, you must enter it manually.

NOTE – The sequence number is used only for sorting purposes in the LOV. It is not used to control the LOV.

Eff Date

Entry is required. Enter an effective date of the donation type in MMDDYYYY format. This field cannot be modified for existing records.

Term Date

Entry is optional. Enter a termination date for non-use of the donation type in MMDDYYYY format.

At Commit

All changes are saved to the database.

What to Do Next

Refer to or review the following:

- Define Procedure Codes (PROCS)
- Define Donation Procedures (DONPROC)
- Define Duration Between Procedures (DBETP)
- Define Max Donations for Proc Groups (MAXDON)

2.3.12 Define Procedure Codes (PROCS)

Intended Use

Use this screen to define procedure codes and the following associated information:

- Number of days ineligible after donation
- Duration of procedure (used for scheduling)
- Sort sequence for display
- RBC and PLASM loss (standard and extra-corporeal)

For RBC and PLASM loss, the standard loss includes the amount of blood that is routinely taken for the procedure and all test tubes collected. If the blood center desires, the amount of blood circulating in an apheresis machine (extra-corporeal volume) can be added into the eligibility calculations.

Limitations

To view a code in the lookup or eligibility functions, it must be associated to the AL donation type. The procedure codes should have corresponding procedure codes in Lab.


Prerequisites

None

WellSky Corporation
Proprietary and confidential

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword PROCS.

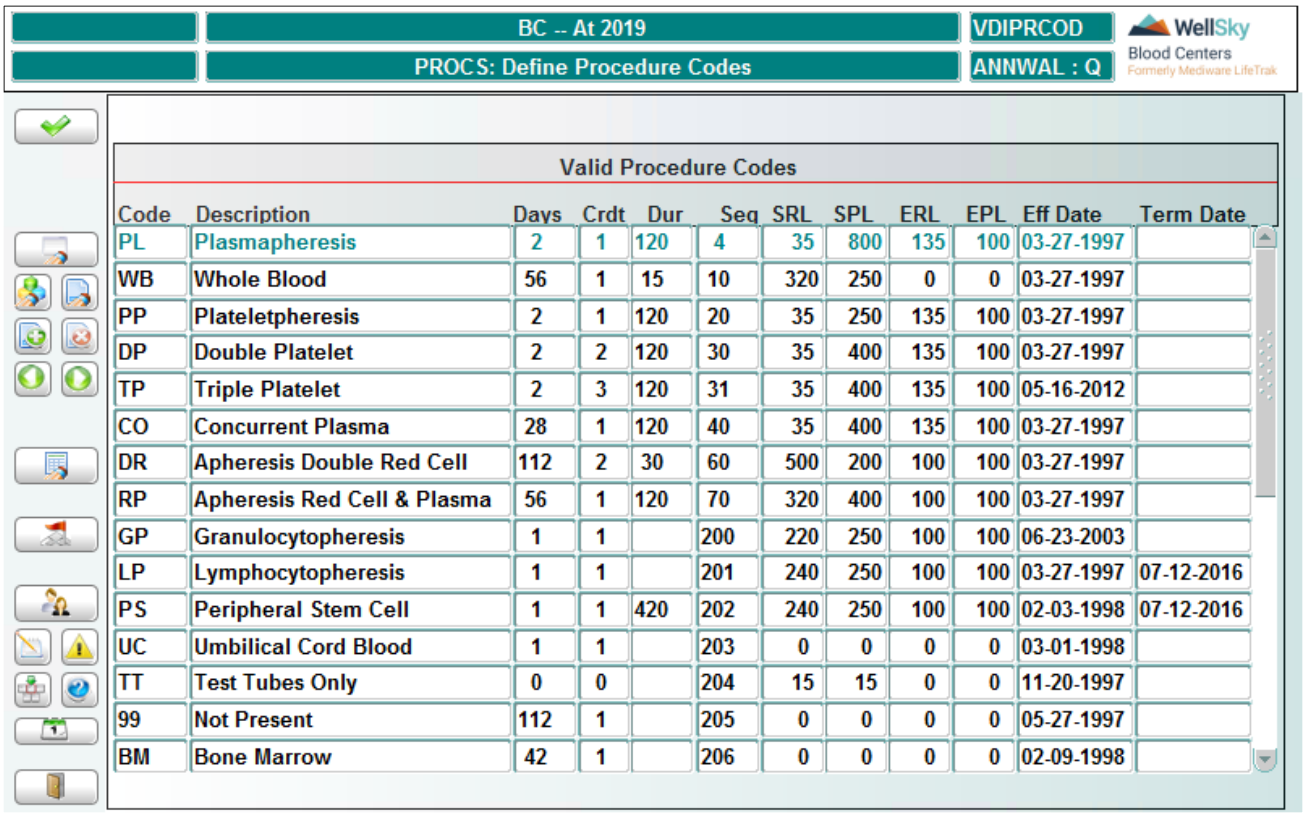

Code	Description	Days	Crdt	Dur	Seq	SRL	SPL	ERL	EPL	Eff Date	Term Date
PL	Plasmapheresis	2	1	120	4	35	800	135	100	03-27-1997	
WB	Whole Blood	56	1	15	10	320	250	0	0	03-27-1997	
PP	Plateletpheresis	2	1	120	20	35	250	135	100	03-27-1997	
DP	Double Platelet	2	2	120	30	35	400	135	100	03-27-1997	
TP	Triple Platelet	2	3	120	31	35	400	135	100	05-16-2012	
CO	Concurrent Plasma	28	1	120	40	35	400	135	100	03-27-1997	
DR	Apheresis Double Red Cell	112	2	30	60	500	200	100	100	03-27-1997	
RP	Apheresis Red Cell & Plasma	56	1	120	70	320	400	100	100	03-27-1997	
GP	Granulocytopheresis	1	1		200	220	250	100	100	06-23-2003	
LP	Lymphocytopheresis	1	1		201	240	250	100	100	03-27-1997	07-12-2016
PS	Peripheral Stem Cell	1	1	420	202	240	250	100	100	02-03-1998	07-12-2016
UC	Umbilical Cord Blood	1	1		203	0	0	0	0	03-01-1998	
TT	Test Tubes Only	0	0		204	15	15	0	0	11-20-1997	
99	Not Present	112	1		205	0	0	0	0	05-27-1997	
BM	Bone Marrow	42	1		206	0	0	0	0	02-09-1998	

To Add or Modify Data

Code

Entry is required. Enter the procedure code. Although up to five characters are allowed, limit the code to two characters for display purposes in other programs. This field cannot be modified for existing records.

Description

Entry is required. Enter up to a 50-character description for the procedure code.

Days

Entry is required. Enter the number of days the donor must wait between procedures (up to 999).

Credit

Entry is required. Enter the number of credits towards a gallon the donor will receive for this procedure.

Duration

Entry is optional. Enter number of minutes the procedure is expected to take (up to 999).

Seq

Entry is optional. Enter the view sort sequence for an LOV (up to three digits). If a value is not in LOV a valid value can be entered manually.

> **NOTE –** The sequence number is used only for sorting purposes in the LOV. It is not used to control the LOV.

SRL

Entry is optional. Enter the standard red cell loss in mL for this procedure, including test tubes. This is the average loss during the donation. Enter 0 in this field if you are not counting standard red cell loss.

SPL

Entry is optional. Enter the standard plasma loss in mL for this procedure including test tubes. This is the average loss during the donation. Enter 0 in this field if you are not counting standard plasma loss.

ERL

Entry is optional. Enter the extra-corporeal volume of red cells in mL (excluding SRL), while donating this procedure. Enter 0 in this field if you are not counting the extra-corporeal volume of red cells.

EPL

Entry is optional. Enter the extra-corporeal volume of plasma in mL (excluding SPL), while donating this procedure. Enter 0 in this field if you are not counting extra-corporeal volume of plasma.

> **NOTE –** At donation registration (REGIS) or when updating a registered donation (REGMAINT), if the user does not enter an amount in the RBC Loss or PLASMA Loss fields in the bleed time entry canvas, the system will use the value entered in this table for the procedure donated.

Eff Date

Entry is required. Enter the effective date for the procedure in MMDDYYYY format. This field cannot be modified for existing records.

Term Date

Entry is optional. Enter the termination date for non-use of the procedure in MMDDYYYY format.

At Commit

All changes are saved to the database.

What to Do Next

Refer to or review the following:

WellSky Corporation
Proprietary and confidential

- Define Donation Procedures (DONPROC)
- Define Duration Between Procedures (DBETP)
- Define Procedure Groups (PROCGRP)

2.3.13 Define Donation Procedures (DONPROC)

Intended Use

Use this screen to define what procedure codes can be associated to specific donation types.

Limitations

Procedures cannot be associated to donation types in registration or audit functions unless defined in this table.


Prerequisites

The following must be previously defined:

- Donation types in Define Donation Types (DONS)
- Procedure codes in Define Procedure Codes (PROCS)

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword DONPROC.

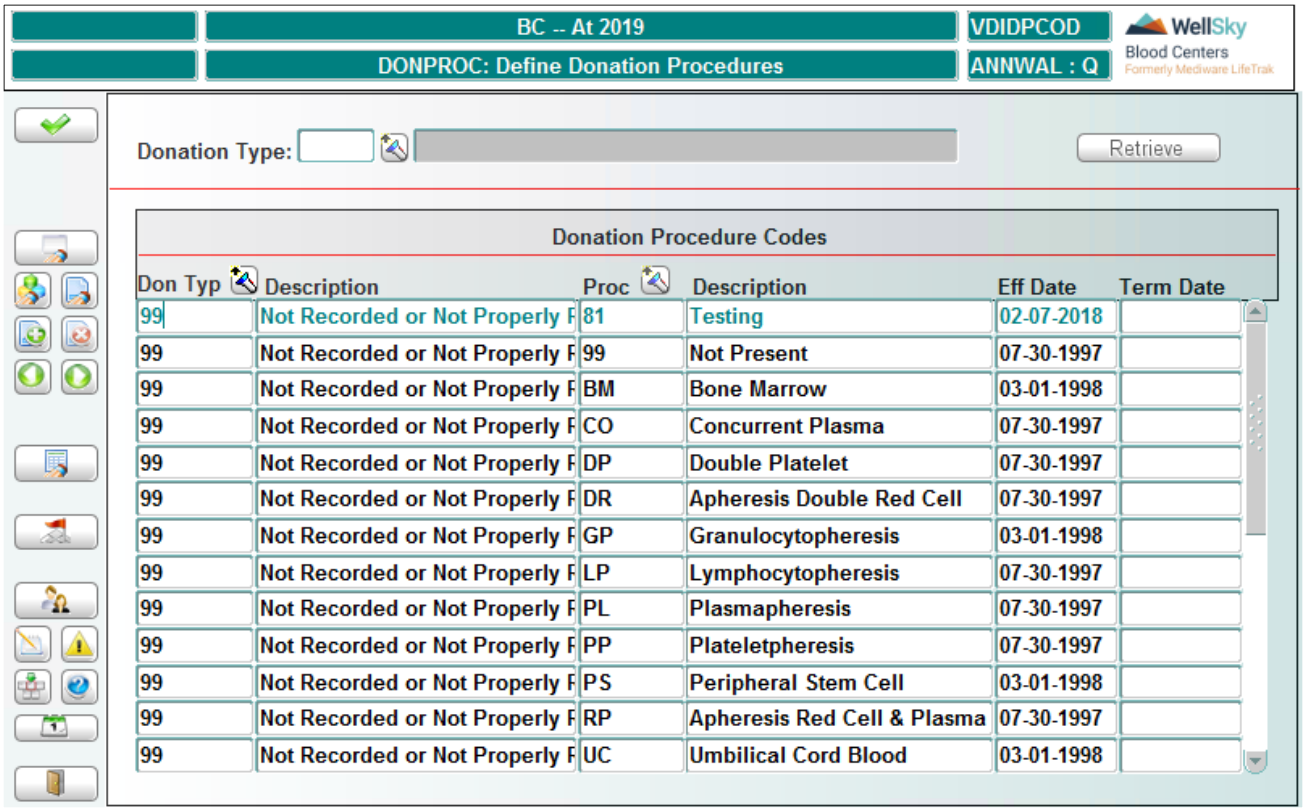

Control Block Fields and Definitions

Donation Type

Entry is optional. Enter the donation type or select from the LOV.

Retrieving Data

Click **Retrieve** to display the donation type. If no donation type is entered or selected, all donation types display.

To Add or Modify an Existing Donation Procedure

Don Type

Entry is required. Enter donation type code or select from the LOV.

Description

Display only. Once a valid donation type is entered or selected, the description automatically populates.

Proc

Entry is required. Enter the procedure code or select from the LOV.

Description

Display only. Once a valid procedure code is entered or selected, the description automatically populates.

Eff Date

Entry is required. Enter the effective date for the donation/procedure in MMDDYYYY format. This field cannot be modified for existing records.

Term Date

Entry is optional. Enter a termination date for non-use of the donation/procedure in MMDDYYYY format.

At Commit

All changes are saved to the database.

What to Do Next

Refer to or review the Define Duration Between Procedures (DBETP) screen.

2.3.14 Define Duration Between Procedures (DBETP)

Intended Use

The eligibility process uses this table in conjunction with other information in deciding eligibility of a donor for a particular donation type and procedure code. Use this screen to define the number of days duration that must exist between procedures for specific donation types.

WellSky Corporation
Proprietary and confidential

Limitations

None


Prerequisites

The following must be defined:

- Donation types in Define Donation Types (DONS)
- Procedure codes in Define Procedure Codes (PROCS)

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `DBETP`.

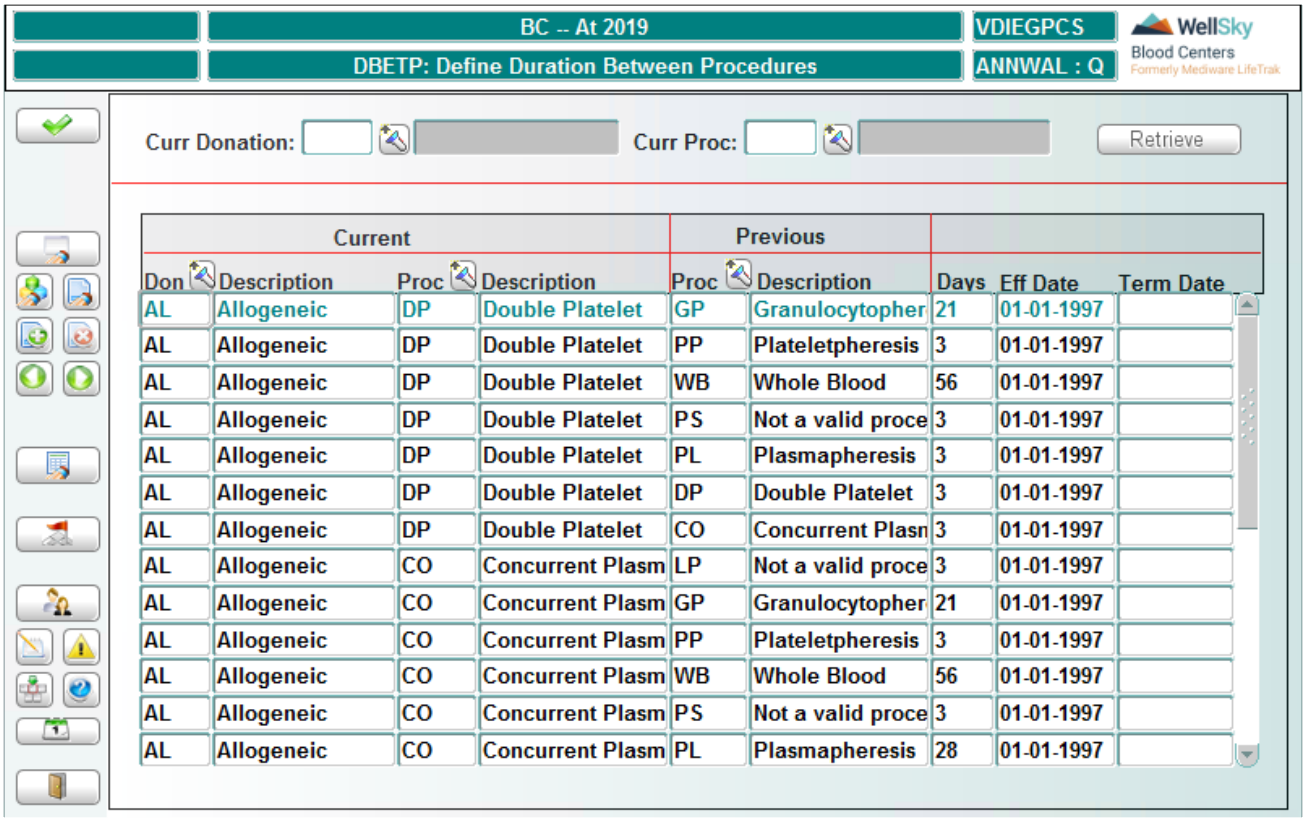

Control Block Fields and Definitions

Curr Donation

Entry is optional. Enter the current donation or select from the LOV.

Curr Proc

Entry is optional. Enter the current procedure or select from the LOV.

Retrieving Data

Click **Retrieve** to display the data that matches the search criteria. If no search criteria were entered, all records display.

To Add or Modify a Defined Duration Between Procedures

Current Don

Entry is required. Enter the current donation type or select from the LOV. Once a valid donation type is entered or selected, the description automatically populates. This field cannot be modified for existing records.

Current Proc

Entry is required. Enter the current donation procedure or select from the LOV. Once a valid donation procedure is entered or selected, the description automatically populates. This field cannot be modified for existing records.

Previous Proc

Entry is required. Enter the previous donation procedure or select from the LOV. Once a valid donation procedure is entered or selected, the description automatically populates. This field cannot be modified for existing records.

Days

Entry is required. Enter the number of days that must exist between the current procedure and the previous procedure for the specified donation type.

Eff Date

Entry is required. Enter the effective date of duration between procedures in MMDDYYYY format. This field cannot be modified for existing records.

Term Date

Entry is optional. Enter the termination date for non-use of the duration between procedures in MMDDYYYY format.

At Commit

All changes are saved to the database.

What to Do Next

Refer to or review the following:

- Define Procedure Groups (PROCGRP)
- Define Max Donations for Proc Groups (MAXDON)

WellSky Corporation
Proprietary and confidential

2.3.15 Define Procedure Groups (PROCGRP)

Intended Use

Use this screen to identify procedure codes belonging to a 'group' of procedures and the number of credits each procedure counts in eligibility calculation. The total number of 'credits' are calculated toward the maximum donations for the procedure group for a given time interval in Define Max Donations for Proc Groups (MAXDON). Procedure codes should be associated to each procedure group to which they belong. For example, RP (apheresis red cell/plasma donation) belongs to both PLASM (plasma) and REDCL (red cell) procedure groups. This program is used in conjunction with other information in deciding eligibility of a donor for a particular procedure group.

Limitations

Entering a credit value of zero means that the procedure will not count towards the total donation credits for the procedure group. Also, the donor will be shown as not eligible at lookup for that type of procedure if the limits for the procedure group have been met in Define Maximum Donations for Proc Groups (MAXDON).


Prerequisites

The following must be defined:

- Procedure groups must be defined in Master Code PRGRP
- Procedure codes must be defined in Define Procedure Codes (PROCS)

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `PROCGRP`.

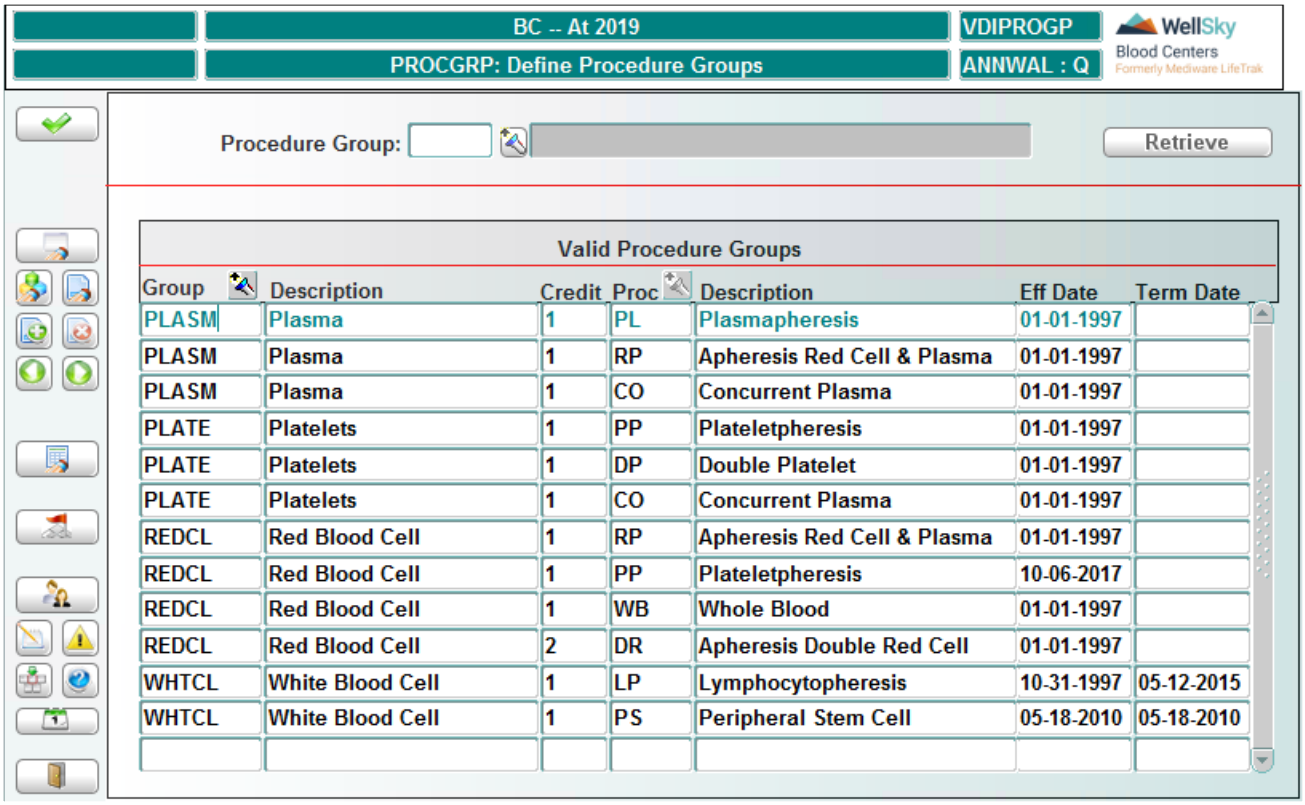

Control Block Fields and Definitions

Procedure Group

Entry is optional. Enter the procedure group or select from the LOV.

Retrieving Data

Click **Retrieve** to display the procedure group. If no procedure group was entered or selected, all groups display:

To Add a Procedure Group or Modify an Existing Procedure Group

The termination date is the only field that can be modified for existing records.

Group

Entry is required. Enter procedure group or select from the LOV. Once a valid group is entered or selected, the description automatically populates.

Credit

Entry is required. Enter the total number of donations the procedure counts towards eligibility for this procedure group (whole number, no decimals).

WellSky Corporation
Proprietary and confidential

Important! This count is calculated toward the *Max Don* and *Interval* fields in Define Max Donations for Proc Groups (MAXDON).

Proc

Entry is required. Enter the donation procedure code or select from the LOV. Enter a procedure code for each applicable procedure group. Once a valid procedure is entered or selected, the description automatically populates.

NOTE – Entering a credit value of zero means that the procedure will not count towards the total donation credits for the procedure group. Also, the donor will be shown as not eligible at lookup for that type of procedure if the limits for the procedure group have been met in Define Maximum Donations for Proc Groups (MAXDON).

Eff Date

Entry is required. Enter the effective date for the procedure group/procedure in MMDDYYYY format.

Term Date

Entry is optional. Enter the termination date for non-use for the procedure group/procedure in MMDDYYYY format.

At Commit

All changes are saved to the database.

What to Do Next

Refer to or review the following:

- Define Max Donations for Proc Groups (MAXDON)

2.3.16 Define Max Donations for Proc Groups (MAXDON)

Intended Use

Use this screen to define the maximum number of procedure 'credits' for a rolling time period by donation type. The procedure 'credit' was previously defined and associated to a procedure group in Define Procedure Groups (PROCGRP). The eligibility process, in conjunction with other information, looks at a donor's sum of credits in a time frame for a procedure group by donation type.

Limitations

None

Prerequisites


Prior associated entries in the following:

- Define Donation Types (DONS)

- Define Procedure Groups (PROCGRP)

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword MAXDON.

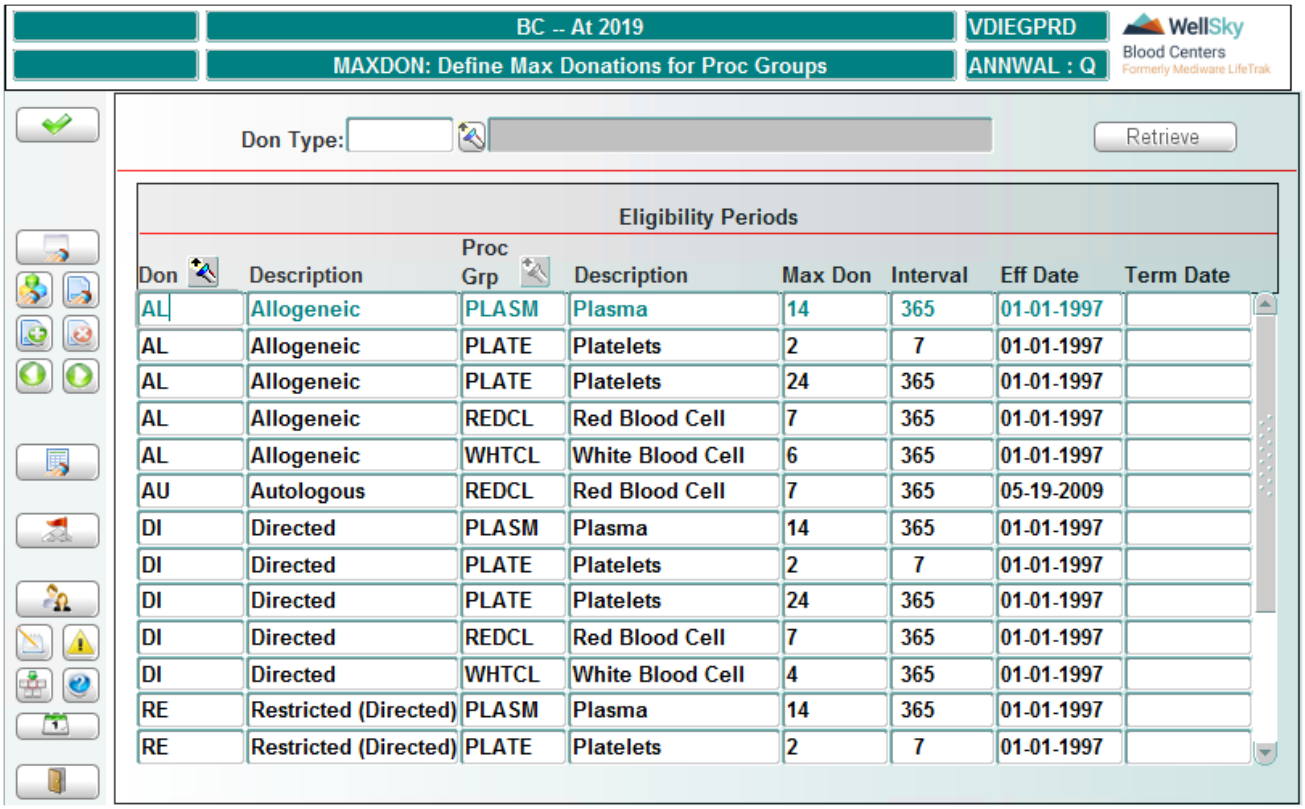

Control Block Fields and Definitions

Don Type

Entry is optional. Enter the donation type or select from the LOV.

Retrieving Data

Click **Retrieve** to display the donation type, or if no donation type was entered or selected, all donation types display.

To Add or Modify Data

Don

Entry is required. Enter the donation type or select from the LOV. Once a valid type is entered or selected, the description automatically populates. This field cannot be modified for existing records.

Proc Grp

Entry is required. Enter the procedure group or select from the LOV. Once a valid group is entered or selected, the description automatically populates. This field cannot be modified for existing records.

WellSky Corporation
Proprietary and confidential

Max Don

Entry is required. Enter the maximum number of donation credits that a donor can have in a specified time period for the procedure group.

Important! Each procedure code is given a 'credit' and assigned to a procedure group in Define Procedure Groups (PROCGRP).

Interval

Entry is required. Enter the time period in days in which the maximum number of donation 'credits' may occur. This is a rolling time period. Therefore, for a 365 entry, eligibility looks at the total of 'credits' in the last 365 days.

Eff Date

Entry is required. Enter the effective date for the maximum donations/procedure group entry in MMDDYYYY format. This field cannot be modified for existing records.

Term Date

Entry is optional. Enter the termination date for non-use for the maximum donations/procedure group in MMDDYYYY format.

At Commit

All changes are saved to the database.

What to Do Next

There is no next step.

2.3.17 Define Eligible Cell & Plasma Loss (LOSS)

Intended Use

Use this screen to identify the maximum loss of red cell or plasma a donor may have over a specified number of days and weight range in order to maintain eligibility. If the donor goes over the maximum amount for the number of days and weight, he becomes ineligible. Entry in this table is only required if your facility is using RBC/PLASMA loss calculations in determining eligibility.

Limitations


There cannot be overlapping max loss and period in the table for the same cell type.

Prerequisites

None

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `LOSS`.

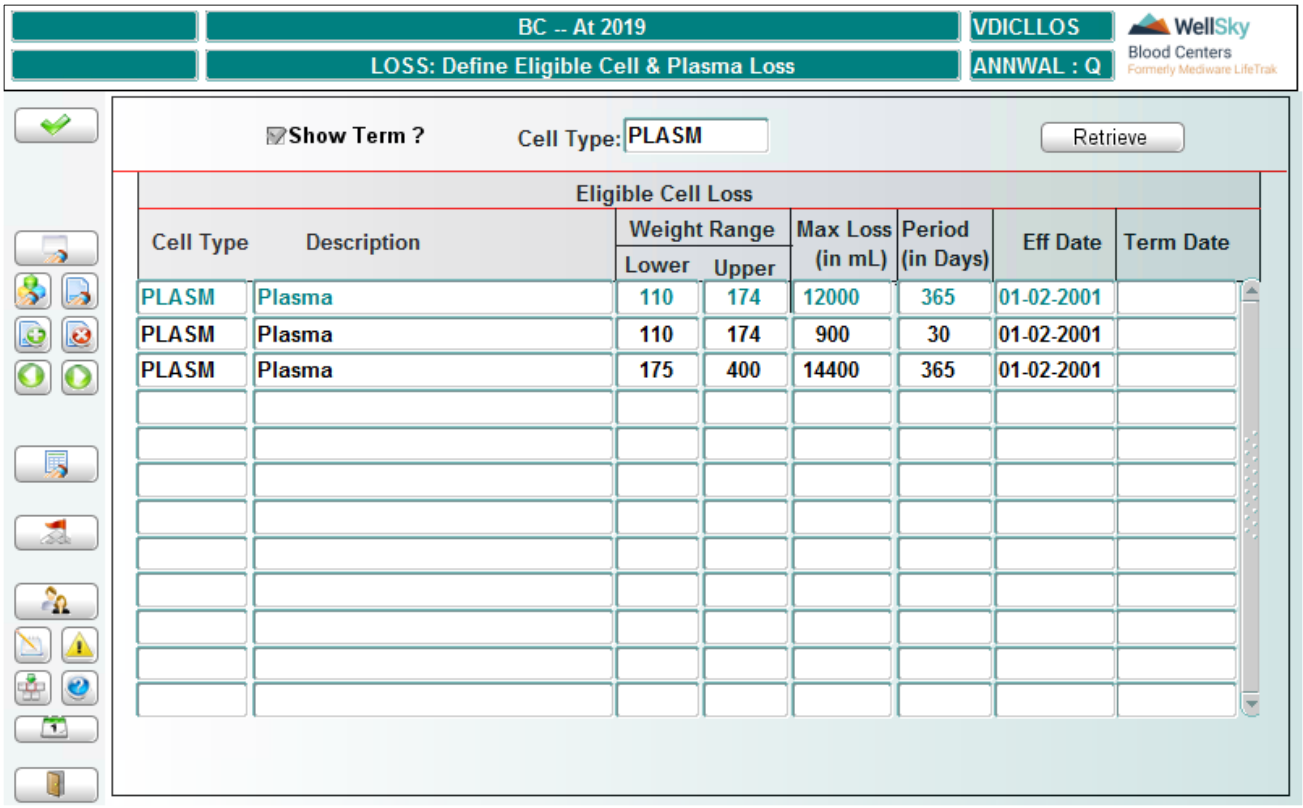

Control Block Fields and Definitions

Show Term?

When checked, which is the default, terminated cell types as well as active cell type records display in the Cell Type field. Click on the check box to remove the check to view only active cell type records.

Cell Type

Entry is optional. Enter a Cell Type or leave blank.

Retrieving Data

Click **Retrieve** to display entries that match the criteria entered. If no cell type is entered, all entries are retrieved.

To Add or Modify Data

Cell Type

Entry is required. Enter a cell type the maximum loss for a specified period.

Weight Range

The range the donor can weigh to determine how much RBC/Plasma can be donated.

Lower

Enter the lowest value used to determine cell/plasma loss in eligibility

WellSky Corporation
Proprietary and confidential

Upper
Enter the highest value used to determine cell/plasma loss in eligibility

Max Loss In (mL)
Entry is required. Enter the maximum volume in mLs that can be lost and maintain eligibility up to 999999.

Period in Days
Entry is required. Enter the rolling period in number of days to look back at the volume of RBC or PLASM loss.

NOTE – There can only be one set of effective dates for RBC or PLASM loss. Any other entries require termination of one set and new effective date for the other set.

Eff Date
Entry is required. Enter the effective date in MMDDYYYY format. The effective date cannot be prior to the system date. This field cannot be modified for existing records.

Term Date
Entry is optional. Enter a date for non-use in the donor search in MMDDYYYY format.

At Commit
RBC and PLASM loss maximums are defined for the rolling period.

What to Do Next
There is no next step.

2.3.18 Define Procedure Exclusions (XCLU)

Intended Use
Use this screen to associate an interdiction to a specific donation type and procedure code. When placed on the donor, the interdiction identifies the donor as ineligible for that donation type and procedure code combination. The user manually places these interdictions.

Limitations
In the Interdiction Codes (INTER) table, the interdiction must not be of the interdiction type HOLDS. HOLDS type interdictions exclude the donor in the Donor to Lab interface. The 'DF' field must be set to N. If Y is in the field, the donor is deferred, which would include all procedure codes.


Prerequisites
The following must be previously defined:

- Donation types in Define Donation Types (DONS)
- Procedure codes in Define Procedure Codes (PROCS)
- Interdiction codes in Interdictions Codes (INTER)

Although no relevance to entry in this screen, the donation type/procedure code combination should be defined in Define Donation Procedures (DONPROC), or that combination cannot be registered for a donation.

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `XCLU`.

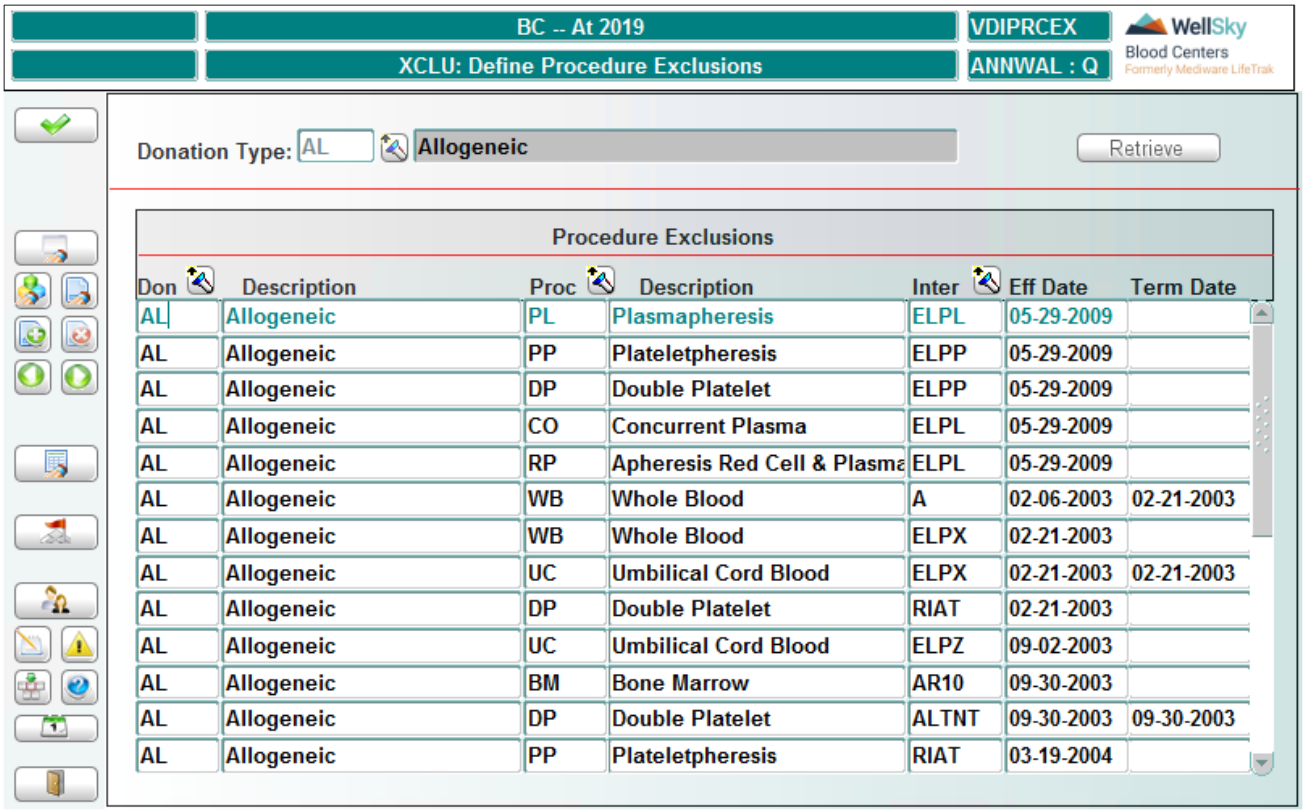

Control Block Fields and Definitions

Donation Type

Enter the donation type or select from the LOV.

Retrieving Data

Click **Retrieve** to display entries that match the criteria entered. If no donation type is entered, all entries are retrieved.

To Add or Modify Data

Don

Enter a donation type or select from the LOV.

WellSky Corporation
Proprietary and confidential

Proc
Enter a procedure code or select from the LOV.

Inter
Enter an interdiction code or select from the LOV.

Eff Date
Enter the effective date in MMDDYYYY format. Date cannot be prior to system date. This field cannot be modified for existing records.

Term Date
Entry is optional. Enter a date for non-use in the donor search in MMDDYYYY format.

At Commit
Those interdictions are associated that donation type/procedure code.

What to Do Next
There is no next step.

2.3.19 Venipuncture Attributes (VENATRR)

Intended Use
Use this screen to maintain venipuncture attribute codes.




NOTE – Refer to Appendix J - Venipuncture Codes for detailed information on using the venipuncture codes.

Limitations
This is only used for VENI (venipuncture) attributes. Venipuncture codes 01 through 08 are static data. If you add other codes, please check with WellSky prior to the change.

Prerequisites
You must first define VENI attribute group in Master Code ATGRP.

Accessing the Screen
Access this screen from the Restricted Validation Tables menu or by entering the keyword `VENATRR`.

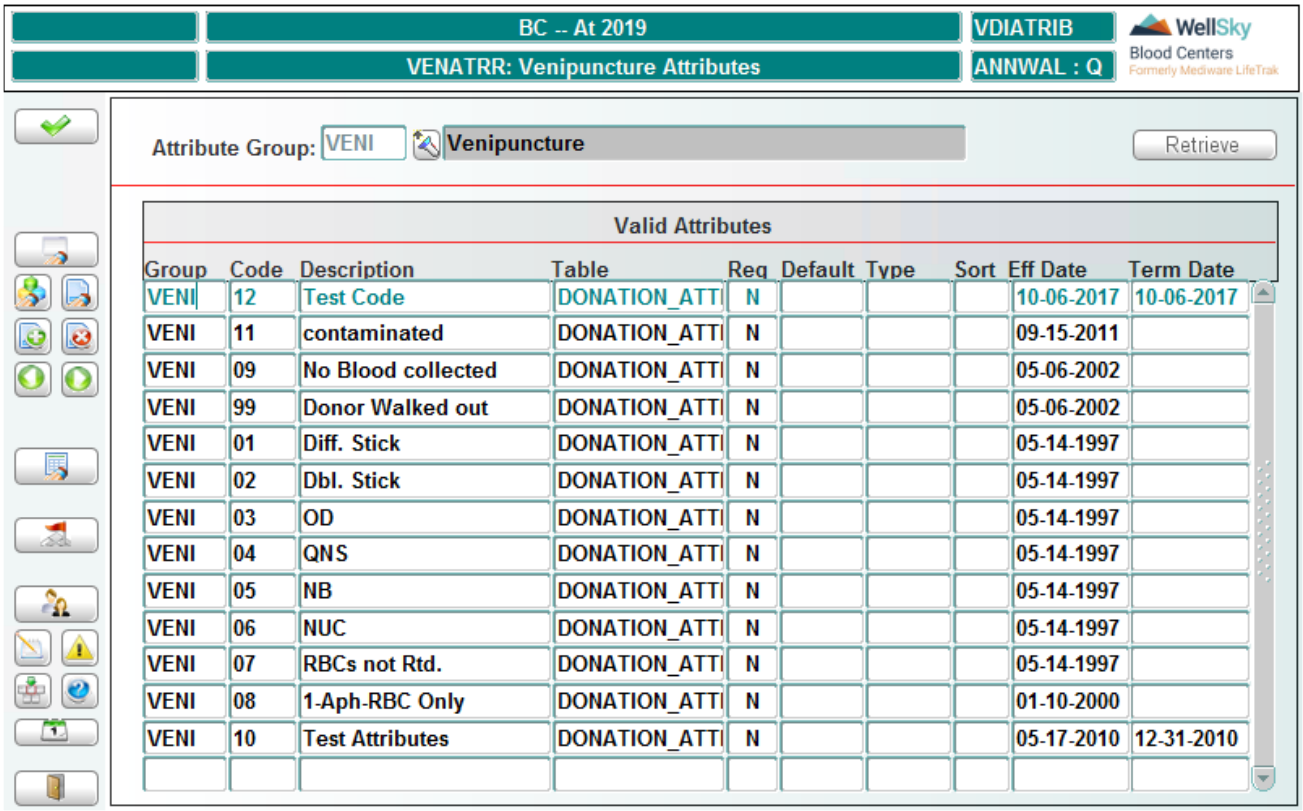

Control Block Fields and Definitions

Attribute Group

Entry is required. Enter VENI for the attribute group or select from the LOV.

Retrieving Data

Click **Retrieve** to display the venipuncture attributes.

To Add or Modify an Existing Attribute

Group

Entry is required. Enter `VENI` as the attribute group.

Code

Entry is required. Enter an attribute code up to five characters.

Description

Entry is required. Enter a description for the code, up to 50 characters.

Table

Entry is required. Enter DONATION_ATTRIBUTES for the database table name.

WellSky Corporation
Proprietary and confidential

Req
Entry is required. Enter N.

Default
Field not utilized.

Type
Field not utilized.

Sort
Entry is optional. If sort sequence is required, enter the ascending numeric value of sort (up to three digits).

Eff Date
Entry is required. Default is the system date. For a different date, enter the effective date of the attribute in MMDDYYYY format.


Term Date
Entry is optional. Enter termination date for non-use of the attribute, using the MMDDYYYY format.

At Commit
All changes are saved to the database.

What to Do Next
There is no next step.

2.3.20 Configure Find Donor Block for a Program (DONBLOCK)

Intended Use
Use the Configure Find Donor Block for Program screen to customize functionality of the Find Donor window (pictured below), which is used by critical programs to identify donors. The Find Donor window can be configured independently for each program that uses it. Become familiar with the fields and how data is retrieved in the Find Donor window to allow configuration for your requirements.

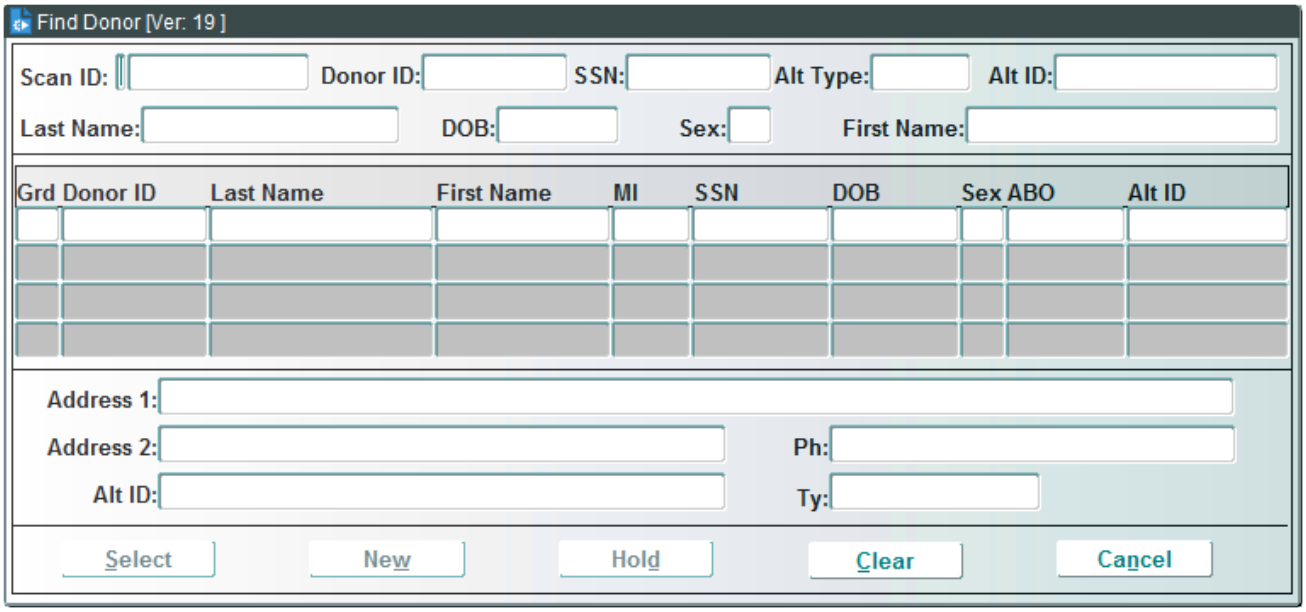

Limitations

Find Donor uses four key data elements for donor uniqueness:

- Last name
- Date of birth
- Gender
- Social security number
- Alt ID and Alt Type

Using a subset of this key data may hinder the ability for unique donor identification.

Prerequisites

The Find Donor window and associated programs have been identified in Associate Programs to Windows (WINPROG) in the WellSky Restricted Menu Administration (WSKYMA) menu functions.

ONLPLOOK is static and should not be removed from the configuration block. This parameter is used in On-Site Registration to configure the General Lookup/Print Card function.

The following functions must be defined:

- NEW_CHECK – Verification key data for the new donor only. This is not associated with any find donor program. Leave the upper portion blank or enter default values. At the detail block, enter all the 5 key data (LAST_NAME, SSN, DOB, GENDER, FIRST_NAME, ALT_ID, ALT_ID_TYPE) and make the appropriate settings. This function is only used when registering a new donor in the On-Site module.
- DON_VERIFY – Verification Key data after entering the donor ID. This is not associated with any find donor blocks. Leave the upper portion blank or enter default values. At the detail block, enter all the 5 key data (LAST_NAME, SSN, DOB, GENDER, FIRST_NAME, ALT_ID, ALT_ID_TYPE) and make the appropriate settings. This entry is only used in the On-Site module for the Health History screen, Link Screen, Walkout screen, and

WellSky Corporation
Proprietary and confidential


Bleed Time Entry screen.

NOTE – If the number of entries is set to 2, the first entry is considered as the LOV selection and another manual entry is considered as the second entry. If the number of entries is set to 1, the first entry is considered as the LOV selection (current On-Site module).

For the new .net On-Site Module: if the number of entries is set to 2, the user will have to enter the value twice; the selection from the Donor Selection List will not be used as the first entry.

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `DONBLOCK`.

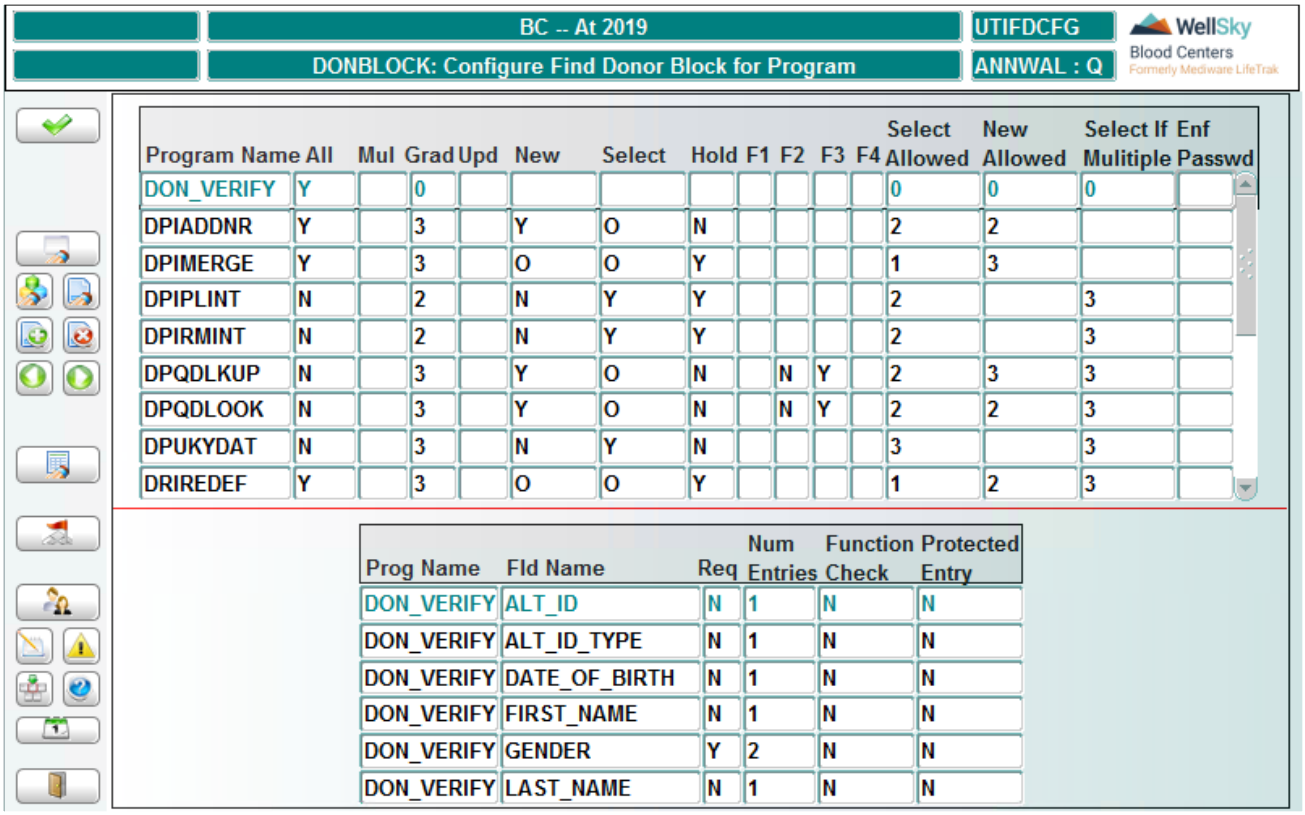

Program Name	All	Mul	Grad	Upd	New	Select	Hold	F1	F2	F3	F4	Select Allowed	New Allowed	Select If Mulitiple	Enf Passwd
DON_VERIFY	Y		0									0	0	0	
DPIADDNR	Y		3		Y	O	N					2	2		
DPIMERGE	Y		3		O	O	Y					1	3		
DPIPLINT	N		2		N	Y	Y					2		3	
DPIRMINT	N		2		N	Y	Y					2		3	
DPQDLKUP	N		3		Y	O	N		N	Y		2	3	3	
DPQDLOOK	N		3		Y	O	N		N	Y		2	2	3	
DPUKYDAT	N		3		N	Y	N					3		3	
DRIREDEF	Y		3		O	O	Y					1	2	3	

Prog Name	Fld Name	Req	Num Entries	Function Check	Protected Entry
DON_VERIFY	ALT_ID	N	1	N	N
DON_VERIFY	ALT_ID_TYPE	N	1	N	N
DON_VERIFY	DATE_OF_BIRTH	N	1	N	N
DON_VERIFY	FIRST_NAME	N	1	N	N
DON_VERIFY	GENDER	Y	2	N	N
DON_VERIFY	LAST_NAME	N	1	N	N

All programs that use the Find Donor window display with current configuration. The cursor rests in the last field, Enf Password, of the highlighted row in the Programs List block. Other specific field information for the selected program displays below in the Program Details block. Although not all fields are used, specificity of each field is addressed.

Programs Block Fields and Definitions

Program Name

Identifies which programs use the Find Donor window. All entries in the selected row are associated to that program, as is the information displayed in the Program Details block below. The current programs using the Find Donor window are already identified. New programs will be added by WellSky as required.

All

Although this field requires an entry, it is no longer used. Enter Y or N. For the ability to invoke the New button, in the Find Donor window refer to the *New* field below.

Mul

Field not used at this time.

Grad

Controls the donor grade matches that are retrieved. Valid entries for donor grade matches range from 1 to 5. Example: an entry of 3 would return donor grade matches 3, 2 and 1. Refer to the Grading Matrix Query (QGRADMAT) screen. Modifications to Donor Grading Matrix (GRADMAT) are controlled under WellSKy Restricted Validation Tables (WSKYRVT).

Upd

Field not used at this time.

New

Valid entries for this field are Y (yes), N (no) or O (optional). This field is used in conjunction with the New Allowed field and the number of potential donor matches retrieved in Find Donor as follows:

- If set to N, the New button is disabled in Find Donor.
- If set to Y or O and no donors are returned, the New button is enabled in Find Donor.
- If set to Y with only one donor returned and the donor's grade match is greater than or equal to the value in Select Allowed, the New button is enabled; otherwise, it is disabled in Find Donor.
- If set to Y or O with only one donor returned and the donor's grade match is greater than or equal to the value in both Select Allowed and New Allowed the New button is enabled; otherwise, it is disabled in Find Donor.
- If set to Y or O with more than one donor returned and none of those donor grade matches are less than the value entered in the New Allowed field, the New button is enabled in Find Donor.
- If set to Y with only one donor returned and the donor's grade match is less than the value in New Allowed, the New button is enabled in Find Donor. However, if set to O with only one donor returned and the donor's grade match is less than the value in New Allowed, the New button is disabled in Find Donor.
  Tom and Bob are twins (same last name; same birth date). Tom is already a registered donor. Bob now wants to register as a donor. When Bob's last name, date of birth, and gender are entered into Find Donor (SSN is not entered), Tom's information will be returned because it is a Grade 1 match. If the *New* field is set to Y, the **New** button will be enabled, allowing Bob to be registered. However, if the *New* field is set to O, the **New** button will be disabled and Bob will not be able to be registered.

Select

Valid entries for this field are Y (yes) or O (optional). This field is used in conjunction with the *Select Allowed* field, the Select If Multiple field and the number of potential donor matches retrieved by the Find Donor block as follows:

WellSky Corporation
Proprietary and confidential

- If set to Y or O and no donors are returned, the Select button is disabled in Find Donor.
- If set to Y or O with only one donor returned and the donor's grade match is less than or equal to the value in Select Allowed, the Select button is enabled, otherwise it is disabled in Find Donor.
- If set to Y or O with more than one donor returned and the highlighted donor's grade match is less than or equal to the value in Select If Multiple, the Select button is enabled for that specific donor, otherwise it is disabled in Find Donor.

Hold

Valid entries for this field are Y (yes), N or O (optional). This field is used in conjunction with the Select Allowed field and the number of potential donor matches retrieved in Find Donor as follows:

- By default, if set to Y, the Hold button is enabled, otherwise, if set to N, the Hold button is disabled in Find Donor.
- If no donors are returned, the Hold button remains in default status in Find Donor.
- If set to Y or O with only one donor returned and the donor's grade match is greater than the value in Select Allowed, the Hold button is enabled; otherwise it is disabled in Find Donor.
- If set to Y or O with more than one donor returned, the Hold button is enabled in Find Donor.

F1

This is not used in the donor look-up programs; but is used in all other programs that call the Find Donor window. Enter Y (yes) if you want to display message 13022: "The specified criteria finds no match in the donor database" if no matching donors are found. If you do not want to display the message, leave this field blank.

F2

Field not used at this time.

F3

Used in donor look-up program only (ONLPLOOK). Enter **Y** for the ONLPLOOK program to receive the following pop-up message: 'Donor Not on File', which will be presented for any new donors. Enter **N** to specify that it is not a look-up program (ONILKREG). The system then looks for the flag F1 for further actions, as explained below.

- If the F1 is Y, then it will display the message code 13022 ("The specified criteria finds no match in the donor database") when no match is found.
- If the F1 is N or blank, then it will not display the message code 13022; the cursor just sits in the Detail Find Donor block.

F4

Field not used at this time.

Select Allowed

In reference to the *Select* field instructions, enter the donor match grade value (1 to 5) where the Select button can be invoked if the donor match grade is less than or equal to this value.

In reference to the *Hold* field instructions, enter the donor match grade value (1 to 5) where the Hold button can be invoked if the donor match grade is greater than this value.

New Allowed

Refer to the *New* field instructions. Enter the donor match grade value (2 to 5) where the New button cannot be selected if any of the multiple donors returned are less than this value and the entry in the *New* field is `Y` or `O`.

Select If Multiple

In reference to the *Select* field instructions, enter the donor match grade value (2 to 5) where the Select button can be invoked if the donor match grade is less than or equal to this value.

Enf Passwd

Field not used at this time.

Details Block Fields and Definitions

Prog Name

Field automatically defaults with program name highlighted in the Programs Block.

Fld Name

Enter the field name.

> **NOTE –** The name entered must match the database column names in the FIND_DONOR_FIELDS table.

Req

Enter `Y` if the entry is required in this field. Enter `N` if entry is not required in this field.

Num Entries

Enter `1` if only 1 entry is required in the field; enter `2` if two entries are required for the field.

> **NOTE –** Only 1 or 2 should be entered. If value other than 1 or 2 is entered, the systems will require only 1 entry.

Function Check

Field not used at this time.

Protected Entry

If `Y` is entered in the Donor ID field, this field is used in CNFRM_FLD. When the donor ID is entered in Find Donor, and the function check is set to Y, the system checks for the value defined in System Parameter Table CNFRM_FLD. This function is only used in ONILKREG.

WellSky Corporation
Proprietary and confidential

At Commit

All changes are saved to the database.

What to Do Next

There is no next step.

2.3.21 Associate Nickname to Name (NICK)

Intended Use

Use this screen to associate a nickname to a first name for use in the donor grading matrix for possible donor matches. The nickname is used as a 'similar' name match for the associated first name.

Limitations


This screen is limited to first names.

Prerequisites

None

Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword `NICK`.

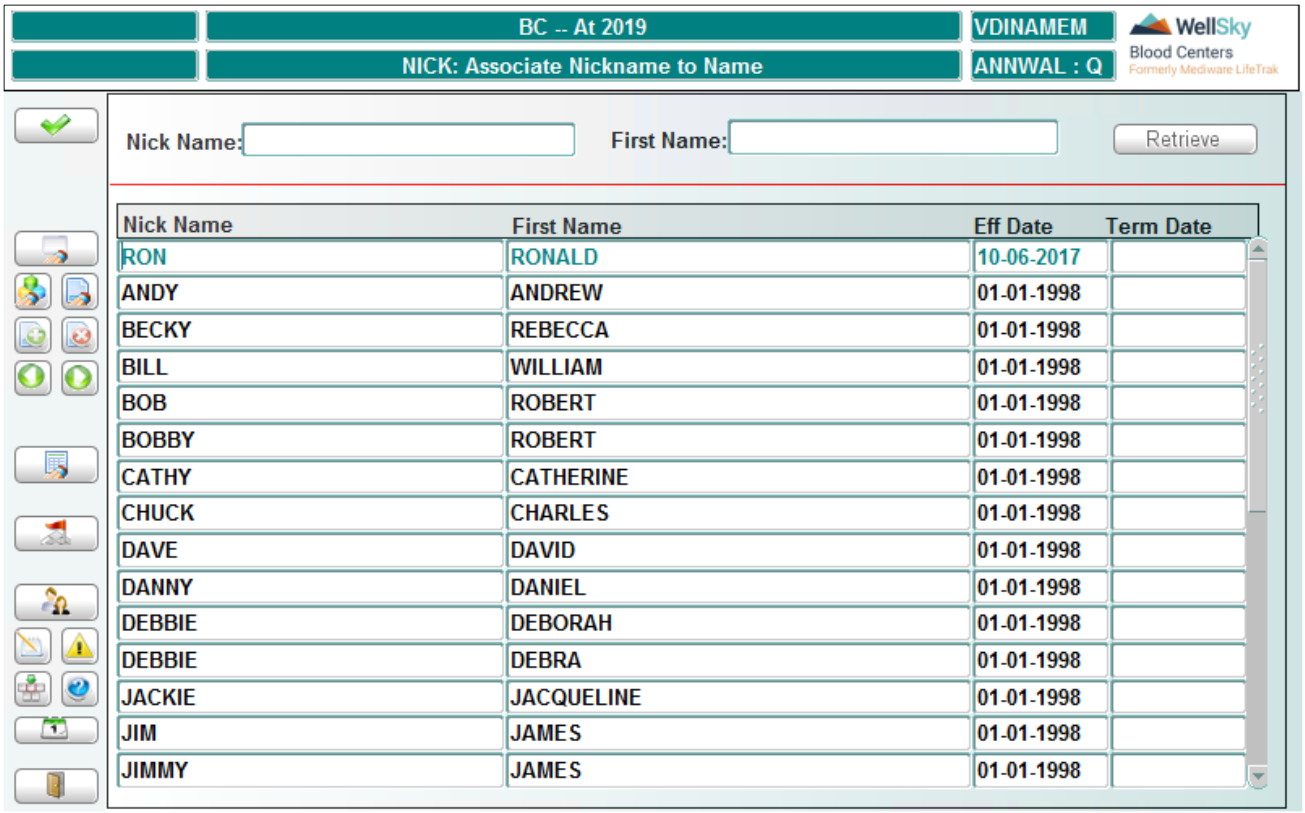

Control Block Fields and Definitions

Nick Name

Entry is optional. Enter a nickname or leave blank. If you enter a nickname, do not enter a first name.

First Name

Entry is optional. Enter a first name or leave blank.

Displaying Entries

Click **Retrieve** to display entries that match the criteria entered. If no nickname or first name were entered, all entries are retrieved.

To Add or Modify Data

Nick Name

Entry is required. Enter a nickname to be associated to a first name.

First Name

Entry is required. Enter the first name the nickname is to be associated with.

Eff Date

Entry is required. Enter the effective date of the pair of names for use in similarity in donor searches in MMDDYYYY format. The effective date cannot be prior to the system date. This field cannot be modified for existing records.

Term Date

Entry is optional. Enter a date for non-use in the donor search in MMDDYYYY format.

At Commit

All changes are saved to the database.

What to Do Next

There is no next step.

2.3.22 Equipment QC Parameters (DRVPRF)

Intended Use

The Equipment QC Parameters allows configuration of drive profile and equipment QC parameters for the equipment and supplies.

WellSky Corporation
Proprietary and confidential

Limitations

- The equipment codes defined for DREQP must match the equipment code type in LAB for equipment master code EQUIP.
- If the catalog, lot number, reference number, whole blood kit, and platelet kit is to be scanned, the following must be defined:
  - LOTNO
  - CATNO
  - REFNO
  - WBKIT
  - PPKIT


Prerequisites

Master Codes:

- DREQP – Drive Equipment
- DRSUP – Drive Supplies
- DRPTY – Drive Profile Types
- QCCON – QC Conditions
- QCPAR – QC Test Parameters
- QCRES – Equipment/Supplies QC Acceptable Results
- QCVTY – QC Value Types

Accessing the Screen

Access this screen from the Donor Restricted Validation Table menu or by entering the keyword DRVPRF.

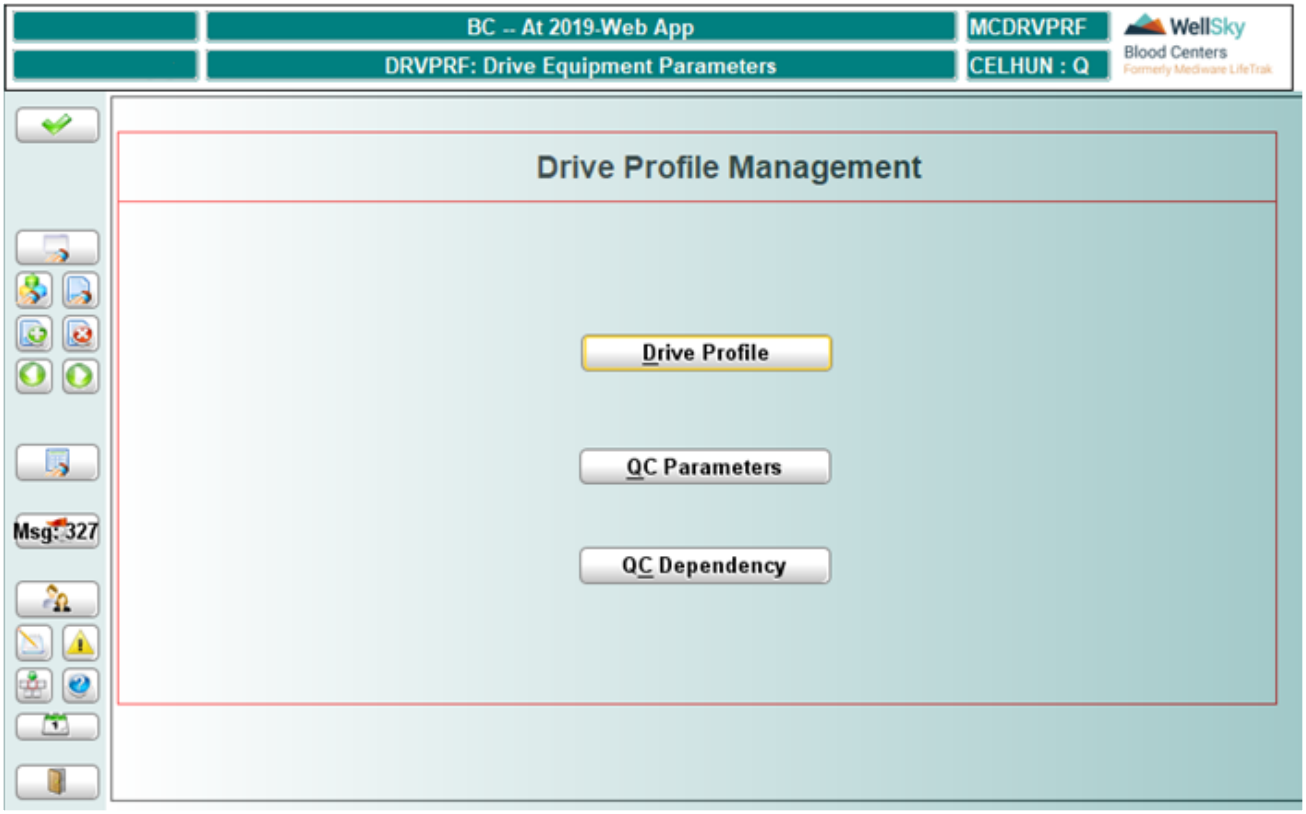

The main screen has three buttons on the form.

Drive Profile – This button is used to define the equipment and supplies for the drive type.

QC Parameters – This button is used to define the tests that need to be defined to perform QC for the equipment and supplies.

QC Dependency – This button is used to define parameter dependency when entering QC data.

Equipment QC Parameters – Drive Profile

Intended Use

Use the Drive Profile form to configure the equipment and supplies required for a drive type.

Limitations

N/A.


Prerequisites

Master Codes to be defined:

- DREQP – Drive Equipment
- DRSUP – Drive Supplies
- DRPTY – Drive Profile Types

Accessing the Screen

Access this screen by clicking **Drive Profile** or using the hot key `ALT + L` from the Drive Profile screen.

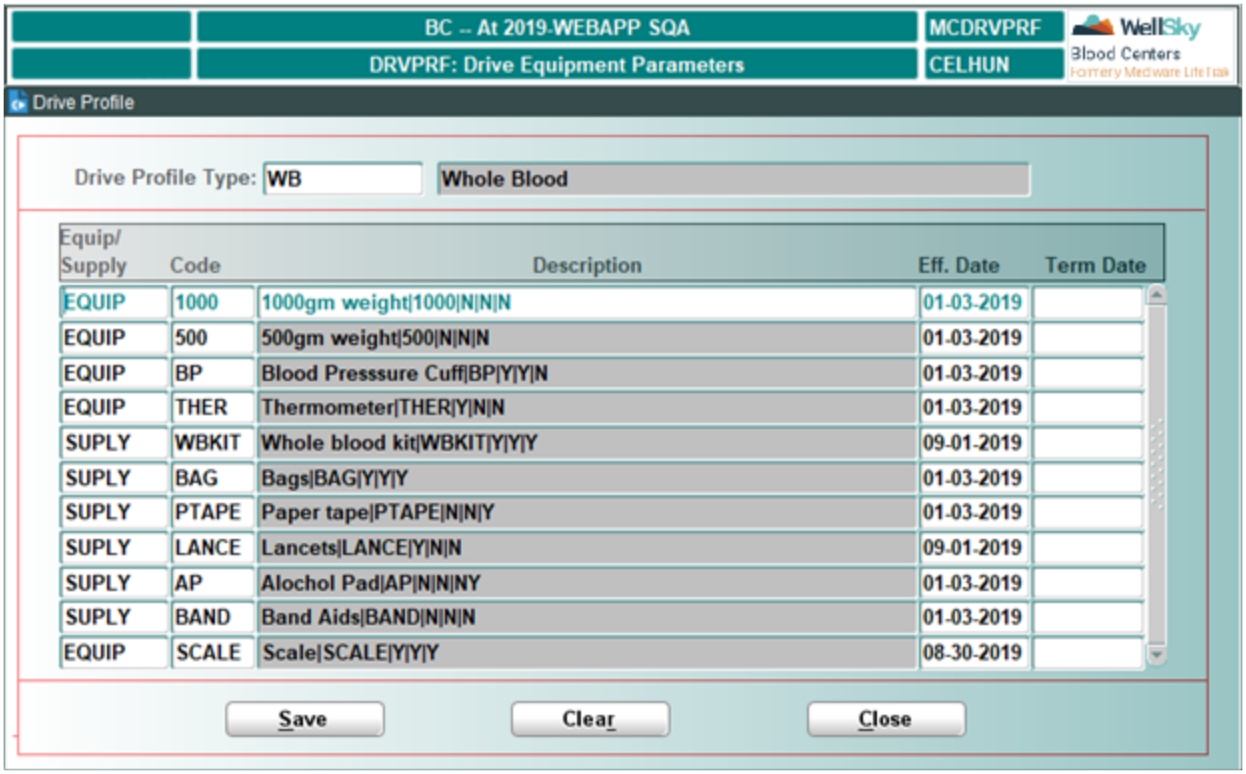

Control Block Fields and Definitions

Drive Profile

Required field. Enter the drive profile or select it from the list of values. The list is populated using the master code DRPTY.

Detail Block Fields and Definitions

Equip/Supply

Required field. Enter `EQUIP` for equipment, or `SUPLY` for supplies.

Code

Required field. Enter the code that corresponds to the equipment or supplies. If you select EQUIP, it will pull the list from the DREQP master code. If you select SUPLY, it will pull the list from the DRSUP master code.

Description

Displays the description of the selected master code.

Eff Date

Enter an effective date in MMDDYYYY format. When leaving the field, the system will reformat it to MM-DD-YYYY.

Term Date

Enter a termination date in MMDDYYYY format. When leaving the field, the system will reformat it to MM-DD-YYYY.

At Commit

The system commits data to the database.

What to Do Next

For normal processing, press **F8** (Exit Screen)to return to the Drive QC Parameter to set up QC Parameters for the equipment and supplies.

Equipment QC Parameters – QC Parameters

Intended Use

Use the Equipment QC Parameters – QC Parameters form to configure the QC test parameters to be performed for each type of equipment and supplies.

Limitations

N/A.

Prerequisites


Master Codes to be defined:

- DREQP – Drive Equipment
- DRSUP – Drive Supplies
- QCCON – QC Conditions
- QCPAR – QC Test Parameter
- QCRES – Equipment/Supplies QC Acceptable Results
- QCVTY – QC Value Types

Accessing the Screen

Access this screen by clicking **Parameter QC** or using the hot key `ALT + Q` from the Drive Equipment QC screen.

WellSky Corporation
Proprietary and confidential

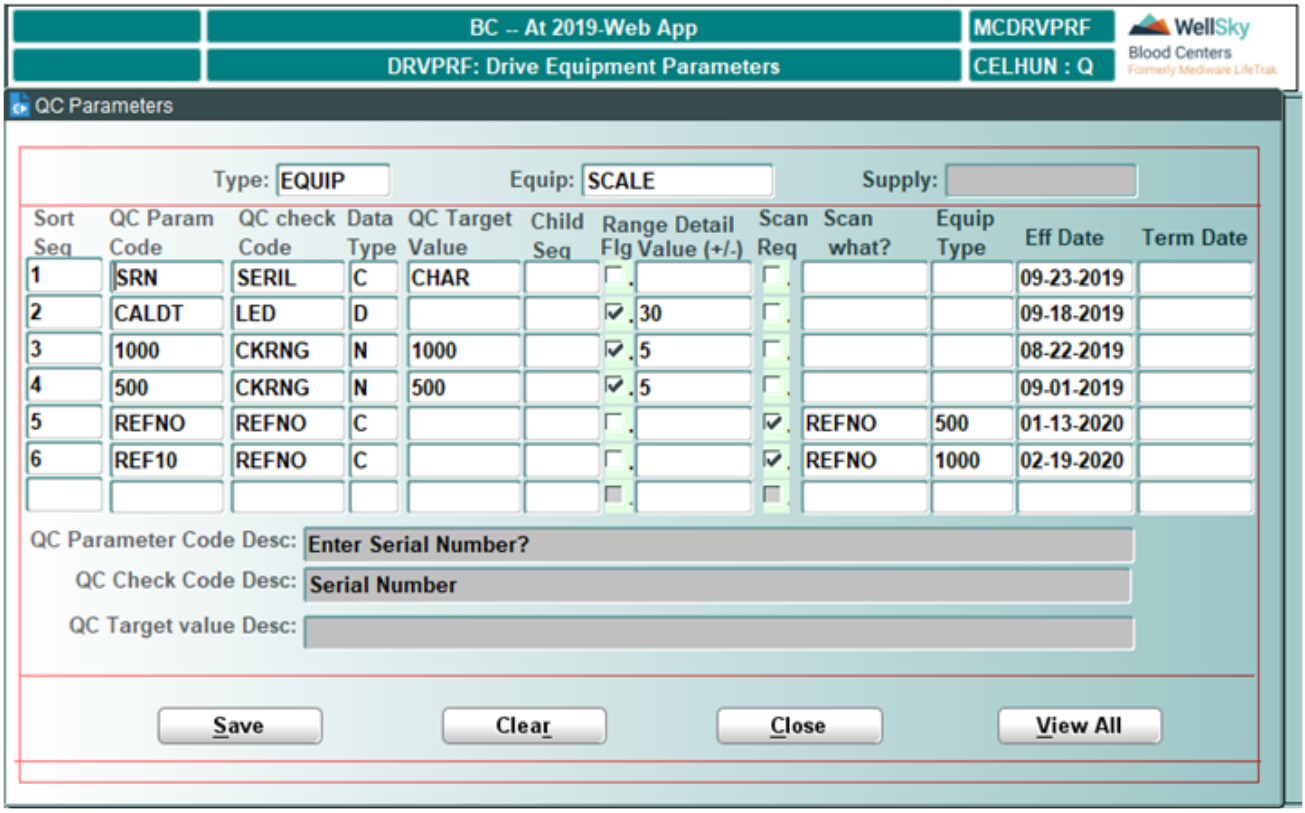

Control Block Fields and Definitions

Type

Field is required. Enter `EQUIP` for equipment, or `SUPLY` for supplies. If you enter EQUIP, the cursor moves to the Equip field and the system disables the Supply field. If you enter SUPLY, the cursor moves to the Supply field, and the system disables the Equip field.

Equip

Field is required if EQUIP is entered for Type. Manually enter or select from the list. The list is populated from the master code DREQP.

Supply


Field is required if SUPLY is entered for Type. Manually enter or select from the list. The list is populated from the master code DRSUP.

Detail Block Fields and Definitions

Sort Seq

Enter the sequence number for the order the QC parameters should display to the user. The first entry in the table will automatically display as 1, but the user can update it to a different number.

NOTE – If you are using the same QC parameter and configuring with different target values, the sequence number should be the same. For example, in the screenshot below, for configuration of a bag, OPCON can have 'YES' or 'NO' as the target value, so they both have a sequence number of 4.

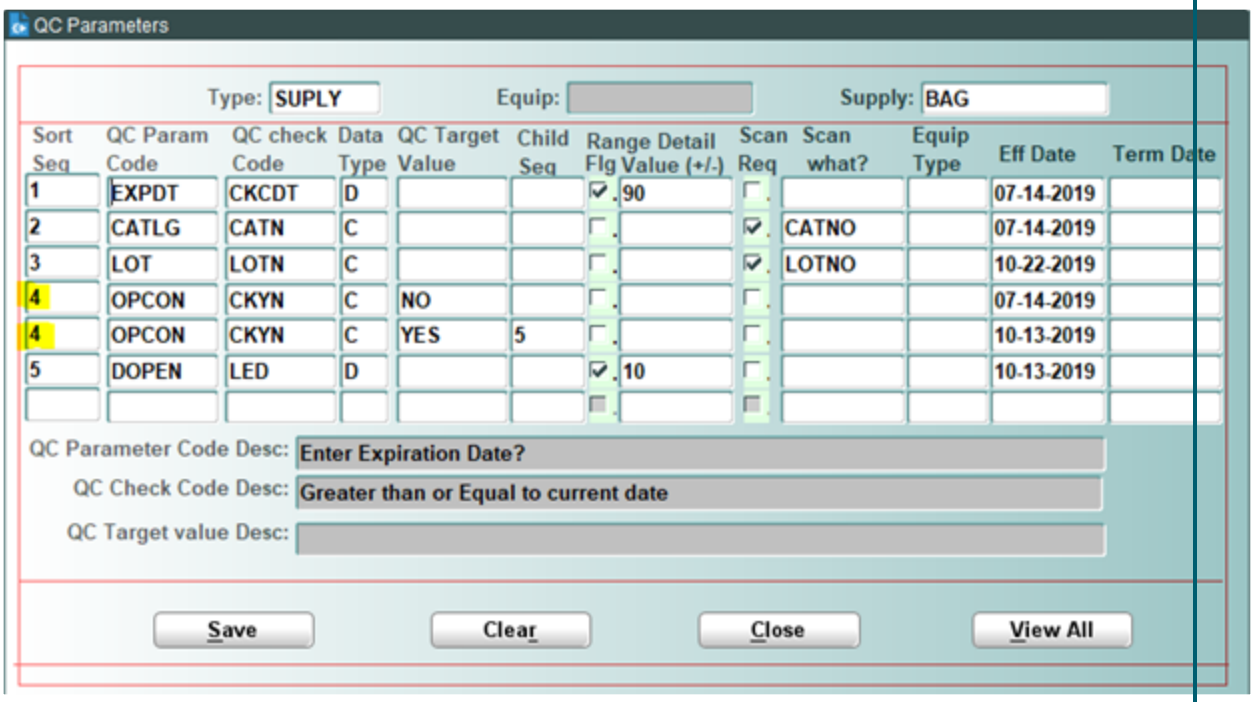

QC Param Code

This is a required field. Manually enter the code or select it from the list. The list is populated from master code QCPAR. This is the description of the test parameter code that will display to the user.

QC Check Code

This is a required field. Manually enter the code or select it from the list. The list is populated from master code QCCON. This is the controlling factor to the actual QC value.

Data Type

Enter C, D, or N.

- C = character (characters or numbers)
- D = date
- N = numbers only

QC Target Value

This is an optional field. Manually enter the value that is expected, or leave the field blank. The list is populated from master code QCRES. This is the controlling factor to the actual QC value.

WellSky Corporation
Proprietary and confidential

Child Seq

This is an optional field that is only used when the same QC parameter is used to configure different target values. Enter the sort sequence number that should be called if the target value is entered.

Range Flg

If a range is required for a specific parameter, place a check mark (✓) in the box.

Detail Value (+/-)

Enter the numerical value that will be added/subtracted from the Target Value entry to determine the range.

Scan Req

If you can scan the value listed in the target value as required for a specific parameter, place a check mark (✓) in the box.

Scan What?

This is an optional field. Manually enter the value that is expected, or leave the field blank. The list is populated from master code QCVTY. This value will be the value scanned. It should be defined in VALID_BARCODE_CONFIG table (backend).

Equip Type

Enter the equipment type that is linked to the reference number that will be scanned. The LOV displays based on the Equipment table in the Lab application.

Eff Date

Enter an effective date in MMDDYYYY format. When leaving the field, the system will reformat the date to MM-DD-YYYY.

Term Date

Enter a termination date in MMDDYYYY format. When leaving the field, the system will reformat the date to MM-DD-YYYY.

Defining a Scannable Field

- The QC parameter should define the scanning of the field (Catalog number, Lot number, Reference number, etc.).
- The QC condition should be equal to the value you want to scan.
  - CATN
  - LOTN
- The scan flag should be checked.
- Scan What? should be set equal to the QC condition:
  - CATN – CATNO
  - LOTN – LOTNO
- To be able to be scanned, the value must be defined in Lab under the Lot Details for Bags (LOTS) table.

Defining a Manual Entry for Lot Number

- The QC parameter should define the scanning of the field (Catalog number, Lot number, Reference number, etc.).
- The QC condition should be equal to the value you want to scan.
  - LOTN
- The data type should be set to "C" so characters and numbers can be entered for the lot number.
- The scan flag should not be checked.

Defining a Date Range

- The QC parameter should describe the calibration date.
- The QC check code should be set to allow the type of a range you want.
  - LED – Less than or equal to current date
  - CKCDT – Greater than or equal to current date
- The data type should equal "D".
- The target value should be null.
- The Range Flg should be checked (✓).
- The detail value (+/-) should have a numerical value that will be added to or subtracted from the target value.

Defining Bag QC Parameters

- Expiration Date of the bag (EXPDT)
  - QC check code – Greater than or equal to current date (CKCDT)
  - Date Type = Date (D)
  - Target value – Equal to or greater than date (EQG)
- Entry of catalog number (CATLG)
  - QC check code – Catalog number (CATN)
  - Data type = Character (C)
  - Target value = (empty)
  - Scan Req – checked
  - Detail value – CATNO
- Has the container been open? (OPCON)
  - QC check code – Yes/No (CKYN)
  - Data type = Character (C)
  - Target value = NO
    - No further test parameters
  - Target value = Yes

WellSky Corporation
Proprietary and confidential

- QC parameter – Date container opened
- Target value = Date (D)
- Range flag checked
- Detail data = Days from current date

NOTE – Use the child sequence number to make sure additional QC parameters are called based on the target value.

Checking Visual Inspection

- Visual Inspection
  - QC parameter – Visual Verification Acceptable? (VIS)
  - QC condition – CKYN
  - Target value = Yes

At Commit

The system commits data to the database.

What to Do Next

For normal processing, press **F8** (Exit Screen).

Equipment QC Parameters – QC Dependencies

Intended Use

Use the QC Dependencies form to enter parameters' relation to one another to determine status of the parameters.

Limitations

N/A.


Prerequisites

Master Codes to be defined:

- DREQP – Drive Equipment
- DRSUP – Drive Supplies
- QCCON – QC Conditions
- QCPAR – QC TEst Parameter
- QCRES – Equipment/Supplies QC Acceptable Results
- QCVTY – QC Value Types

Accessing the Screen

Access this screen by clicking **Drive Profile** or using the hot key `ALT + C` from the QC Dependencies screen.

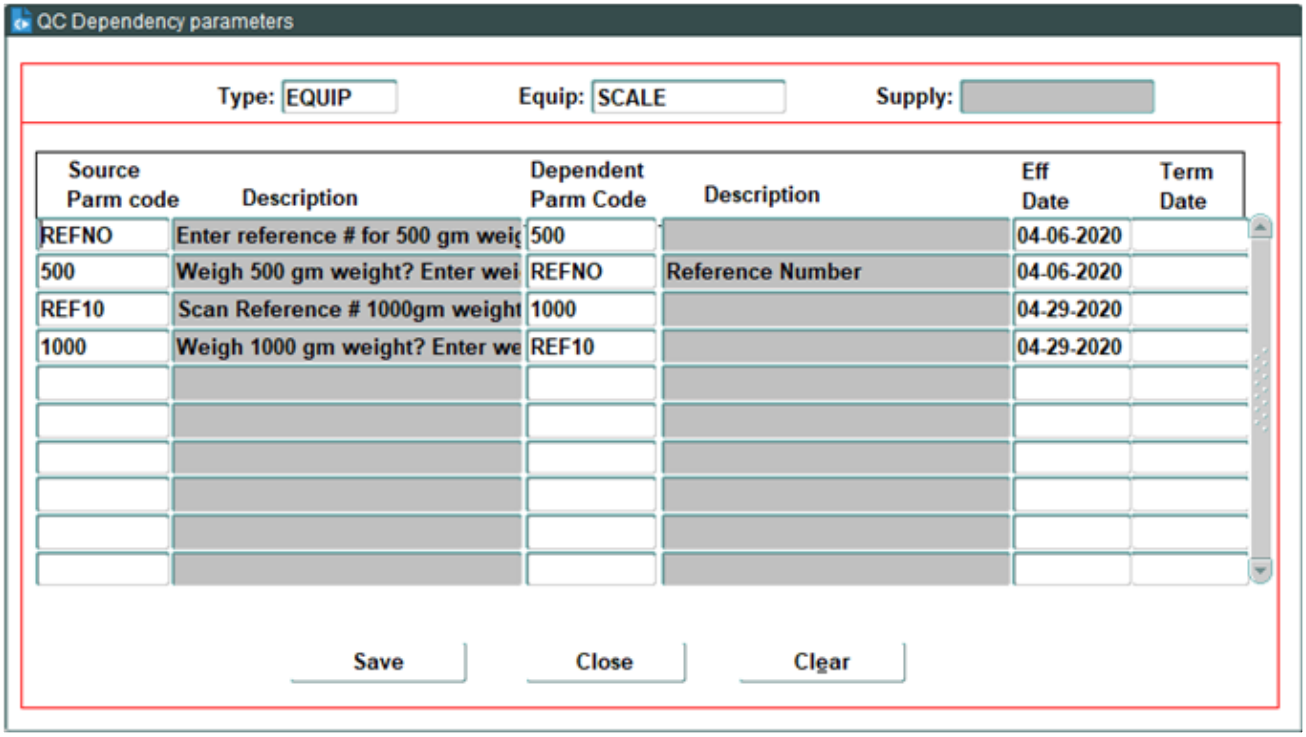

Control Block Fields and Definitions

Type

This is a required field. Enter `EQUIP` for equipment, or `SUPLY` for supplies. If you enter EQUIP, the cursor moves to the Equip field and the system disables the Supply field. If you enter SUPLY, the cursor moves to the Supply field, and the system disables the Equip field.

Equip

This is a required field if EQUIP is entered for Type. Manually enter or select from the list. The list is populated from the master code DREQP.

Supply

This is a required field if SUPLY is entered for Type. Manually enter or select from the list. The list is populated from the master code DRSUP.

Detail Block Fields and Definitions

Source Parm Code

This is a required field. Manually enter the code, or select it from the list. The list is populated from master code QCPAR. This is the description of the test parameter code that will display to the user.

Dependent Parm Code

This is a required field. Manually enter the code, or select it from the list. The list is populated from master code QCPAR. This is the description of the test parameter that will display to the user.

WellSky Corporation
Proprietary and confidential

The Dependent parm code is the code that the entry of this code is linked to or is in direct correlation to the Source parm code. If the Source parm code is out of range, the Dependent parm code will also be out of range.

Eff Date

Enter an effective date in MMDDYYYY format. When leaving the field, the system will reformat the date to MM-DD-YYYY.

Term Date

Enter a termination date in MMDDYYYY format. When leaving the field, the system will reformat the date to MM-DD-YYYY.

2.3.23 Don/Proc Consent Definition (DPCONST)

Intended Use

Use this screen to configure the donation/procedure to a specific consent. The consents need to be defined in Communication Letters (COMLET).

Limitations


NA.

Prerequisites

Letter codes must be defined in Define Communication Letters (COMLET).

Accessing the Screen

Access this screen either from the Donor Restricted Validation Tables menu or by entering the keyword DPCONST.

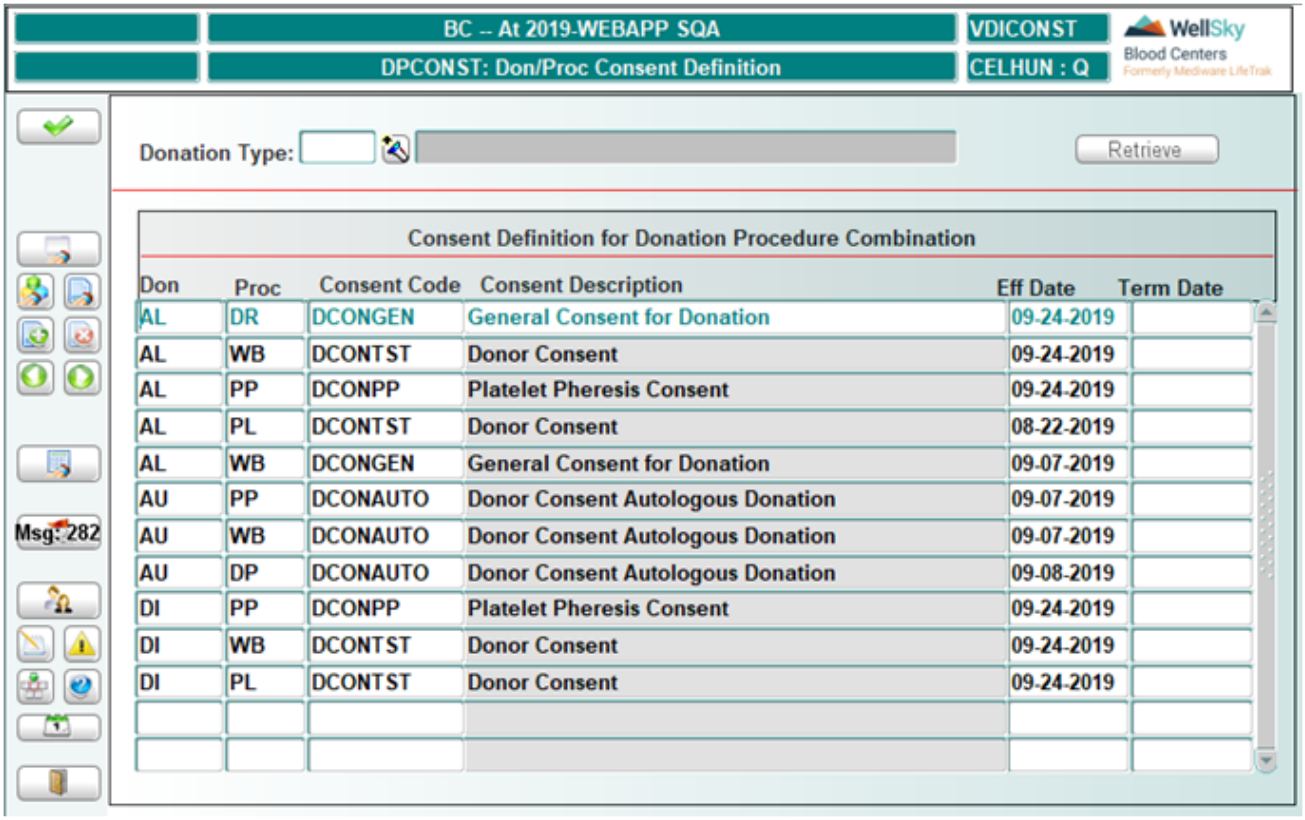

Don	Proc	Consent Code	Consent Description	Eff Date	Term Date
AL	DR	DCONGEN	General Consent for Donation	09-24-2019	
AL	WB	DCONTST	Donor Consent	09-24-2019	
AL	PP	DCONPP	Platelet Pheresis Consent	09-24-2019	
AL	PL	DCONTST	Donor Consent	08-22-2019	
AL	WB	DCONGEN	General Consent for Donation	09-07-2019	
AU	PP	DCONAUTO	Donor Consent Autologous Donation	09-07-2019	
AU	WB	DCONAUTO	Donor Consent Autologous Donation	09-07-2019	
AU	DP	DCONAUTO	Donor Consent Autologous Donation	09-08-2019	
DI	PP	DCONPP	Platelet Pheresis Consent	09-24-2019	
DI	WB	DCONTST	Donor Consent	09-24-2019	
DI	PL	DCONTST	Donor Consent	09-24-2019	

Control Block Fields and Definitions

Donation Type

Entry is optional. Enter the donation type or select it from the LOV.

Retrieving Data

Click **Retrieve** when the donation type has been entered or has been left blank. If you leave the donation type empty, all of the donation types/procedures that have been configured will be retrieved to the form.

In the Detail Block

Don

The system will automatically default the donation type entered in the control block. If the control block is empty, enter the donation type or select it from the LOV.

Proc

Entry is required. Enter the procedure code or select it from the LOV.

Consent Code

Entry is required. Enter the consent code or select it from the LOV.

WellSky Corporation
Proprietary and confidential

NOTE – The consent codes that display in the LOV come from the Define Communication Letters (COMLET) that start with "DCON".

Consent Description

Display only. Displays the description of the consent code that was defined in the Define Communication Letters Title field.

Effective Date

Entry is required. Enter a date in MMDDYYYY format, and the system will reformat to MM-DD-YYYY format.

Termination Date

Entry is not required. Enter a date in MMDDYYYY format, and the system will reformat to MM-DD-YYYY format.

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step for this screen.

2.3.24 Donor Survey Manager

Intended Use

The Donor Survey Manager controls multiple processes. The Donor Survey Manager allows configuration of questions, responses, and templates for surveys that the donor will be requested to complete. The Survey Manager will also allow the viewing and reporting of the survey data.

Limitations

N/A


Prerequisites

Master Codes:

- SUTYPE – this master lists the types of surveys that can be created.

Accessing the Screen

Access this screen from the Donor Survey menu or by entering the keyword `SURVEYM`.

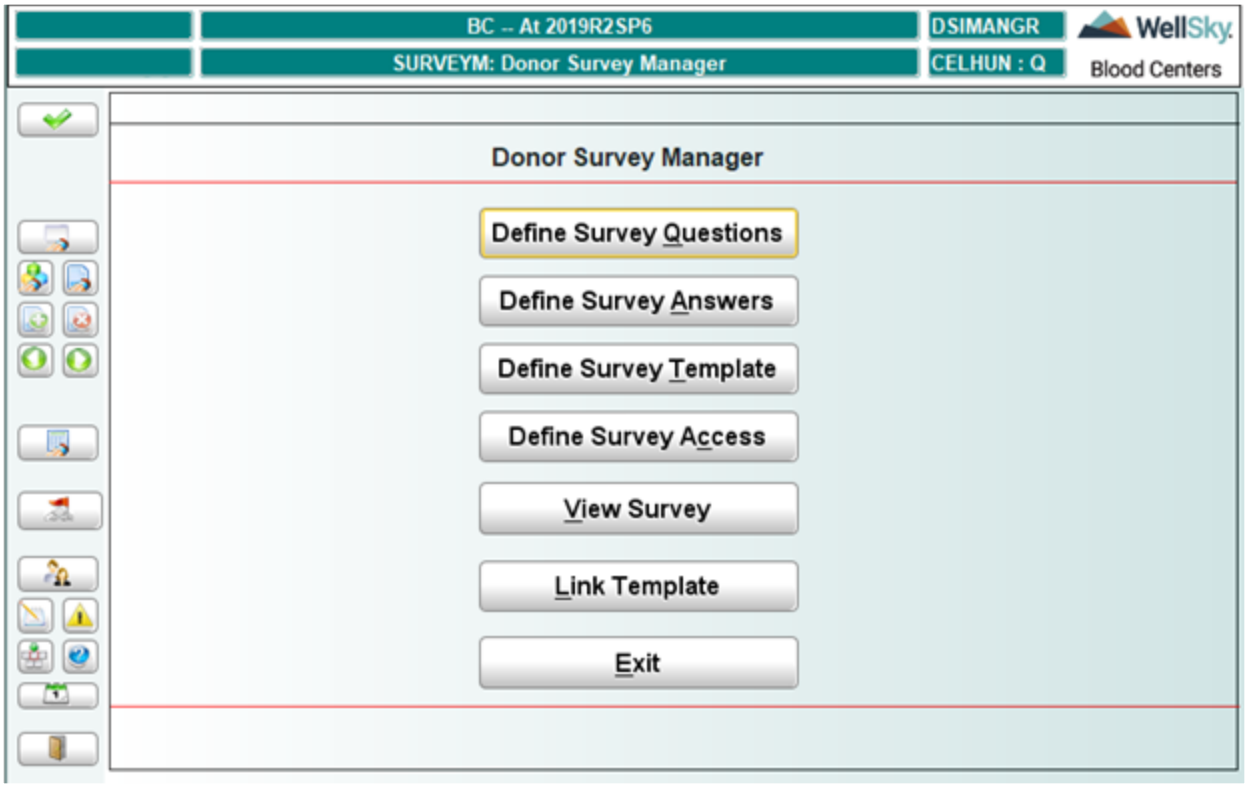

The main screen has seven buttons on the form:

Define Survey Questions – this button is used to open the question form where the survey questions will be defined.

Define Survey Answers – this button is sued to define responses to the donor survey questions.

Define Survey Template – this button is used to configure the donor survey template that will be presented to the donor.

Define Survey Access – this button is used to define by chapter the location where the survey will be called within the On-Site application for regular and FastTrak donors.

View Survey – this button is used to view survey responses that have been captured in the system, and to allow the user to create reports and view statistical data.

Link Template – this button is used to set the criteria for displaying templates to the donor.

Exit – this button will close the main form and return to the Donor Survey screen.

Donor Survey Manager – Define Survey Questions

Intended Use

Use the Define Survey Questions form to configure the questions that will be asked by survey type. Also, the form allows the user to query any questions already configured in the system.

Limitations

N/A

WellSky Corporation
Proprietary and confidential


Prerequisites

Master Codes to be defined:

- SUTYPE - survey types

Accessing the Screen

Access this screen by either clicking **Define Survey Questions** or using the hot keys `ALT+Q` from the Donor Survey Manager screen.

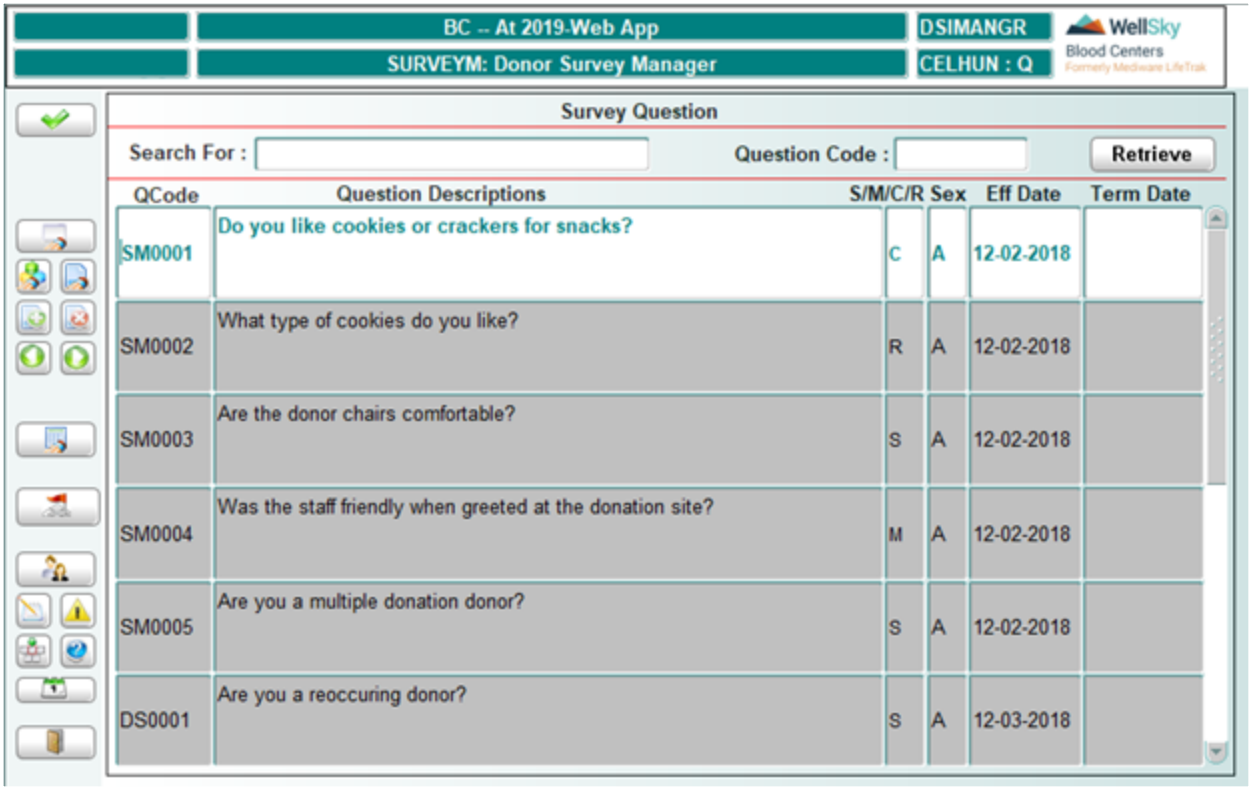

Control Block Fields and Definitions

Search For

This field is used to search for partial or entire words that are contained within a question description.

Question Code

Enter the question code, or select it from the LOV. The LOV comes from the definition within the same table.

Detail Block Fields and Definitions

QCode

Enter a question code, which can be a maximum of 10 characters. Alpha and numeric characters are allowed. Special characters should not be used in the question code.

Question Descriptions

The description of the question can be a maximum of 1000 characters. Alpha, numeric, and special characters are allowed.

S/M/C/R

Enter S, M, C, or R.

- S = single answer is required
- M = multiple answers are required
- C = comment entry
- R = ranking answers

Sex

Enter the sex of the donor that will be required to respond to the survey question. Entry of F, M, or A is allowed.

- F = Female
- M = Male
- A = Everyone (All)

Eff Date

Enter an effective date in MMDDYYYY format. When leaving the field, the system will reformat the date to MM-DD-YYYY format.

Term Date

Enter a termination date in MMDDYYYY format. When leaving the field, the system will reformat the date to MM-DD-YYYY format.

Query of Data Already Present in Table

The field entry in the control block will determine the data that is brought to the screen.

- If you query in search, it will bring all questions that have the entry in the question description.
- If you query by survey type, it will bring all of the questions linked to that survey type.
- If you query by question code, it will only bring that single question code to the detail block.
- If multiple fields are populated in the control block, data will be retrieved based on the combination of populated fields.

At Commit

The system commits the data to the database.

What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Donor Survey Manager menu.

WellSky Corporation
Proprietary and confidential

Donor Survey Manager – Define Survey Answers

Intended Use

Use the Define Survey Answers form to configure the answers to the survey questions. Also, this form allows the user to query any question answers already configured in the system.

Limitations

N/A


Prerequisites

Master Codes to be defined:

- SUTYPE - survey types

Accessing the Screen

Access this screen by either clicking **Define Survey Responses** or using the hot keys `ALT+A` from the Donor Survey Manager screen.

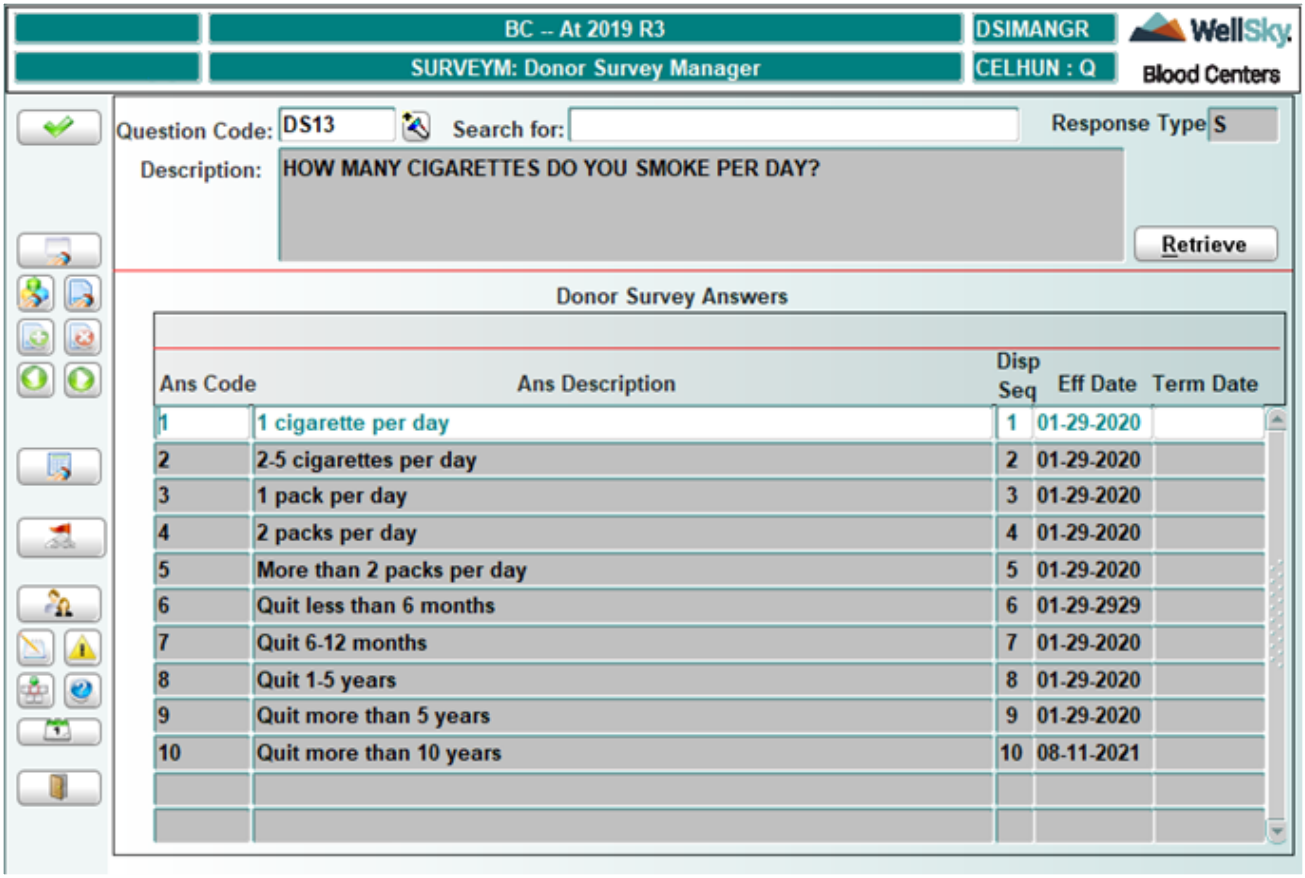

Control Block Fields and Definitions

Question Code

Enter the question code or select it from the list of values (LOV). The LOV comes from the definition of survey questions.

Search for

This field is used to search for partial or entire words that are contained within a question description.

Response Type

This is a display-only field. Data will display based on the selected question code.

Description

This is a display-only field. Data will display based on the selected question code.

Detail Block Fields and Definitions

Ans Code

Enter an answer code, which can be a maximum of 10 characters. Alpha and numeric values are allowed, but you should not use special characters in the answer code.

Ans Description

Enter a description of the answer code here, which can be a maximum of 500 characters. Alpha, numeric, and special characters are allowed in this field.

Disp Seq

An entry is required in this field. Enter the display sequence number. The display sequence number allows you to sort the answers in the order you want the donor to see them in the survey.

Eff Date

Enter an effective date in MMDDYYYY format. When leaving the field, the system will reformat the date to MM-DD-YYYY format.

Term Date

Enter a termination date in MMDDYYYY format. When leaving the field, the system will reformat the date to MM-DD-YYYY format.

Query of Data Already Present in Table

The field entry in the control block will determine the data that is brought to the screen.

- If you query in search, it will bring all answers that have the entry in the answer description.
- If you query by question code, it will only bring that single question code to the detail block.
- If multiple fields are populated in the control block, data will be retrieved based on the combination of populated fields.

WellSky Corporation
Proprietary and confidential

At Commit
The system commits the data to the database.

What to Do Next
For normal processing, press **F8** (Exit Screen) to return to the Donor Survey Manager menu.


Donor Survey Manager – Define Survey Templates

Intended Use
Use the Define Survey Templates form to configure the template that will be asked by survey type. Also, the form allows the user to query any templates that are already configured in the system.

Limitations
N/A

Prerequisites
- Master Codes to be defined:
  - SUTYPE - survey types
- Survey Questions must be defined
- Survey Answers must be linked to the questions

Accessing the Screen
Access this screen by either clicking **Define Survey Template** or using the hot keys `ALT+T` from the Donor Survey Manager screen.

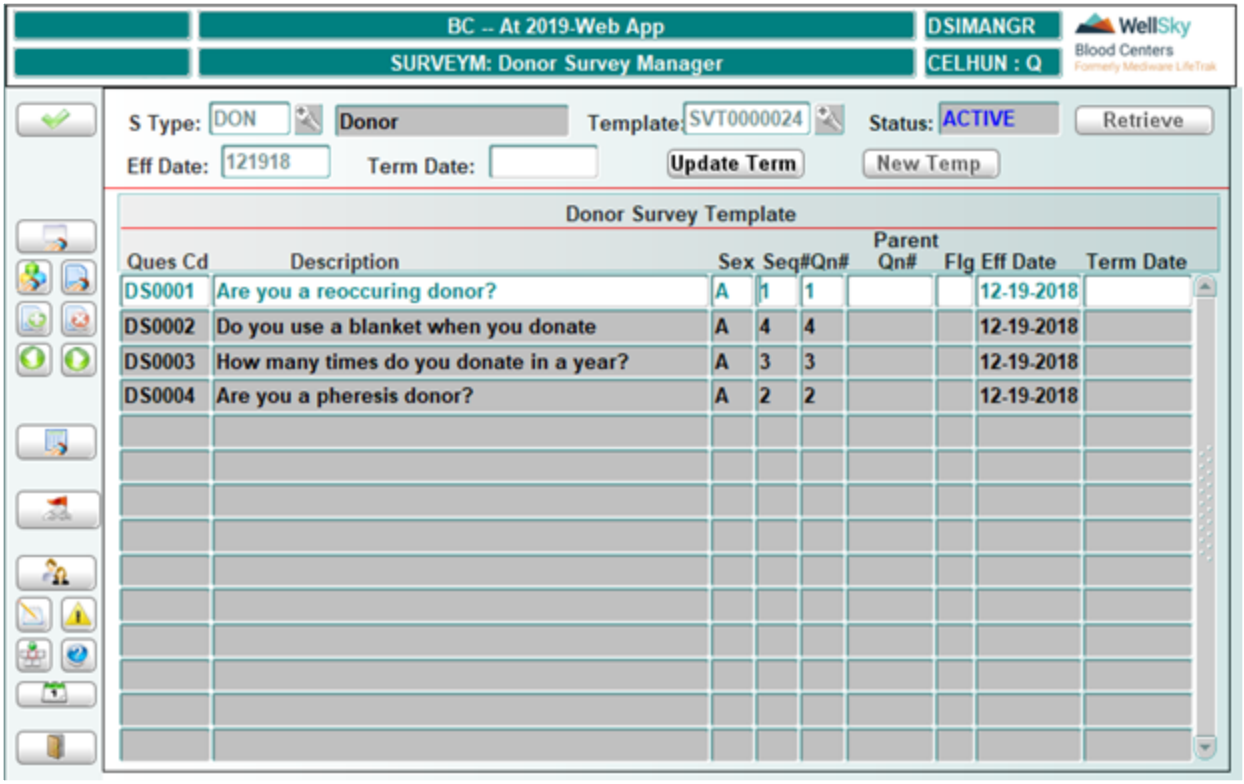

Control Block Fields and Definitions

S Type

Manually enter the survey type, or select it from the list of values (LOV). The LOV comes from master code SUTYPE.

Question Code

Enter the question code, or select it from the LOV. The LOV comes from the definition within the same table.

Detail Block Fields and Definitions

Ques Cd

Enter a question code, which can be a maximum of 10 characters. Alpha and numeric characters are allowed. Special characters should not be used in the question code.

Description

The description of the question can be a maximum of 1000 characters. Alpha, numeric, and special characters are allowed.

S/M/C/R

Enter `S`, `M`, `C`, or `R`.

- S = single answer is required
- M = multiple answers are required

WellSky Corporation
Proprietary and confidential

- C = comment entry
- R = ranking answers

Sex

Enter the sex of the donor that will be required to respond to the survey questions. Entry of F, M, or A is allowed.

- F = Female
- M = Male
- A = Everyone (All)

NOTE – When assigning the gender of the question, the selected gender should match the gender flag defined in Define Donor Survey Question. The final rule based on gender will be determined in the template.

Eff Date

Enter an effective date in MMDDYYYY format. When leaving the field, the system will reformat it to MM-DD-YYYY format.

Term Date

Enter a termination date in MMDDYYYY format. When leaving the field, the system will reformat it to MM-DD-YYYY format.

Query of Data Already Present in Table

The field entry in the control block will determine the data that is brought to the screen.

- If you query in search, it will bring all questions that have the entry in the question description.
- If you query by survey type, it will bring all of the questions linked to that survey type.
- If you query by question code, it will only bring that single question code to the detail block.
- If multiple fields are populated in the control block, data will be retrieved based on the combination of populated fields.

At Commit

The system commits the data to the database.

What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Donor Survey Manager menu.

Donor Survey Manager – Define Survey Access

Intended Use

Use the Define Survey Access form to configure by chapter the location within the On-Site application where the donor survey will be called.

Limitations

If you link your donor in ONPLKREG (Lookup/Registration & Modify Data), the system will not be able to distinguish between a Regular donor (not using FastTrak to answer questions) and a FastTrak donor.


If you are linking on any function of Physical Findings, Health History, Donor Response, or Donor Consent to determine if the donor is FastTrak, the responses need to be downloaded prior to moving to that function.

Prerequisites

Add Functions (ADDFCN) needs to be defined for the Survey parameter so that the function LOV will be populated. The Parameter 2 must be defined for SURVEY, and a 'Y' has to be defined. This is static and should not be modified.

Accessing the Screen

Access this screen by either clicking **Define Survey Access** or using the hot keys `ALT+C` from the Donor Survey Manager screen.

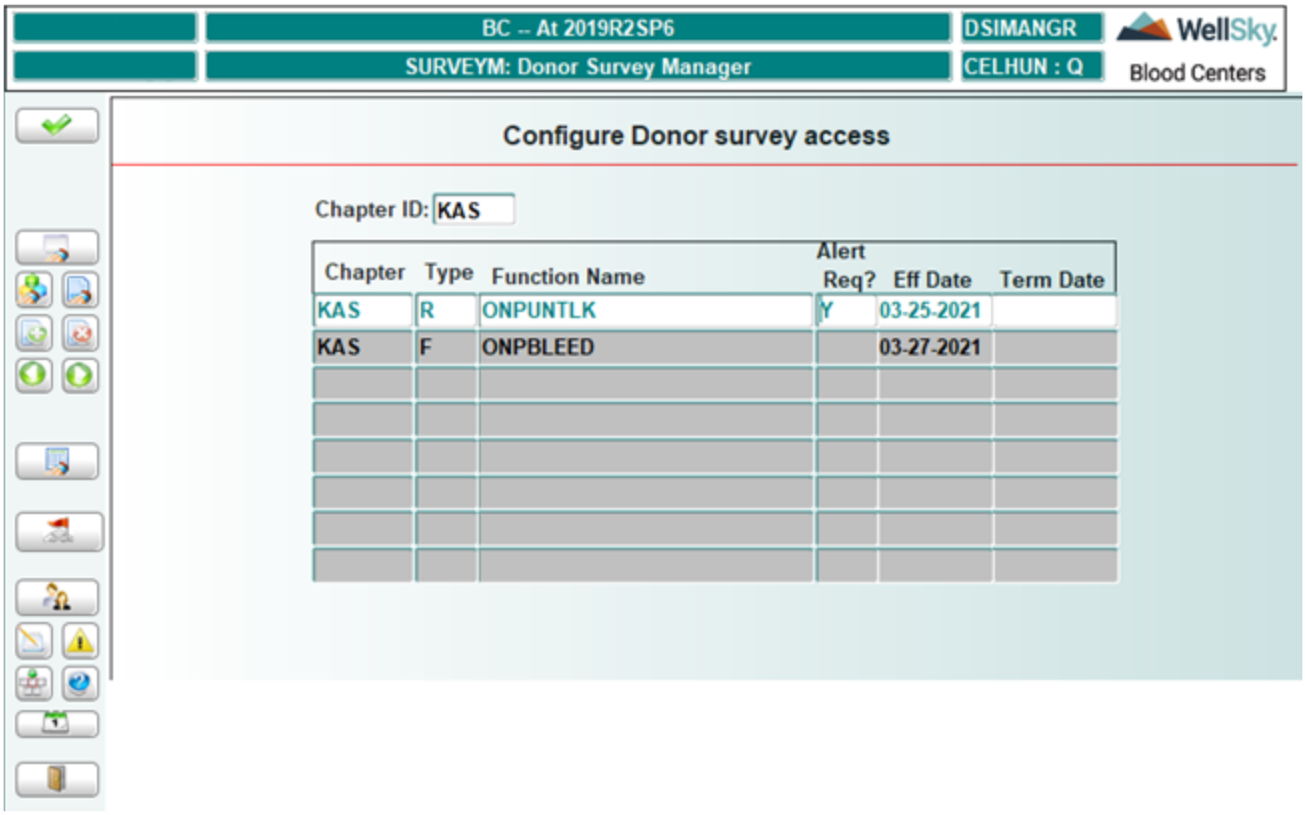

Control Block Fields and Definitions

Chapter ID

Enter the chapter ID manually, or select it from the list of values (LOV). The list of values comes from the Chapters table.

Detail Block Fields and Definitions

Chapter

The chapter ID automatically populates with the chapter ID selected in the control block.

Type

Enter `R` or `F`.

- R = Regular donor; the donor has not answered questions through FastTrak.
- F = FastTrak donor; the donor has not responded through FastTrak, and question response was by use of bar code.


NOTE – There can only be one 'R' and one 'F' code defined.

Function Name


Enter the function name or select it from the list of values (LOV) where the survey will be called for the type of donor.

NOTE – If an update to the function is required, then change the function name and save it.

NOTE – The list of functions is defined by the Add Function program, where Parameter 2 is set to SURVEY and value equal to Y. This parameter SHOULD NOT be changed; only certain online programs can call Survey.

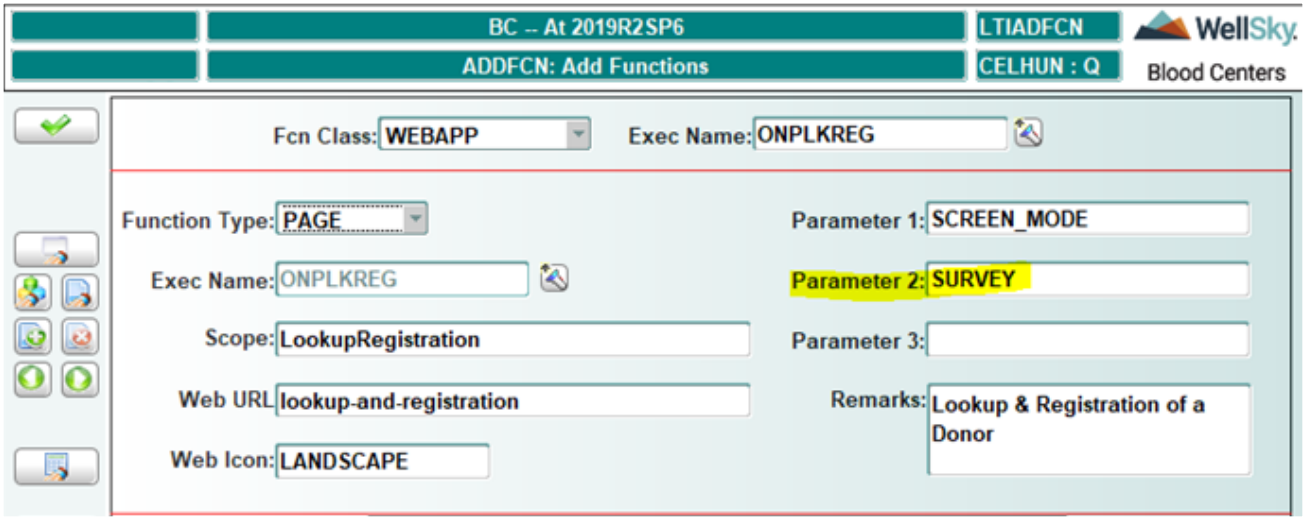

In Maintain Web Menu Item (WEBITM), set to value to Y for the function to show up in the list of values (LOV) in the function. These values are STATIC and should not be changed.

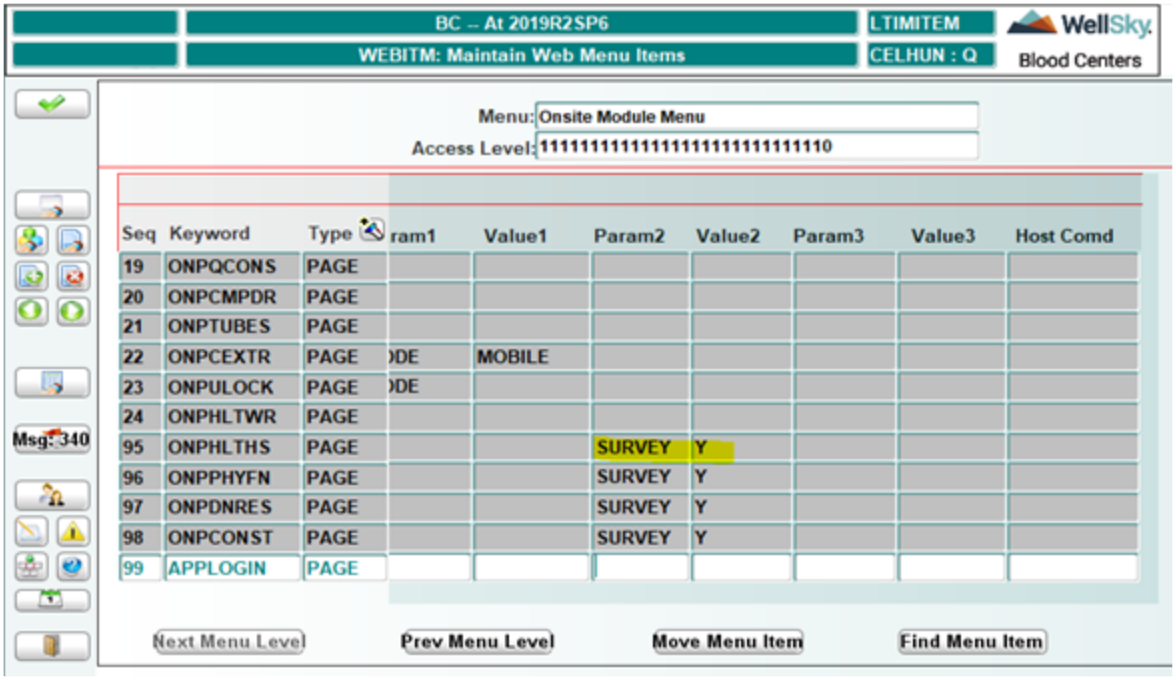

Alert Req?

Enter `Y` or leave blank. If you enter Y, the donor will receive an error message to decide if they want to take the donor survey. The error number that is linked to the alert message is Err: 23037, which can be updated. A maximum of 70 characters is allowed.

Eff Date

Enter an effective date in MMDDYYYY format. When leaving the field, the system will reformat the date to MM-DD-YYYY format.


Term Date

Enter a termination date in MMDDYYYY format. When leaving the field, the system will reformat the date to MM-DD-YYYY format.

Query of Data Already Present in Table

If a chapter is not entered in the control block, the system will display all the chapters and how the survey is configured within that chapter.

WellSky Corporation
Proprietary and confidential

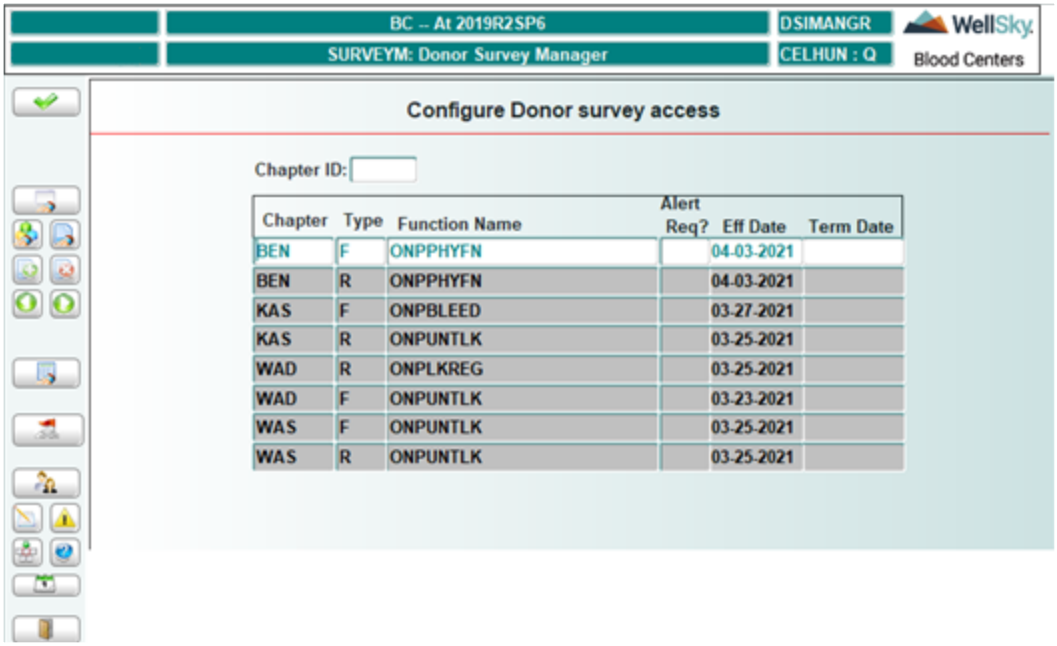

At Commit

The system commits the data to the database.

What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Donor Survey Manager menu.

Donor Survey Manager – View Surveys

Intended Use

Use the View Surveys form to display data already received on the survey. The form allows a user to view the data in comprehensive detail, either by each question or by graph.

Limitations


N/A

Prerequisites

- Master Codes to be defined:
  - SUTYPE – survey types
- Survey questions must be defined
- Survey answers must be linked to the questions
- Survey templates must be defined

Accessing the Screen

Access this screen by either clicking **View Survey** or using the hot keys `ALT+V` from the Donor Survey Manager screen.

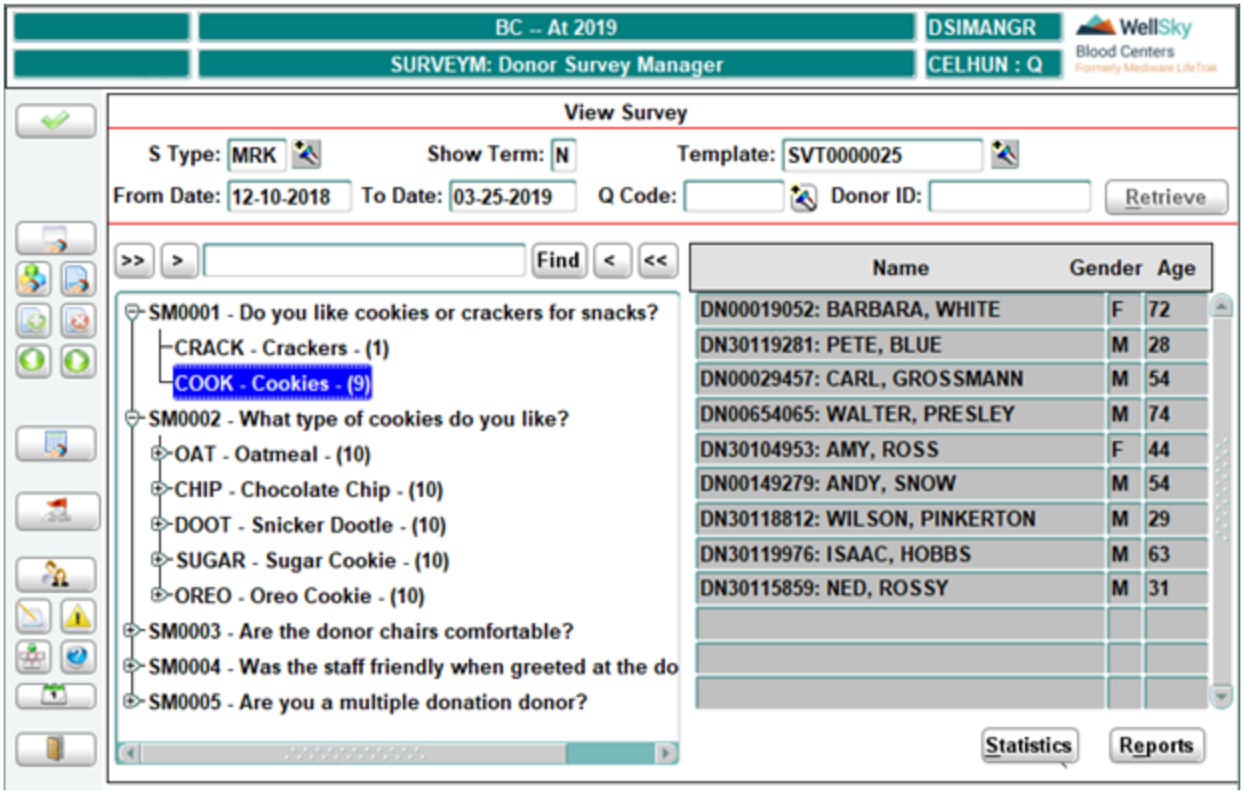

Control Block Fields and Definitions

S Type

This is a required field. Manually enter the survey type or select it from the list of values (LOV). The LOV comes from master code SUTYPE.

Show Term

This field defaults to "N", but the user is allowed to enter "Y", which will allow the system to pull up past data.

Template

Manually enter the template ID, or select it from the LOV. The LOV comes from the Define Survey Template table. This field requires an entry.

From Date

This field is optional. Enter the date in MMDDYYYY format, and the system will reformat the date to MM-DD-YYYY format.

NOTE – The From Date field does not allow a future date for the chapter.

WellSky Corporation
Proprietary and confidential

To Date

This field is optional. Enter the date in MMDDYYYY format, and the system will reformat the date to MM-DD-YYYY format.

NOTE – The To Date field does not allow a future date for the chapter.

Q Code

Enter the question code or select it from the LOV. The LOV comes from the Define Survey Questions table.


Donor ID

This is an optional field. Enter a donor ID to view the survey questions performed.


Detail Block Fields and Definitions

Display of Questions

The survey template questions that were selected in the control block display on the left side of the form.

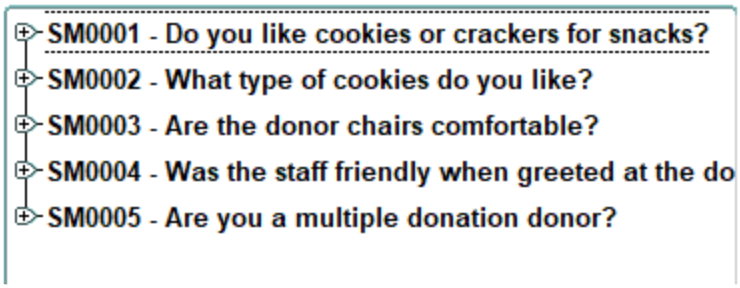


Click on the **+** to expand the question to display the responses.

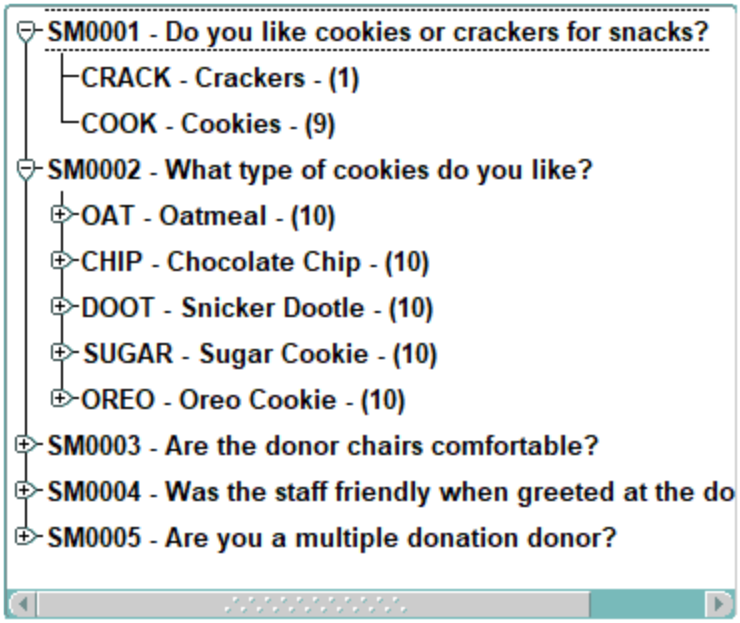

Double-click on an answer, and the donors linked to that response display on the right side of the form.

If a response has additional information, click on the **+**, and the details of the response, e.g. a ranked response, display.

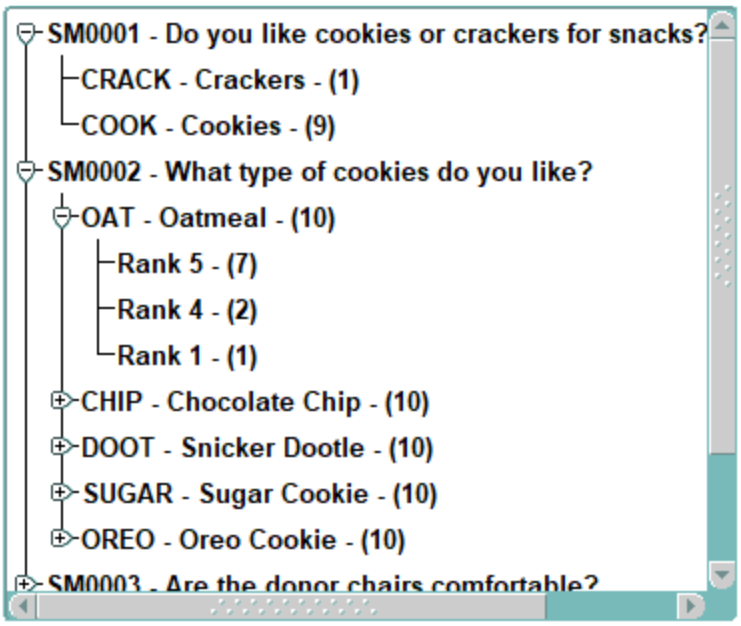

Display of Donors


Double-click on the response code to see the donors that responded to the question with that response. The following donor information displays:

- Donor name
- Age
- Gender

Statistics Button

Click **Statistics** to view data by question code and answer code.

WellSky Corporation
Proprietary and confidential

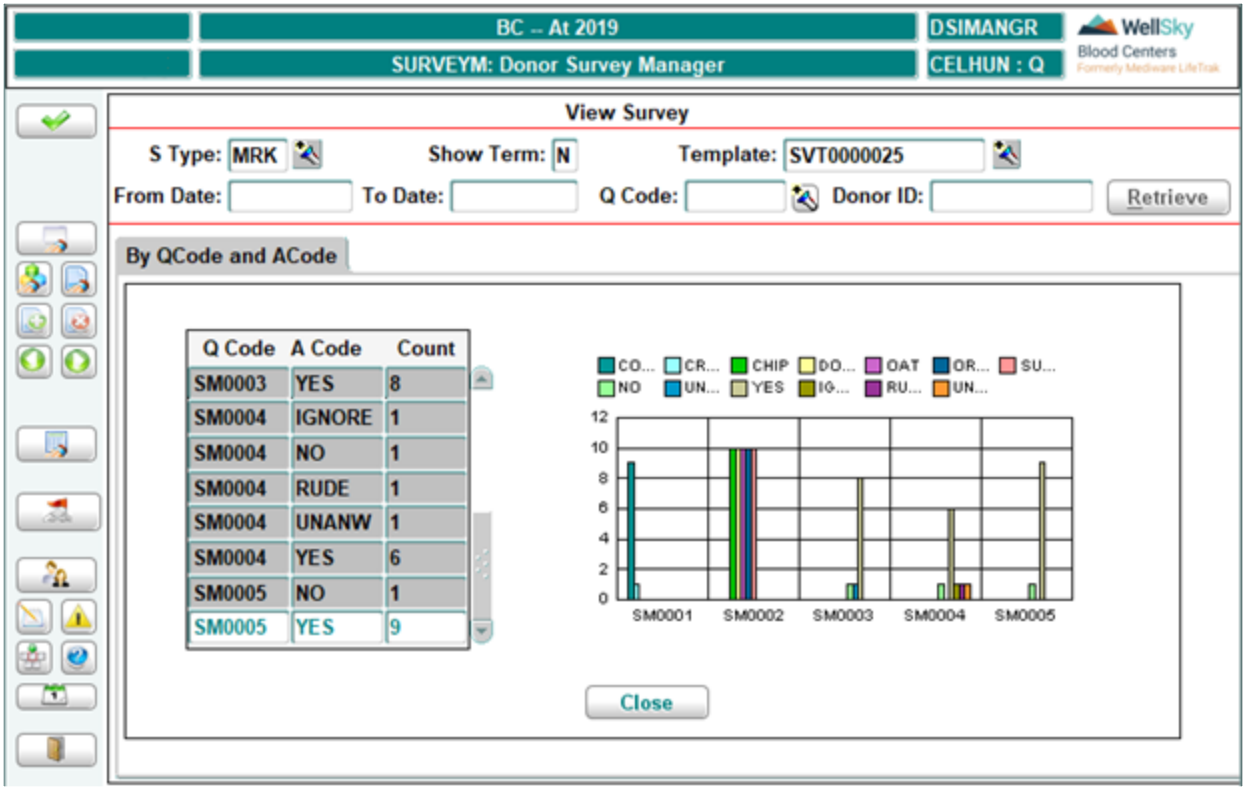

Report Button

This is a future enhancement.

At Commit

The system commits the data to the database.

What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Donor Survey Manager menu.

Donor Survey Manager – Link Surveys

Intended Use

Use the Link Surveys form to configure the donors that will receive each survey template based on entered criteria.

Limitations

N/A


Prerequisites

- Master Codes to be defined:
  - SUTYPE – survey types

- Survey questions must be defined
- Survey answers must be linked to the questions

Accessing the Screen

Access this screen by either clicking **Link Template** or using the hot keys `ALT+L` from the Donor Survey Manager screen.

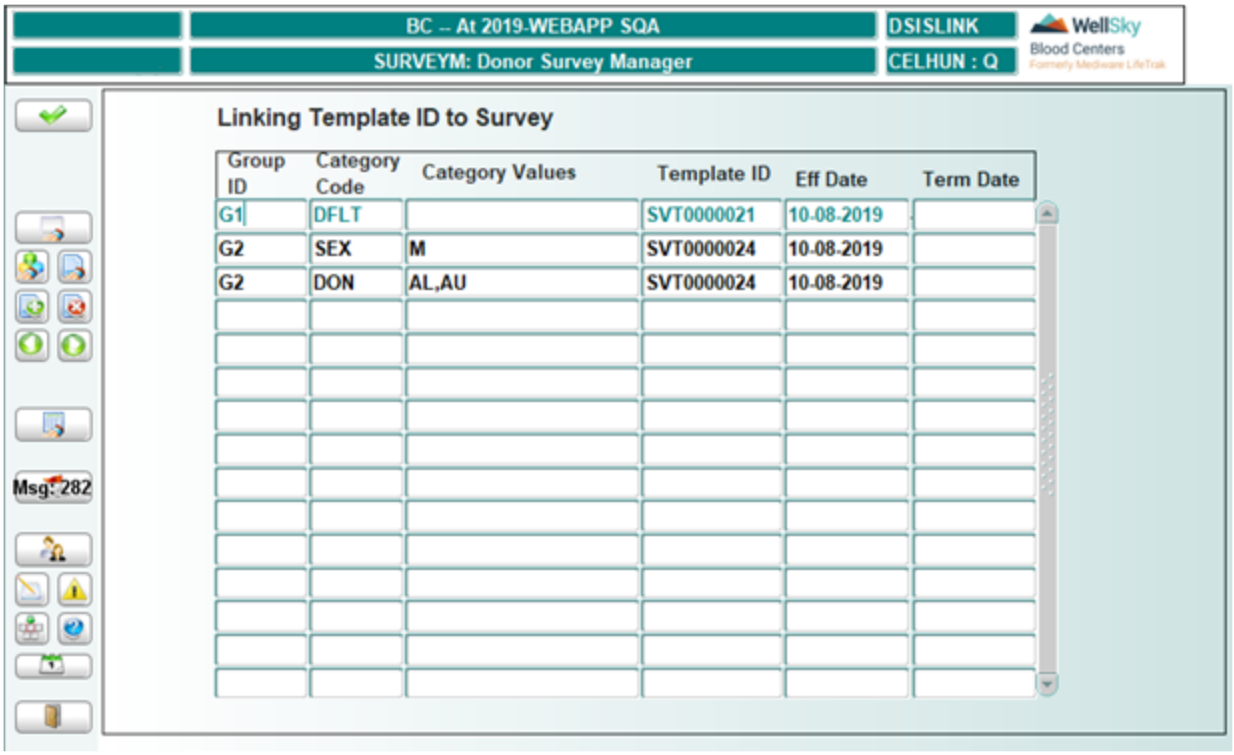

Fields and Definitions

Group ID

This is a required field. Enter a code that is a maximum of XX characters in length. Letters, numbers, and special characters are allowed.

Category Code

This is a required field. Manually enter the category code or select it from the list of values (LOV). The LOV comes from master code SUCAT.

- ZIP – Zip code category
- SEX – Gender category
- RETD – Return donor category
- PROC – Procedure code category
- NEWD – New donor category


- DON – Donation type category
- DFLT – Default survey category

Category Values

This is a required field. Manually enter the category value or select it from the LOV. The LOV is based on the selected category code.

- ZIP – displays based on City, State, Zip Query (CITYQ)
- SEX – displays male (M) and female (F)
- RETD – return donor category, does not have any codes associated to it
- PROC – Define Procedure Code table (PROCS)
- NEWD – new donor category, does not have any values associated to it
- DON – Define Donation Types (DONS)
- DFLT – default survey category, does not have any values associated to it

If selecting from a LOV, it is possible to select multiple values. Select the category, open the LOV, and select a single value or multiple values.

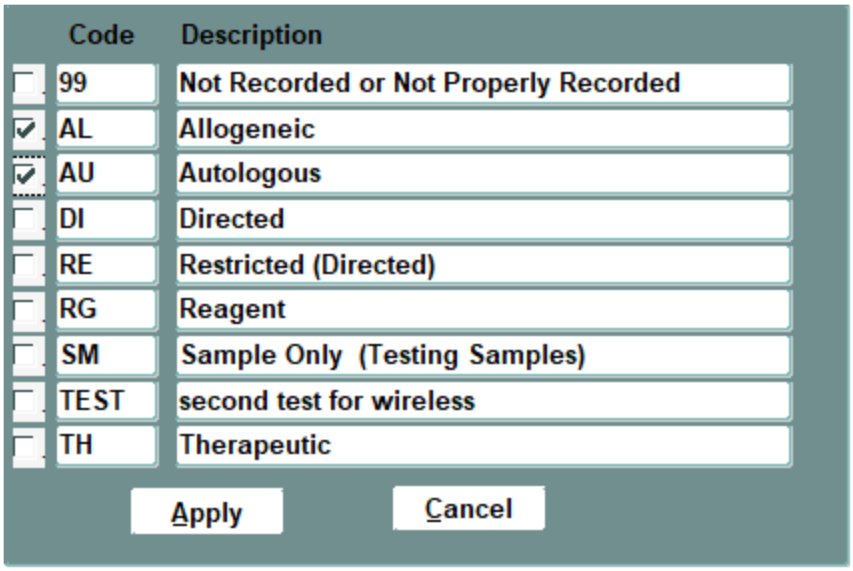

Click Apply to select the values and populate the field.

Template ID

Manually enter the survey template ID or select it from the LOV. The LOV comes from Define Survey Template.

Eff Date

Enter an effective date in MMDDYYYY format. When you are leaving the field, the system will reformat it to MM-DD-YYYY format.

Term Date

Enter a termination date in MMDDYYYY format. When you are leaving the field, the system will reformat it to MM-DD-YYYY format.

At Commit

The system commits the data to the database.

What to Do Next


For normal processing, press F8 (Exit Screen) to return to the Donor Survey Manager menu.

WellSky Corporation
Proprietary and confidential

2.4 Lab Restricted Validation Tables (LVALID)

2.4 Screens and Descriptions

These functions are accessed from the following menu:

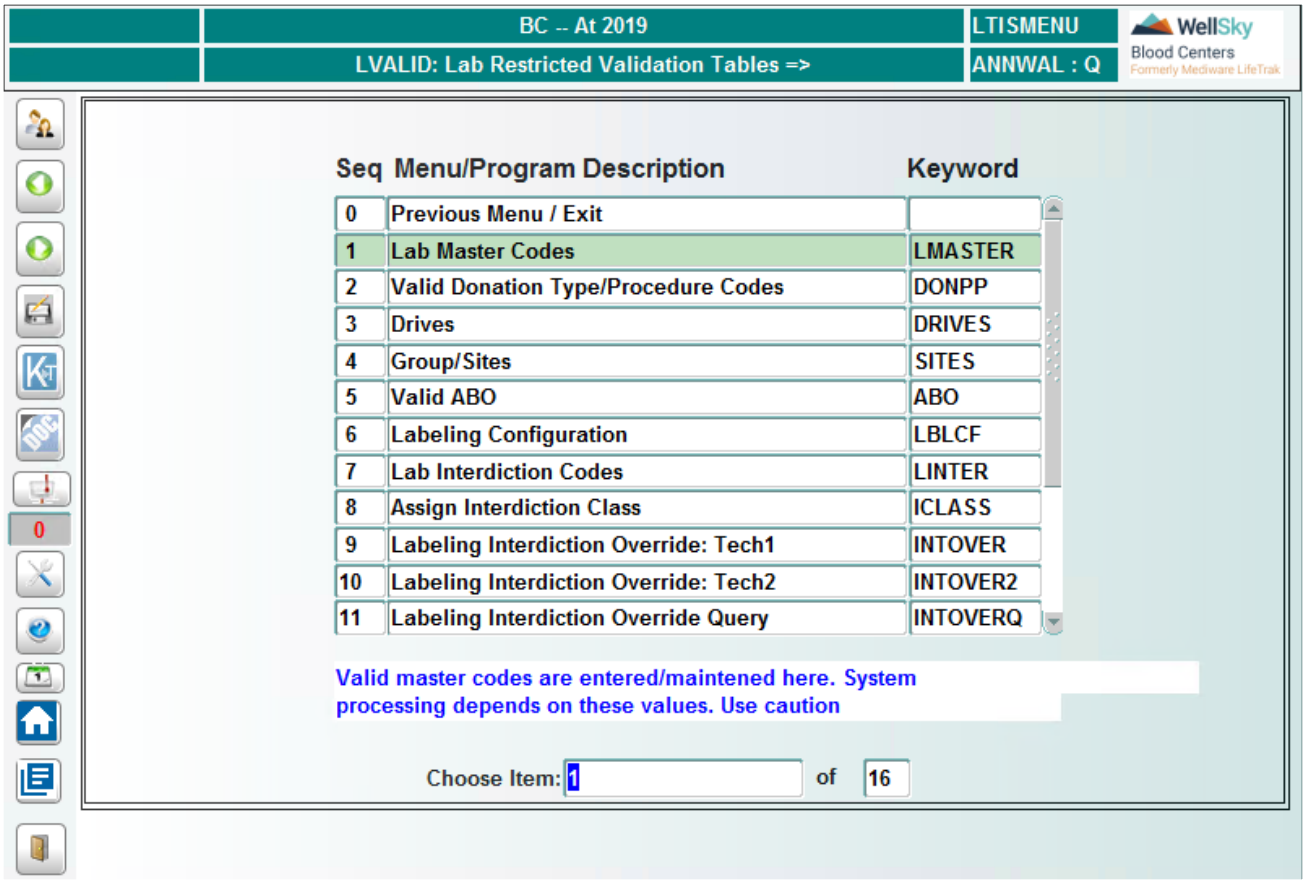

2.4.1 Lab Master Codes (LMASTER)

Intended Use

Master Codes are a set of code types used by individual modules to provide flexibility to the application. A table of underlying codes is associated to each code type. The code types are specifically coded within in the application. Some Master Codes define data for other tables. WellSky may be required to add new or modify existing Master Codes.

All Master Codes should be defined under the Master Code MASTR. Once the Master Code is defined under MASTR, its name and description display in the Code Type LOV and can then be selected.


Limitations

Each Code type is coded for specific use within the application and should not be changed. New Code types should not be added. Some underlying Code fields should remain static while others can be changed dynamically. Refer to Appendix K, Lab Master Codes.

Prerequisites

Each code is described in the Lab Master Codes in Appendix K.

Entering/Viewing Data

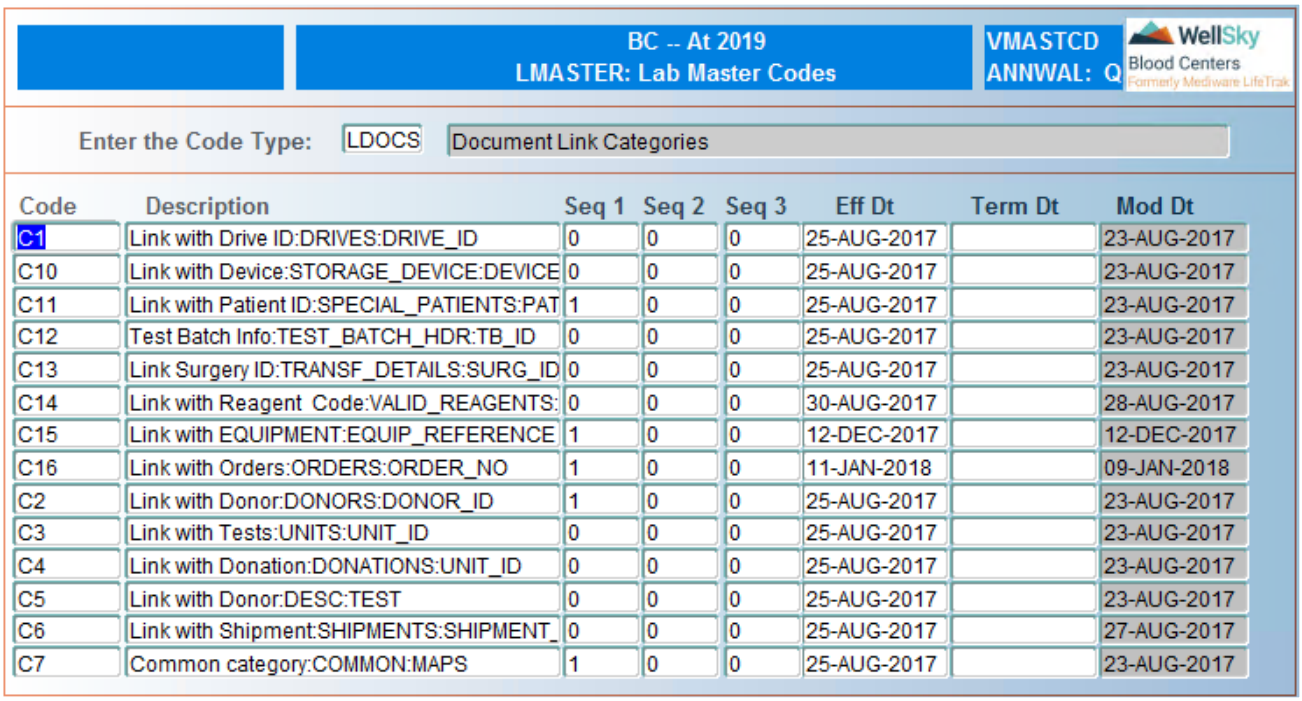

Code	Description	Seq 1	Seq 2	Seq 3	Eff Dt	Term Dt	Mod Dt
C1	Link with Drive ID:DRIVES:DRIVE_ID	0	0	0	25-AUG-2017		23-AUG-2017
C10	Link with Device:STORAGE_DEVICE:DEVICE	0	0	0	25-AUG-2017		23-AUG-2017
C11	Link with Patient ID:SPECIAL_PATIENTS:PAT	1	0	0	25-AUG-2017		23-AUG-2017
C12	Test Batch Info:TEST_BATCH_HDR:TB_ID	0	0	0	25-AUG-2017		23-AUG-2017
C13	Link Surgery ID:TRANSF_DETAILS:SURG_ID	0	0	0	25-AUG-2017		23-AUG-2017
C14	Link with Reagent Code:VALID_REAGENTS:	0	0	0	30-AUG-2017		28-AUG-2017
C15	Link with EQUIPMENT:EQUIP_REFERENCE	1	0	0	12-DEC-2017		12-DEC-2017
C16	Link with Orders:ORDERS:ORDER_NO	1	0	0	11-JAN-2018		09-JAN-2018
C2	Link with Donor:DONORS:DONOR_ID	1	0	0	25-AUG-2017		23-AUG-2017
C3	Link with Tests:UNITS:UNIT_ID	0	0	0	25-AUG-2017		23-AUG-2017
C4	Link with Donation:DONATIONS:UNIT_ID	0	0	0	25-AUG-2017		23-AUG-2017
C5	Link with Donor:DESC:TEST	0	0	0	25-AUG-2017		23-AUG-2017
C6	Link with Shipment:SHIPMENTS:SHIPMENT_	0	0	0	25-AUG-2017		27-AUG-2017
C7	Common category:COMMON:MAPS	1	0	0	25-AUG-2017		23-AUG-2017

Code Type

Enter code type or select from LOV. A maximum of 5 characters is allowed.

NOTE – All code types are to remain static. At times new code types and underlying codes will be added for new or modified functionality. Existing codes associated to the individual code types can be either static or dynamic. Refer to Appendix K to determine if a code can be modified.

NOTE – Lab Master Code LMASTER is used to define all master codes and description so that it appears in the LOV. If the Master Code is not defined in LMASTER, users will not be able to view the code in the table.

Code

Enter a code that is to be under the code type. A maximum of 5 characters is allowed.

WellSky Corporation
Proprietary and confidential

Description
Enter a description for the code. A maximum of 500 characters is allowed.

Seq 1
This is not a required field for all codes. When entering a new code, '0' is automatically populated by default.

Seq 2
This is not a required field for all codes. When entering a new code, '0' is automatically populated by default.

Seq 3
This is not a required field for all codes. When entering a new code, '0' is automatically populated by default.

Eff Dt
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date in DD-MON-YYYY format.

Mod Dt
Field automatically populates with the date modifications were last made. Field is not navigable.

What to Do Next
There is no next step for this screen.


2.4.2 Valid Donation Type/Procedure Codes (DONPP)

Intended Use
Use this screen to define attributes that are associated to donation types and/or procedure codes entered in Donor. The defined attribute(s) is/are automatically inserted on the unit in Check-In and Donor Source Card Entry (DSCE).

Limitations
- Attributes will only be placed on units if the donor has been registered in Donor.
- Attributes will only be placed on units checked in using Check-In and Donor Source Card Entry (DSCE).

Prerequisites
- Define Lab Master Codes (LMASTER), codes:
  - ATTR – Define valid attribute groups.
- Attribute Codes (ATTRIB) – Define valid attribute codes.
- Define Donation Types (DONS) – Define valid donation types in Donor.
- Define Procedure Codes (PROCS) – Define valid procedure codes in Donor.

Entering/Viewing Data

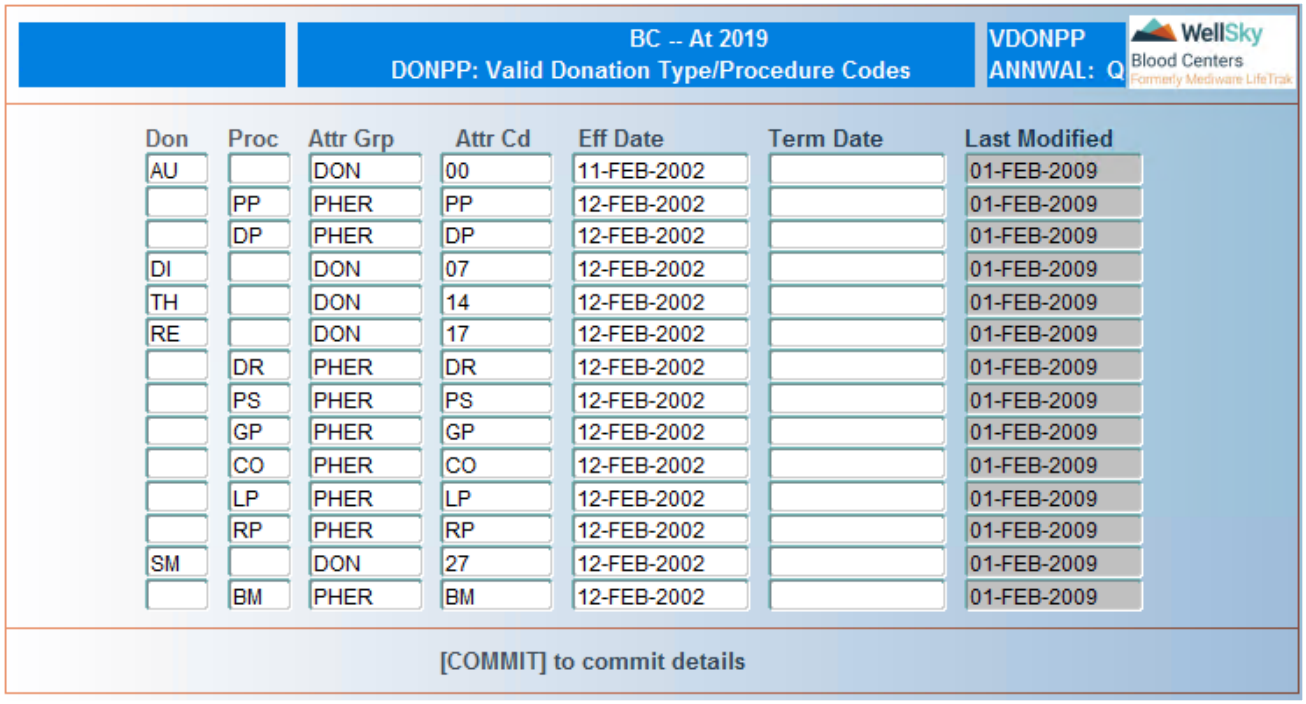

To add a new record, press CTRL + F2 (Create Record).

Don

Enter donation type or select from LOV or leave blank.

Proc

Enter procedure code or select from LOV.

NOTE – Field is navigable only if the *Don* field is left blank.

Attr Grp

Enter attribute group or select from LOV.

NOTE – Only one DON group attribute can be associated per donation type.

Attr Cd

Enter attribute code or select from LOV.

Eff Date

Enter effective date in DD-MON-YYYY format.

WellSky Corporation
Proprietary and confidential

Term Date

Enter termination date in DD-MON-YYYY format.

Last Modified

Populates automatically by the system when the code is updated. Field is not navigable.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

2.4.3 Drives (DRIVES)

Intended Use

Use this screen to view drive information. This information is interfaced daily from Donor; however, drive information can also be entered or updated directly from this screen.


Limitations

None

Prerequisites

- Groups/Sites (SITES) – Define groups and sites.
- Chapter Details (CHAPTER) – Define chapter information.

Entering/Viewing Data

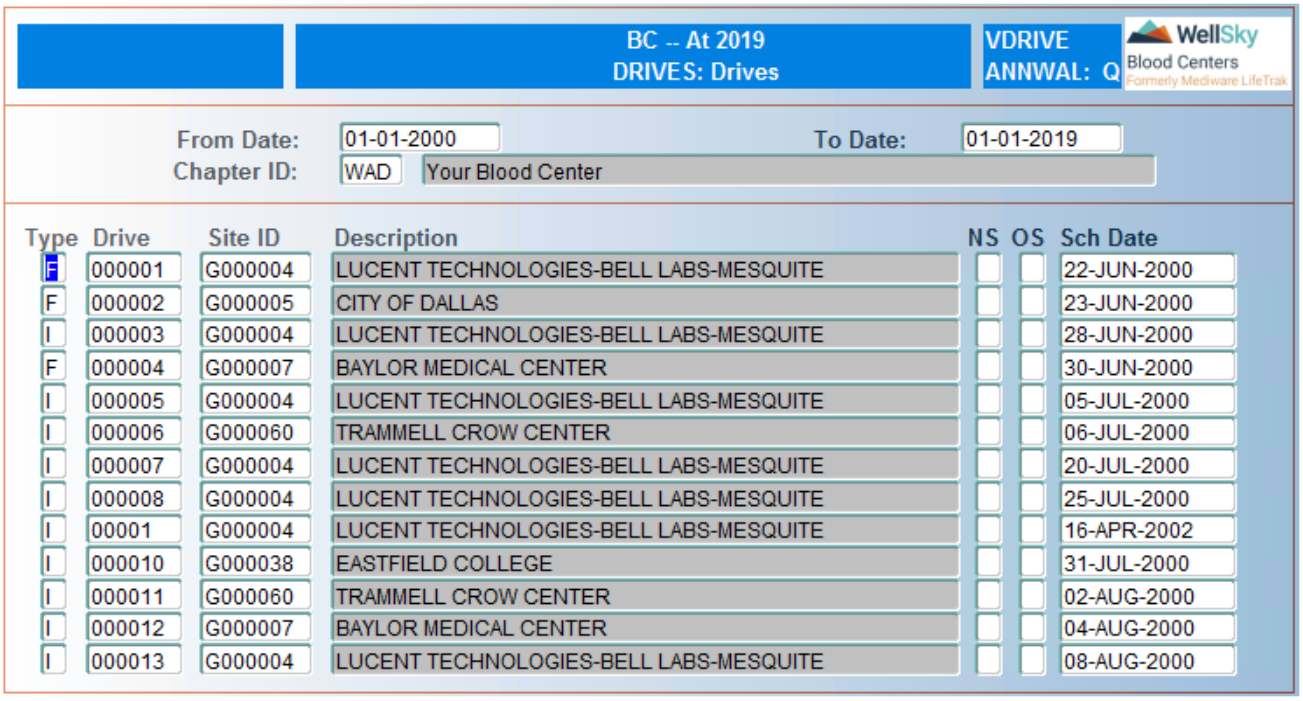

From Date

Enter beginning date in MM-DD-YY format for which you wish to view scheduled drives or leave blank to enter a new drive.

To Date

Enter ending date in MM-DD-YY format for which you wish to view scheduled drives or leave blank to enter a new drive.

Chapter ID

Enter the chapter ID code or select from the LOV.

Type

Enter a drive type, as follows:

- `F` – Fixed site drives
- `I` – Mobile drives
- `C` – Central site drives

Drive

Enter drive ID. A maximum of 6 characters is allowed.

Site ID

Enter site ID code or select from LOV.

WellSky Corporation
Proprietary and confidential

Description
Field automatically populates with the site ID description after the Site ID code is entered.

NS
Leave field blank. Field not utilized.

OS
Enter one of the following:

- `Y` (or leave blank) – Units from this drive can be shipped out of state.
- `N` – Units from this drive cannot be shipped out of state.

NOTE – In addition to the out-of-state option being set to Y in this table, the system considers other criteria for the final decision of whether or not a unit can be shipped out of state.

Sch Date
Enter drive schedule date in DD-MON-YYYY format.

Press **F12** (Commit) to save entries.

At Commit
Entries are saved to the database.

What to Do Next
There is no next step for this screen.


2.4.4 Group/Sites (SITES)

Intended Use
Use this screen to define and view Sponsor Groups and Sites. This information is interfaced daily from Donor.

Limitations
None

Prerequisites
None

Entering/Viewing Data

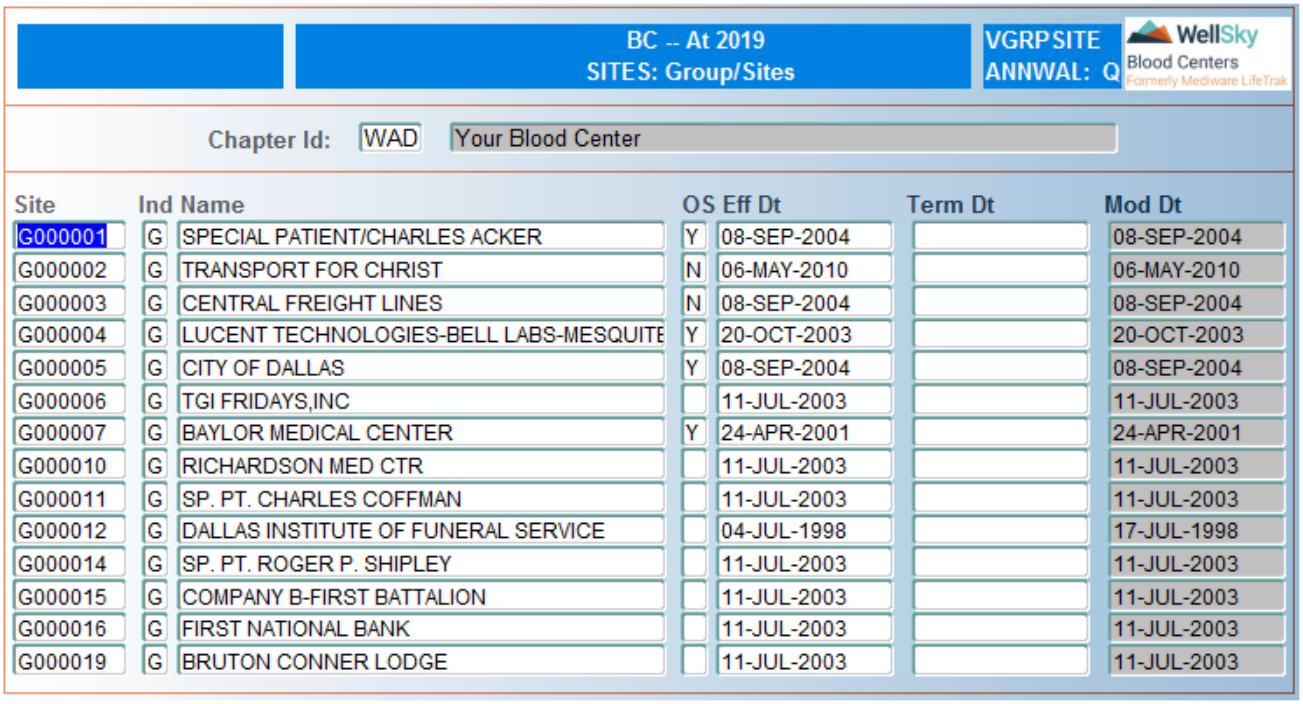

Chapter Id

Enter chapter ID or select from LOV.

Site

Enter site ID.

Ind

Enter one of the following:

- G – Donor groups
- S – Donor sites

Name

Enter the description for the donor group or site.

OS

Enter one of the following:

- Y – Units collected from this group or site can be shipped out of state.
- N (or leave blank) – Units collected from this group or site are not licensed to send out of state.

Eff Date

Enter the drive group or site effective date in DD-MON-YYYY format.

WellSky Corporation
Proprietary and confidential

Term Date

Enter the drive group or site termination date in DD-MON-YYYY format.

Mod Date

Field automatically populates with the date modifications were last made. Field is not navigable.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

2.4.5 Valid ABO (ABO)

Intended Use

Use this screen to define valid ABO types and to assign multiple mnemonics that will be recognized as valid by the system.


Limitations

The following transfusable flag codes are static and cannot be changed or terminated in the system: B, H, M, N and Y.

Prerequisites

- Lab Master Code Types (CODE) – Define master code types.
- Lab Master Codes (LMASTER), code IDENT – Define valid intended uses.

Entering/Viewing Data

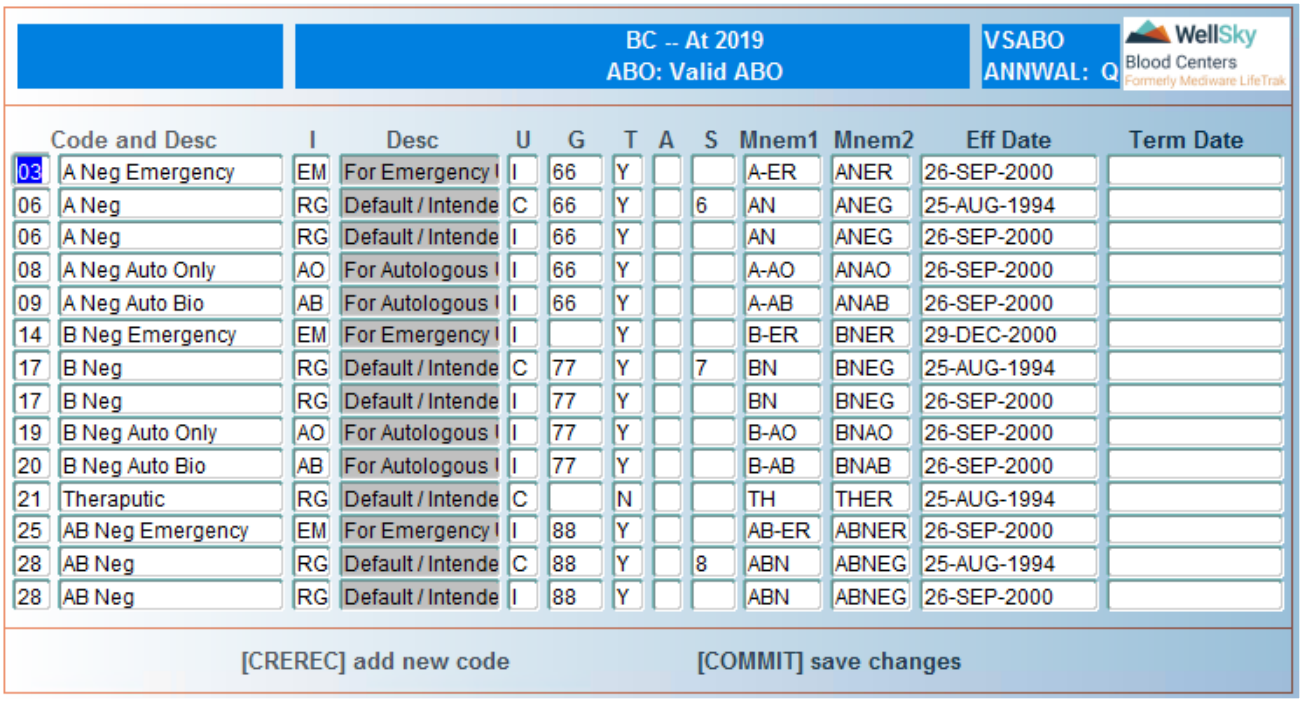

Code and Desc	I	Desc	U	G	T	A	S	Mnem1	Mnem2	Eff Date	Term Date
03 A Neg Emergency	EM	For Emergency I	I	66	Y			A-ER	ANER	26-SEP-2000	
06 A Neg	RG	Default / Intende	C	66	Y		6	AN	ANEG	25-AUG-1994	
06 A Neg	RG	Default / Intende	I	66	Y			AN	ANEG	26-SEP-2000	
08 A Neg Auto Only	AO	For Autologous I	I	66	Y			A-AO	ANAO	26-SEP-2000	
09 A Neg Auto Bio	AB	For Autologous I	I	66	Y			A-AB	ANAB	26-SEP-2000	
14 B Neg Emergency	EM	For Emergency I	I		Y			B-ER	BNER	29-DEC-2000	
17 B Neg	RG	Default / Intende	C	77	Y		7	BN	BNEG	25-AUG-1994	
17 B Neg	RG	Default / Intende	I	77	Y			BN	BNEG	26-SEP-2000	
19 B Neg Auto Only	AO	For Autologous I	I	77	Y			B-AO	BNAO	26-SEP-2000	
20 B Neg Auto Bio	AB	For Autologous I	I	77	Y			B-AB	BNAB	26-SEP-2000	
21 Theraputic	RG	Default / Intende	C		N			TH	THER	25-AUG-1994	
25 AB Neg Emergency	EM	For Emergency I	I	88	Y			AB-ER	ABNER	26-SEP-2000	
28 AB Neg	RG	Default / Intende	C	88	Y		8	ABN	ABNEG	25-AUG-1994	
28 AB Neg	RG	Default / Intende	I	88	Y			ABN	ABNEG	26-SEP-2000	

Press **CTRL** + **F2** (Create Record) to create a new entry, or scroll down to an existing entry for modifications.

Code

Enter ABO/Rh code. A maximum of 2 characters is allowed.

Desc

Enter ABO/Rh description. A maximum of 50 characters is allowed.

I

Enter intended use or select valid use from LOV.

NOTE – RG and EM are the only codes used for Codabar. All other codes pertain to ISBT configuration.

Desc

Field automatically populates once the intended use is entered.

U

Enter valid unit scheme. Enter `I` for ISBT128, or `C` for Codabar.

G

Enter valid order ABO group or leave blank.

WellSky Corporation
Proprietary and confidential

T

Enter one of the following:

- `Y` – ABO type is transfuable.
- `N` – ABO type is not transfusable.
- `B` – ABO type is biohazard.
- `M` – ABO type is manufacturing.
- `H` – ABO type is for HOLD.

NOTE – These codes are static and cannot be changed.

A

Enter `Y` if the blood type is not relevant to the ABO type; otherwise, leave blank.

S

Enter the sequence number to order the ABO type among other ABO types in lists of values; otherwise, leave blank.

Mnem1

Enter any commonly used abbreviation for the ABO being defined (for example, OPOS or O+) or leave blank. A maximum of 5 characters is allowed.

Mnem2

Enter a second commonly used abbreviation for the ABO being defined (for example, OPOS or O+) or leave blank. A maximum of 5 characters is allowed.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Press **F12** (Commit) to save all changes.

What to Do Next

There is no next step for this screen.

2.4.6 Labeling Configuration (LBLCF)

Intended Use

This screen is used to configure the bar codes, product types, and recovered plasma tests. The screen is also used to map the test messages.

Limitations

There is a limitation from Hematrax that a maximum of 200 characters for the test message can be printed on the ABORH (PFF) label.

Prerequisites

None

Printer Setup

The following instructions explain how to set up the printer.

1. Access the printer via the web (using any browser) following the steps below:
   a. Enter the printer IP address in the URL, and press **Enter**.
   b. At the printer homepage (Zebra Technologies....), click View and Modify Printer Settings.
   c. If you are prompted for access credentials, the user is **admin**, and the password is **1234**.
   d. Click Media Setup.
   e. Verify the current PRINT WIDTH setting is set to maximum.


   i. If the PRINT WIDTH is already set to maximum, then try breaking the message using the vertical symbol (in red) as shown below, and skip the rest of the instructions.

   ii. Otherwise, change PRINT WIDTH to maximum, click Submit Changes, click View and Modify Printer Settings, and then click Save Current Configuration.

2. Wait 30 seconds, and then close the web browser.


WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

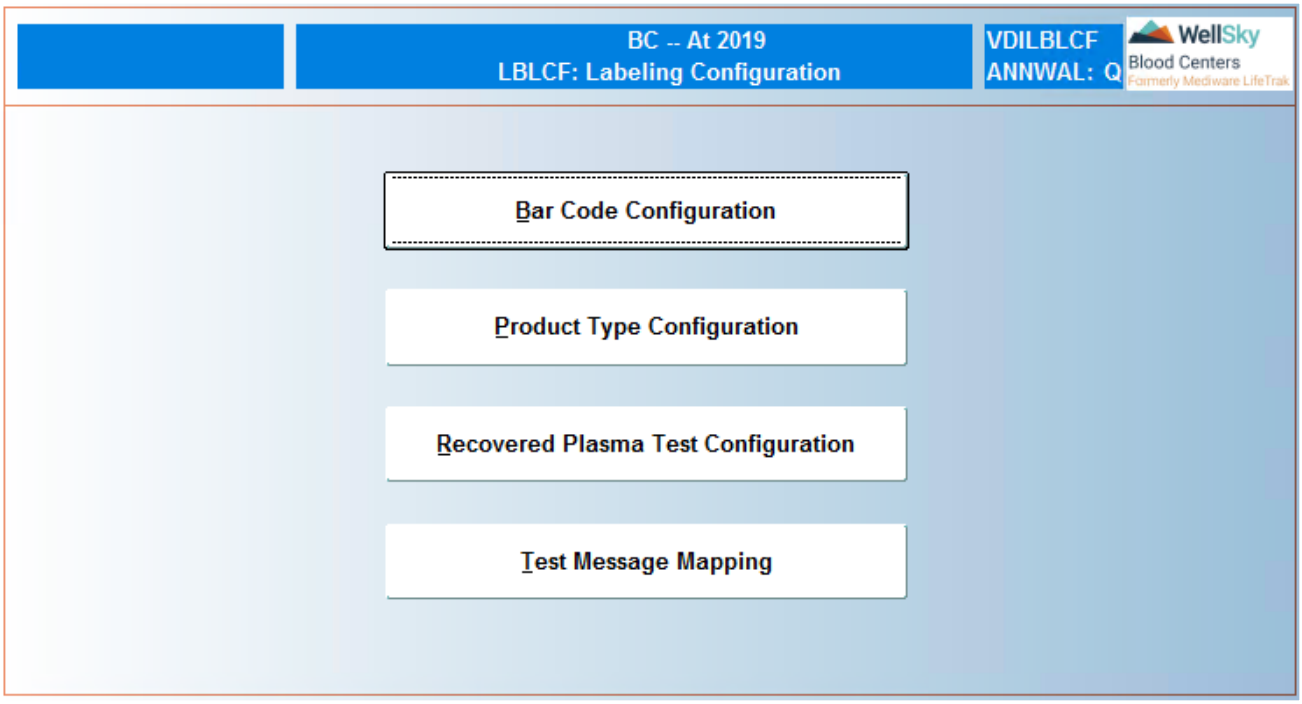

Bar Code Configuration

This window is used to insert or modify the labeling special testing bar code configuration. Click **Bar Code Configuration** to open the window, as shown:

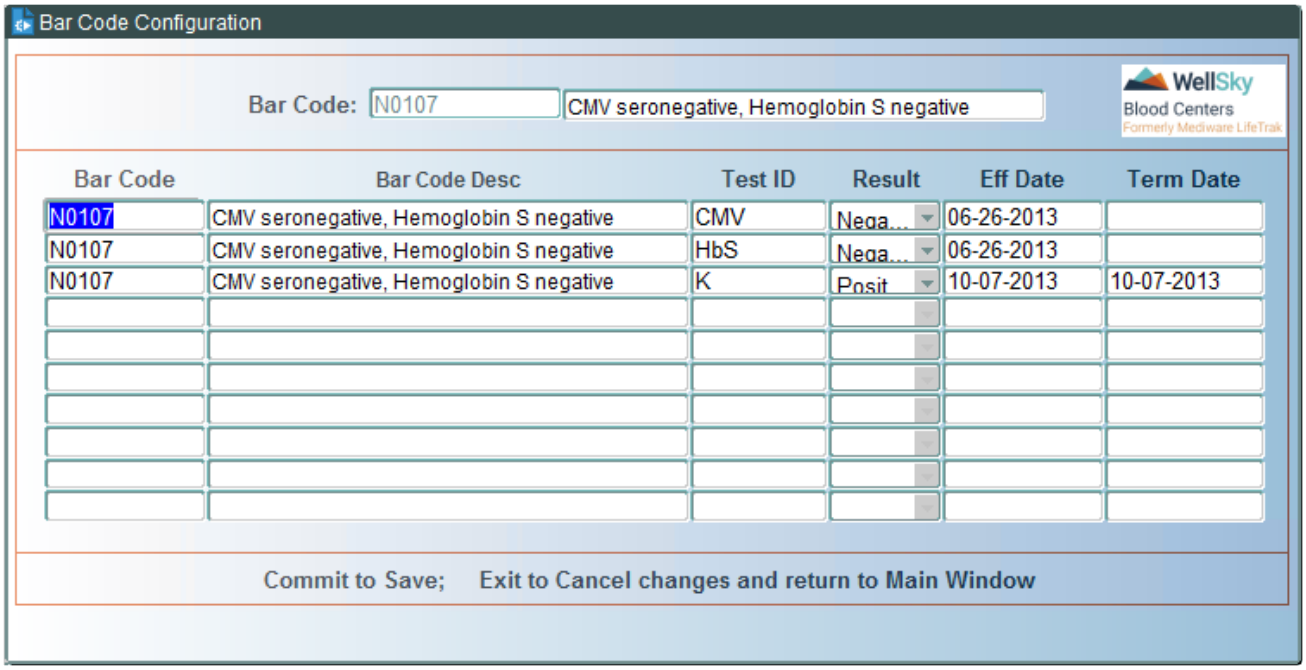

Control Block

Bar Code

Enter the bar code or select from LOV. Press **ENTER** to display data for the selected bar code.

Leave field blank and press **ENTER** to display all bar code data that has already been entered. If you display all bar code data, you will not be able to update any code or create a new record.

Detail Block

Bar Code

The field populates with the bar code entered in the control block *Bar Code* field. This value cannot be changed. If you enter or select a different value, the following message displays:



Click **OK** to close the window and select the correct bar code value.

Bar Code Desc

The bar code description automatically displays. Field is not navigable.

Test ID

Enter valid test ID or select from LOV. If you enter an invalid test ID, the following message displays:



Click **OK** to close the window. Enter a valid test ID or select from LOV.

Result

Select **Positive** or **Negative** from the LOV.

Eff Date

Field populates with the system date. Accept this date or enter a future date in MM-DD-YYYY format.


Term Date

Enter a termination date in MM-DD-YYYY format, or leave blank. If you enter a termination date, it must be the same as or later than the effective date.

Saving Changes

Press **F12** (Commit) to save your changes, or press **F8** (Exit Screen) to discard your changes without saving. If you press **F8** (Exit Screen), the following window opens:


WellSky Corporation
Proprietary and confidential

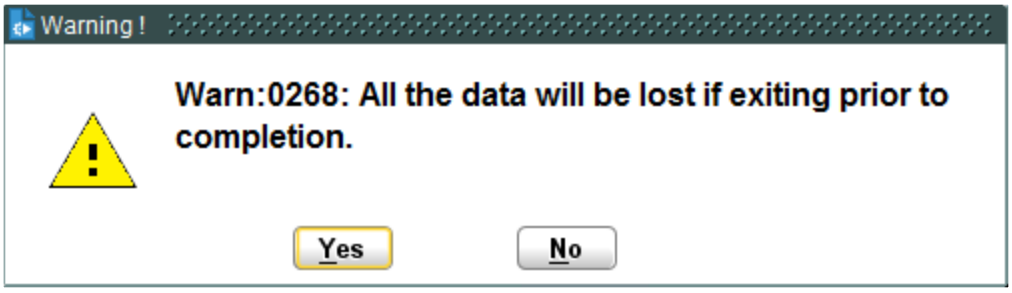

Press **Yes** to quit without saving, or press **No** to close the windows. If you press **No**, you will then have an opportunity to save changes.

Product Type Configuration

This window is used to insert or modify the labeling product type configuration for which special testing will be linked and the attribute will print at labeling. Click **Product Type Configuration** to open the window, as shown:

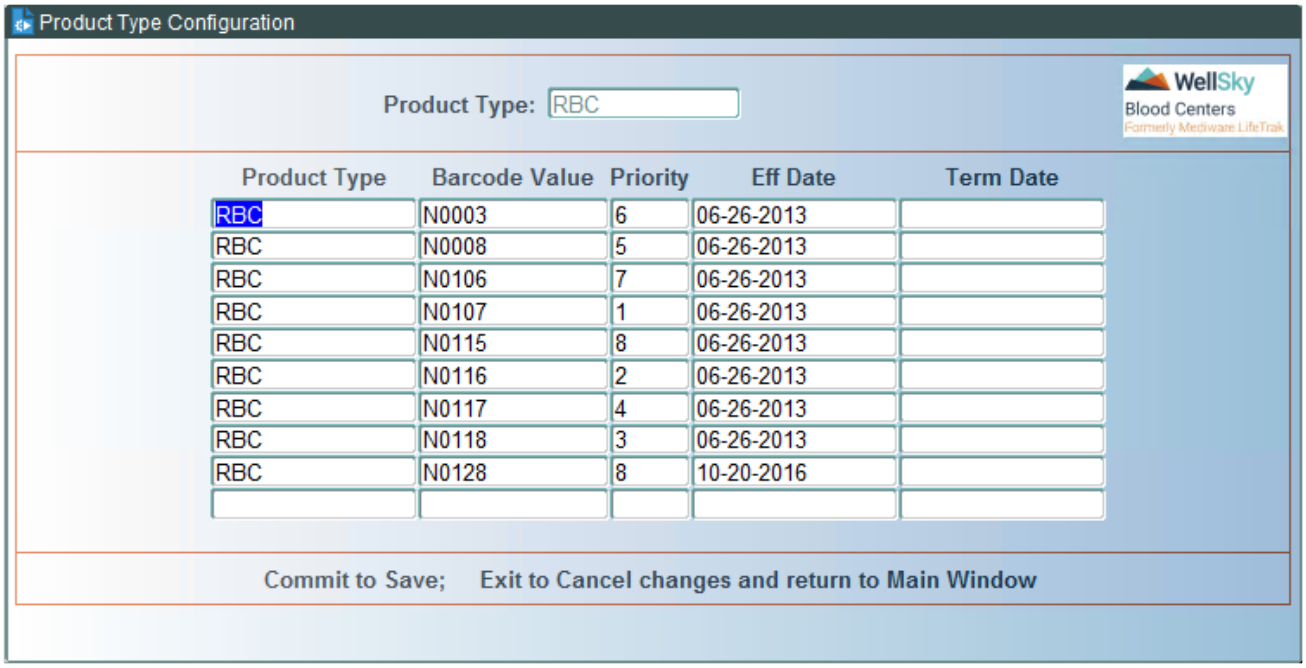

Product Type	Barcode Value	Priority	Eff Date	Term Date
RBC	N0003	6	06-26-2013	
RBC	N0008	5	06-26-2013	
RBC	N0106	7	06-26-2013	
RBC	N0107	1	06-26-2013	
RBC	N0115	8	06-26-2013	
RBC	N0116	2	06-26-2013	
RBC	N0117	4	06-26-2013	
RBC	N0118	3	06-26-2013	
RBC	N0128	8	10-20-2016	

Control Block

Product Type

Enter the product type or select from LOV. Press **ENTER** to display data for the selected product type.

Leave field blank and press **ENTER** to display all product type data that has already been entered. If you display all product type data, you will not be able to update any product type or create a new record.

Detail Block

Product Type

The field populates with the product type entered in the control block *Product Type* field. This value cannot be changed. If you enter or select a different value, the following message displays:



Click **OK** to close the window and select the correct product type value.

Barcode Value

Enter barcode value or select from LOV.

Priority

Enter the priority sequence number. Enter the priority for the code that has precedence over the other codes.

> **NOTE –** If a product is tested for both CMV and HbS and you want both results to print on the label, set the CMV, HbS label to a higher priority than just the CMV label.

Eff Date


Field populates with the system date. Accept this date or enter a future date in MM-DD-YYYY format.

Term Date

Enter a termination date in MM-DD-YYYY format, or leave blank. If you enter a termination date, it must be the same as or later than the effective date.

Saving Changes


Press **F12** (Commit) to save your changes, or press **F8** (Exit Screen) to discard your changes without saving. If you press **F8** (Exit Screen), the following window opens:

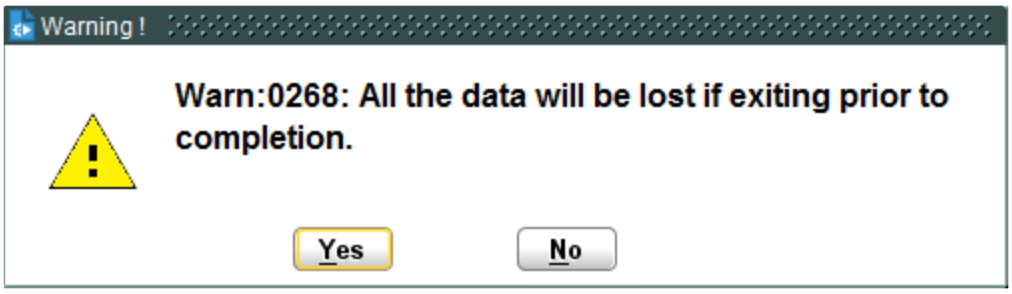

Press **Yes** to quit without saving, or press **No** to close the windows. If you press **No**, you will then have an opportunity to save changes.

Recovered Plasma Test Configuration

This window is used to insert or modify the labeling recovered plasma test configuration. Click **Recovered Plasma Test Configuration** to open the window, as shown:

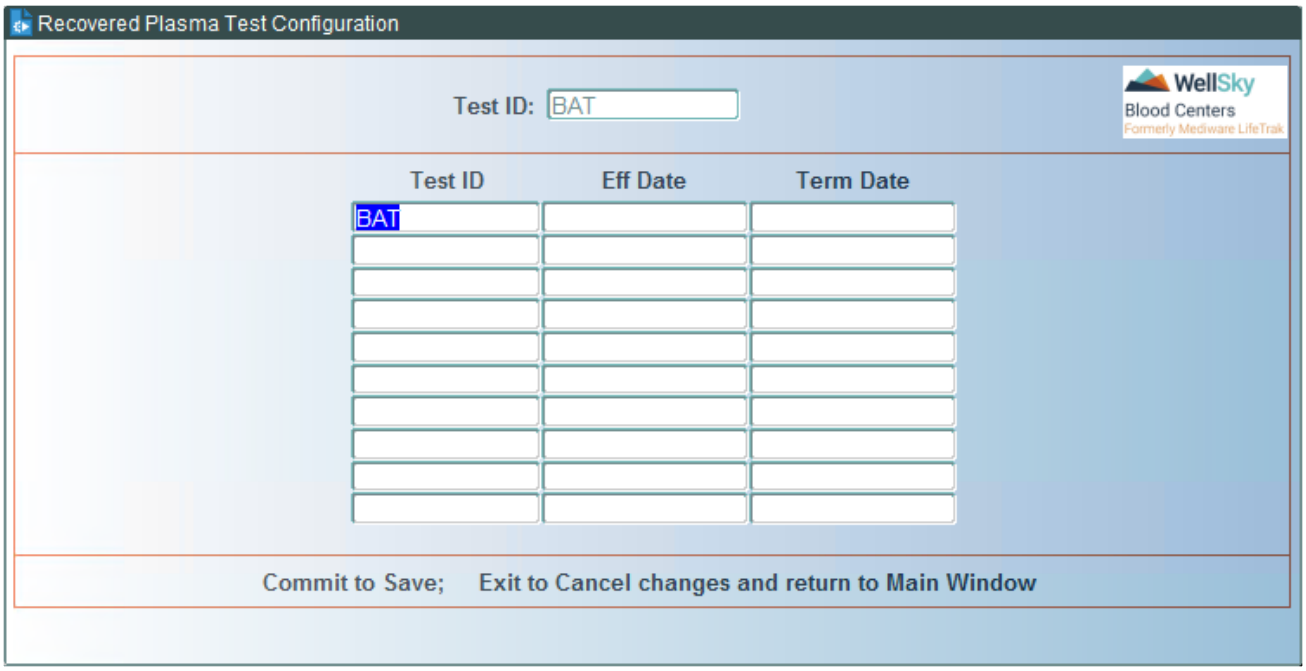

Control Block

Test ID

Enter the test ID or select from LOV. Press **ENTER** to display data for the selected test ID.

Leave field blank and press **ENTER** to display all test ID data that has already been entered. If you display all test ID data, you will not be able to update any test ID or create a new record.

Detail Block

Test ID

The field populates with the test ID entered in the control block *Test IDe* field. This value cannot be changed. If you enter or select a different value, the following message displays:



Click **OK** to close the window and select the correct test ID value.

Eff Date


Field populates with the system date. Accept this date or enter a future date in MM-DD-YYYY format.

Term Date

Enter a termination date in MM-DD-YYYY format, or leave blank. If you enter a termination date, it must be the same as or later than the effective date.

Saving Changes


Press **F12** (Commit) to save your changes, or press **F8** (Exit Screen) to discard your changes without saving. If you press **F8** (Exit Screen), the following window opens:

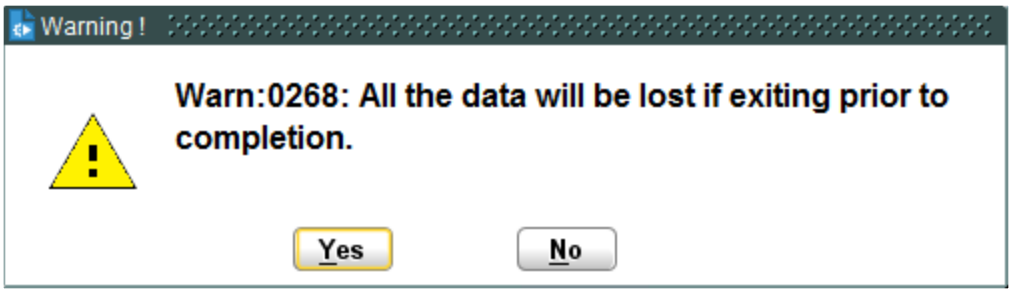

Press **Yes** to quit without saving, or press **No** to close the windows. If you press **No**, you will then have an opportunity to save changes.

Test Message Mapping

This window is used to insert or modify the test message mapping. Click **Test Message Mapping** to open the window, as shown:

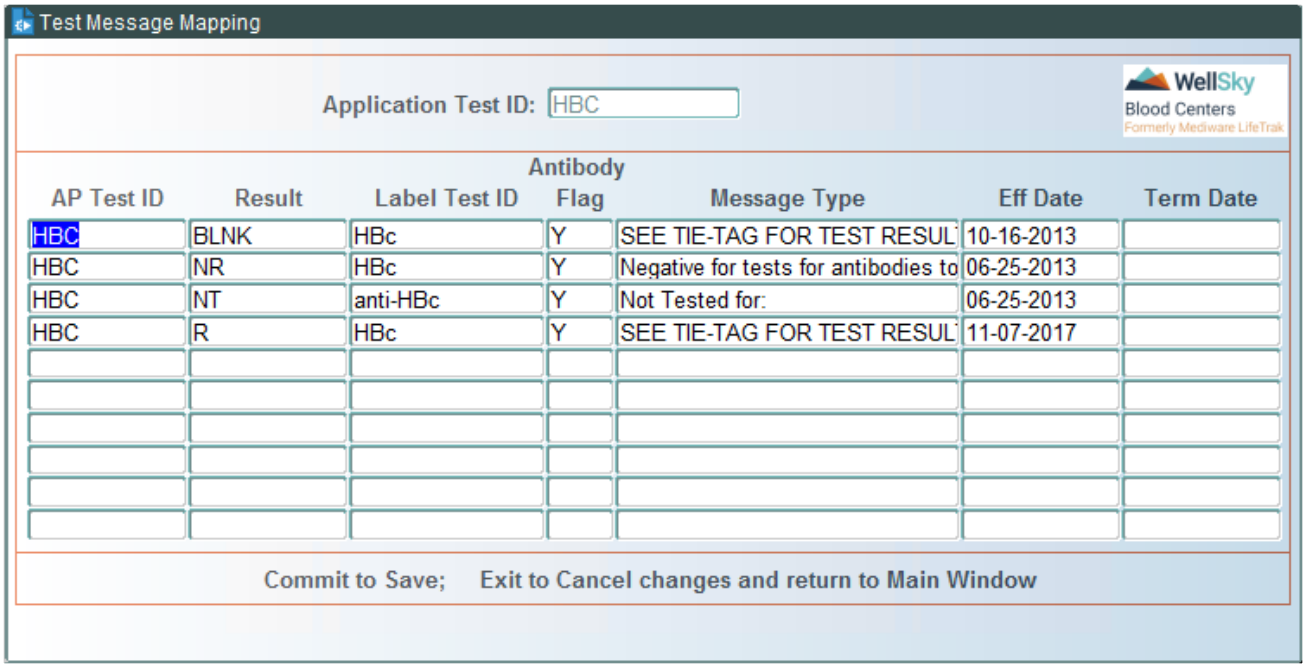

WellSky Corporation
Proprietary and confidential

NOTE – The order in which the master code records (MTYPE) are defined determines the order in which the test information displays on the actual label. The "Negative for Antibodies to" entry must be defined first so that the testing statement starts off with the statement, then the "and nonreactive for" entry should be defined second. The program is not using any order clause while reading from this master code, so it goes by whichever entry comes first.

Control Block

LT Test ID

Enter the LT test ID or select from LOV. Press **ENTER** to display data for the selected LT test ID.

Leave field blank and press **ENTER** to display all LT test ID data that has already been entered. If you display all LT test ID data, you will not be able to update any LT test ID or create a new record.

Detail Block

LT Test ID

The field populates with the LT test ID entered in the control block *LT Test ID* field. This value cannot be changed. If you enter or select a different value, the following message displays:



Click **OK** to close the window and select the correct LT test ID value.

Result

Enter result or select from LOV.

NOTE – BLNK is hard coded within the system and cannot be changed. It represents that there are no results present in schedule tests.

If multiple types of test results are found, the system will print “SEE TIE-TAG FOR TEST INFORMATION”. This is hard coded within the system.

Label Test ID

Enter a label name for the specified test ID.

Antibody Flag

Enter `Y` or `N`.

Message Type

Select the message type from the drop-down. The options in the drop-down come from the master code MTYPE.

EXAMPLE – Negative for test for antibodies to *|**HBc, HCV, HIV-1/2, HTLV-VII and|nonreactive to Babesia, T.cruzi,**|*HBsAg, NAT, STS, WNV, ZIKVF.

NOTE – The MTYPE should be defined with No Space before and after the vertical symbol "|".

Eff Date


Field populates with the system date. Accept this date or enter a future date in MM-DD-YYYY format.

Term Date

Enter a termination date in MM-DD-YYYY format, or leave blank. If you enter a termination date, it must be the same as or later than the effective date.

Saving Changes

Press **F12** (Commit) to save your changes, or press **F8** (Exit Screen) to discard your changes without saving. If you press **F8** (Exit Screen), the following window opens:

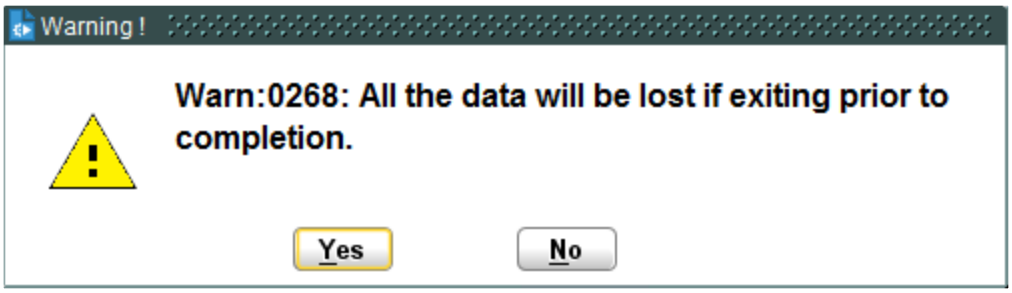

Press **Yes** to quit without saving, or press **No** to close the windows. If you press **No**, you will then have an opportunity to save changes.

At Commit

Add data is saved to the database.

What to Do Next

There is no next step.

2.4.7 Lab Interdiction Codes (LINTER)

Intended Use

This screen is used to define interdictions which affect the system label decision (SLD) of components. Interdictions are also used to alert the user of unit or component conditions. Without other underlying circumstances, there are four interdiction types that can dictate the SLD of components:

- HOLD 'H' – Component labeled as Hold.
- BIO 'B' – Component labeled as Biohazard.
- NFT 'N' – Component labeled as Not For Transfusion.
- INITIAL (Informational) 'I' – Information present that may or may not affect a component SLD.

WellSky Corporation
Proprietary and confidential

This screen is only available from Lab.

Limitations


Highly restricted access – modifications to interdictions could affect the entire function of the application. BIO and INITIAL interdictions can only be placed and removed by the system.

For a list of static interdiction codes that cannot be changed or terminated from the system, refer to Appendix O.

Prerequisites

None

Entering/Viewing Data

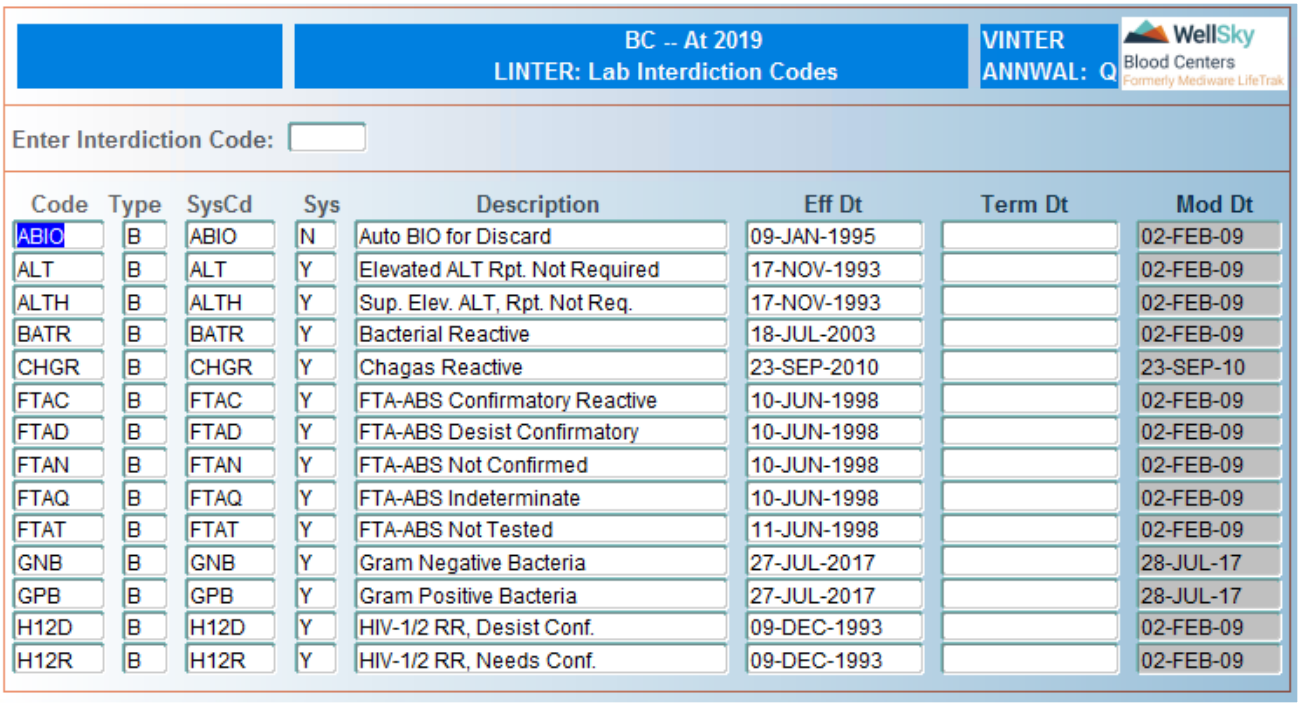

Code	Type	SysCd	Sys	Description	Eff Dt	Term Dt	Mod Dt
ABIO	B	ABIO	N	Auto BIO for Discard	09-JAN-1995		02-FEB-09
ALT	B	ALT	Y	Elevated ALT Rpt. Not Required	17-NOV-1993		02-FEB-09
ALTH	B	ALTH	Y	Sup. Elev. ALT, Rpt. Not Req.	17-NOV-1993		02-FEB-09
BATR	B	BATR	Y	Bacterial Reactive	18-JUL-2003		02-FEB-09
CHGR	B	CHGR	Y	Chagas Reactive	23-SEP-2010		23-SEP-10
FTAC	B	FTAC	Y	FTA-ABS Confirmatory Reactive	10-JUN-1998		02-FEB-09
FTAD	B	FTAD	Y	FTA-ABS Desist Confirmatory	10-JUN-1998		02-FEB-09
FTAN	B	FTAN	Y	FTA-ABS Not Confirmed	10-JUN-1998		02-FEB-09
FTAQ	B	FTAQ	Y	FTA-ABS Indeterminate	10-JUN-1998		02-FEB-09
FTAT	B	FTAT	Y	FTA-ABS Not Tested	11-JUN-1998		02-FEB-09
GNB	B	GNB	Y	Gram Negative Bacteria	27-JUL-2017		28-JUL-17
GPB	B	GPB	Y	Gram Positive Bacteria	27-JUL-2017		28-JUL-17
H12D	B	H12D	Y	HIV-1/2 RR, Desist Conf.	09-DEC-1993		02-FEB-09
H12R	B	H12R	Y	HIV-1/2 RR, Needs Conf.	09-DEC-1993		02-FEB-09

In the Control Block

Enter Interdiction Code

Enter interdiction code or leave blank to view all interdictions.

In the Detail Block

Code

Enter interdiction code. A maximum of 4 characters is allowed.

Type

Enter one of the following interdiction types:

- H – HOLD
- N – NFT
- B – BIO
- I – INITIAL

SysCd
Enter same code that was entered in the Code field.

Sys
Enter one of the following:

- Y – Interdiction is placed automatically by the system.
- N – Code must be placed by a user.



NOTE – Modifications must not be made to interdictions placed by the system. If the interdiction type is 'B' or 'I', the interdiction must be placed by the system.

Description
Enter an appropriate interdiction description. A maximum of 50 characters is allowed.

Eff Date
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date in DD-MON-YYYY format.

Mod Dt
Field automatically populates with the date modifications were last made. Field is not navigable.

What to Do Next

- Assign Interdiction Classes (ICLASS) – assign interdictions to interdiction classes.
- Available Tests (TEST) – define valid tests with associated system interdictions.
- Labeling Interdiction Override: Tech1 (INTOVER) – enter interdictions that are to be overridden for labeling purposes (first tech entry).
- Labeling Interdiction Override: Tech2 (INTOVER2) – enter interdictions that are to be overridden for labeling purposes (second tech entry).
- Donor Interdiction Override: Tech 1 (OVERDON1) – enter interdictions that are to be overridden in the donor deferral registry check (first tech entry).
- Donor Interdiction Override: Tech 2 (OVERDON2) – enter interdictions that are to be overridden in the donor deferral registry check (second tech entry).

WellSky Corporation
Proprietary and confidential

2.4.8 Assign Interdiction Class (ICLASS)

Intended Use

This screen is used to associate interdictions to the appropriate interdiction class(es). Users can only place and/or remove interdictions that are in their interdiction class.


Limitations

- BIO and INITIAL interdictions can only be placed and removed by the system. Users must have appropriate access defined.
- Certain screens do not examine the termination date. Therefore, users may have access to interdictions in certain screens, even if the interdictions have been terminated using the ICLASS screen.
- ICLASS does not examine the termination date in all functions. If you need to remove access completely from a particular group of users, you must delete the users from the table.

Prerequisites

- Valid Lab Interdictions (LINTER) – Define valid interdictions.
- Lab Master Codes (LMASTER), code INTCL – Define valid interdiction classes.

Entering/Viewing Data

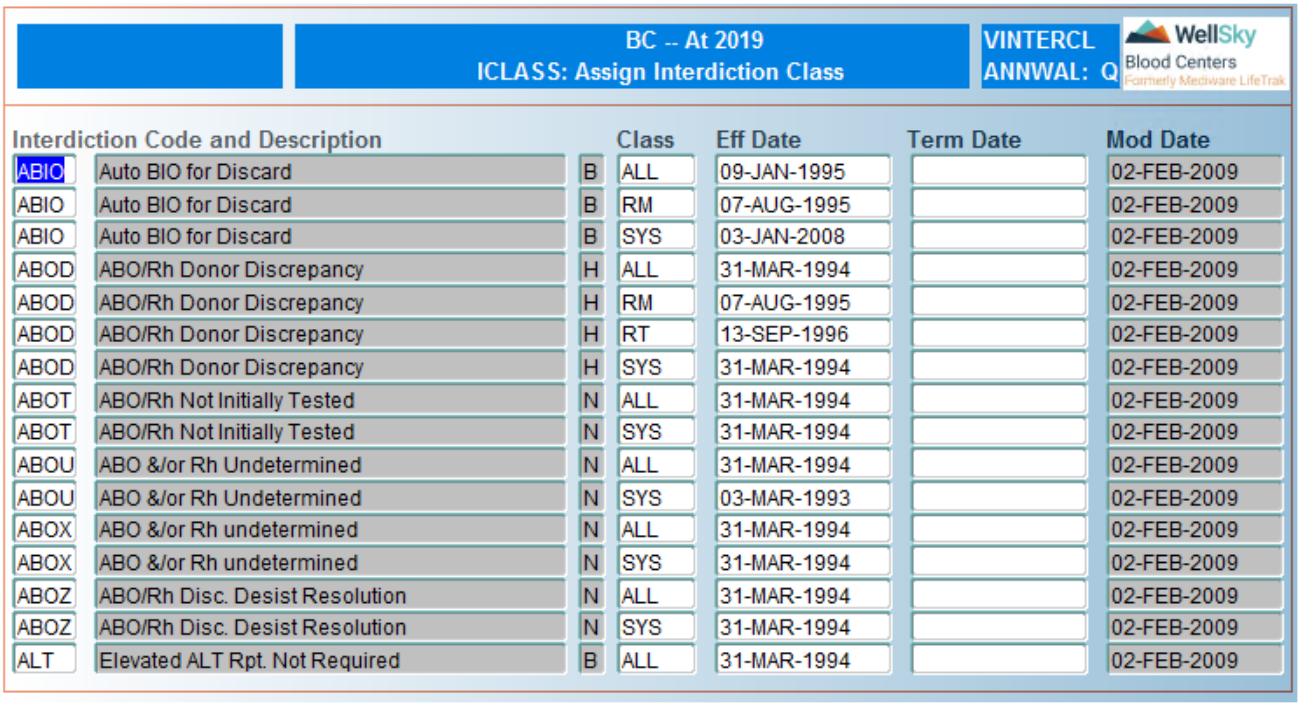

Interdiction Code and Description			Class	Eff Date	Term Date	Mod Date
ABIO	Auto BIO for Discard	B	ALL	09-JAN-1995		02-FEB-2009
ABIO	Auto BIO for Discard	B	RM	07-AUG-1995		02-FEB-2009
ABIO	Auto BIO for Discard	B	SYS	03-JAN-2008		02-FEB-2009
ABOD	ABO/Rh Donor Discrepancy	H	ALL	31-MAR-1994		02-FEB-2009
ABOD	ABO/Rh Donor Discrepancy	H	RM	07-AUG-1995		02-FEB-2009
ABOD	ABO/Rh Donor Discrepancy	H	RT	13-SEP-1996		02-FEB-2009
ABOD	ABO/Rh Donor Discrepancy	H	SYS	31-MAR-1994		02-FEB-2009
ABOT	ABO/Rh Not Initially Tested	N	ALL	31-MAR-1994		02-FEB-2009
ABOT	ABO/Rh Not Initially Tested	N	SYS	31-MAR-1994		02-FEB-2009
ABOU	ABO &/or Rh Undetermined	N	ALL	31-MAR-1994		02-FEB-2009
ABOU	ABO &/or Rh Undetermined	N	SYS	03-MAR-1993		02-FEB-2009
ABOX	ABO &/or Rh undetermined	N	ALL	31-MAR-1994		02-FEB-2009
ABOX	ABO &/or Rh undetermined	N	SYS	31-MAR-1994		02-FEB-2009
ABOZ	ABO/Rh Disc. Desist Resolution	N	ALL	31-MAR-1994		02-FEB-2009
ABOZ	ABO/Rh Disc. Desist Resolution	N	SYS	31-MAR-1994		02-FEB-2009
ALT	Elevated ALT Rpt. Not Required	B	ALL	31-MAR-1994		02-FEB-2009

To add a new record, press CTRL + F2 (Create Record).

Interdiction Code and Description

Enter interdiction code to be assigned to be assigned to interdiction class or select from LOV. The description field automatically populates after the interdiction code is entered.

Class

Enter the class to which the interdiction should be assigned or select from LOV. Select ALL to assign the interdiction to all classes.

NOTE – A separate line must be used for each class the interdiction is to be assigned.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Mod Dt

Field automatically populates with the date modifications were last made.

What to Do Next

There is no next step for this screen.

2.4.9 Labeling Interdiction Override: Tech 1 (INTOVER)

Intended Use

This screen is used to enter interdictions that are to be overridden so that certain products can be labeled. Because overriding interdictions is a highly critical function, double entry of this information is required. This screen provides a mechanism for recording the first tech entry of the override information.

Limitations


Donor interdictions to be overridden are to be entered in Donor Interdiction Override (OVERDON1).

Prerequisites

- Donor Decision Codes (DDCODES) – define valid Confidential Unit Exclusion (CUE) codes.
- Lab Master Codes (LMASTER), code PRDTY – Define valid product types.
- Lab Interdiction Codes (LINTER) – Define interdictions.

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

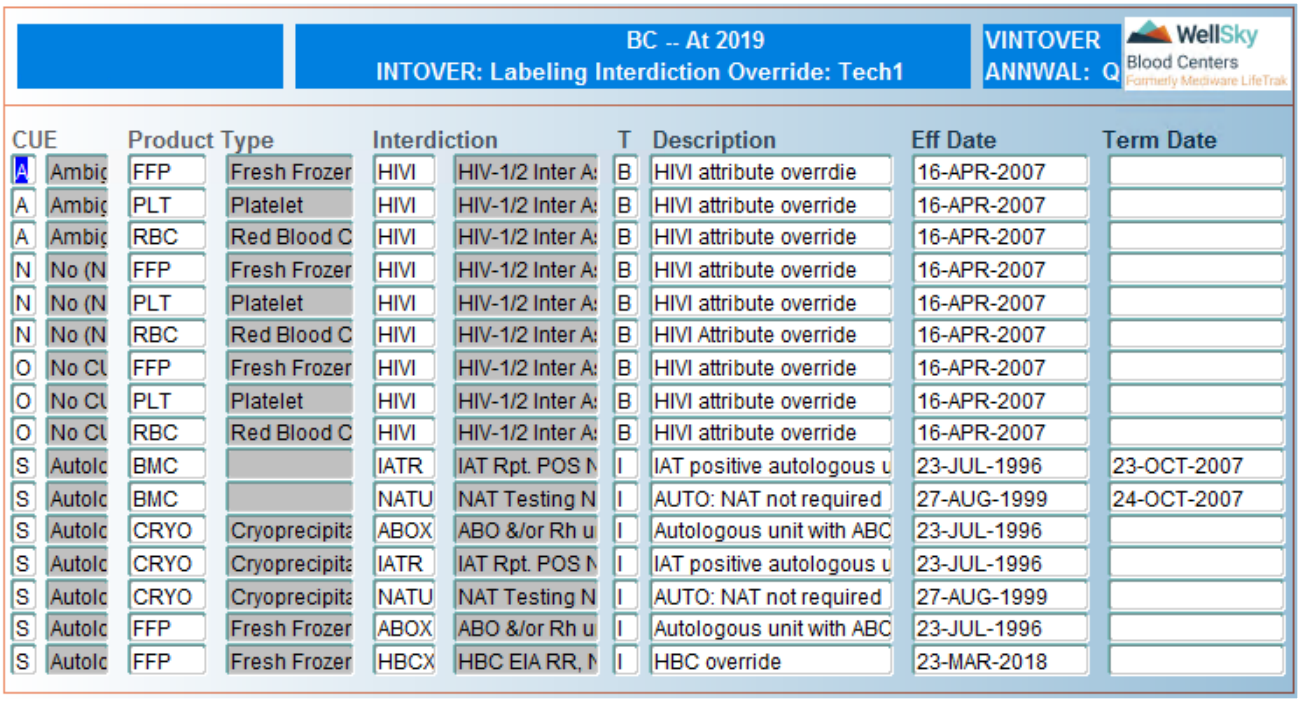

CUE	Product Type		Interdiction		T	Description	Eff Date	Term Date
A	Ambig	FFP	Fresh Frozer	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overrdie	16-APR-2007	
A	Ambig	PLT	Platelet	HIVI	HIV-1/2 Inter A:	B	HIVI attribute override	16-APR-2007	
A	Ambig	RBC	Red Blood C	HIVI	HIV-1/2 Inter A:	B	HIVI attribute override	16-APR-2007	
N	No (N	FFP	Fresh Frozer	HIVI	HIV-1/2 Inter A:	B	HIVI attribute override	16-APR-2007	
N	No (N	PLT	Platelet	HIVI	HIV-1/2 Inter A:	B	HIVI attribute override	16-APR-2007	
N	No (N	RBC	Red Blood C	HIVI	HIV-1/2 Inter A:	B	HIVI Attribute override	16-APR-2007	
O	No CU	FFP	Fresh Frozer	HIVI	HIV-1/2 Inter A:	B	HIVI attribute override	16-APR-2007	
O	No CU	PLT	Platelet	HIVI	HIV-1/2 Inter A:	B	HIVI attribute override	16-APR-2007	
O	No CU	RBC	Red Blood C	HIVI	HIV-1/2 Inter A:	B	HIVI attribute override	16-APR-2007	
S	Autolo	BMC		IATR	IAT Rpt. POS N	I	IAT positive autologous u	23-JUL-1996	23-OCT-2007
S	Autolo	BMC		NATU	NAT Testing N	I	AUTO: NAT not required	27-AUG-1999	24-OCT-2007
S	Autolo	CRYO	Cryoprecipita	ABOX	ABO &/or Rh u	I	Autologous unit with ABC	23-JUL-1996	
S	Autolo	CRYO	Cryoprecipita	IATR	IAT Rpt. POS N	I	IAT positive autologous u	23-JUL-1996	
S	Autolo	CRYO	Cryoprecipita	NATU	NAT Testing N	I	AUTO: NAT not required	27-AUG-1999	
S	Autolo	FFP	Fresh Frozer	ABOX	ABO &/or Rh u	I	Autologous unit with ABC	23-JUL-1996	
S	Autolo	FFP	Fresh Frozer	HBCX	HBC EIA RR, N	I	HBC override	23-MAR-2018	

To add a new record, press **CTRL** + **F2** (Create Record).

CUE

Enter donor CUE type for which the override is valid or select from LOV.

NOTE – Each CUE for which the interdiction override is valid must be entered on a separate line.

Product Type

Enter product type for which the override is valid or select from LOV.

NOTE – Each product type for which the override is valid must be entered on a separate line.

Interdiction

Enter interdiction to be overridden or select from LOV.

T

Enter the type to which the interdiction is to be overridden, as follows:

- `I` – Initial
- `B` – Bio

- N – NFT
- H – Hold

Description
Enter a description for the override to be displayed at labeling. A maximum of 50 characters is allowed.

Eff Date
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date in DD-MON-YYYY format.

What to Do Next
Labeling Interdiction Override: Tech 2 (INTOVER2) – Verification of interdiction overrides.

2.4.10 Labeling Interdiction Override: Tech 2 (INTOVER2)


Intended Use
This screen is used to verify interdictions that are to be overridden from the Labeling Interdiction Override: Tech 1. Because overriding interdictions is a highly critical function, verification of this information is required. This screen provides a mechanism for recording the second tech verification of the override information.

Limitations
- Initial entry and verification must be performed by different users.
- Donor interdictions to be overridden are to be entered in Donor Interdiction Override (OVERDON1).

Prerequisites
- Labeling Interdiction Override: Tech 1 (INTOVER) – Define interdictions that can be overridden.

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

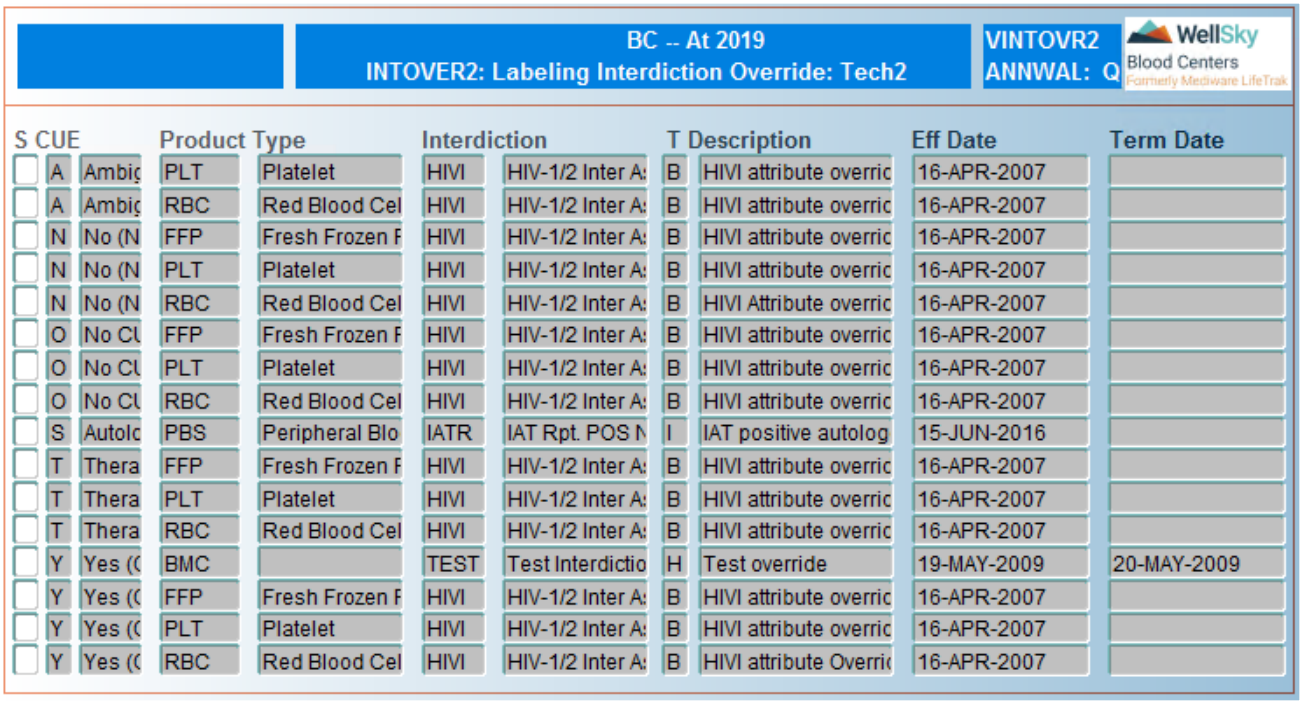

BC -- At 2019
INTOVER2: Labeling Interdiction Override: Tech2
VINTOVR2
ANNWAL: Q

S	CUE		Product Type		Interdiction		T	Description	Eff Date	Term Date
	A	Ambig	PLT	Platelet	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overric	16-APR-2007	
	A	Ambig	RBC	Red Blood Cel	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overric	16-APR-2007	
	N	No (N	FFP	Fresh Frozen F	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overric	16-APR-2007	
	N	No (N	PLT	Platelet	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overric	16-APR-2007	
	N	No (N	RBC	Red Blood Cel	HIVI	HIV-1/2 Inter A:	B	HIVI Attribute overric	16-APR-2007	
	O	No CU	FFP	Fresh Frozen F	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overric	16-APR-2007	
	O	No CU	PLT	Platelet	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overric	16-APR-2007	
	O	No CU	RBC	Red Blood Cel	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overric	16-APR-2007	
	S	Autolo	PBS	Peripheral Blo	IATR	IAT Rpt. POS N	I	IAT positive autolog	15-JUN-2016	
	T	Thera	FFP	Fresh Frozen F	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overric	16-APR-2007	
	T	Thera	PLT	Platelet	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overric	16-APR-2007	
	T	Thera	RBC	Red Blood Cel	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overric	16-APR-2007	
	Y	Yes (C	BMC		TEST	Test Interdictio	H	Test override	19-MAY-2009	20-MAY-2009
	Y	Yes (C	FFP	Fresh Frozen F	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overric	16-APR-2007	
	Y	Yes (C	PLT	Platelet	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overric	16-APR-2007	
	Y	Yes (C	RBC	Red Blood Cel	HIVI	HIV-1/2 Inter A:	B	HIVI attribute Overri	16-APR-2007	

NOTE – Only interdiction overrides to be verified appear on the screen.

S

Enter x to select the row to be validated. Press F12 (Commit) to save the verified entries.

What to Do Next

- Donor Interdiction Override: Tech 1 (OVERDON1) – Enter valid donor interdiction overrides.
- Donor Interdiction Override: Tech 2 (OVERDON2) – Verify donor interdiction overrides.

2.4.11 Labeling Interdiction Override Query (INTOVERQ)

Intended Use

This screen is used to query labeling interdiction overrides.


Limitations

No updates can be made in this screen.

Prerequisites

Overrides must have been entered in Labeling Interdiction Override: Tech 1 (INTOVER) and confirmed in Labeling Interdiction Override: Tech 2 (INTOVER2) in order to be queried in this screen.

Entering/Viewing Data

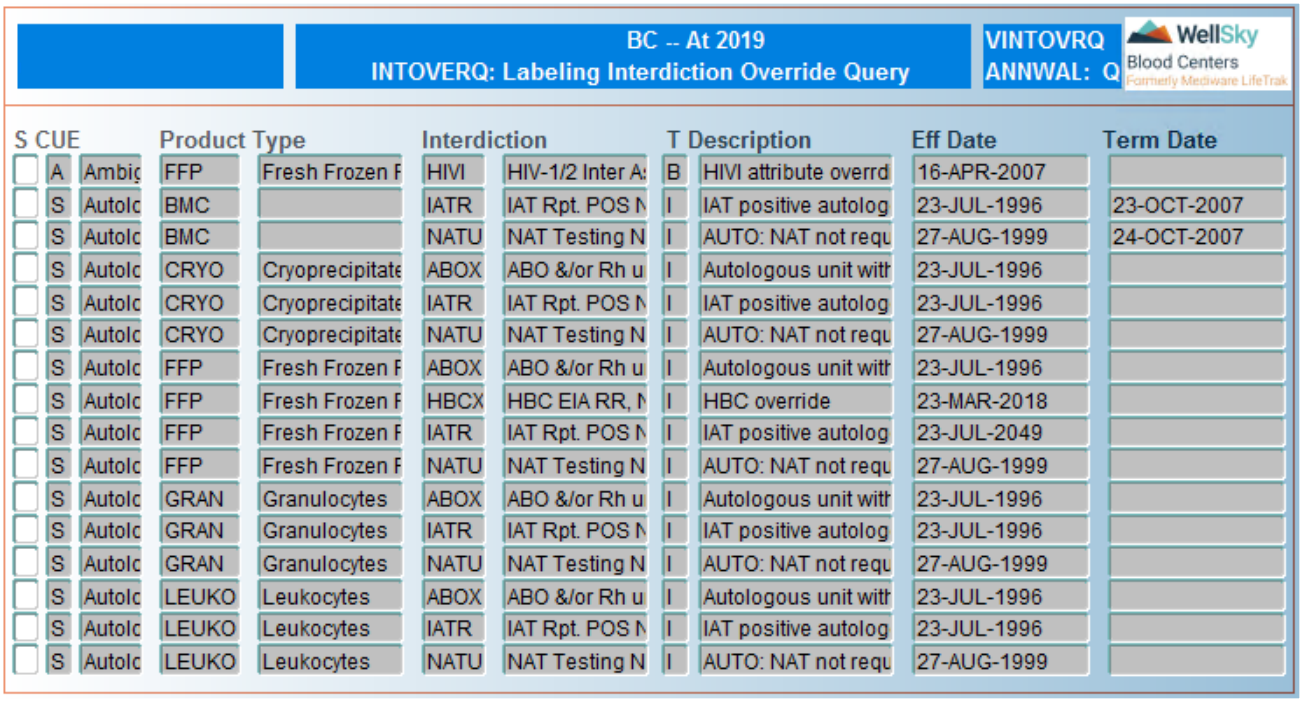

S	CUE	Product Type		Interdiction		T	Description	Eff Date	Term Date
	A	Ambig	FFP	Fresh Frozen F	HIVI	HIV-1/2 Inter A:	B	HIVI attribute overrd	16-APR-2007	
	S	Autolo	BMC		IATR	IAT Rpt. POS N	I	IAT positive autolog	23-JUL-1996	23-OCT-2007
	S	Autolo	BMC		NATU	NAT Testing N	I	AUTO: NAT not requ	27-AUG-1999	24-OCT-2007
	S	Autolo	CRYO	Cryoprecipitate	ABOX	ABO &/or Rh u	I	Autologous unit with	23-JUL-1996	
	S	Autolo	CRYO	Cryoprecipitate	IATR	IAT Rpt. POS N	I	IAT positive autolog	23-JUL-1996	
	S	Autolo	CRYO	Cryoprecipitate	NATU	NAT Testing N	I	AUTO: NAT not requ	27-AUG-1999	
	S	Autolo	FFP	Fresh Frozen F	ABOX	ABO &/or Rh u	I	Autologous unit with	23-JUL-1996	
	S	Autolo	FFP	Fresh Frozen F	HBCX	HBC EIA RR, N	I	HBC override	23-MAR-2018	
	S	Autolo	FFP	Fresh Frozen F	IATR	IAT Rpt. POS N	I	IAT positive autolog	23-JUL-2049	
	S	Autolo	FFP	Fresh Frozen F	NATU	NAT Testing N	I	AUTO: NAT not requ	27-AUG-1999	
	S	Autolo	GRAN	Granulocytes	ABOX	ABO &/or Rh u	I	Autologous unit with	23-JUL-1996	
	S	Autolo	GRAN	Granulocytes	IATR	IAT Rpt. POS N	I	IAT positive autolog	23-JUL-1996	
	S	Autolo	GRAN	Granulocytes	NATU	NAT Testing N	I	AUTO: NAT not requ	27-AUG-1999	
	S	Autolo	LEUKO	Leukocytes	ABOX	ABO &/or Rh u	I	Autologous unit with	23-JUL-1996	
	S	Autolo	LEUKO	Leukocytes	IATR	IAT Rpt. POS N	I	IAT positive autolog	23-JUL-1996	
	S	Autolo	LEUKO	Leukocytes	NATU	NAT Testing N	I	AUTO: NAT not requ	27-AUG-1999	

Use the **UP** and **DOWN** arrow keys to scroll through the list.

2.4.12 Donor Interdiction Override: Tech 1 (OVERDON1)

Intended Use

This screen is used to enter donor interdictions that are to be overridden in the donor deferral registry check. Because overriding interdictions is a highly critical function, double entry of this information is required. This screen provides a mechanism for recording the first tech entry of the override information.

Limitations

- Labeling interdiction overrides are not defined in this screen. Enter labeling interdictions in Labeling Interdiction Override: Tech 1 (INTOVER).
- The interdiction code in Donor can have a maximum of 4 characters.


Prerequisites

- Donor Decision Codes (DDCODES) – Define valid Confidential Unit Exclusion (CUE) codes.

WellSky Corporation
Proprietary and confidential

- Lab Master Codes (LMASTER), code PRDTY – Define valid product types.
- Lab Interdiction Codes (LINTER) – Define interdictions.
- Attribute Codes (ATTRIB) – Define attributes.

Entering/Viewing Data

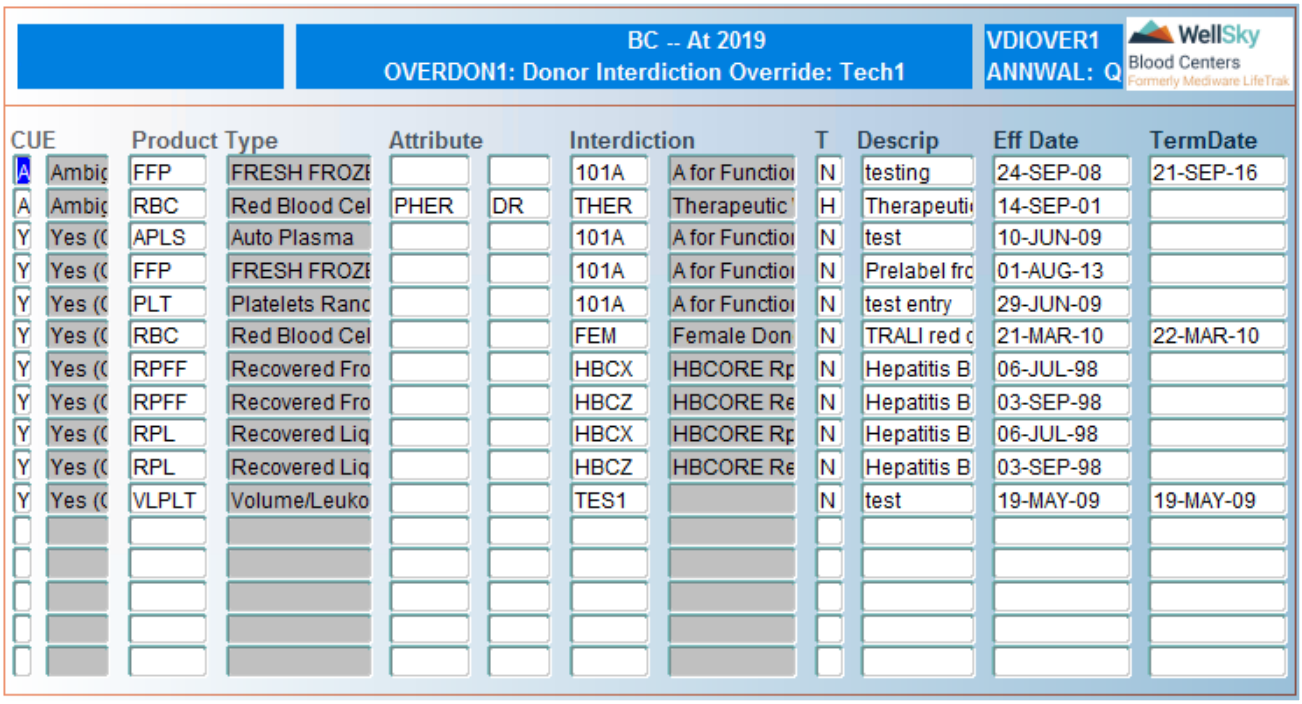

To add a new record, press CTRL + F2 (Create Record).

CUE

Enter donor CUE type for which the override is valid or select from LOV.

NOTE – Each CUE for which the interdiction override is valid must be entered on a separate line.

Product Type

Enter the product type for which the override is valid or use LOV.

NOTE – Each product type for which the override is valid must be entered on a separate line.

Attribute

Enter the attribute type that must be on the unit or select from LOV. Leave blank if attribute should not be considered.

Interdiction
Enter the interdiction to be overridden or select from LOV.

T
Enter the type to which the interdiction is to be overridden, as follows:

- `N` – No effect on product suitability.
- `H` – Quarantine all products from donor.
- `C` – Discard products from unit causing interdiction.
- `Q` – Quarantine all products from unit causing interdiction.
- `A` – Discard all products from donor.
- `I` – Discard products between effective and termination dates.

Description
Enter a description for the override to be displayed at labeling. A maximum of 50 characters is allowed.

Eff Date
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date in DD-MON-YYYY format.

What to Do Next
Labeling Interdiction Override: Tech 2 (INTOVER2) – Verification of interdiction overrides.


2.4.13 Donor Interdiction Override: Tech 2 (OVERDON2)

Intended Use
This screen is used to verify donor interdictions that are to be overridden from the Donor Interdiction Override: Tech 1 (OVERDON1). Because overriding interdictions is a highly critical function, verification of this information is required. This screen provides a mechanism for recording the second tech verification of the override information.

Limitations
- Initial entry and verification must be performed by different users.
- Labeling interdictions to be overridden are to be entered in Labeling Interdiction Override (INTOVER1).

Prerequisites
Donor Interdiction Override: Tech 1 (OVERDON1) – Define donor interdictions that can be overridden.

Entering/Viewing Data

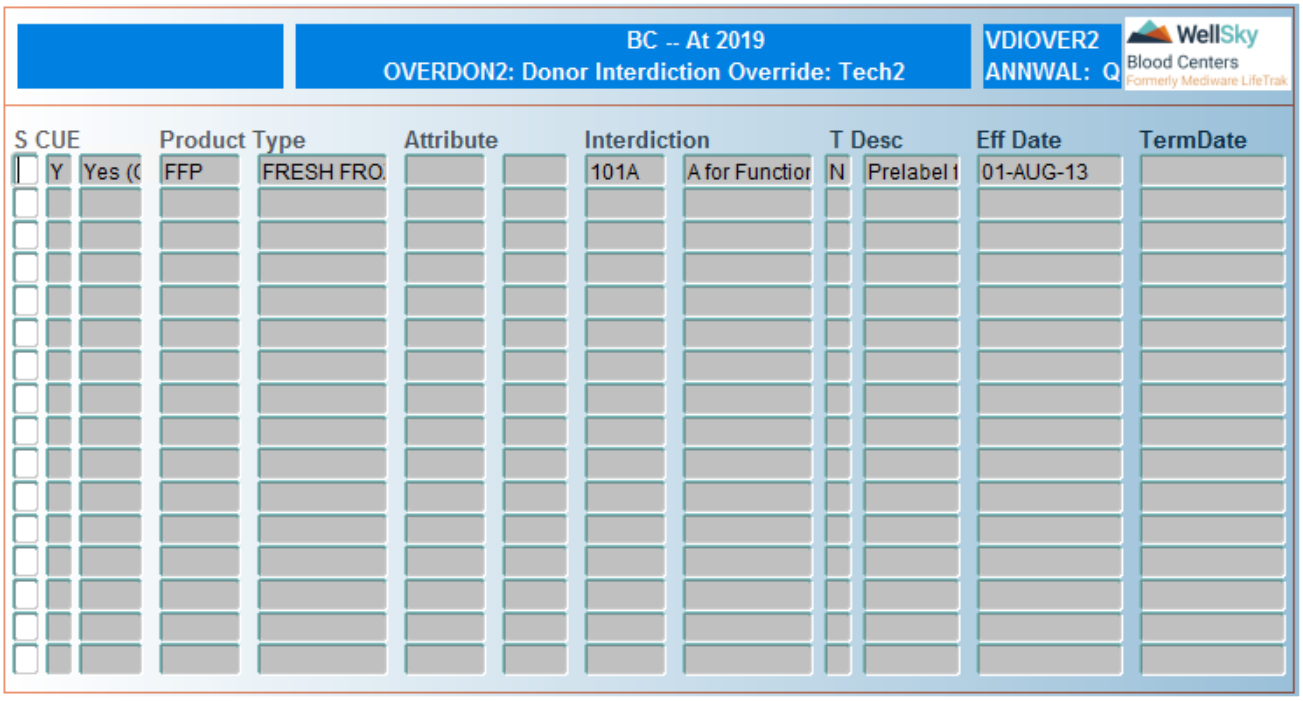

NOTE – Only donor interdiction overrides to be verified appear on the screen.

S

Enter x to select the row to be validated. Press F12 (Commit) to save the verified entries.

What to Do Next

There is no next step for this screen.

2.4.14 Donor Interdiction Override Query (OVERDONQ)

Intended Use

This screen is used to query donor interdiction overrides.


Limitations

No updates can be made in this screen.

Prerequisites

Overrides must have been entered in Donor Interdiction Override: Tech 1 (OVERDON1) and confirmed in Donor Interdiction Override: Tech 2 (OVERDON2) in order to be queried in this screen.

Entering/Viewing Data

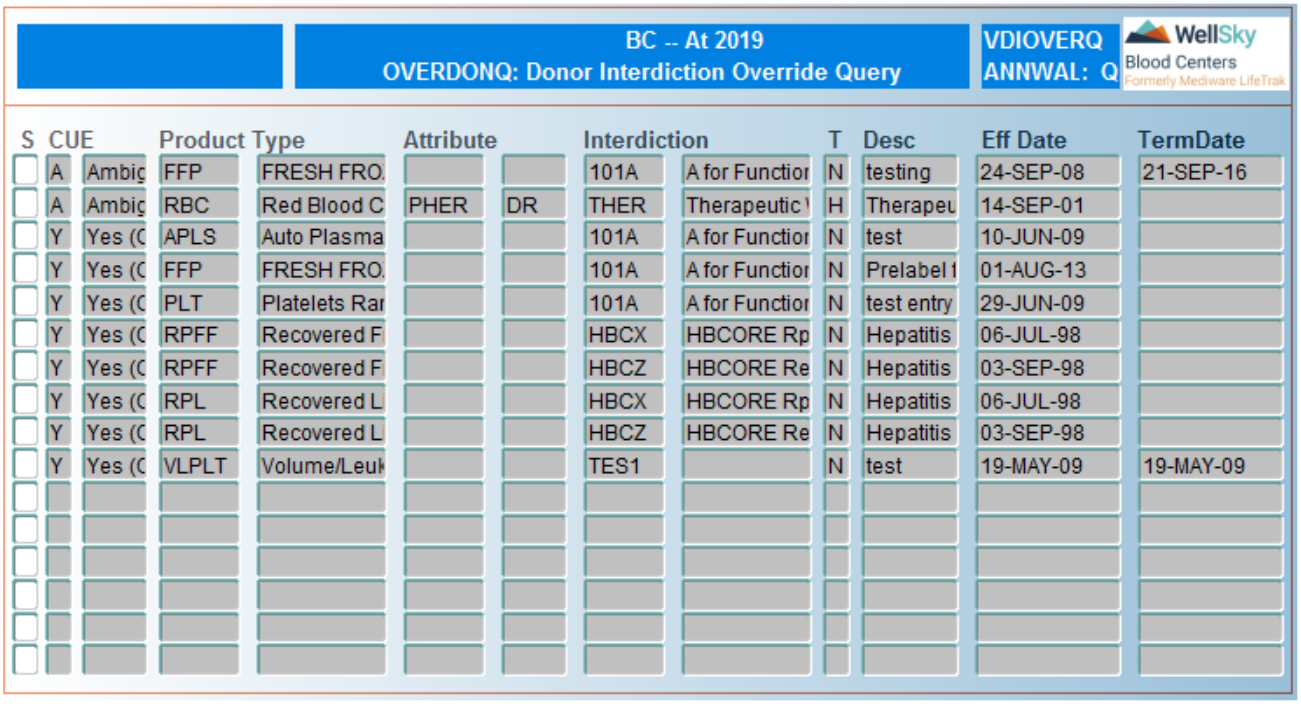

Use the **UP** and **DOWN** arrow keys to scroll through the list.

2.4.15 Donor Decision Codes (DDCODES)

Intended Use

Use this screen to define or update donor decision codes. This screen allows definition of valid barcodes for the scanning of the donor CUE. This validation table will only be used if the facility is using the CUE.

Limitations


The following donor decision code types are static and cannot be changed:

- A – Ambiguous
- N – No (not for transfusion)
- O – No Cue
- S – Autologous
- T – Therapeutic
- Y – Yes (OK for transfusion)

Prerequisites

None

Entering/Viewing Data

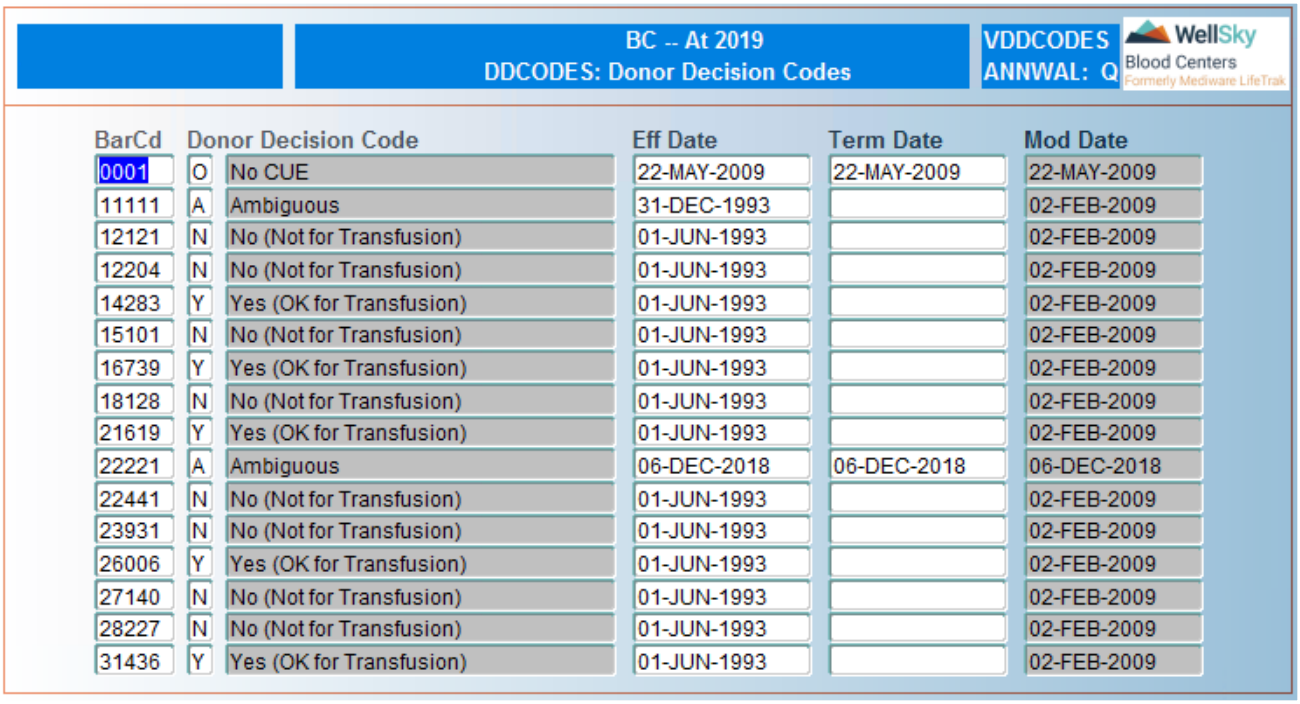

BarCd		Donor Decision Code	Eff Date	Term Date	Mod Date
0001	O	No CUE	22-MAY-2009	22-MAY-2009	22-MAY-2009
11111	A	Ambiguous	31-DEC-1993		02-FEB-2009
12121	N	No (Not for Transfusion)	01-JUN-1993		02-FEB-2009
12204	N	No (Not for Transfusion)	01-JUN-1993		02-FEB-2009
14283	Y	Yes (OK for Transfusion)	01-JUN-1993		02-FEB-2009
15101	N	No (Not for Transfusion)	01-JUN-1993		02-FEB-2009
16739	Y	Yes (OK for Transfusion)	01-JUN-1993		02-FEB-2009
18128	N	No (Not for Transfusion)	01-JUN-1993		02-FEB-2009
21619	Y	Yes (OK for Transfusion)	01-JUN-1993		02-FEB-2009
22221	A	Ambiguous	06-DEC-2018	06-DEC-2018	06-DEC-2018
22441	N	No (Not for Transfusion)	01-JUN-1993		02-FEB-2009
23931	N	No (Not for Transfusion)	01-JUN-1993		02-FEB-2009
26006	Y	Yes (OK for Transfusion)	01-JUN-1993		02-FEB-2009
27140	N	No (Not for Transfusion)	01-JUN-1993		02-FEB-2009
28227	N	No (Not for Transfusion)	01-JUN-1993		02-FEB-2009
31436	Y	Yes (OK for Transfusion)	01-JUN-1993		02-FEB-2009

BarCd

Enter the numerical barcode value for the donor decision code.

Donor Decision Code

Enter the donor decision code type or select from LOV. These values are static and user must select from the values that display in the LOV.

NOTE – Once the donor decision code type is selected the description populates automatically.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Date

Enter termination date in DD-MON-YYYY format.

Mod Date

Populated automatically by the system when the code is updated. Field is not navigable.

What to Do Next

There is no next step for this screen.

2.4.16 Valid ff Flag Values – ISBT (FFVAL)

Intended Use

Use this screen to enter the ff value that is assigned to the end of the ISBT number for the facility.


Limitations

None

Prerequisites

- Define Lab Master Code (LMASTER) code type FFSRC.
- Chapter Details (CHAPTER) – Define chapter information.
- Define Valid Collection Facilities (COLLID) – Define valid collection facilities.

Entering/Viewing Data

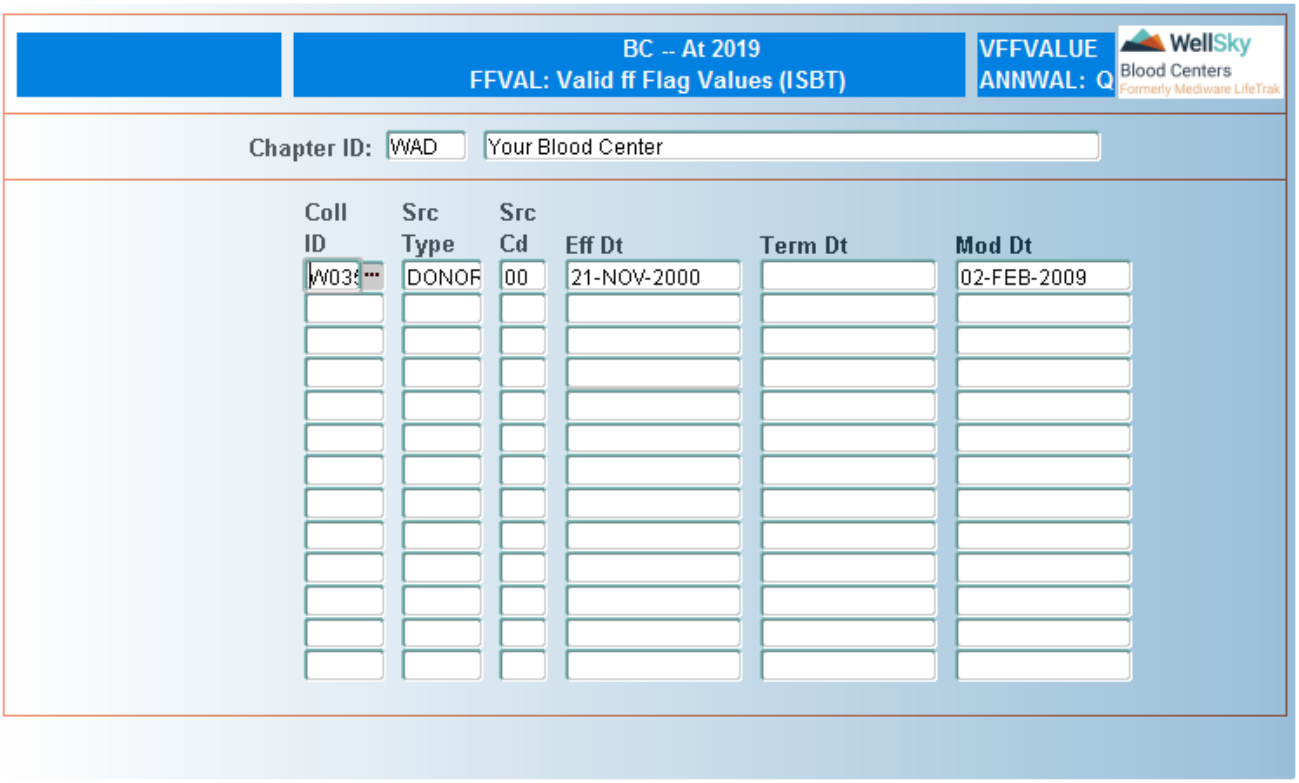

In the Control Block

Chapter ID

Enter the chapter ID or select from LOV. The chapter description displays after entry in this field.

WellSky Corporation
Proprietary and confidential

In the Detail Block

Coll ID

Enter collection facility ID or select from LOV.

Src Type

Enter source type or select from LOV.

Src code

Enter the flag values that can appear at the end of the ISBT unit ID bar code.

Eff Dt

Enter effective date in DD-MON-YYYY format. Field defaults to the system date.

Term Dt

Enter termination date in DD-MON-YYYY format. Only enter the termination date if you no longer need to use the facility code.

Mod Dt

Field is not navigable. This field is updated when you commit your entries.

At Commit

Entries are saved to the database.


What to Do Next

There is no next step for this screen.

2.5 Distribution Restricted Validation Tables (SVALID)

2.5 Screens and Descriptions

These functions are accessed from the following menu:

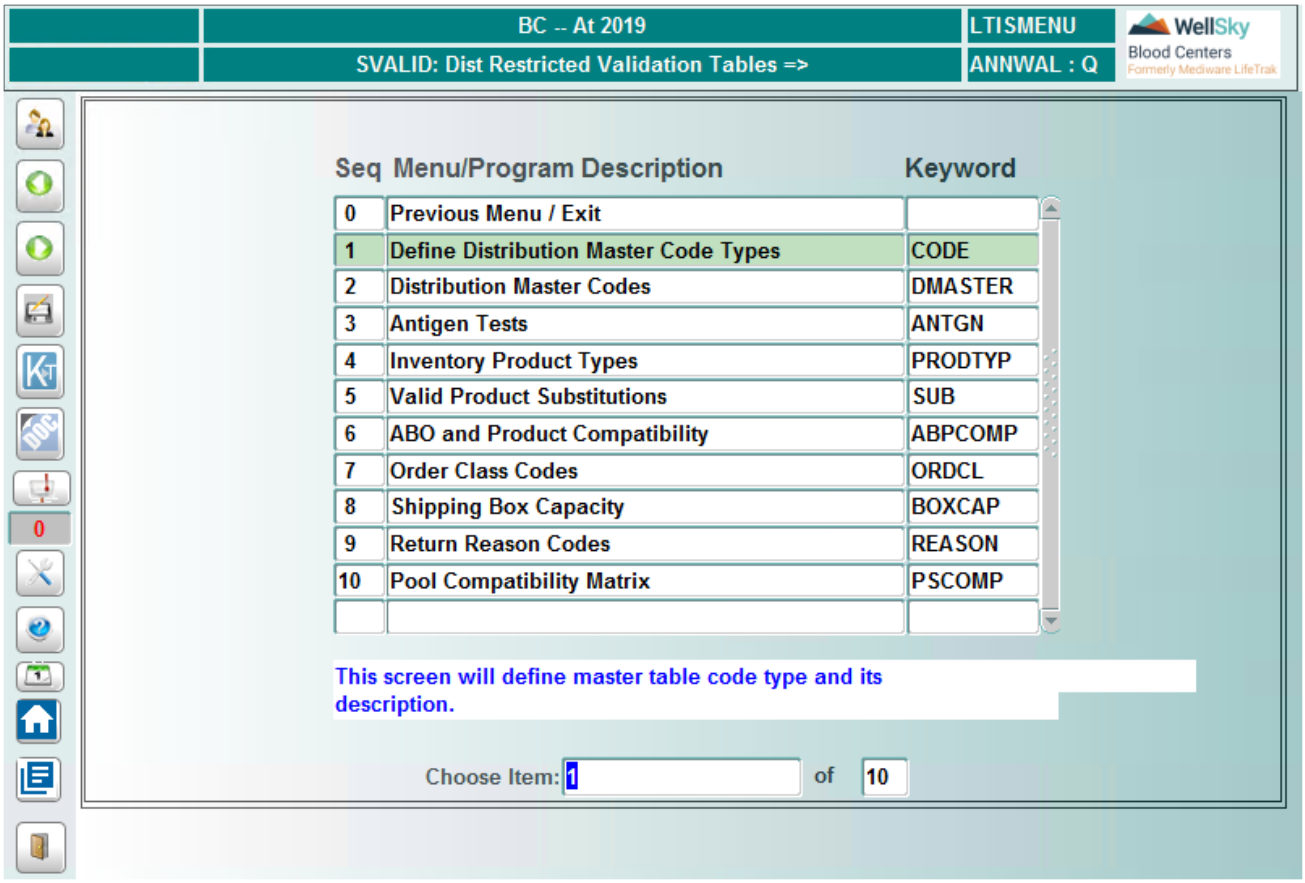

2.5.1 Define Distribution Master Code Types (CODE)

Intended Use

Master Codes are a set of code types used by individual modules to provide flexibility to the application. A table of underlying codes is associated to each code type. The code types are specifically coded within in the application. Some Master Codes define data for other tables. WellSky may be required to add new or modify existing Master Codes.


Limitations

Each Code type is coded for specific use within the application and should not be changed. New Code types should not be added.

Prerequisites

Each code is described in the Distribution Master Codes, Appendix Q.

Entering/Viewing Data

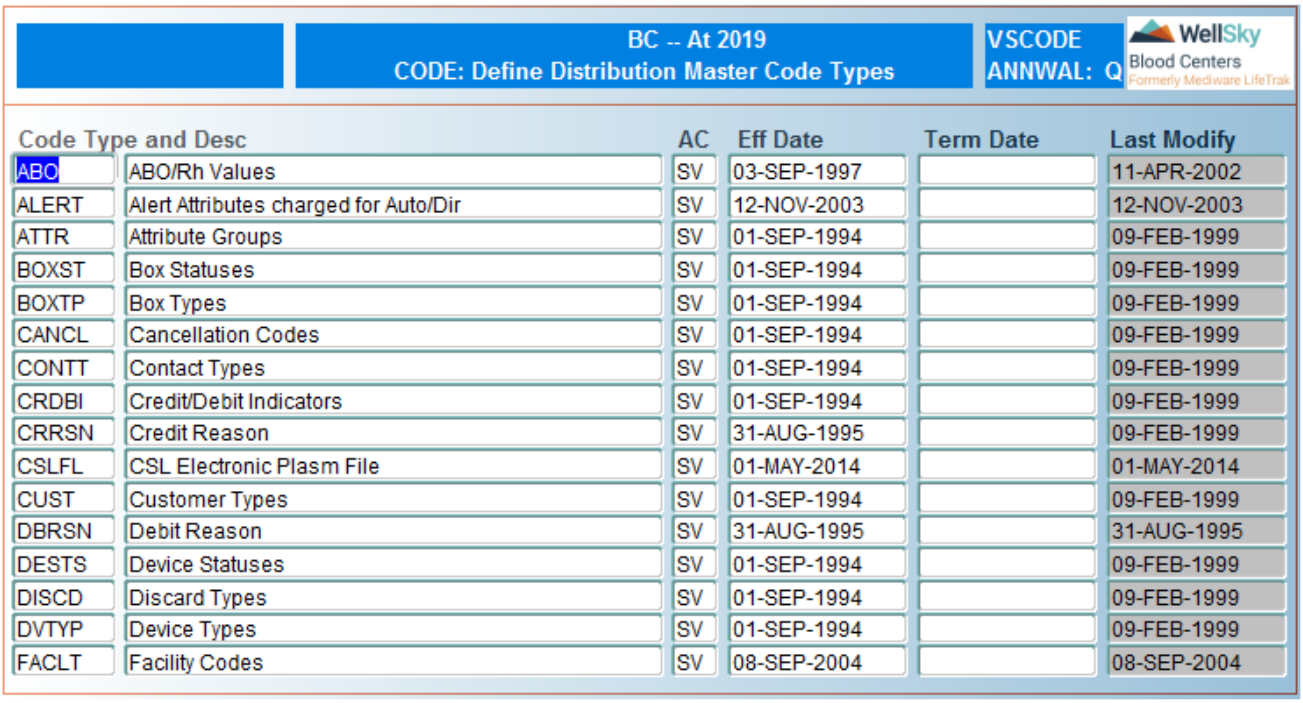

Code Type and Desc		AC	Eff Date	Term Date	Last Modify
ABO	ABO/Rh Values	SV	03-SEP-1997		11-APR-2002
ALERT	Alert Attributes charged for Auto/Dir	SV	12-NOV-2003		12-NOV-2003
ATTR	Attribute Groups	SV	01-SEP-1994		09-FEB-1999
BOXST	Box Statuses	SV	01-SEP-1994		09-FEB-1999
BOXTP	Box Types	SV	01-SEP-1994		09-FEB-1999
CANCL	Cancellation Codes	SV	01-SEP-1994		09-FEB-1999
CONTT	Contact Types	SV	01-SEP-1994		09-FEB-1999
CRDBI	Credit/Debit Indicators	SV	01-SEP-1994		09-FEB-1999
CRRSN	Credit Reason	SV	31-AUG-1995		09-FEB-1999
CSLFL	CSL Electronic Plasm File	SV	01-MAY-2014		01-MAY-2014
CUST	Customer Types	SV	01-SEP-1994		09-FEB-1999
DBRSN	Debit Reason	SV	31-AUG-1995		31-AUG-1995
DESTS	Device Statuses	SV	01-SEP-1994		09-FEB-1999
DISCD	Discard Types	SV	01-SEP-1994		09-FEB-1999
DVTYP	Device Types	SV	01-SEP-1994		09-FEB-1999
FACLT	Facility Codes	SV	08-SEP-2004		08-SEP-2004

Code

Enter a code type. A maximum of 5 characters is allowed.

NOTE – All code types are to remain static. At times new code types and underlying codes will be added for new or modified functionality.

Type

Enter a description for the code type. A maximum of 50 characters is allowed.

AC

Enter SV for application custody.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Last Modify

Field automatically populates with the date modifications were last made.

What to Do Next

Define Master Codes for code types in Master Codes (MASTER).

2.5.2 Distribution Master Codes (DMASTER)

Intended Use

Master Codes are a set of code types used by individual modules to provide flexibility to the application. A table of underlying codes is associated to each code type. The code types are specifically coded within the application. Some Master Codes define data for other tables. WellSky may be required to add new or modify existing Master Codes.

Limitations


Some underlying Code fields should remain static, while others can be changed dynamically. Refer to Appendix Q, Distribution Master Codes.

Prerequisites

Define Master Code Types (CODE) – Define master code types.

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

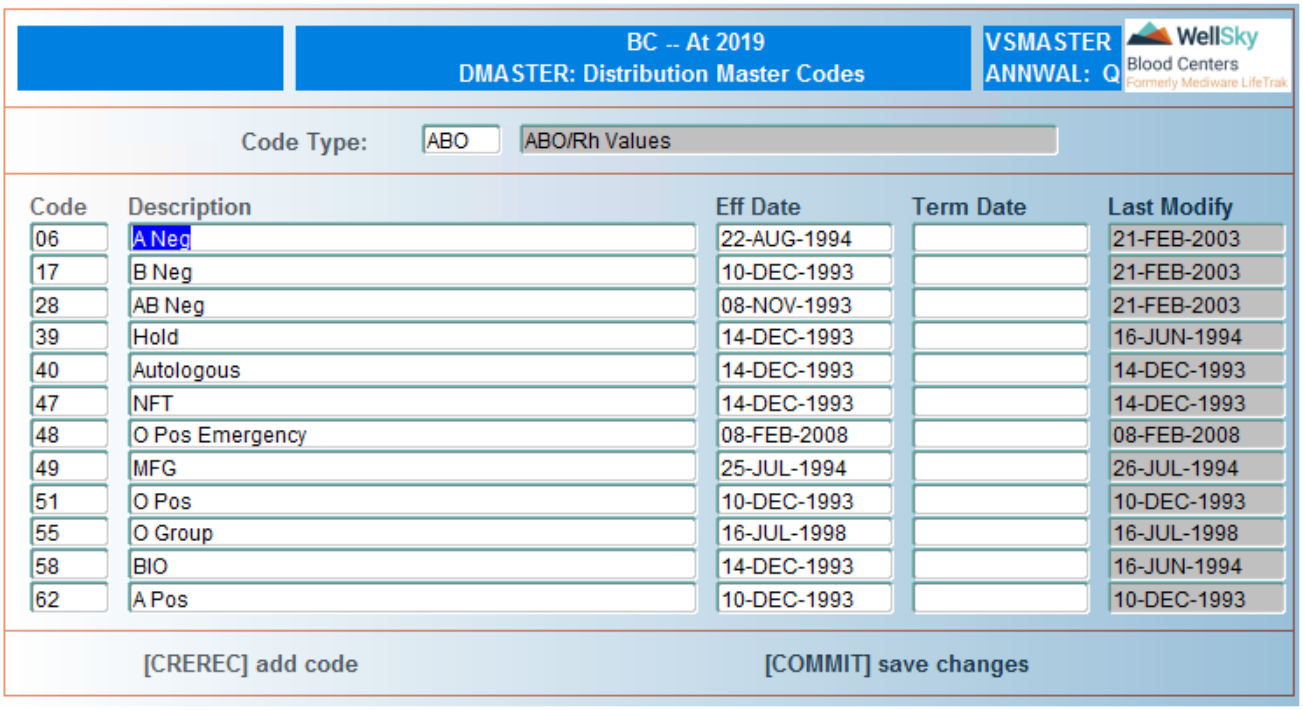

Enter the Code Type

Enter up to a code type or select code from LOV. A maximum of 5 characters is allowed.

NOTE – All code types are to remain static. At times new code types and underlying codes will be added for new or modified functionality. Existing codes associated to the individual code types can be either static or dynamic. Refer to Distribution Master Codes – Appendix Q to determine if a code can be modified.

Code

Enter a code that is to be under the code type. A maximum of 5 characters is allowed.

Description

Enter a description for the code. A maximum of 50 characters is allowed.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Last Modify

Field automatically populates with the date modifications were last made.

What to Do Next

There is no next step for this screen.

2.5.3 Antigen Tests (ANTGN)

Intended Use

Use this screen to define and view valid antigen tests.


Limitations

None

Prerequisites

None

Entering/Viewing Data

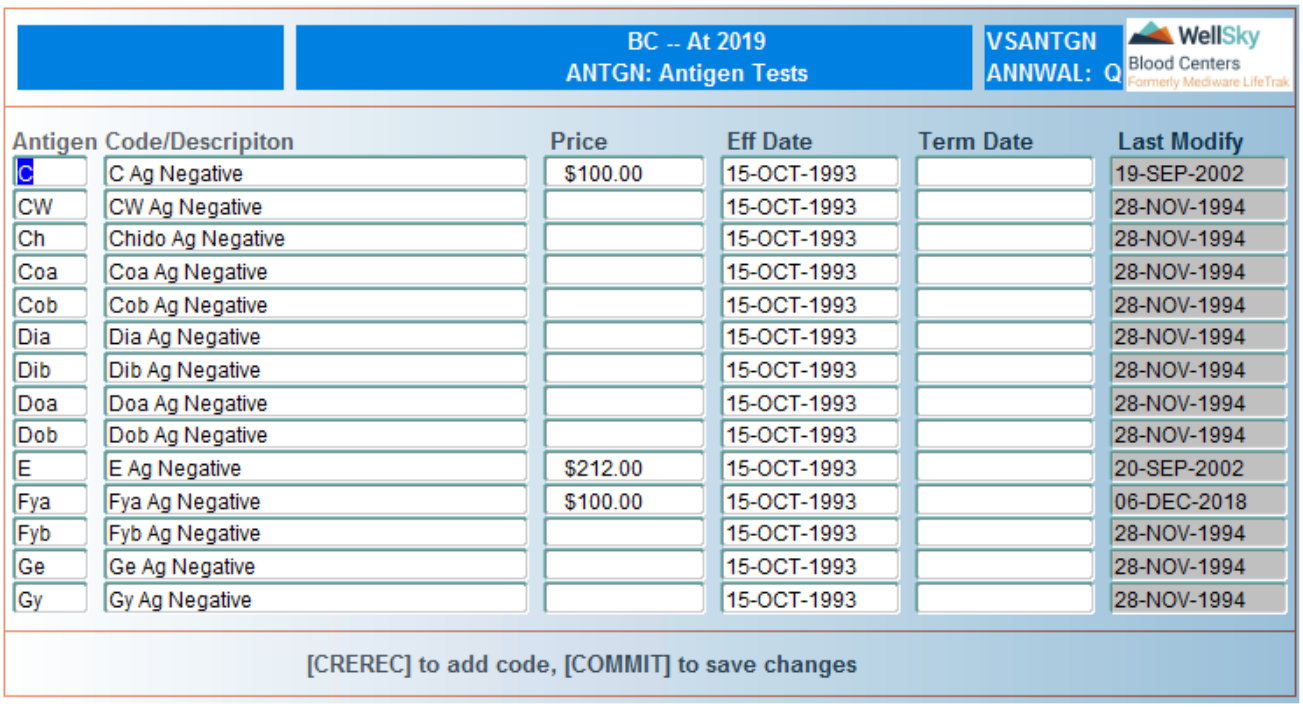

Antigen Code/Descripiton		Price	Eff Date	Term Date	Last Modify
C	C Ag Negative	$100.00	15-OCT-1993		19-SEP-2002
CW	CW Ag Negative		15-OCT-1993		28-NOV-1994
Ch	Chido Ag Negative		15-OCT-1993		28-NOV-1994
Coa	Coa Ag Negative		15-OCT-1993		28-NOV-1994
Cob	Cob Ag Negative		15-OCT-1993		28-NOV-1994
Dia	Dia Ag Negative		15-OCT-1993		28-NOV-1994
Dib	Dib Ag Negative		15-OCT-1993		28-NOV-1994
Doa	Doa Ag Negative		15-OCT-1993		28-NOV-1994
Dob	Dob Ag Negative		15-OCT-1993		28-NOV-1994
E	E Ag Negative	$212.00	15-OCT-1993		20-SEP-2002
Fya	Fya Ag Negative	$100.00	15-OCT-1993		06-DEC-2018
Fyb	Fyb Ag Negative		15-OCT-1993		28-NOV-1994
Ge	Ge Ag Negative		15-OCT-1993		28-NOV-1994
Gy	Gy Ag Negative		15-OCT-1993		28-NOV-1994

Press **CTRL** + **F2** (Create Record) to create a new entry or scroll through the list to modify existing entries.

Antigen Code

Enter antigen code. A maximum of 4 characters is allowed.

Description

Enter description for the antigen code. A maximum of 50 characters is allowed.

WellSky Corporation
Proprietary and confidential

Price
Leave blank. This field is currently not used in Distribution.

NOTE – Charges for antigens can be added via the attribute.

Eff Date
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date in DD-MON-YYYY format.

Last Modify
Field automatically populates with the date modifications were last made.

Press **F12** (Commit) to save entries/modifications.

What to Do Next
There is no next step for this screen.

2.5.4 Inventory Product Types (PRODTYP)


Intended Use
Use this screen to define or modify manufactured products, standard pricing, and inventory product groupings. Grouping assigned in this screen determine what product types can be packed together in the same container.

Limitations
The following inventory types are static within the system and cannot be modified or terminated:

CPPLS	CRYO	FFP
LRBC	PLT	RBC
RPFF	RPL	WB

Prerequisites
- Product Codes (PRODUCT) – Define valid product codes.
- Distribution Master Codes (DMASTER), code PRDGP – Define valid product groupings.

Entering/Viewing Data

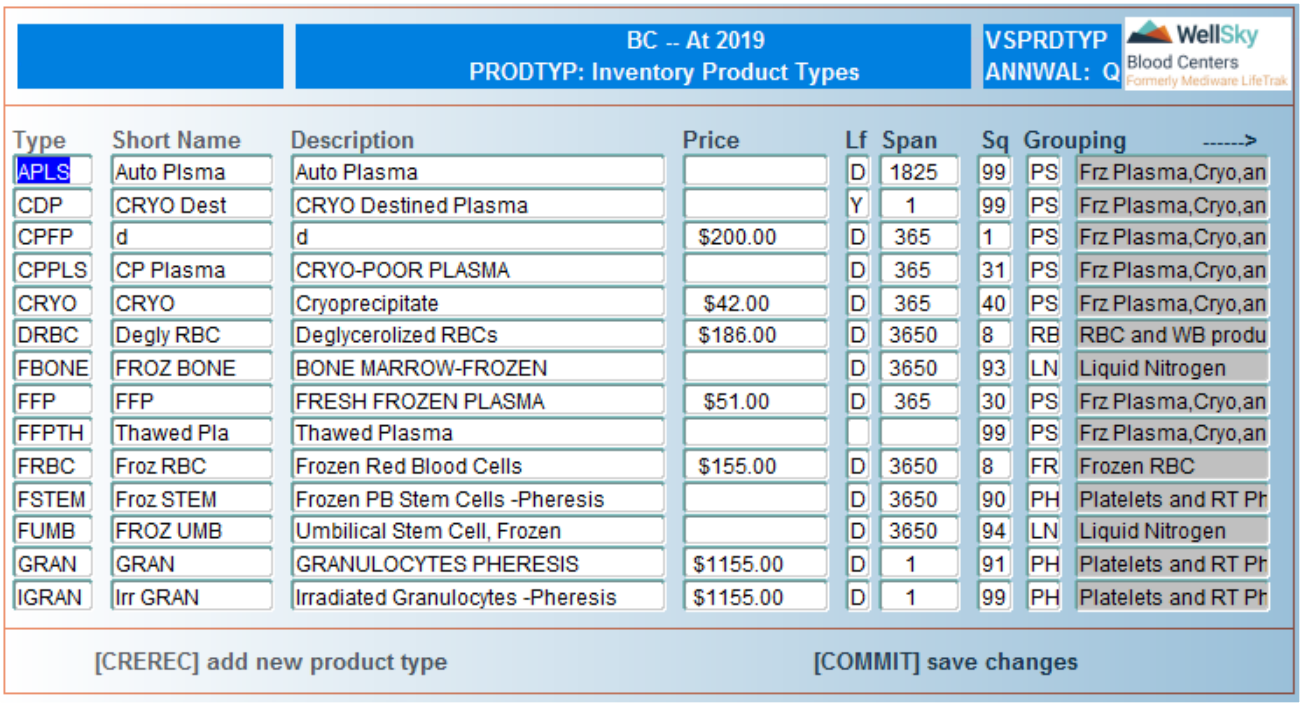

BC -- At 2019
PRODTYP: Inventory Product Types
VSPRDTYP
ANNWAL: Q
WellSky Blood Centers Formerly Mediware LifeTrak

Type	Short Name	Description	Price	Lf	Span	Sq	Grouping ------>
APLS	Auto Plsma	Auto Plasma		D	1825	99	PS Frz Plasma,Cryo,an
CDP	CRYO Dest	CRYO Destined Plasma		Y	1	99	PS Frz Plasma,Cryo,an
CPFP	d	d	$200.00	D	365	1	PS Frz Plasma,Cryo,an
CPPLS	CP Plasma	CRYO-POOR PLASMA		D	365	31	PS Frz Plasma,Cryo,an
CRYO	CRYO	Cryoprecipitate	$42.00	D	365	40	PS Frz Plasma,Cryo,an
DRBC	Degly RBC	Deglycerolized RBCs	$186.00	D	3650	8	RB RBC and WB produ
FBONE	FROZ BONE	BONE MARROW-FROZEN		D	3650	93	LN Liquid Nitrogen
FFP	FFP	FRESH FROZEN PLASMA	$51.00	D	365	30	PS Frz Plasma,Cryo,an
FFPTH	Thawed Pla	Thawed Plasma				99	PS Frz Plasma,Cryo,an
FRBC	Froz RBC	Frozen Red Blood Cells	$155.00	D	3650	8	FR Frozen RBC
FSTEM	Froz STEM	Frozen PB Stem Cells -Pheresis		D	3650	90	PH Platelets and RT Ph
FUMB	FROZ UMB	Umbilical Stem Cell, Frozen		D	3650	94	LN Liquid Nitrogen
GRAN	GRAN	GRANULOCYTES PHERESIS	$1155.00	D	1	91	PH Platelets and RT Ph
IGRAN	Irr GRAN	Irradiated Granulocytes -Pheresis	$1155.00	D	1	99	PH Platelets and RT Ph

[CREREC] add new product type [COMMIT] save changes

Press CTRL + F2 (Create Record) to create a new record or scroll up and down to modify an existing record.

Type

Enter product type or select valid product type from LOV.

Short Name

Enter short name for product type. A maximum of 10 characters is allowed.

Description

Enter product type description. A maximum of 20 characters is allowed.

NOTE – If the 20-character maximum is exceeded, the Allocated Products Query (ALLUN) screen will receive an error; however, the error can be ignored and the Product Type in the ALLUN screen can still be selected from the list of values LOV.

Price

Enter standard tier pricing for inventory product type or leave blank. Two decimal places are provided. If a whole number is entered, the system will automatically insert the decimal places (.00).

NOTE – This entry should be consistent with the price established for the product code associated with this inventory product type.

WellSky Corporation
Proprietary and confidential

Lf

Unit of time that defines the inventory product life span. Enter one of the following

- D – Days
- H – Hours
- Y – Years

Span

Enter a numeric value to define the inventory product life span. The value entered relates to the unit of time defined in Lf above. Value will default to life span defined in valid product types table; the field will only accept that value.

Sq


Enter the desired sequence number to order the display of inventory product types with LOVs available to users in order entry screens.

Grouping

Enter a valid product grouping code or select from LOV. The description field automatically displays once the grouping code is entered.

NOTE – Products within the same product grouping can be boxed together when being packed for shipment.

All entry fields in this screen cannot be displayed at one time. Once the product grouping code has been entered, the screen will shift to the right and the hidden columns below become visible.

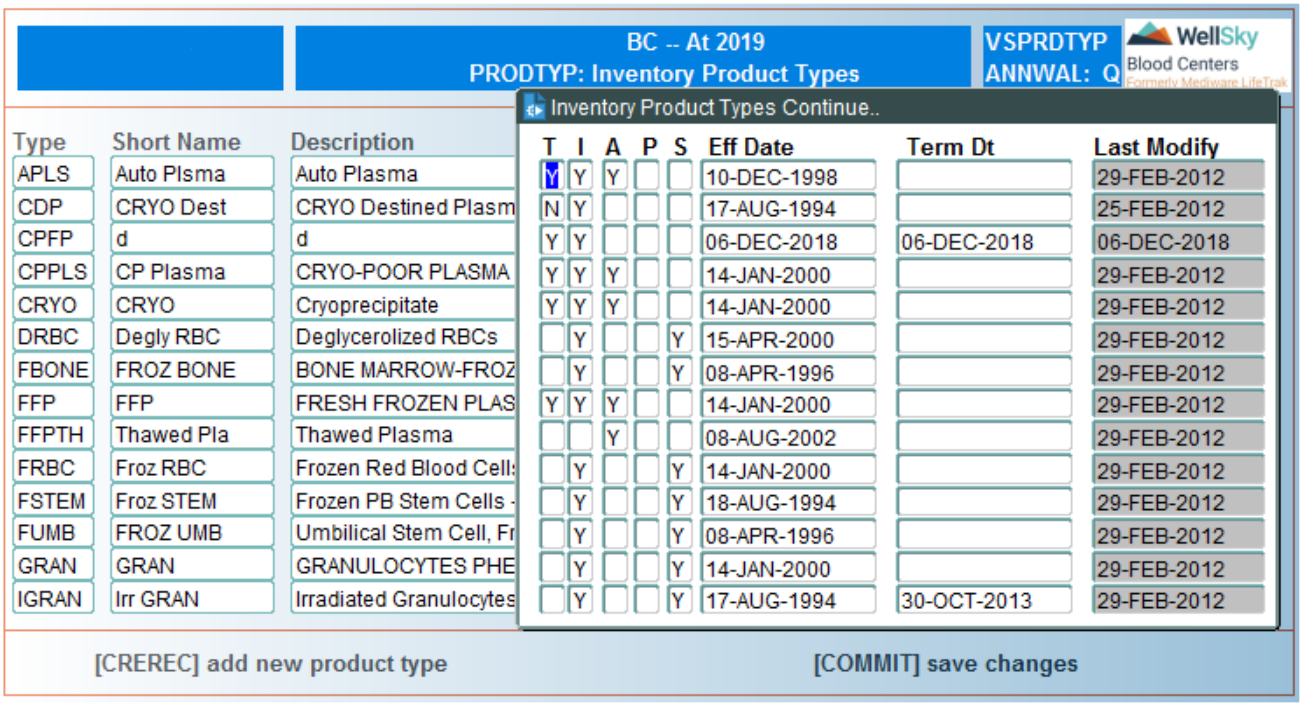

ABO

This field has two columns.

- Left Column – Enter `Y` if the product can be ordered without regard to specific ABO/Rh; otherwise, leave blank.
- Right Column – Enter `Y` if the product can be checked in during import check-in; leave blank if the product cannot be checked in during import check-in.

A

Enter `Y` to ship any Rh factor. Leave this field blank for a non-ABO/Rh-specific product.

P

Enter `Y` if this is a pooled product; otherwise, enter `N` or leave blank.

S

Enter `Y` if this is a special inventory product; otherwise, enter `N` or leave blank.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Last Modify

Field automatically populates with the date modifications were last made.

What to Do Next

There is no next step for this screen.

2.5.5 Valid Product Substitutions (SUB)

Intended Use

Use this screen to define inventory products that may be substituted for an ordered product if the customer specifies that a substitution is acceptable.

Limitations


None

Prerequisites

- Product Codes (PRODUCT) – Define valid product codes.
- Inventory Product Types (PRODTYP) – Define valid inventory product types.

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

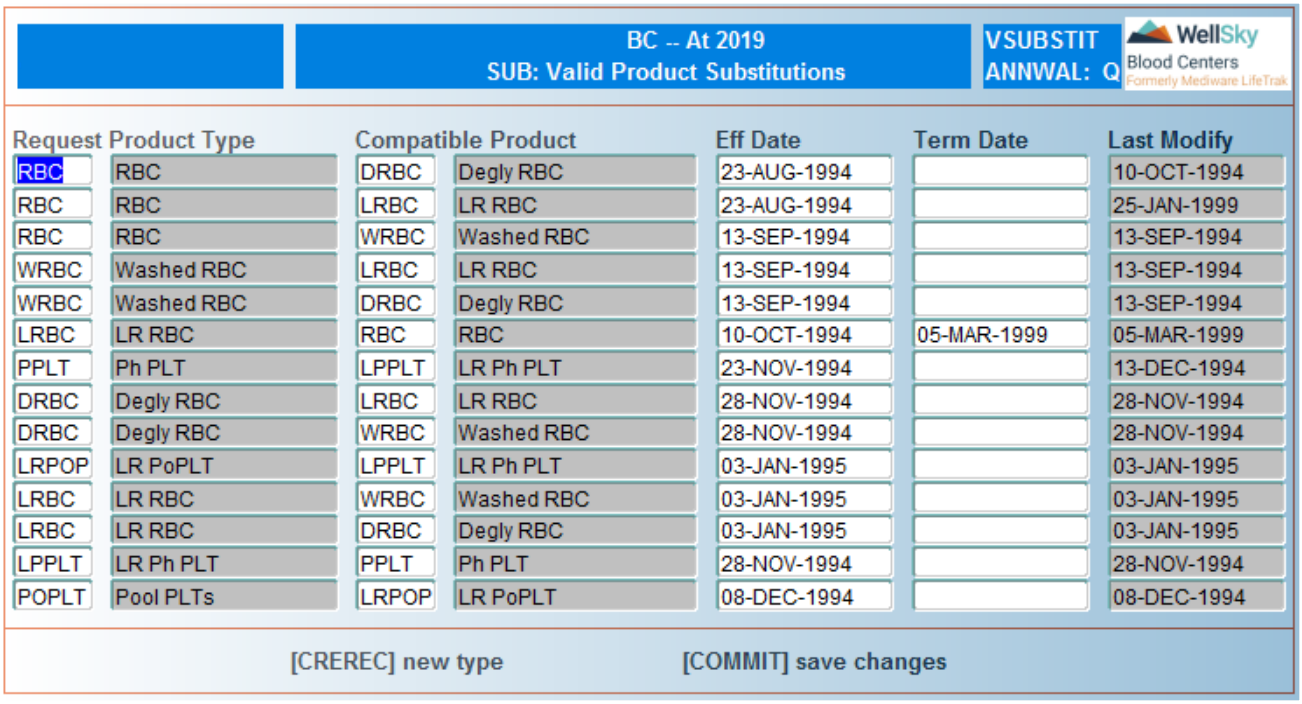

Request Product Type		Compatible Product		Eff Date	Term Date	Last Modify
RBC	RBC	DRBC	Degly RBC	23-AUG-1994		10-OCT-1994
RBC	RBC	LRBC	LR RBC	23-AUG-1994		25-JAN-1999
RBC	RBC	WRBC	Washed RBC	13-SEP-1994		13-SEP-1994
WRBC	Washed RBC	LRBC	LR RBC	13-SEP-1994		13-SEP-1994
WRBC	Washed RBC	DRBC	Degly RBC	13-SEP-1994		13-SEP-1994
LRBC	LR RBC	RBC	RBC	10-OCT-1994	05-MAR-1999	05-MAR-1999
PPLT	Ph PLT	LPPLT	LR Ph PLT	23-NOV-1994		13-DEC-1994
DRBC	Degly RBC	LRBC	LR RBC	28-NOV-1994		28-NOV-1994
DRBC	Degly RBC	WRBC	Washed RBC	28-NOV-1994		28-NOV-1994
LRPOP	LR PoPLT	LPPLT	LR Ph PLT	03-JAN-1995		03-JAN-1995
LRBC	LR RBC	WRBC	Washed RBC	03-JAN-1995		03-JAN-1995
LRBC	LR RBC	DRBC	Degly RBC	03-JAN-1995		03-JAN-1995
LPPLT	LR Ph PLT	PPLT	Ph PLT	28-NOV-1994		28-NOV-1994
POPLT	Pool PLTs	LRPOP	LR PoPLT	08-DEC-1994		08-DEC-1994

[CREREC] new type [COMMIT] save changes

Press **CTRL** + **F2** (Create Record) to create a new entry, or scroll through the list to modify an existing entry.

Request Product Type

Enter valid requested product type or select type from LOV. The product type description automatically displays after the type is entered.

Compatible Product

Enter valid compatible product type or select type from LOV. The product type description automatically displays after the type is entered.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Last Modify

Field automatically populates with the date modifications were last made.

What to Do Next

There is no next step for this screen.

2.5.6 ABO and Product Compatibility (ABPCOMP)

Intended Use

Use this screen to define ordered product and ABO combinations that are compatible with other inventory product/ABO combinations. The system refers to this screen when searching for compatible ABOs if the product substitution flag in product/ABO combinations is not available.


Limitations

Existing records in this screen cannot be modified; they can only be terminated.

Prerequisites

- Product Codes (PRODUCT) – Define valid product codes.
- Valid ABO (ABO) – Define valid ABOs.
- Inventory Product Types (PRODTYP) – Define valid inventory product types.

Entering/Viewing Data

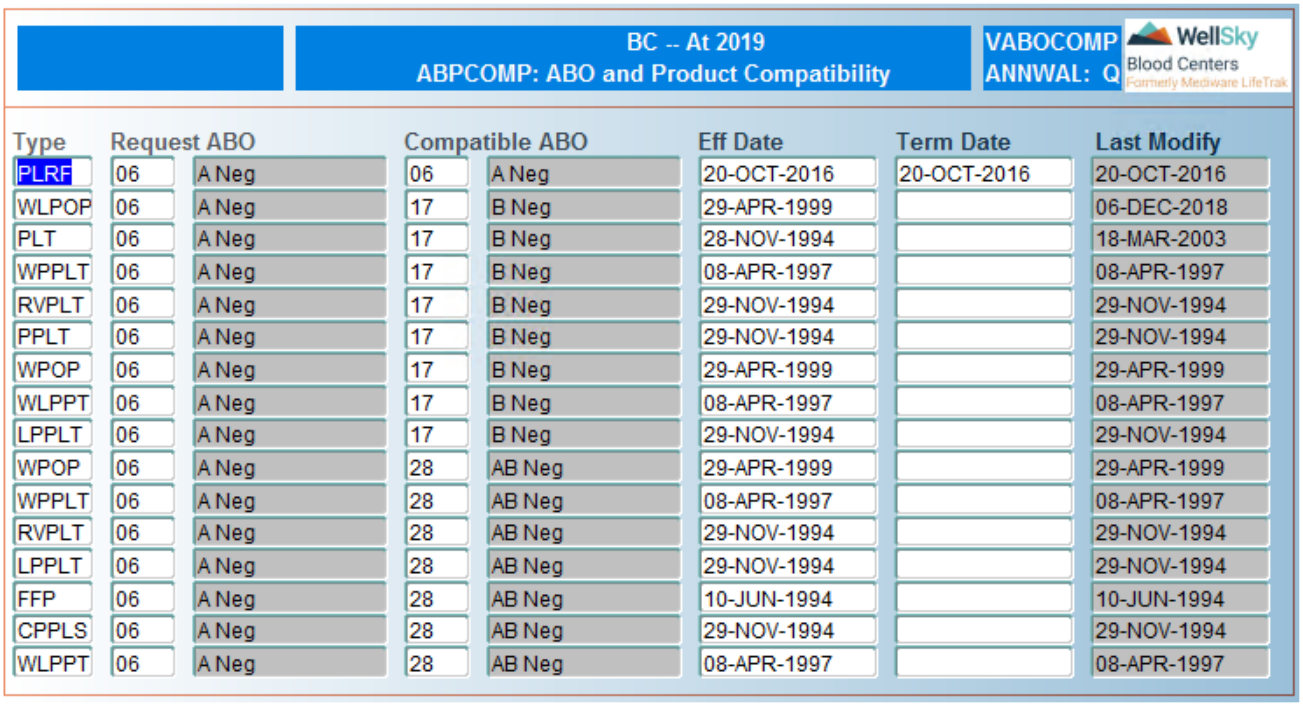

Type	Request ABO		Compatible ABO		Eff Date	Term Date	Last Modify
PLRF	06	A Neg	06	A Neg	20-OCT-2016	20-OCT-2016	20-OCT-2016
WLPOP	06	A Neg	17	B Neg	29-APR-1999		06-DEC-2018
PLT	06	A Neg	17	B Neg	28-NOV-1994		18-MAR-2003
WPPLT	06	A Neg	17	B Neg	08-APR-1997		08-APR-1997
RVPLT	06	A Neg	17	B Neg	29-NOV-1994		29-NOV-1994
PPLT	06	A Neg	17	B Neg	29-NOV-1994		29-NOV-1994
WPOP	06	A Neg	17	B Neg	29-APR-1999		29-APR-1999
WLPPT	06	A Neg	17	B Neg	08-APR-1997		08-APR-1997
LPPLT	06	A Neg	17	B Neg	29-NOV-1994		29-NOV-1994
WPOP	06	A Neg	28	AB Neg	29-APR-1999		29-APR-1999
WPPLT	06	A Neg	28	AB Neg	08-APR-1997		08-APR-1997
RVPLT	06	A Neg	28	AB Neg	29-NOV-1994		29-NOV-1994
LPPLT	06	A Neg	28	AB Neg	29-NOV-1994		29-NOV-1994
FFP	06	A Neg	28	AB Neg	10-JUN-1994		10-JUN-1994
CPPLS	06	A Neg	28	AB Neg	29-NOV-1994		29-NOV-1994
WLPPT	06	A Neg	28	AB Neg	08-APR-1997		08-APR-1997

Press CTRL + F2 (Create Record) to create a new record.

Type

Enter valid product type, or select type from LOV.

WellSky Corporation
Proprietary and confidential

Request ABO
Enter valid requested ABO code or select from LOV. After the ABO code is entered, the ABO description automatically populates.

Compatible ABO
Enter valid compatible ABO code or select from LOV. After the ABO code is entered, the ABO description automatically populates.

Eff Date
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date in DD-MON-YYYY format.

Last Modify
Field automatically populates with the date modifications were last made.

What to Do Next
There is no next step for this screen.

2.5.7 Order Class Codes (ORDCL)


Intended Use
Use this screen to define classifications for orders in terms of priority and response time.

Limitations
The following Order Class Codes are static within the system and cannot be terminated or modified:

AD AP AS ER RE SO ST

Prerequisites
None

Entering/Viewing Data

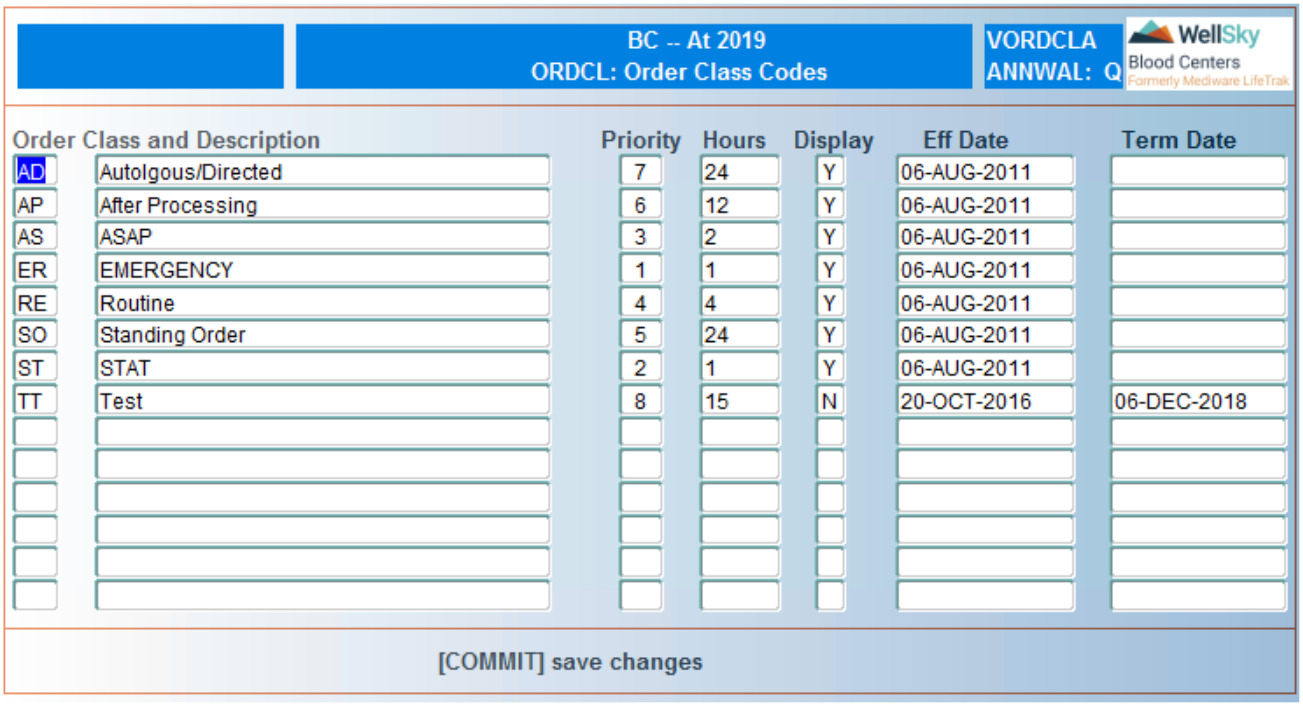

Press CTRL + F2 (Create Record) to created a new entry or scroll through the list to modify an existing entry.

Order Class and Description

Enter order class. A maximum of 2 characters is allowed.

Enter order class description. A maximum of 50 characters is allowed.

Priority

Enter a numerical code that will determine the order's urgency among other order classes, with the lowest number representing the highest priority.

NOTE – Priority numbers cannot be duplicated in the table. Each priority number can only be used once.

Hours

Enter a numerical value that represents the standard number of hours required for receipt by the ordering institution.

Display

Enter `Y` if the order is to be displayed in order entry screens; otherwise, leave blank.

Eff Date

Enter effective date in DD-MON-YYYY format.

WellSky Corporation
Proprietary and confidential

Term Dt

Enter termination date in DD-MON-YYYY format.

> **NOTE –** The time parameters defined here are used by statistical reports in the system when determining on-time shipment and delivery performance. Order priorities defined here are associated to entire orders.

What to Do Next

There is no next step for this screen.

2.5.8 Shipping Box Capacity (BOXCAP)

Intended Use

Use this screen to define the number of products that can be packed in a single container. When box capacity has been reached, the system will display a warning to the user. The user will, however, be permitted to continue in all packing screens except recovered plasma. The box capacity for recovered plasma, when reached, automatically closes the box and forces creation of a new box.


Limitations

The following box types are static in the system and cannot be modified or terminated: CA and CO.

Prerequisites

- Distribution Master Codes (DMASTER), code BOXTP – Define box types.
- Product Codes (PRODUCT) – Define valid product codes.
- Inventory Product Types (PRODTYP) – Define valid inventory product types.

Entering/Viewing Data

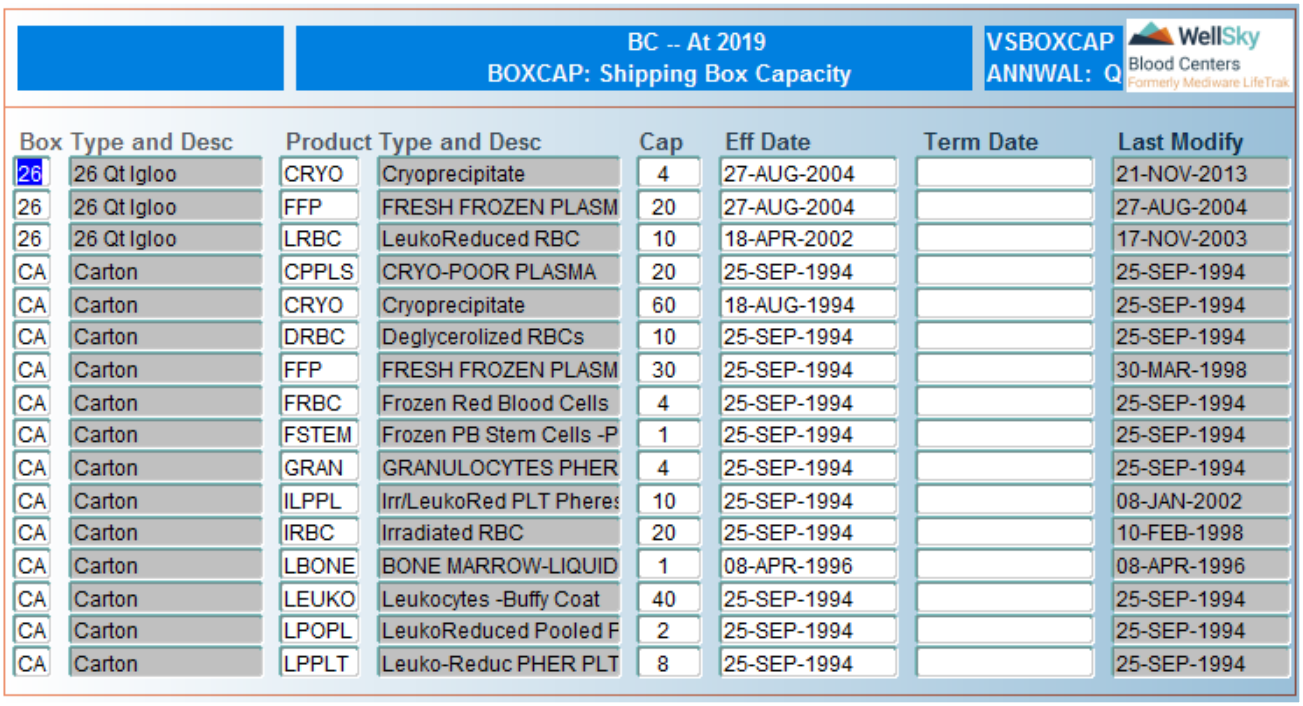

BC -- At 2019
BOXCAP: Shipping Box Capacity
VSBOXCAP
ANNWAL: Q

Box Type and Desc		Product Type and Desc		Cap	Eff Date	Term Date	Last Modify
26	26 Qt Igloo	CRYO	Cryoprecipitate	4	27-AUG-2004		21-NOV-2013
26	26 Qt Igloo	FFP	FRESH FROZEN PLASM	20	27-AUG-2004		27-AUG-2004
26	26 Qt Igloo	LRBC	LeukoReduced RBC	10	18-APR-2002		17-NOV-2003
CA	Carton	CPPLS	CRYO-POOR PLASMA	20	25-SEP-1994		25-SEP-1994
CA	Carton	CRYO	Cryoprecipitate	60	18-AUG-1994		25-SEP-1994
CA	Carton	DRBC	Deglycerolized RBCs	10	25-SEP-1994		25-SEP-1994
CA	Carton	FFP	FRESH FROZEN PLASM	30	25-SEP-1994		30-MAR-1998
CA	Carton	FRBC	Frozen Red Blood Cells	4	25-SEP-1994		25-SEP-1994
CA	Carton	FSTEM	Frozen PB Stem Cells -P	1	25-SEP-1994		25-SEP-1994
CA	Carton	GRAN	GRANULOCYTES PHER	4	25-SEP-1994		25-SEP-1994
CA	Carton	ILPPL	Irr/LeukoRed PLT Pheres	10	25-SEP-1994		08-JAN-2002
CA	Carton	IRBC	Irradiated RBC	20	25-SEP-1994		10-FEB-1998
CA	Carton	LBONE	BONE MARROW-LIQUID	1	08-APR-1996		08-APR-1996
CA	Carton	LEUKO	Leukocytes -Buffy Coat	40	25-SEP-1994		25-SEP-1994
CA	Carton	LPOPL	LeukoReduced Pooled F	2	25-SEP-1994		25-SEP-1994
CA	Carton	LPPLT	Leuko-Reduc PHER PLT	8	25-SEP-1994		25-SEP-1994

Box Type and Descr

Enter valid box type or select from LOV. The box description field automatically populates after the type is entered.

Product Type and Desc

Enter valid product type than can be packed in box type selected or select from LOV. The product type description field automatically populates after the type is entered.

Cap

Enter a value for the maximum number of products that can be packed in the box type.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Last Modify

Field automatically populates with the date modifications were last made.

What to Do Next

There is no next step for this screen.

WellSky Corporation
Proprietary and confidential

2.5.9 Return Reason Codes (REASON)

Intended Use

Use this screen to define valid reasons for return of products from customers.


Limitations

The following return reason codes are static within the system and cannot be modified or terminated: NOAPP and RECAL.

Prerequisites

Distribution Master Codes (DMASTER), code LOCTY – Define valid location types.

Entering/Viewing Data

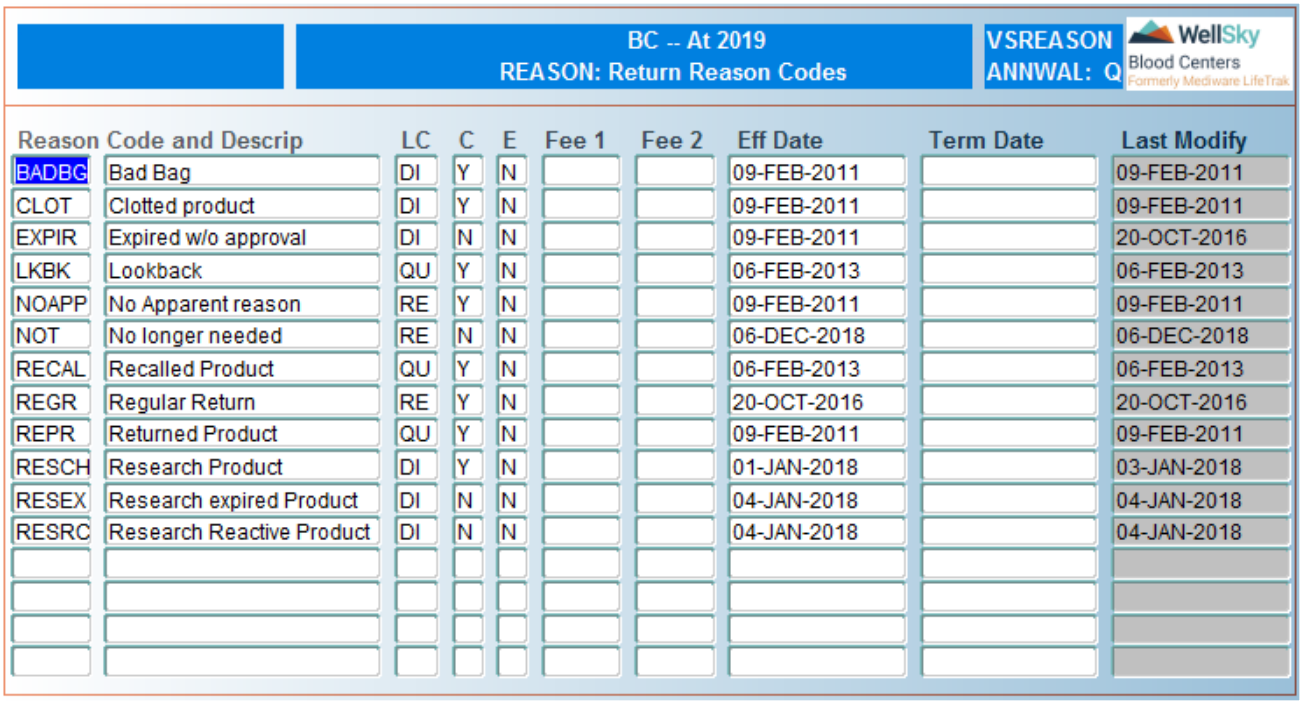

Reason Code and Descrip		LC	C	E	Fee 1	Fee 2	Eff Date	Term Date	Last Modify
BADBG	Bad Bag	DI	Y	N			09-FEB-2011		09-FEB-2011
CLOT	Clotted product	DI	Y	N			09-FEB-2011		09-FEB-2011
EXPIR	Expired w/o approval	DI	N	N			09-FEB-2011		20-OCT-2016
LKBK	Lookback	QU	Y	N			06-FEB-2013		06-FEB-2013
NOAPP	No Apparent reason	RE	Y	N			09-FEB-2011		09-FEB-2011
NOT	No longer needed	RE	N	N			06-DEC-2018		06-DEC-2018
RECAL	Recalled Product	QU	Y	N			06-FEB-2013		06-FEB-2013
REGR	Regular Return	RE	Y	N			20-OCT-2016		20-OCT-2016
REPR	Returned Product	QU	Y	N			09-FEB-2011		09-FEB-2011
RESCH	Research Product	DI	Y	N			01-JAN-2018		03-JAN-2018
RESEX	Research expired Product	DI	N	N			04-JAN-2018		04-JAN-2018
RESRC	Research Reactive Product	DI	N	N			04-JAN-2018		04-JAN-2018

To add a new record, press CTRL + F2 (Create Record).

Reason Code and Descrip

Enter reason code. Maximum of 5 characters is allowed.

Enter description for reason code. Maximum of 50 characters is allowed.

LC

Enter location type or select from LOV.

C

Enter one of the following:

- `Y` – Credit is to be given for a product returned with this return reason.
- `N` – Credit is not to be given.

E

Enter one of the following:

- `Y` – Enforce return policy when products are returned with this return reason.
- `N` – Return policy is not to be enforced.

Fee1

Enter the first fee charged for products returned with this return code or leave blank.

Fee2

Enter the second fee charged for products returned with this return code or leave blank.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Last Modify

Field automatically populates with the date modifications were last made.

What to Do Next

There is no next step for this screen.

2.5.10 Pool Compatibility Matrix (PSCOMP)

Intended Use

Use this screen to define product types that are associated to pooled product types.

Limitations


None

Prerequisites

Distribution Master Codes (DMASTER), code WRKOP – Define work options.

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

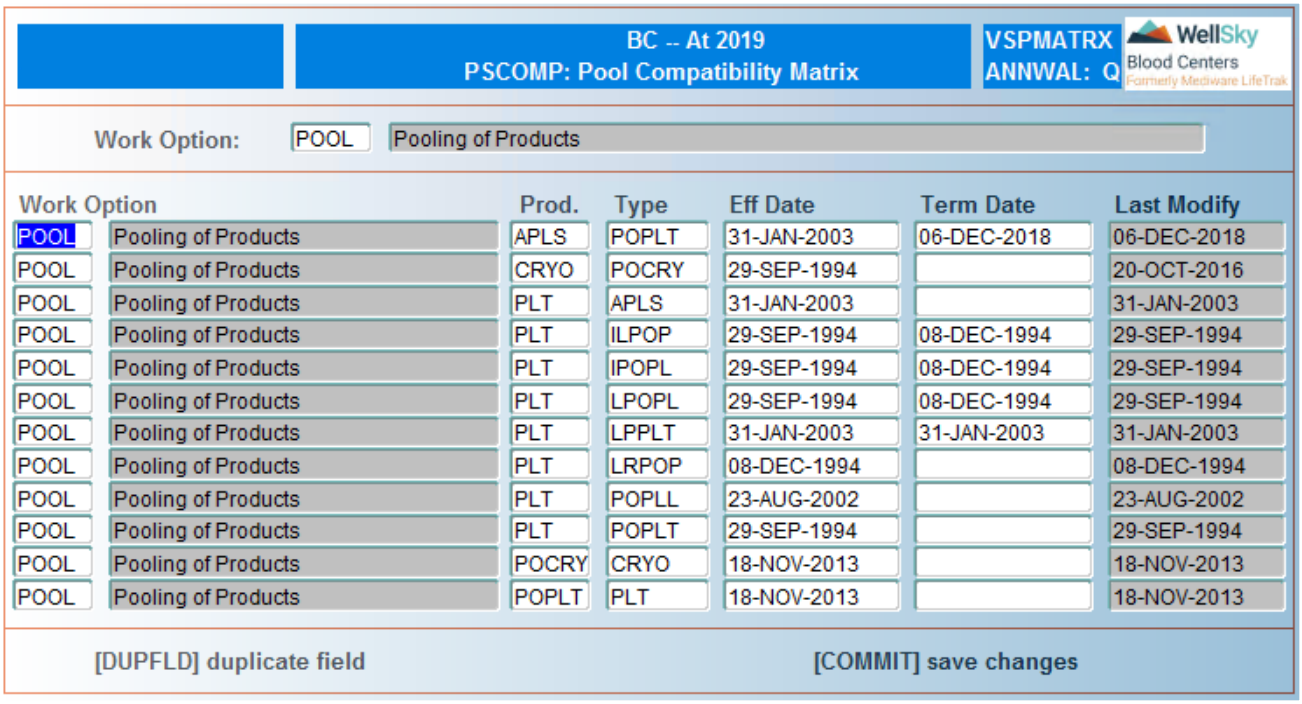

Work Option		Prod.	Type	Eff Date	Term Date	Last Modify
POOL	Pooling of Products	APLS	POPLT	31-JAN-2003	06-DEC-2018	06-DEC-2018
POOL	Pooling of Products	CRYO	POCRY	29-SEP-1994		20-OCT-2016
POOL	Pooling of Products	PLT	APLS	31-JAN-2003		31-JAN-2003
POOL	Pooling of Products	PLT	ILPOP	29-SEP-1994	08-DEC-1994	29-SEP-1994
POOL	Pooling of Products	PLT	IPOPL	29-SEP-1994	08-DEC-1994	29-SEP-1994
POOL	Pooling of Products	PLT	LPOPL	29-SEP-1994	08-DEC-1994	29-SEP-1994
POOL	Pooling of Products	PLT	LPPLT	31-JAN-2003	31-JAN-2003	31-JAN-2003
POOL	Pooling of Products	PLT	LRPOP	08-DEC-1994		08-DEC-1994
POOL	Pooling of Products	PLT	POPLL	23-AUG-2002		23-AUG-2002
POOL	Pooling of Products	PLT	POPLT	29-SEP-1994		29-SEP-1994
POOL	Pooling of Products	POCRY	CRYO	18-NOV-2013		18-NOV-2013
POOL	Pooling of Products	POPLT	PLT	18-NOV-2013		18-NOV-2013

In the Control Block

Work Option

Enter the work option or select from LOV. Leave blank to retrieve all work options.

In the Detail Block

Press **CTRL** + **F2** (Create Record) to create a new entry.

Work Option

Enter the work option or select from LOV.

Prod

Enter product type to be associated to pooled product or select from LOV.

Type

Enter pooled product type or select from LOV.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Last Modify

Field automatically populates with the date modifications were last made.

Press **F12** (Commit) to save changes.

What to Do Next

There is no next step for this screen.

WellSky Corporation
Proprietary and confidential

2.6 WellSky Restricted Validation Tables (WSKYRVT)

Tables in WellSky Restricted Validation Tables (WSKYRVT) are restricted to WellSky Support access due to their impact and interaction with the application. WellSky will make required modifications to these tables. Detailed training to use these tables will not be provided. These functions are identified in MENUITM with access associated to ADM00, WellSky Support. No user at your facility should have access to these functions.

The WellSky Restricted Validation Tables (WSKYRVT) contains the following functions:

- Define All Donor ID Sequences (ALLIDS) – defines the sequences of system-generated numbers.
- Donor Error Codes (ERRORS) – defines Donor application errors by number; identifies the type of code as error, message, or warning, and displays the code text.
- Donor Grading Matrix (GRADMAT) – where a grade level is assigned to discreet elements of donor information that, when combined, assist in uniquely identifying a donor (for example, social security number, last name, first name, date of birth and gender).
- Maintain Laptop Tables (LAPMASTR) – defines tables for laptop replication.
- Define Operators (OPER) – Define SQL operators used in the SQL statements.
- Find Donor Routine Logic (UTDONQ) - validate donor IDs.
- Valid ABO Values (ABOVAL) – identifies and is used to determine appropriate values for display, calculation and printing.
- Valid Scan/Scale Interfaces (SCANTYP) – a table that contains the scale configurations for automatic interface of weight.
- Bar Code Translations (BARCODE) – a table that defines numeric to alpha conversions.
- Lab Error Codes (LERRORS) – a table that defines all Lab error codes and their descriptions.
- Dist Error Codes (DERRORS) – a table that defines all Distribution error codes and their descriptions.

This Page Intentionally Left Blank

3

Chapter 3 - System Administration

3.1 Introduction 180
3.2 Screens and Descriptions 182
3.3 Report Administration 183
3.3.1 Blood Center Report Maintenance 183
3.3.2 WellSky Report Maintenance 187
3.4 Menu Administration 188
3.4.1 Blood Center Menu Administration 188
3.4.2 WellSky Restricted Menu Admin. 194
3.5 User Administration 195
3.5.1 Common User Administration 195
3.5.2 Lab/Distribution User Administration 211
3.5.3 Donor User Administration 216


3.1 Introduction

WellSky Blood Centers is designed to simulate the organizational and operational structure of most blood centers, while allowing you to capture and record Current Good Manufacturing Processes (cGMP) data. The application must be configured to reflect your organization's unique requirements.

This chapter provides you with an overview of the System Administrator functions of Blood Centers, and how you can customize the application to meet your specific organizational needs, which involve the following:


- Defining donor card and report printers.
- Defining label and report printers.
- Defining user (working/functional) groups and menu access.
- Understanding user access permissions.
- Identifying critical and static values.
- Identifying WellSky restricted access functions.

The above system administration functions are accessed from System Administration (SYSADMIN) via the Main Menu (MAIN).

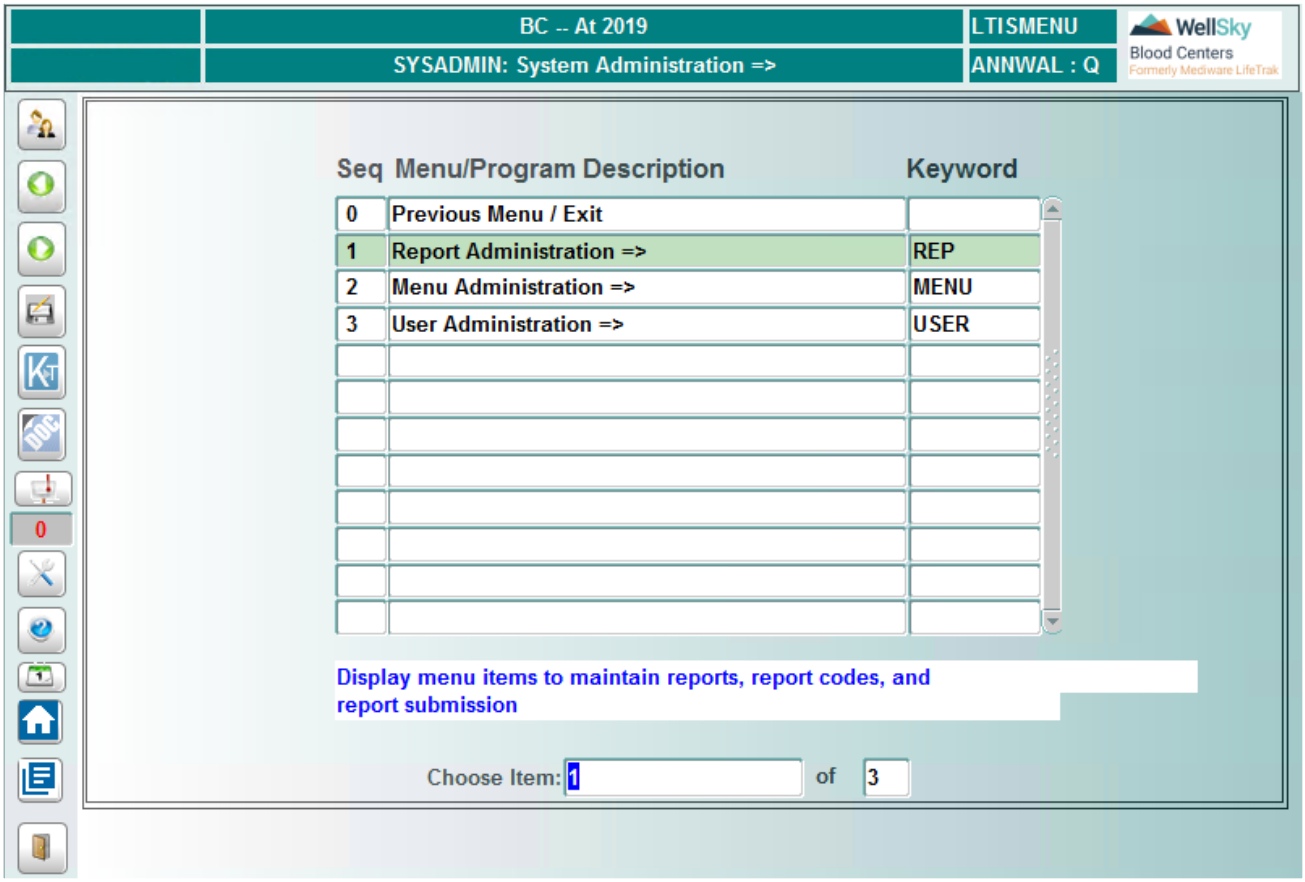

WellSky Corporation
Proprietary and confidential


Blood Center Report Maintenance (BCRM) under Report Administration (REP) has functions that allow definition of printers and user report options.

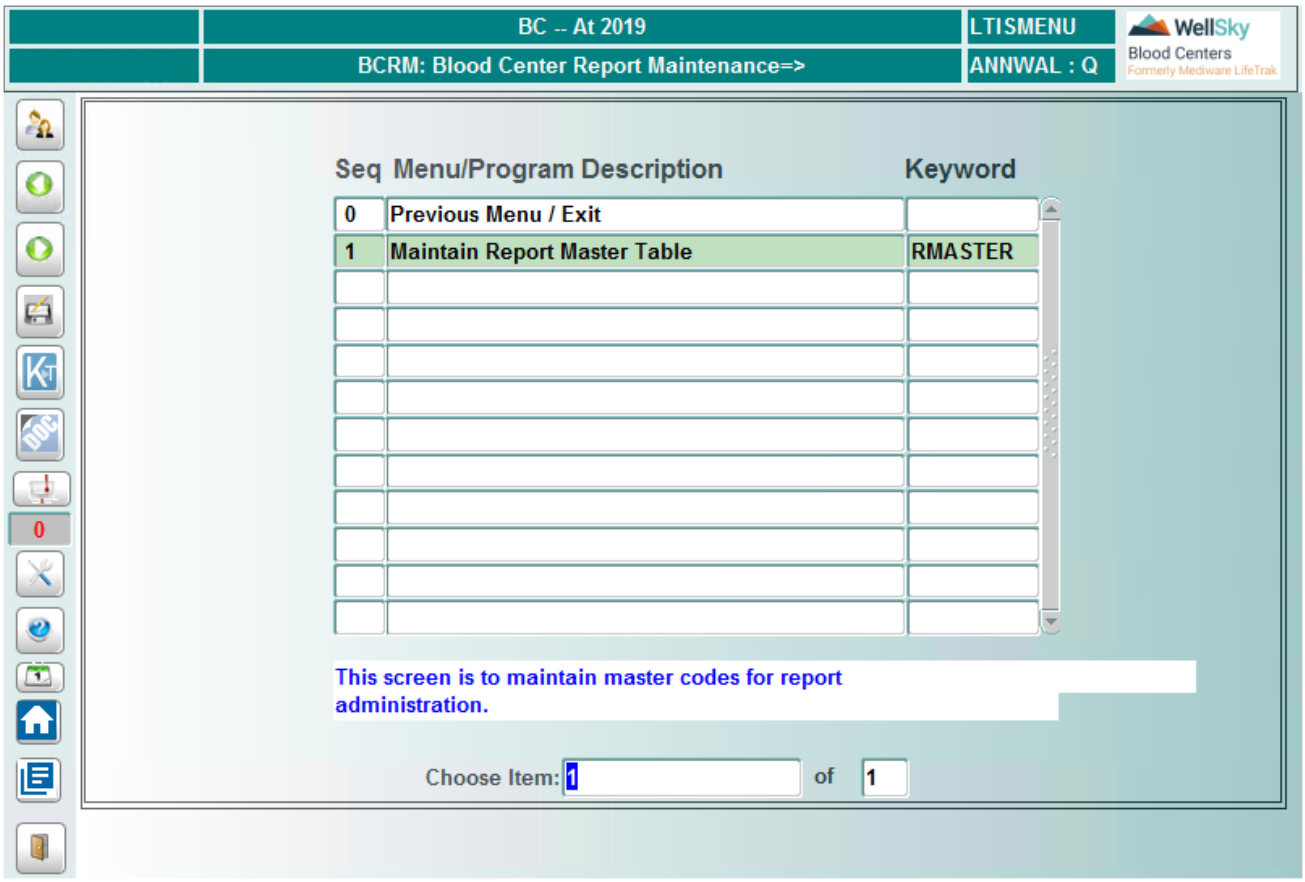

For correct use, printers must be defined in the application and in Linux. No dependence lies on definition order.

3.2 Screens and Descriptions

These functions are accessed from the following menu:

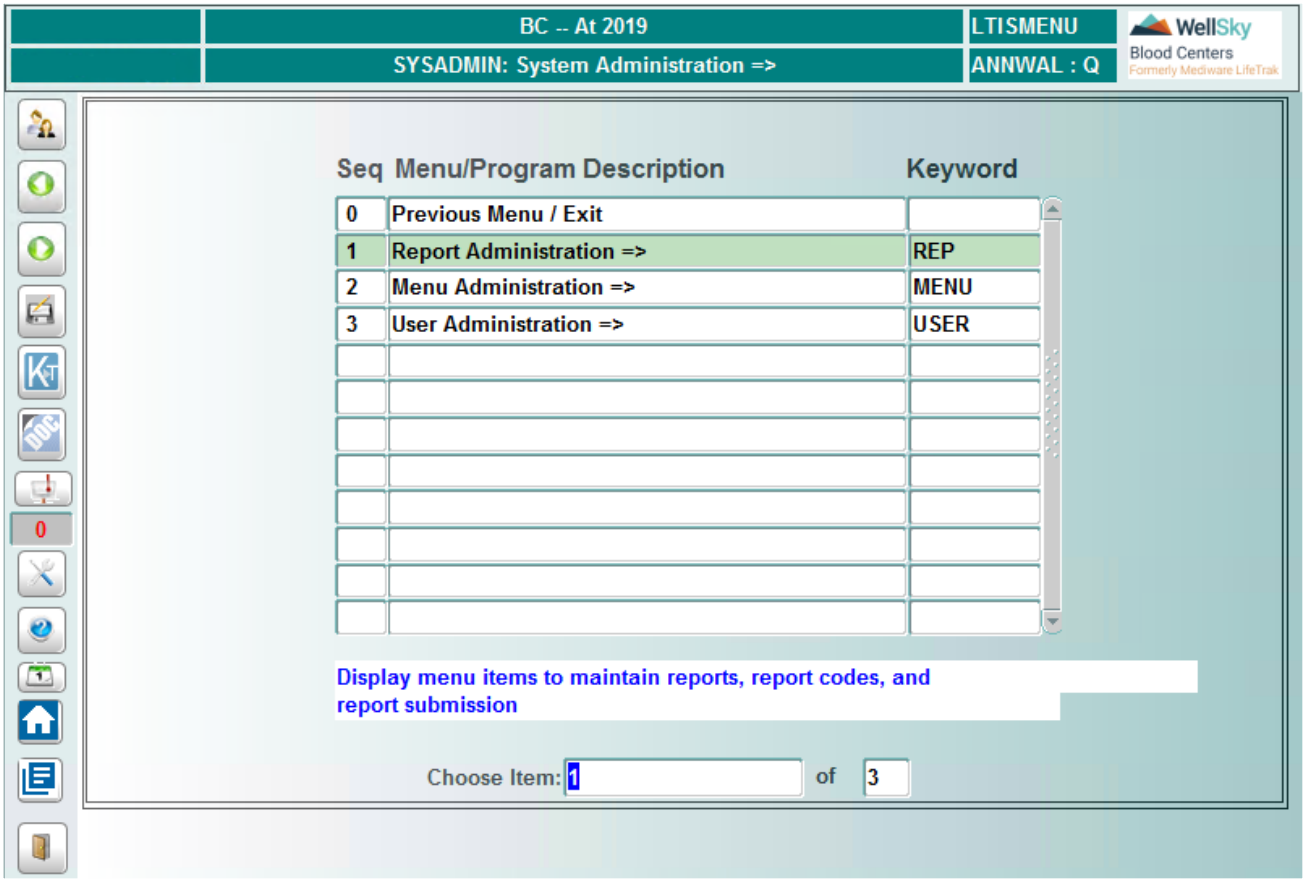

WellSky Corporation
Proprietary and confidential

3.3 Report Administration

3.3.1 Blood Center Report Maintenance


Maintain Report Master Table (RMASTER)

Intended Use

Use this screen to define system printers for general use and donor card demographics in Donor. The identifying printer definition types are:

- DDEM – Donor card demographic printer definition
- FORM – Static information identifying printing format options recognized by the system used for individual report settings
- L – Local printer
- LBL – Label printer
- LP – System line printer definition
- LBLPGM – program name that will be printing product labels
- LBLPTR – printer that will be printing product labels

In order for users to view and print donation history forms (which are generated in PDF format), you must create a specific printer definition. To do this, create a printer type of DDEM with a code of PDF, as shown:

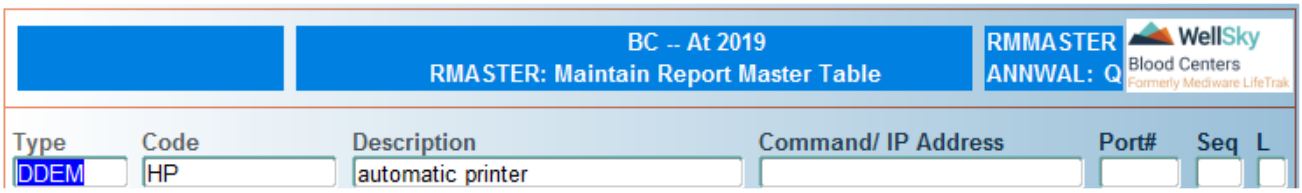

In Lab and Distribution, this screen is used to define system print functions.

- `LP` – Linux printers
- `LBLPTR` – label printers, FORM for report formats
- `LBLPGM` – programs printing labels
- `FLP` – pack list printers (Pack list printers are used in Blood Centers Distribution only.)
- `OASVR` – listing of the report server names, as follows:

Code	Description	Example
9002	First Report Server URL	http://172.16.12.170:9002
8888	Second Report Server URL	http://172.16.12.170:8888
R1	First Report Server Name	rep_wls_reports_chdevsrv10_lt_inst

Code	Description	Example
R2	Second Report Server Name	RptSvr_chdevsrv10_LT_Inst

NOTE – The code itself is static, but the description will change for each customer.

NOTE – FORM type must NOT be changed.

Limitations

Donor:

None

Lab/Distribution:

- FORM type entries must not be changed.
- No user network printers can be defined in this screen.

Prerequisites

Donor:


None

Lab/Distribution:

Warehouses must be defined, if applicable.

Accessing the Screen

Access this screen from the Blood Center Report Maintenance menu or by entering the keyword `RMASTER`.

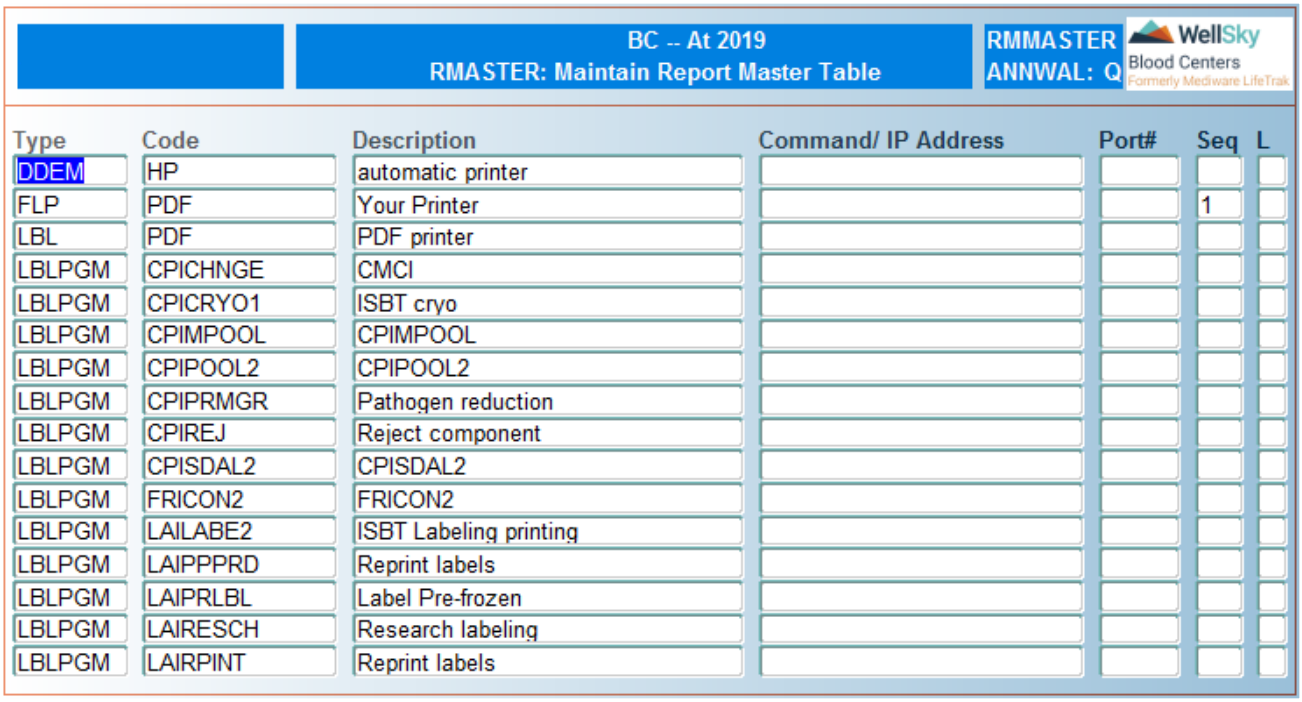
BC -- At 2019
RMASTER: Maintain Report Master Table
RMMASTER
ANNWAL: Q
WellSky Blood Centers Formerly Mediware LifeTrak

Type	Code	Description	Command/ IP Address	Port#	Seq	L
DDEM	HP	automatic printer				
FLP	PDF	Your Printer			1	
LBL	PDF	PDF printer				
LBLPGM	CPICHNGE	CMCI				
LBLPGM	CPICRYO1	ISBT cryo				
LBLPGM	CPIMPOOL	CPIMPOOL				
LBLPGM	CPIPOOL2	CPIPOOL2				
LBLPGM	CPIPRMGR	Pathogen reduction				
LBLPGM	CPIREJ	Reject component				
LBLPGM	CPISDAL2	CPISDAL2				
LBLPGM	FRICON2	FRICON2				
LBLPGM	LAILABE2	ISBT Labeling printing				
LBLPGM	LAIPPPRD	Reprint labels				
LBLPGM	LAIPRLBL	Label Pre-frozen				
LBLPGM	LAIRESCH	Research labeling				
LBLPGM	LAIRPINT	Reprint labels				

Control Block Fields and Definitions

To retrieve all the data, do not enter any criteria. To limit the data retrieved, enter the following search criteria:

Code Type

Entry is optional. Enter a code for the type of printer or select from the LOV.

NOTE – Code types must be defined; defined code types populate the Code Types LOV.

Code

Entry is optional. Enter a code or select from the LOV. You can define new codes, modify existing codes, and delete existing codes in this screen.

Click **Retrieve** to display the information.

The following data displays for each retrieved record:

- Code type.
- Code.
- LP: enter the code for the printer
- LBLPGM: enter the name of the program that should print labels
- LBLPTR: enter the code for the label printer ID
- FPL: enter the code for the packlist printer
- FORM: enter the layout code

- Description of printer location.
- Command (only functional for records with FORM as type).

NOTE – The second Printer field is not used.

Command/ IP Address

- LP: Leave blank
- LBLPGM: Leave blank
- LBLPTR: Enter the printer IP Address
- FLP: Leave field blank
- FORM: Enter the command code

Port#

- LP: Leave blank
- LBLPGM: Leave blank
- LBLPTR: Enter the network port number
- FLP: Leave blank
- FORM: Leave blank

Seq

- LP: Leave blank
- LBLPGM: Leave the field blank
- LBLPTR: Enter the PC COM port number
- FLP: Enter the default sequence for warehouse choice selection
- FORM: Leave blank

L

- LP: Leave blank
- LBLPGM: Leave the field blank
- LBLPTR: Enter the warehouse ID or use the [LOV], if applicable
- FLP: Enter the warehouse ID or use the [LOV], if applicable
- FORM: Leave the field blank

At Commit

All additions, modifications, and deletions are saved to the database upon clicking COMMIT  .

WellSky Corporation
Proprietary and confidential

What to Do Next

There is no next step.

3.3.2 WellSky Report Maintenance

WellSky Report Maintenance (WSKYREM)

Some functions are restricted to WellSky access due to their impact and interaction within Blood Centers. WellSky will make the required modifications to these tables and/or functions. Due to restricted WellSky access, detailed training on how to use these functions will not occur. These items are identified in MENUITM with access associated to ADM00, WellSky Support. No user at your facility should have application access to these functions.

- Maintain Report Parameters (RMCODE) – a table that maintains report parameters that must be defined before it can be used in a report.
- Maintain Reports (RMREP) – a table that maintains report definitions.

3.4 Menu Administration

3.4.1 Blood Center Menu Administration

Maintain Menu Items (MENUITM)

Intended Use

Use this screen to set the access level within a group. There are up to 40 groups (ADM00 and GRP01 through GRP39). Each group may have up to nine access levels. This program associates executables to function types and keywords and assigns their place in the menu. It allows certain menu items to be hidden from all users. WellSky should be consulted prior to any other changes.

NOTE – With the merge of the Donor, Lab, and Distribution databases into one database, some functions have been moved to other menus, and some menus have been removed completely.

Limitations

None


Prerequisites

None

Accessing the Screen

Access this screen from the Blood Center Menu Administration menu or by entering the keyword `MENUITM`.

WellSky Corporation
Proprietary and confidential

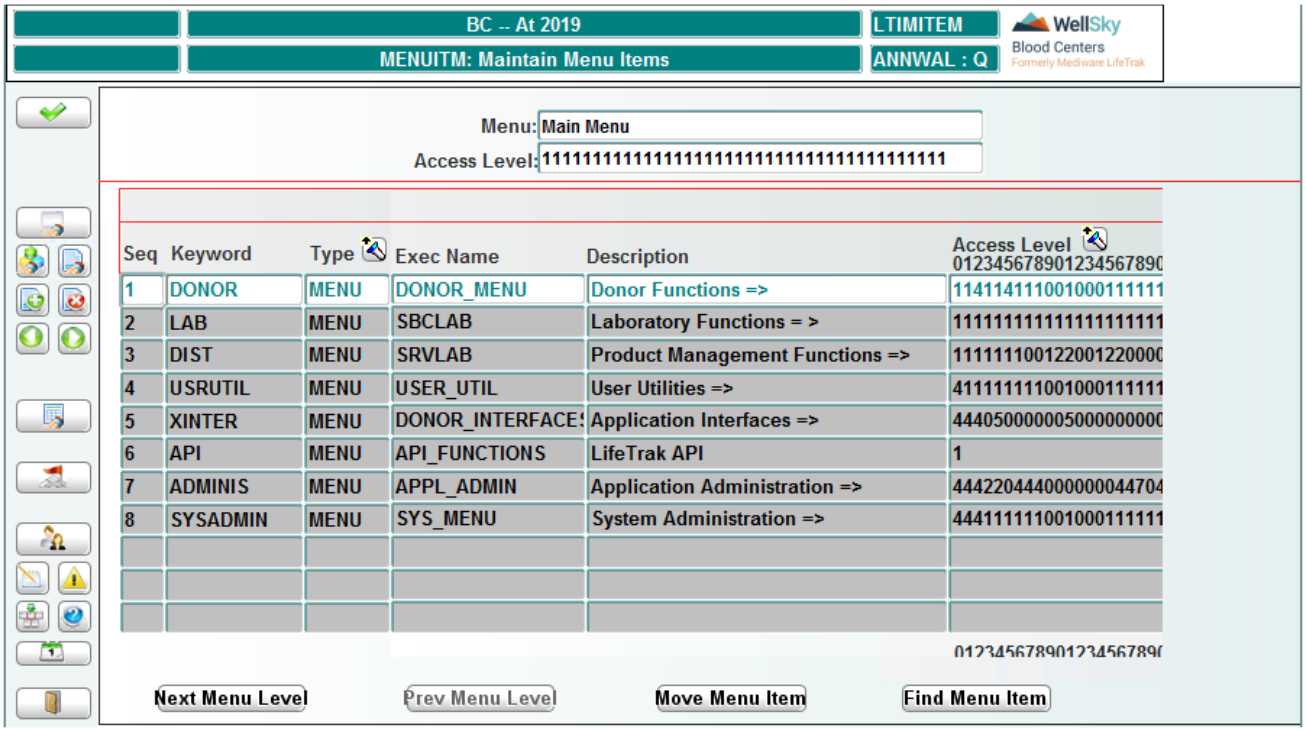

The *Access Level* column defines the access level for each group for each executable. The numbering of the *Access Level* column are as follows:

- The first 0 through 9 represent groups ADM00 through GRP09.
- The second 0 through 9 represent groups GRP10 through GRP19.
- The third 0 through 9 represent groups GRP 20 through GRP29.
- The fourth 0 through 9 represent groups GRP30 through GRP39.

Navigating the Screen


Click **Next Menu Level** and **Prev Menu Level** to navigate between a highlighted menu function to sub-menu functions and back.

Press **ENTER** or **TAB** to move to the right in the screen. When you reach the last column, you will automatically wrap back to the beginning.

Press **SHIFT + TAB** to move to the left.

Groups and Users

Click the **LOV** button at the top of the *Access Level* column to open a window that displays the function groups in order and associated group users with their access level.

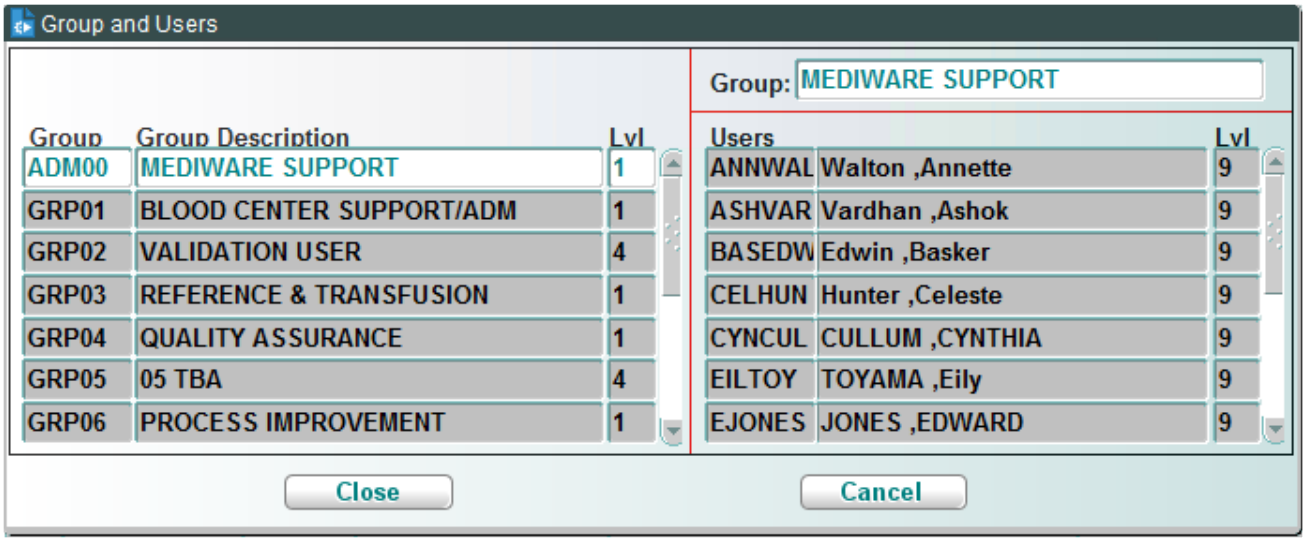

Each group can have from 0 to 9 levels of access; 0 being no access and 9 being the highest level of access within a group. The hierarchical approach grants access as follows:

- 0 – No access to that function.
- 1 – Lowest level of access.
- 2 – Has access of 1, plus additional access.
- 3 – Has access of 2, plus additional access and so forth up through 9.


To understand primary access to functions, you must first understand that the working/functional groups are defined based on your business needs. Levels of access are decided within each group and associated to a number (for example, primary user (2), supervisory (4), etc.). Once levels are decided, assign the minimal access level (0 to 9) required to a particular function for the group. Assign each function within the application the minimal access level for the group. Generally, this will remain static once decided. If a user is not given access to the menu function for a module, access to any functions within the module is denied.

NOTE – Since users are assigned to a group and a level within the group, it may be beneficial to start minimal required access at level 2, then use 4 as the next level. This is helpful if all training for the next access level is not completed, thus allowing temporary access to be granted at an interim level. Remember, any access at an interim level is available to the next highest level. Assign 0 if no access is required for the group.

Application Password

Validation tables are defined with the ability to require a password at commit of data for security. You may choose to use this feature or not. The application password is the same as the user login password. When invoked, the password box identifies the user as In Production, although your center may choose to use this feature in your QA and Training databases also. The ability to invoke this password is located in Maintain Menu Items (MENUITM).

WellSky Corporation
Proprietary and confidential

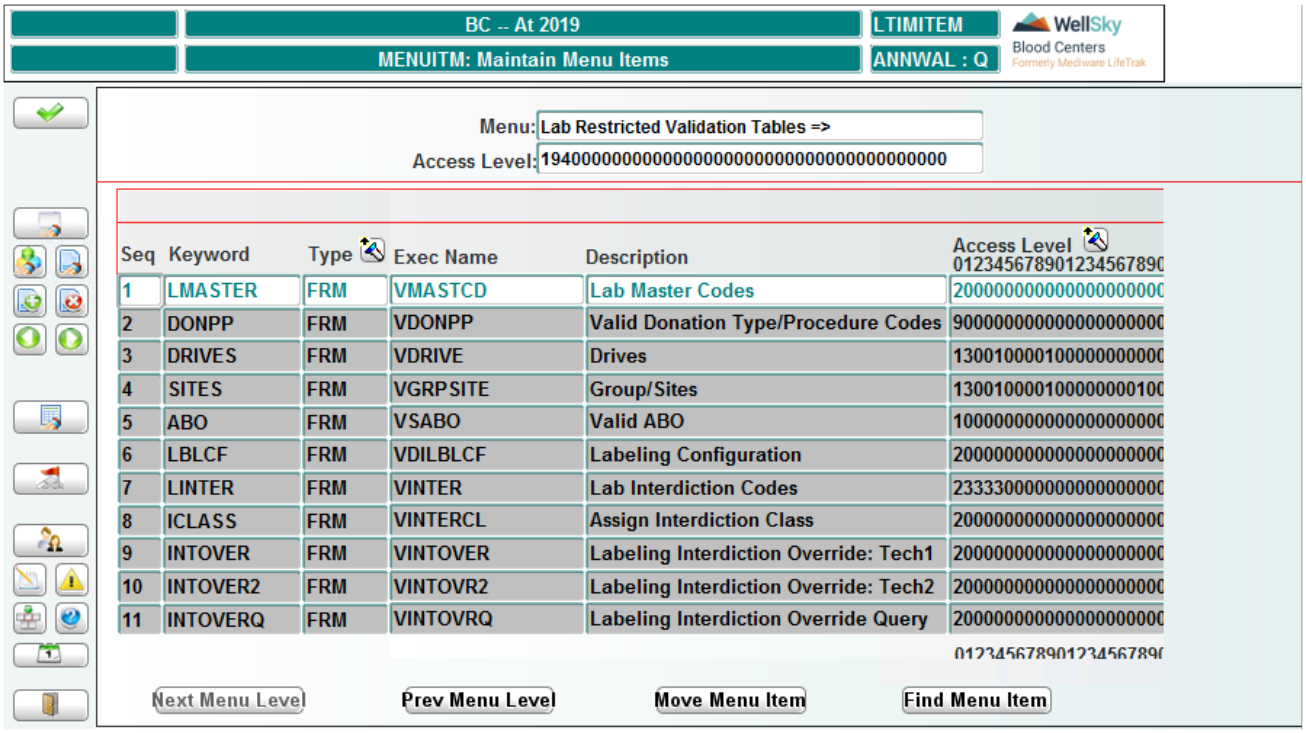

Press ENTER or TAB to move the cursor to the *Param* (parameter) and *Value* fields. (It may or may not be the first parameter.) It must be the first parameter for Lab and Distribution functions.

If the application password can be invoked, PASSWD displays in the *Param* field. In the *Value* field, enter `Y` (Yes) to invoke the password at commit or `N` (No) to not invoke.

NOTE – If PASSWD is not displayed, an entry of Y or N has no function.

The LBLPRINT Parameter

The LBLPRINT parameter is used in several Lab screens to control whether or not product code verification is required in Lab. For the following screens, set the LBLPRINT parameter as described. If not already present, you must add this parameter to these screens using the ADDFCN screen.

COMPENTI

CMCI

CONVI

ALIQUOTI

CRYOMAN2

CRYO2I1

SDD

PHERI

Hiding a Menu Item

To hide a menu item, do the following:

1. Navigate to the screen you want to hide.
2. Press ENTER or TAB to move to the *H* field, and enter Y in the field.
3. Press F12 (Commit).


Once a menu item is hidden, it will not be listed in its associated menu list. It will not be found if you enter its keyword in a menu screen's *Choose Item* field.

NOTE – To make the menu item visible again, remove the Y from the *H* field and then press F12 (Commit).

Moving a Menu Item

To move a menu item, do the following:

1. Highlight the program that needs to be moved, and click Move Menu Item. The following window opens:

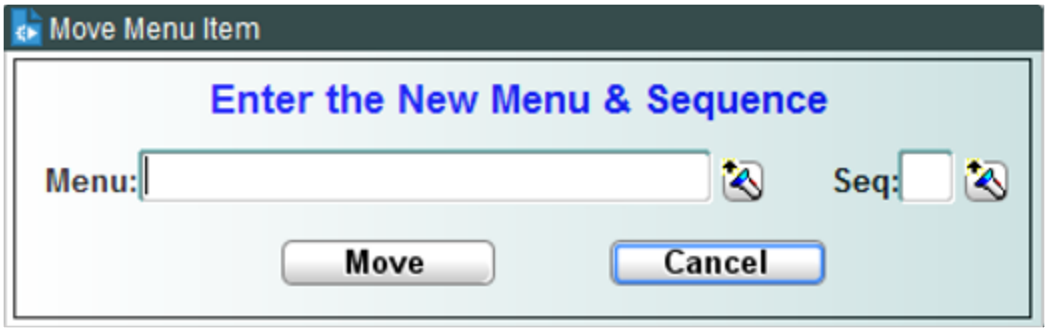

2. Enter the menu or select the menu from the LOV.
3. Enter the sequence where you want to move the item in the new menu.
4. Click MOVE, and the item will move from the current menu structure to the new menu structure.

At Commit

Click COMMIT to save changes before moving to a different page for the menu level. If you move to a different menu level without committing your changes, your entries will not be saved.

What to Do Next


There is no next step.

Define Groups (GROUPS)

Define working/functional groups in Define Groups (GROUPS). There are 40 functional groups. The ADM00 group is reserved for WellSky support functions; Group 01 through 39 can be used to identify functional accesses. Groups are identified by five characters: three alpha and two numeric (GRP01), which should remain static. Also, it does not matter in which order they are identified in this table; they are sorted by numeric value for functional access.

The description of the group can be modified to suit individual business needs. Once the description is modified, press F12 (Commit) to save the changes. (Coordination of group names between Donor, Lab, and Distribution enhances usability.)

Use the LOV in the *Group ID* field to select a particular group. Press ENTER to display.

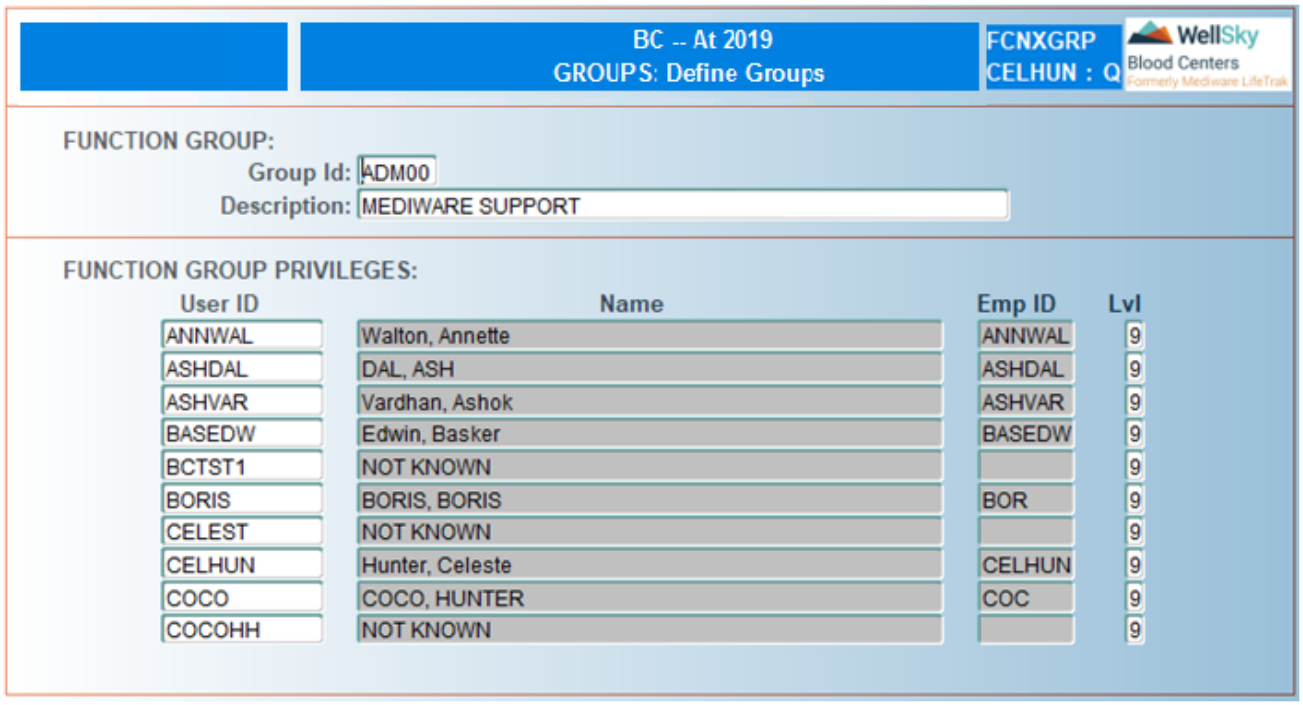

Control Block Fields and Definitions

Group ID

Entry is optional. Enter a group ID or select from LOV. If no group is entered or selected, all groups display.

Retrieving Data

Click **Retrieve** to display the group data.

The following data displays for each retrieved group:

- Application
- Group ID
- Group description

To Modify Groups

Place the cursor in the Description field for the group to modify. Enter the new description and click COMMIT

. It does not matter which order groups are identified in this table, they are sorted by the numeric value for functional access.

NOTE – Coordination of group names between Donor, Lab and Distribution supports easier usability.

At Commit

Modifications are saved to the database upon commit.

What to Do Next

There is no next step.

Maintain Web Menu Items (WEBITM)

Use this screen to set the access level within a group for the On-Site Module web screens. Refer to Maintain Menu Items (MENUITM) in this chapter for instructions on using this screen.

Page (Program)	Description	Parameter	Value
ONPCEXTR	Extract Mobile Server Data	MODE	MOBILE
ONPULOCK	Lock/Unlock Mobile Users	MODE	MOBILE
ONPLOOKQ	Lookup and Print Donor Card	SCREEN_MODE	MANUAL
ONPLKREG	Lookup/Registration & Modify Data	SCREEN_MODE	AUTO

3.4.2 WellSky Restricted Menu Admin.

Some functions are restricted to WellSky access due to their impact and interaction within Blood Centers. WellSky will make required modifications to these tables and/or functions. Due to restricted WellSky access, detailed training on how to use these functions will not occur. These items are identified in MENUITM with access associated to ADM00, WellSky Support. No user at your facility should have application access to these functions.

WellSky Restricted Menu Tables

The WellSky Restricted Menu Admin (WSKYMA) contains the following functions:

- Add Functions (ADDFCN) – a program where all new function executable definition occurs.
- Define Windows (WIN) – a function that allows definition of Windows pulled-in programs.
- Associate Programs to Windows (WINPROG) – a table that defines window associations to programs.
- Define New Applications (DEFAPPL) – a screen where new applications are defined.
- Application Sequence Numbers (NUMBERS) - a screen where application sequences are numbered.

WellSky Corporation
Proprietary and confidential

3.5 User Administration

3.5.1 Common User Administration

Reset User Password (RESET)

Intended Use

Use this screen to reset a staff member's password when the staff member cannot reset or remember his or her login password.

Limitations

- You must have the appropriate privileges to reset a password:
  - If the Single User Parameter is set to N, you must have DBA privileges to change the staff member's password.
  - If the Single User Parameter is set to Y, you must have the appropriate user access level.
- The staff member is allowed one login under the reset password, then is forced to change that password.
- A staff member does not use this screen to change his or her own password. To reset a password, a staff member should click CHANGE PASSWORD  .
- The check for minimal character change from last password to new password is not performed. This check must occur between the old password and new password; since this screen does not contain the old password, the check cannot be performed.

Prerequisites

The staff member whose password is being reset must already be a valid system user.


If strong password configuration is required, the Strong Password feature must be enabled during installation, and the new password must meet the strong password configuration requirements.



NOTE – See the WellSky Blood Centers Installation Guide for more information on enabling and configuring strong passwords.

Accessing the Screen

Access this screen from the User Access Administration menu or by entering the keyword `RESET`.

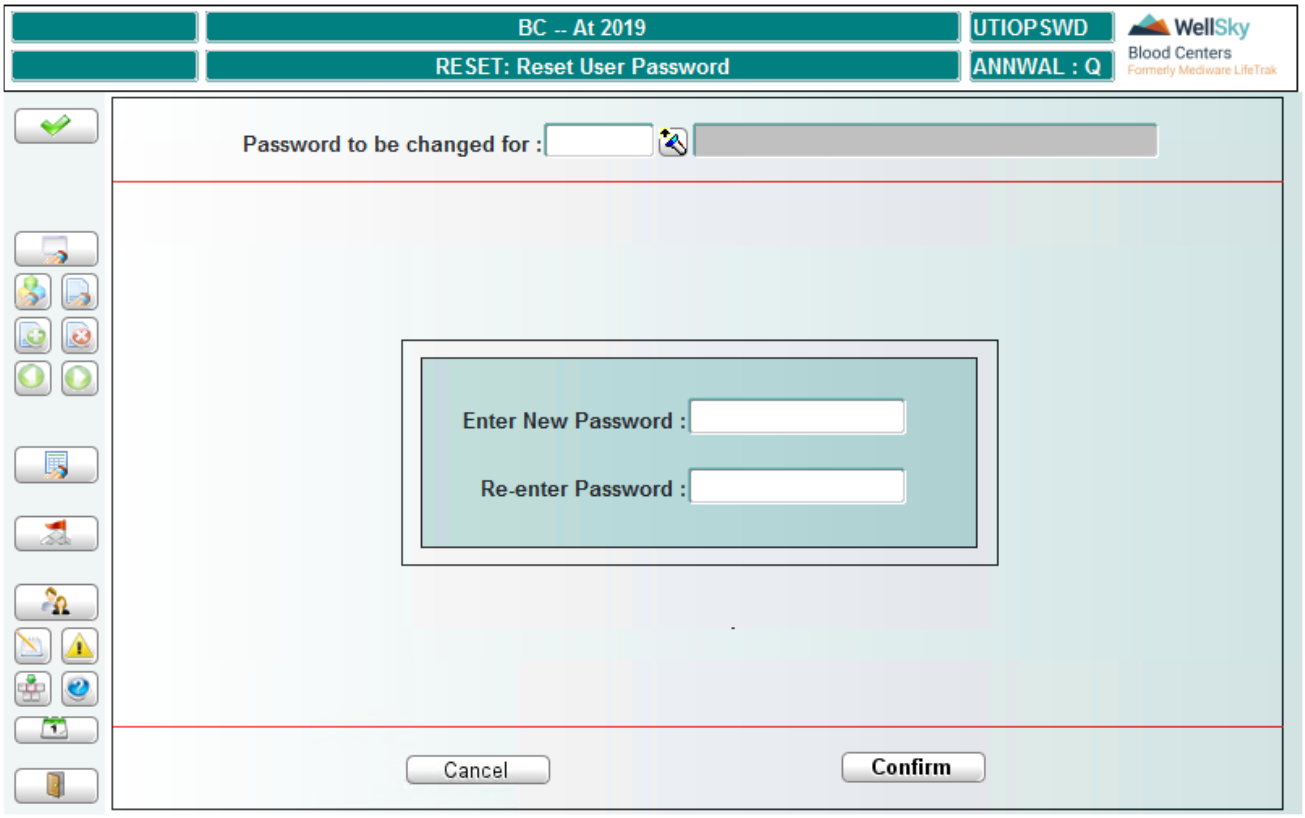

Password to be Changed for

Enter the user ID of the staff member whose password requires changing or select from the LOV.

Enter New Password

Enter the new password for the staff member, following at least the minimal password naming convention of either:

- Strong password configuration (suggested) – 15-50 characters, consisting of at least 2 upper case alpha, 2 lower case alpha, 2 numeric, and 2 special characters
- Traditional password configuration – 6-50 characters, consisting of at least 1 alpha and 1 numeric character.

NOTE – The new password can be a maximum of 50 characters. If you are using Active Directory, you may be limited to a fewer number of characters if there are password restrictions with LDAP.

NOTE – When a strong password is entered, the system checks the following in this particular order to verify that the entry fulfills the strong password requirements: min_length, min_numbers, min_uppers, min_lowers, and min_special.

Re-enter Password

Re-enter the new password for verification.

The Confirm Button

Click **Confirm** to commit the new password to the database.

What to Do Next

Notify the user of the password change.

Add System User (ADDUSER)

Intended Use

This screen creates a new user in both the application and Oracle. Use it also to modify the existing group and/or access level of a staff member, or to terminate a staff member's access. Creation of the user in Linux is not required for Blood Centers.

Limitations

To be created in Oracle, a new user must be created under the super user login. This will define the user directly in the application and in Oracle simultaneously. These users have no access to the database outside the application.

NOTE – If a Printer ID is not selected for a user, the Chapter description will display "invalid chapter id" when the user information is retrieved. To display the correct chapter description, navigate to the *Chapter* field and re-select the appropriate chapter. The correct chapter description will then display.

This Limitation applies to the Donor application only; it does not apply to Lab or Distribution.


Prerequisites

- You must work under the super user login to create new users.
- Groups and access levels should be appropriately defined.
- All user system printers must be defined in Maintain Reports Master table (RMASTER).
- A unique naming convention for user identification is required.

NOTE – When establishing your standard naming convention for the user ID, it is generally easier to use an identifier such as employee numbers, if they are unique. Limit your user ID to five or six characters, even though field space allows up to ten characters.

Accessing the Screen

Access this screen from the Common User Administration menu or by entering the keyword `ADDUSER`.

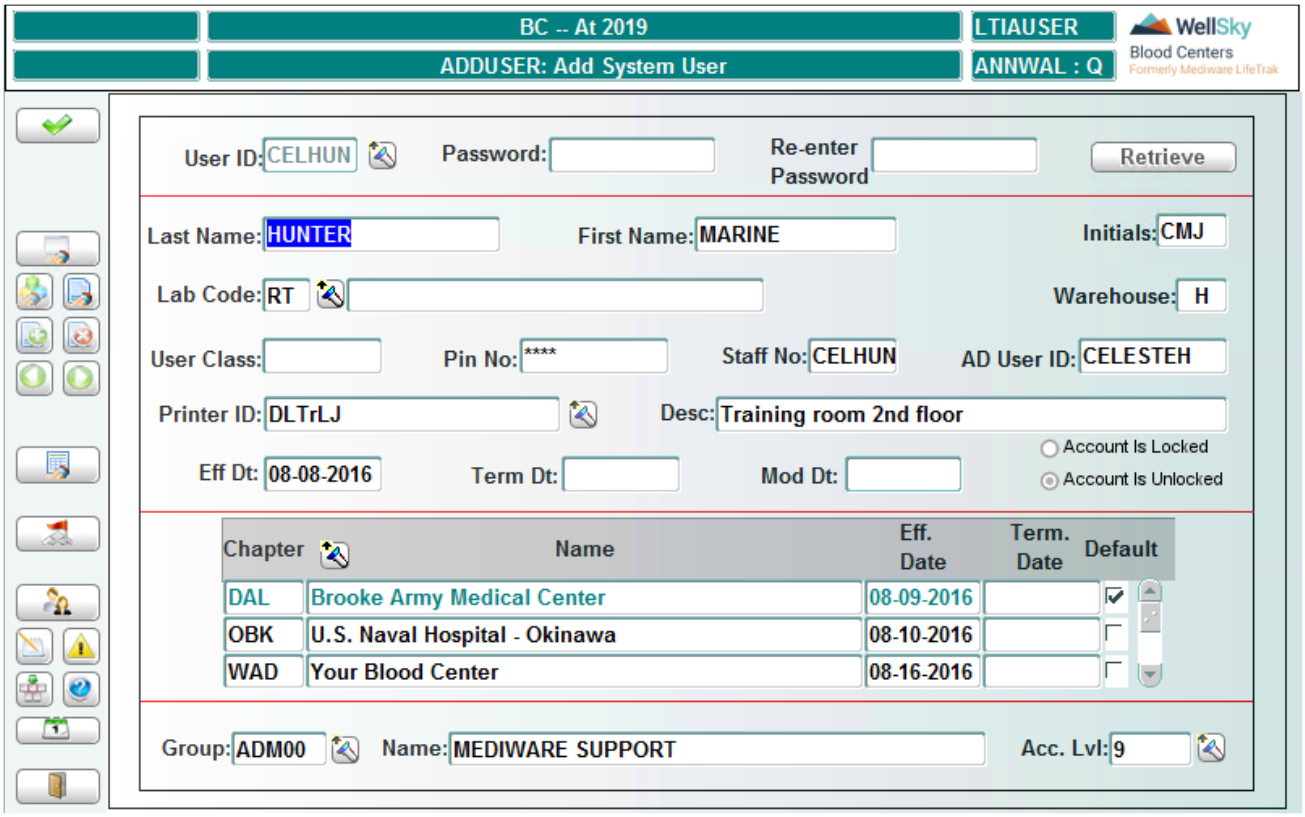

Entering Data for a New User

To create a new user, enter the following information:

User ID

Entry is required. Uniqueness required; enter a maximum of six characters.

- If single-user access is not enabled, you will receive a warning when creating a new user that the user is not a valid Oracle user. The new user will be created in both Oracle and the application at completion.
- If single-user access is enabled, the user is defined for login and the application.

Password

Entry is required. Enter your system password.

Re-enter Password

Enter your system password a second time to validate your entry. Your second entry must match your original entry.

Last Name

Entry is required. Enter up to 30 characters for the user's last name.

First Name

Entry is required. Enter up to 25 characters for the user's first name.

WellSky Corporation
Proprietary and confidential

Initials

Entry is optional. Enter the user's initials.

Lab Code

Enter the lab code, or select it from the LOV.

Warehouse

Enter the default warehouse for the user. This is the value that will automatically log the user in upon initial login.

User Class

Field not used at this time.

Pin No

Enter the staff pin number, which must be between 4 and 10 numeric characters.



NOTE – The pin number is used in the Onsite Module to electronically sign the donor consent form as a witness.

Staff No

Entry required. Up to six characters can be entered, which must be the same as the staff number for any employee defined in a Maintain Staff Details (STAFF) employees table (that is, recruiter, caretaker recruiter, telemarketer, collection staff, and so on).

KT User ID

Entry is optional. Enter the WellSky Quality & Compliance user ID for this user.



NOTE – This field will only display if the system is configured for Quality & Compliance interface.

AD User ID

Displays the user's network ID if your facility is using Active Directory. If this field does not match the user's network ID, the user will not be able to log in to Blood Centers. The field is not navigable unless the Active Directory feature is turned on at your facility.



NOTE – WellSky must associate the first AD User for the site once the feature is turned on so that you can add the rest of the users' AD User links.

Printer ID

Planned for future modification. Do not enter any data into this field.

Desc

Planned for future modification. Do not enter any data into this field.

Eff Dt

Entry is required. Enter the effective date of the user's access in MMDDYYYY format.

Term Dt

Entry is optional. Enter the termination date of the user's access in MMDDYYYY format.

Mod Dt

Display only. The date the user's record was last modified displays in MMDDYYYY format.


Account is Locked/Account is Unlocked (Option Buttons)

This function is used to unlock a user who has exceeded the number of login attempts as configured for the facility.

If the user exceeds the allowed number of times a user can try to log in, the account is locked and the **Account is Locked** option button will have a black dot.

To release the lock and allow the user to attempt to log in, click the **Account is Unlocked** option button.

Associate Chapter IDs to User

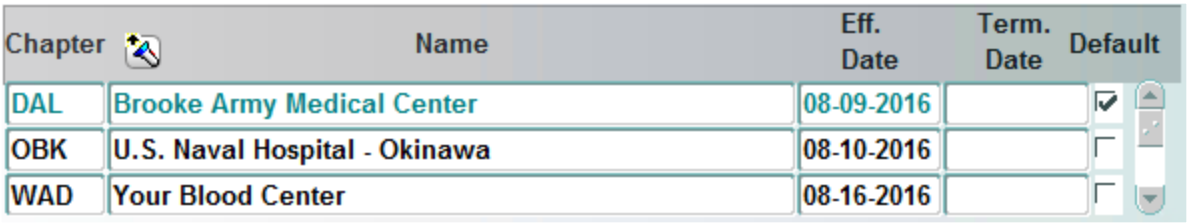

Chapter	Name	Eff. Date	Term. Date	Default
DAL	Brooke Army Medical Center	08-09-2016		☑
OBK	U.S. Naval Hospital - Okinawa	08-10-2016		☐
WAD	Your Blood Center	08-16-2016		☐

Chapter

Enter the Chapter ID or select it from the LOV. The chapter name automatically populates when the chapter ID is entered.

Eff. Date

Entry is required. Enter the effective date of the chapter association to the user in MMDDYYYY format.

Term. Date

Entry is required. Enter the termination date of the chapter association to the user in MMDDYYYY format.

Default

Place a check mark by the chapter ID that will be the default chapter for the user.

Adding Group Information

Group

Entry is required. Enter the working/functional group of the user or select from LOV. The *Name* field automatically populates when a valid group is entered or selected.


Acc Lvl

Entry is required. Enter a value from `0` to `9` or select from LOV to associate the user to their required access level, enabling the user to perform his or her functions within the menu.

At Commit for a New User

Press **F12** (Commit). The following window opens:

WellSky Corporation
Proprietary and confidential

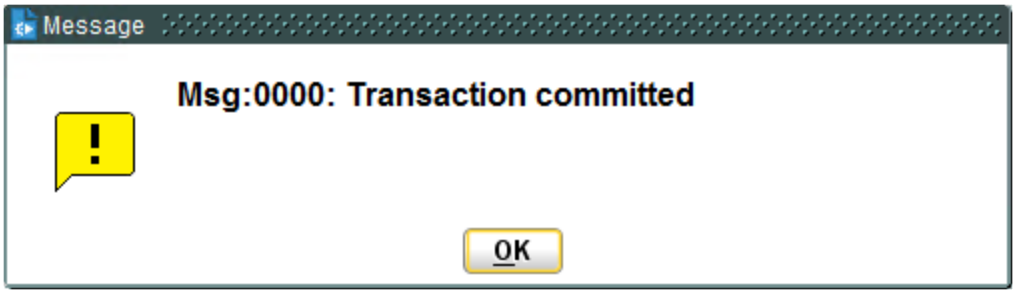

Click **OK** or press **ENTER** to close the window.

NOTE – The user is created in the application and Oracle simultaneously.

Communicate this login/password to the user for his/her access into the system. This password gives access to general group functions at the defined access level. The user must change this password at his or her first login to the application.

NOTE – For more information on how to change your password, refer to Reset User Password RESET in this guide and the WellSky Blood Centers User Guide, How to Change your Password.

Modifying User Access

Use this screen to modify primary access when an employee is terminated, moves to another working/functional group, or requires a different access level within the same group. You may also use Modify User Access within a Group (MUAG) to change a user's functional/working group and/or access level.

To retrieve an existing user, enter the user ID into the *User ID* field or select from the LOV and then click **Retrieve**.

You can modify every active field except the user ID.

At Commit

- A new user is created.
- A modified user is reassigned to a working/functional group and/or level within the group.
- A terminated user is denied login/password access to the application.

What to Do Next

Grant required access to any Access Class. Use Define User Access (UACCESS).

Password Configuration (PWDCFG)

Intended Use

Use this screen to configure the parameters users must adhere to in order to create valid user passwords. This includes defining the number of upper case, lower case, and special characters needed to make the user password a valid password. This screen also configures the time parameters for resetting passwords, warning users when their passwords need resetting, etc.

Limitations

The following special characters are not allowed to be entered in the special character field:


- & (ampersand)
- ‘ (quote)
- , (comma)
- % (percent)
- @ (at)

Prerequisites

- The strong password feature must be enabled (strong password flag in the LT_APPLICATION_CONFIG table set to Y) for this screen to function. If the strong password flag in the LT_APPLICATION_CONFIG table is set to N, data can still be entered; however, it will not be used by the system.
- If the password configuration has been defined and passwords created under that configuration, changing the configuration must be checked carefully.
- If the configuration is changed to require more characters than were previously defined, all users that currently have passwords will not be able to login to the system.
- If the configuration entered is less than what was defined for previous passwords, the defined passwords will continue to work.

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

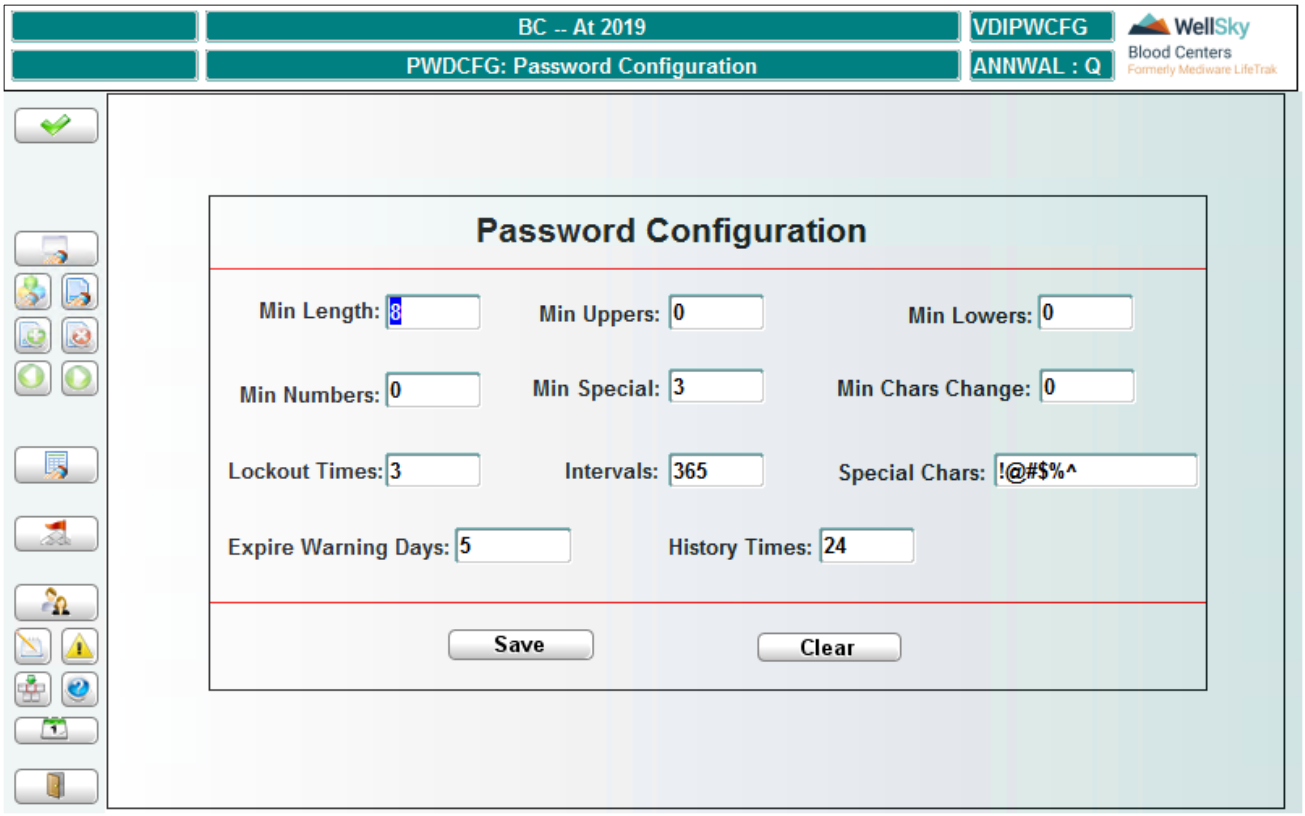

Min Length

Enter a number that defines the minimum length for a valid user password.

NOTE – The new password can be a maximum of 50 characters. If you are using Active Directory, you may be limited to a fewer number of characters if there are password restrictions with LDAP.

Min Uppers

Enter a number that defines the minimum number of upper-case characters a valid user password must contain.

Min Lowers

Enter a number that defines the minimum number of lower-case characters a valid user password must contain.

Min Numbers

Enter a number that defines the minimum number of numeral (number) characters a valid user password must contain.

Min Specials

Enter a number that defines the minimum number of special characters a valid user password must contain.

Min Chars Change

Enter a number that defines the minimum number of characters that must be different between the current user password and a new password when the password is changed.

Lockout Times

Enter a number that defines the number of times a user can enter an incorrect password before the user is locked out.

Intervals

Enter a number that defines the number of days in which the password is valid before the user is required to change the password. This is the period of time that the password will be active before requiring the user to change passwords.

Special Chars

Enter the list of specific characters that can be used as special characters in the creation of a valid user password. The list must contain no spaces and no separators, such as commas, semicolons, etc.

NOTE – The following special characters cannot be used:

- & (ampersand)
- ‘ (quote)
- , (comma)
- % (percent)
- @ (at)

Expire Warning Days

Enter a number that defines the number of days before a password expires that users will receive a warning message indicating they must change their password.

History Times

Enter a number that define the number of previously used passwords that the user cannot re-use.

Click **Save** to save changes or click **Clear** to clear all fields and re-enter information.

What to Do Next

There is no next step.

Maintain Staff Details (STAFF)

Intended Use

Use this screen to enter and modify details about recruiters. Once entered, a recruiter can be assigned to recruitment territories.

WellSky Corporation
Proprietary and confidential

Limitations


None

Prerequisites

None

Accessing the Screen

Access this screen from the Recruitment Maintenance menu or by entering the keyword `STAFF`.

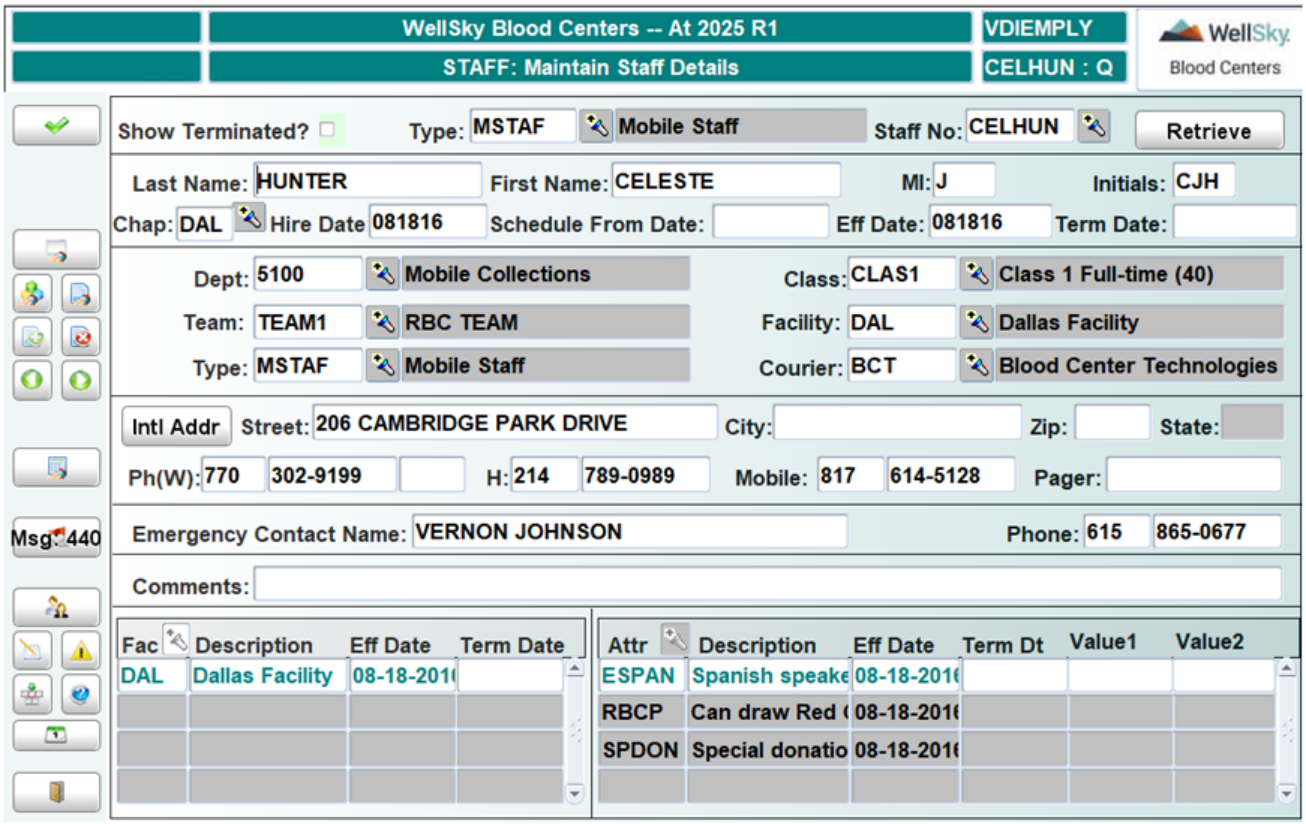

Control Block Fields and Definitions

Type

Entry is optional. Enter the code for a staff category or select from the LOV. If left blank, all types are retrieved.

Staff No.

Enter staff number, if known, or leave blank. This field populates after a retrieved employee is selected.

Staff No

Entry is required. Enter a valid staff number if modifying details for an existing employee.


NOTE – The entry in the *Staff No* field must be the same staff number that is defined in LTIAUSER.

Retrieving Data

Click **Retrieve** to display details for an existing employee.

To Add a New Employee


If the system does not recognize the employee ID entered, a message displays, asking you to confirm that a new employee is being created:

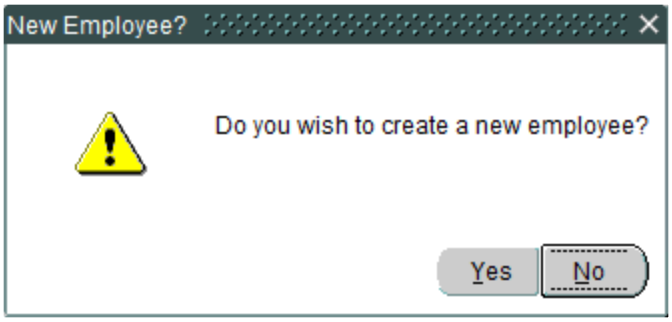

- Click **Yes** to create the new employee.
- Click **No** to return to the *Staff No* field to revise your entry.

To Search for an Existing Employee

To search for an existing employee, click LOV. The following window opens:

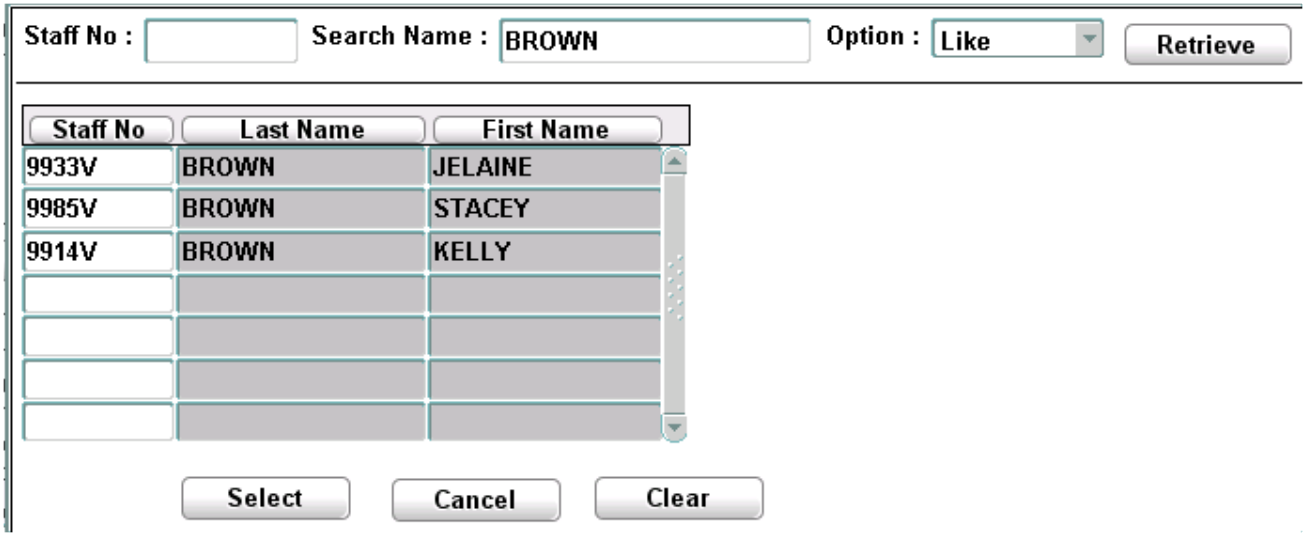

Search Name

Enter employee name being searched for.

Option

Select one of the following:

WellSky Corporation
Proprietary and confidential

- **Like** – Search will find partial matches.
- **Exact** – Search will find only an exact match.

Click **Retrieve** to retrieve a list of employees that match the search criteria.

Select the desired employee name and then click **Select**. The selected employee's information is populated into the STAFF screen.

Click **Clear** to clear the contents of the search window and begin a new search. Click **Cancel** to close the search window and return to the STAFF screen.

Modifying Data for an Existing Employee

The existing data may be modified for an employee by advancing to or clicking in the appropriate field and correcting the entry.

Creating a New Employee

Enter the following data to create a new employee:

In the Key Data Block:

Last Name

Entry is required. Enter the employee's last name. Up to 15 characters are permitted.

First Name

Entry is required. Enter the employee's first name. Up to 15 characters are permitted.

MI

Entry is optional. Enter the employee's middle name or middle initial. Up to three characters are permitted.

Initials

Entry is optional. Enter the employee's initials.

Chap

Enter Chapter or select from LOV.

Hire Date

Entry is optional. Enter the employee's hire date in MMDDYYYY format.

Schedule From Date

Entry is optional. The date can be entered using the MMDDYYYY format.

Eff Date

Entry is required. The default is the system date. It may be changed using the MMDDYYYY format.

Term Date

Entry is optional. A termination date may be entered to preclude an employee from being scheduled for pickups beyond a certain date. Enter the date using the MMDDYYYY format. This is the only way an existing employee record

can be deactivated.

In the Assignment Data Block

Dept

Entry is optional. Enter the employee's department ID or select from the LOV. Once a valid department ID is entered or selected, the department name displays automatically.

Class

Entry is required. Enter the employee's employee classification code or select from the LOV. Once a valid code is entered or selected, the classification description automatically displays.

NOTE – The LOV is populated from master code STFTP.

Team

Entry is optional. If the employee is assigned to a team, enter the team ID or select from the LOV. Once a team ID is entered or selected, the team description automatically displays.

Facility

Entry is optional. If the employee is assigned to a specific central site, enter the facility code or select from the LOV. Once a valid code is entered or selected, the facility description automatically displays.

Type

Entry is required. Enter a valid employee type code or select from the LOV.

NOTE – This LOV is populated from master code EMPCL. It is the same LOV that displayed in the *Type* field in the Control Block. The selection in the Control Block, however, is used only to restrict the list of selectable staff records. This *Type* field associates the employee type with the record you are entering.


Courier

Entry is optional. If the employee is associated with a courier, enter the courier ID or select from the LOV.

Intl Addr (button)

Click **Intl Addr** to open the International Address window, as follows:

WellSky Corporation
Proprietary and confidential

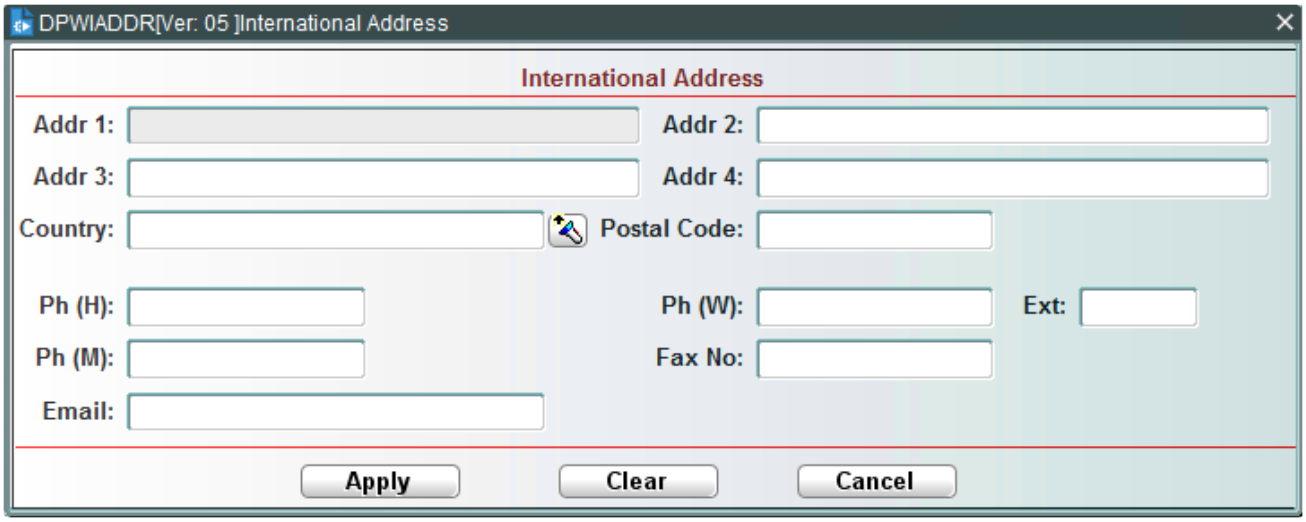

Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

In the Address and Phone Block

Street

Entry is optional. Enter the employee's street address. Up to 19 characters are permitted.

NOTE – If a street address is entered, the city, state, Zip code, and phone number fields may be entered. If the street address is not entered, neither can any other field in this block be entered. Therefore, if the street address is not known but phone numbers can be entered, make a false entry in the Address and Zip fields to enable the phone fields.

Zip

Entry is optional. Enter a Zip code or select from the LOV. Once a valid Zip code is entered, the city and state fields automatically populate. Enter a nine-digit Zip code by entering the last four digits in the *Ext* field.

NOTE – If the Zip code is unknown, enter the city name and return to the *Zip* field. The LOV in the *Zip* field will contain only valid Zip codes for the entered city.

City

Entry is optional. Enter city name or go to the Zip field and enter Zip code. The city name then automatically populates.

NOTE – If more than one city exists for a Zip code, an LOV appears with all valid city options. Select the correct city.

State

Display only. This field automatically populates when a valid Zip code is entered. No entry or modification is permitted.

Ph(W)

Entry is optional. Enter the employee's work phone number. Fields are provided for area code, seven-digit phone number, and a four-digit extension. The system automatically inserts the hyphen.

H

Entry is optional. Enter the employee's home phone number. Fields are provided for area code and a seven-digit phone number. The system automatically inserts the hyphen.

Mobile

Entry is optional. Enter a mobile phone number for the employee, if available. Fields are provided for area code and phone number. The system automatically inserts the hyphen.

Pager

Entry is optional. Enter a pager phone number for the employee, if available. This is a free-form entry field. Up to 12 characters are permitted.

In the Contact and Comments Block

Emergency Contact

Entry is optional. Enter an emergency contact name for the employee, if available. Up to 30 characters are permitted.

Phone

Entry is optional. Enter a phone number for the emergency contact, if available. Fields are provided for area code and phone number. The system automatically inserts the hyphen.

Comments

Entry is optional. This is a free form entry field that accepts up to 240 characters.

In the Facility Block

Fac

Entry is required. Enter a valid facility code or select from the LOV. Once a valid code is entered or selected, the facility description automatically displays.



NOTE – If the staff member is able to work from facilities other than the one that they are headquartered in, those facilities should be defined here. This will be utilized by the staff scheduling program.

Eff Date

Entry is required. Enter the effective date for the facility assignment, using the MMDDYYYY format.

WellSky Corporation
Proprietary and confidential

Term Date

Entry is optional. To terminate an employee facility assignment, enter a termination date using the MMDDYYYY format. This is the only manner in which an existing facility assignment may be terminated.

In the Attributes Block

You can enter specific attributes (skills and qualifications) for an employee in the Attributes block. Click NEXT BLOCK  or click in the block.

Attrib

Entry is required once the cursor enters the field. Enter a valid attribute code or select the LOV. Once a valid code is entered or selected, the attribute description automatically displays.

Eff Date

Entry is required. Enter the effective date for the attribute in MMDDYYYY format. Effective date must be a current or future date.

Term Dt

Entry is optional. To terminate an employee attribute, enter a termination date using the MMDDYYYY format. This is the only manner in which an existing attribute may be terminated.

Value1

Entry is optional. Enter staff attribute value 1. Attribute values are for informational purposes only.

Value2

Entry is optional. Enter staff attribute value 2. Attribute values are for informational purposes only.

Committing the Transaction

Click COMMIT  to save the transaction to the database. A message confirms that the transaction is committed, and the screen clears.

Click EXIT FORM  to leave the screen, or continue to enter and/or modify employee records.

What to Do Next

Employees may be assigned to scheduled pickups or territories after the effective date or Schedule From Date entered in this screen. Use Assign Driver to Pickup (DRVRPKP) or Create and Assign Territory to Recruiter (TTOR).

3.5.2 Lab/Distribution User Administration

Assign User Interdiction Class (UCLASS)

Intended Use

This screen is used to associate users to interdiction classes. Interdiction class, functional group, and access level determine which interdictions you can place, view, and remove.

This screen is only available from Lab.


Limitations

Interdiction classes for Donor are not handled in this screen.

Prerequisites

- Add New/Maintain User (ADDUSER) - define user access.
- Lab Master Codes (LMASTER), code INTCL – define interdiction classes.

Entering/Viewing Data

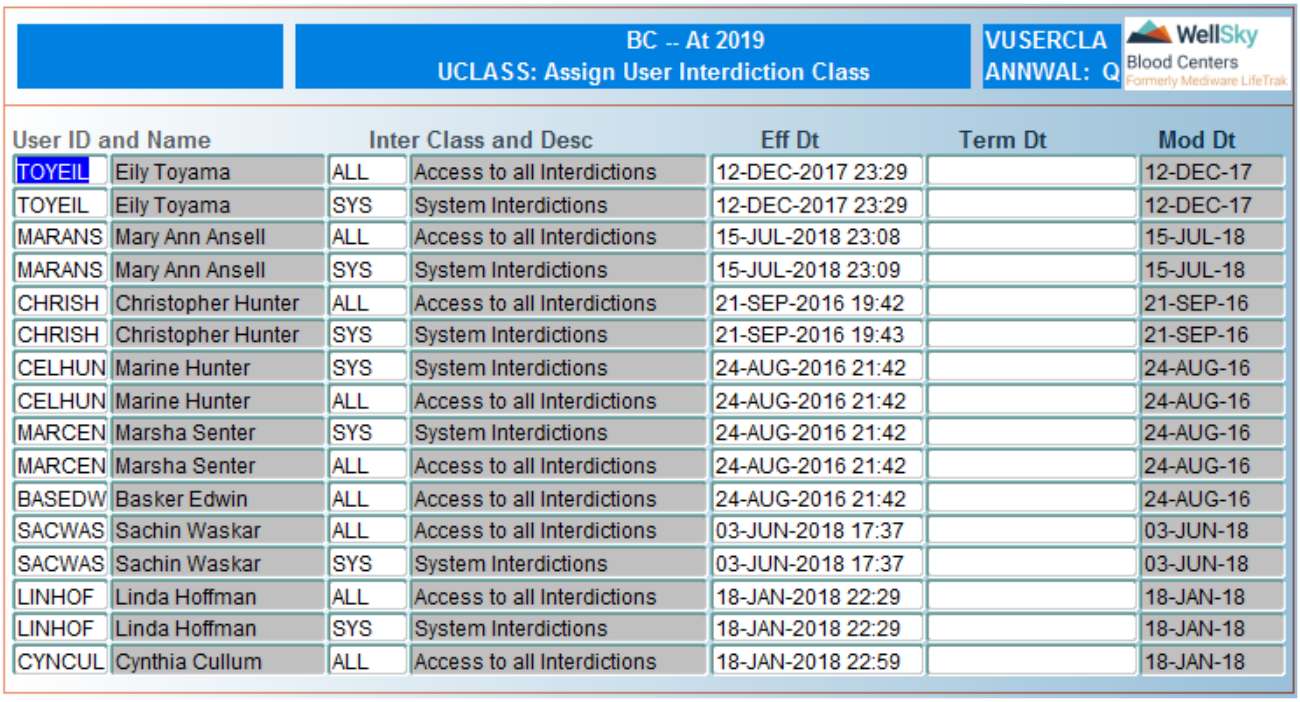

User ID and Name		Inter Class and Desc		Eff Dt	Term Dt	Mod Dt
TOYEIL	Eily Toyama	ALL	Access to all Interdictions	12-DEC-2017 23:29		12-DEC-17
TOYEIL	Eily Toyama	SYS	System Interdictions	12-DEC-2017 23:29		12-DEC-17
MARANS	Mary Ann Ansell	ALL	Access to all Interdictions	15-JUL-2018 23:08		15-JUL-18
MARANS	Mary Ann Ansell	SYS	System Interdictions	15-JUL-2018 23:09		15-JUL-18
CHRISH	Christopher Hunter	ALL	Access to all Interdictions	21-SEP-2016 19:42		21-SEP-16
CHRISH	Christopher Hunter	SYS	System Interdictions	21-SEP-2016 19:43		21-SEP-16
CELHUN	Marine Hunter	SYS	System Interdictions	24-AUG-2016 21:42		24-AUG-16
CELHUN	Marine Hunter	ALL	Access to all Interdictions	24-AUG-2016 21:42		24-AUG-16
MARCEN	Marsha Senter	SYS	System Interdictions	24-AUG-2016 21:42		24-AUG-16
MARCEN	Marsha Senter	ALL	Access to all Interdictions	24-AUG-2016 21:42		24-AUG-16
BASEDW	Basker Edwin	ALL	Access to all Interdictions	24-AUG-2016 21:42		24-AUG-16
SACWAS	Sachin Waskar	ALL	Access to all Interdictions	03-JUN-2018 17:37		03-JUN-18
SACWAS	Sachin Waskar	SYS	System Interdictions	03-JUN-2018 17:37		03-JUN-18
LINHOF	Linda Hoffman	ALL	Access to all Interdictions	18-JAN-2018 22:29		18-JAN-18
LINHOF	Linda Hoffman	SYS	System Interdictions	18-JAN-2018 22:29		18-JAN-18
CYNCUL	Cynthia Cullum	ALL	Access to all Interdictions	18-JAN-2018 22:59		18-JAN-18

To add a new record, press CTRL + F2 (Create Record).

User ID and Name

Enter user ID or select from LOV. The Name field automatically populates after the user ID is entered.

Inter Class and Desc

Enter the interdiction class to which user should have access or select from LOV. Enter `ALL` if a user should have access to all interdictions. The interdiction class description field automatically populates after the class is entered.

> **NOTE –** If a user is to have access to more than one interdiction class, the user must be assigned to each class, using a separate line for each class entry.

Eff Dt

Enter effective date in DD-MON-YYYY format.

WellSky Corporation
Proprietary and confidential

Term Dt

Enter termination date in DD-MON-YYYY format.

Mod Dt

Field automatically populates with the date modifications were last made. Field is not navigable.

Assign User to a Warehouse (WUSER)

Intended Use

This screen is used to associate users to warehouses and printers.


Limitations

Printer assignment for Donor is not handled in this screen.

Prerequisites

- Add New/Maintain User (ADDUSER) – define user access.
- Lab Master Codes (LMASTER), code LTYPE – define valid warehouse IDs.
- Maintain Reports Master Table (RMASTER) – define valid printers.

Entering/Viewing Data

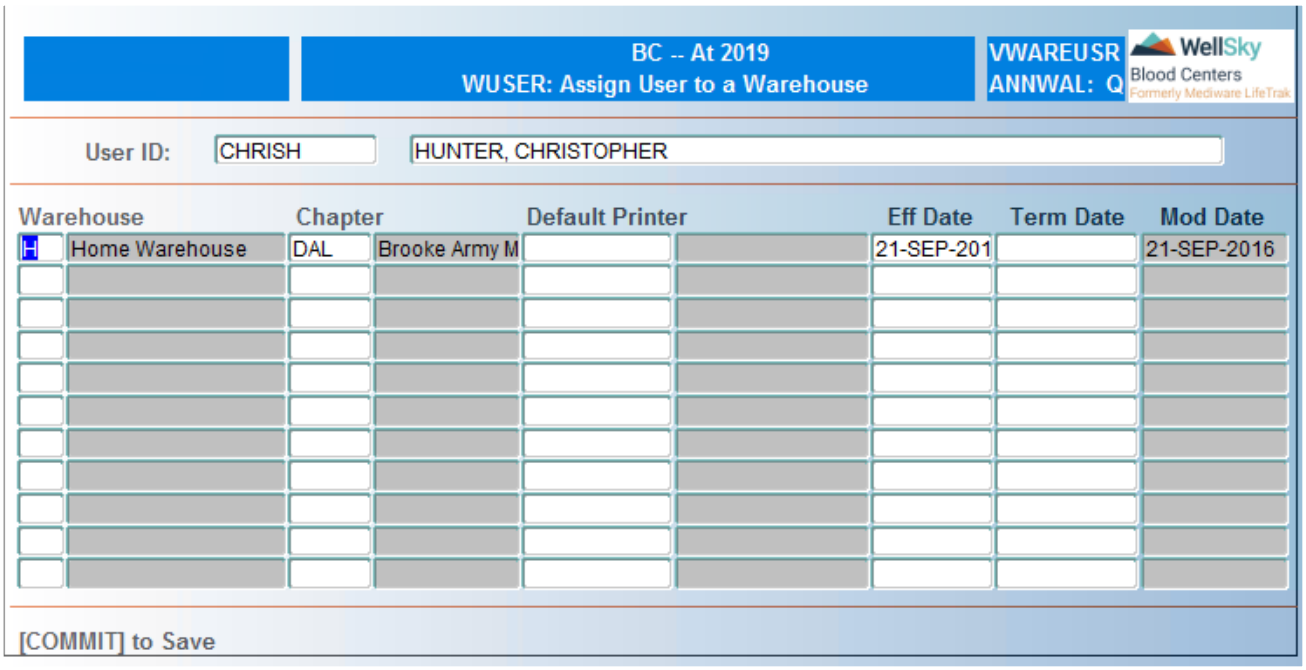

User ID

Enter user ID or select from LOV. The user name field automatically populates after the ID is entered.

Warehouse

Enter warehouse ID or select from LOV. The warehouse description field automatically populates after the warehouse code is entered.

Default Printer

Planned for future modification. Do not enter any data into this field.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Mod Dt

Field automatically populates with the date modifications were last made. Field is not navigable.

At Commit

You are able to access warehouses to which you are assigned.

Define Lab User Access (LUACCESS)

Intended Use

Use this screen to define access classes to a user. Currently, two access classes can be assigned:

- DNOTE – permission to delete notes
- UNOTE – permission to add notes
- UDOC – used to delete or unlink an external document to a source
- UPEXP – used to allow the user to extend the expiration date of the Codabar unit when changing it to an ISBT product
- CFPNO – place confirmatory notation codes from samples or tests
- CFRNO – remove confirmatory notations from samples or tests
- PLQY – allows the user to view data across chapters for plasma units in Plasma Tube Manager
- SUPVD – give user access to perform Supervisory Void in Void, Cancel, and SUPVOID program
- VOID – give user access to perform Void in Void, Cancel, and SUPVOID program
- CANCL – give user access to perform Cancel in Void, Cancel, and SUPVOID program

Limitations


Access level does not have any functionality.

WellSky Corporation
Proprietary and confidential

Prerequisites

- User must be defined in the system.
- All user access classes must be defined in Lab Master Codes (LMASTER) under code type ACLAS.

Accessing the Screen

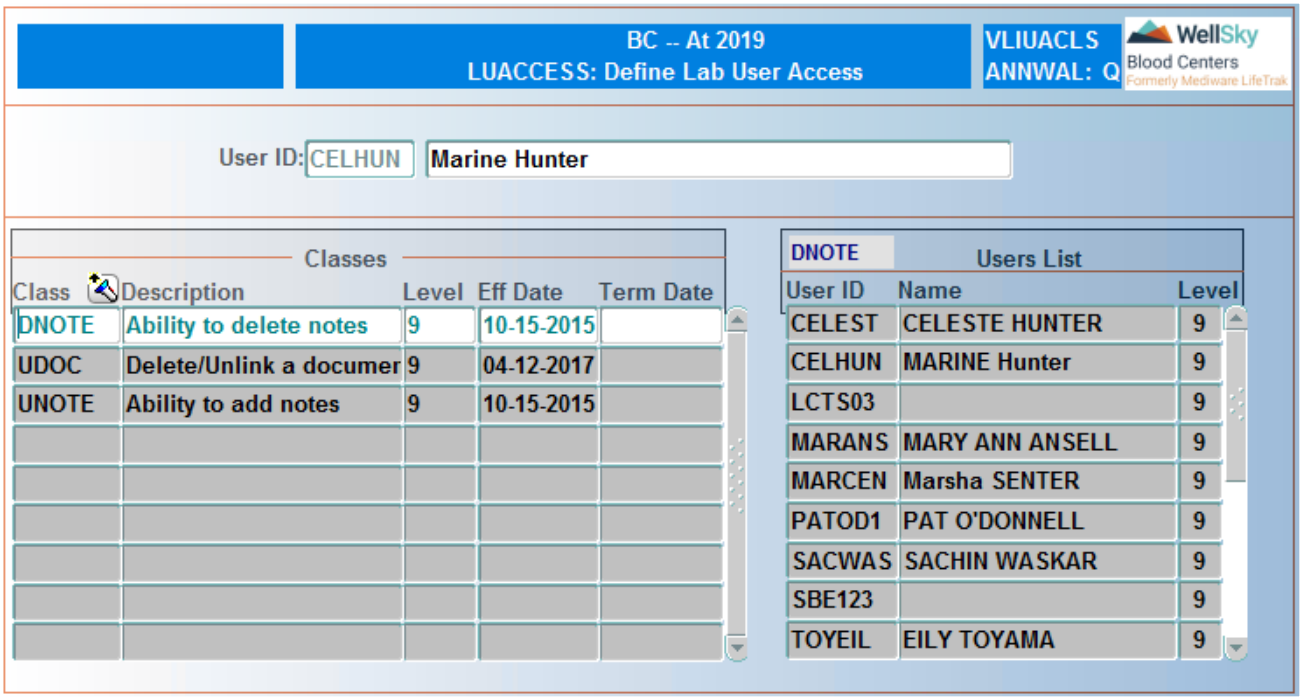

Control Block Fields and Definitions

User ID

Entry is required. Enter User ID or select from LOV. Once entered or selected, the user's name also displays.

NOTE – Any classes that have already been defined for the selected user display in the Detail Block.

Detail Block Fields and Definitions

Class

Entry is required. Enter a class or select from LOV.

Description

The class description automatically displays. Field is not navigable.

Level

Entry is required. Enter an access level from 1 - 9. Currently, any access level will grant full access to the user. The *Level* field is not currently used in the application

Eff Date

Entry is required. Enter effective date in MM-DD-YYYY format. Date cannot be earlier than today's date.

Term Date

Entry is optional. Enter termination date in MM-DD-YYYY format. Date cannot be earlier than effective date.

Users List Block

The system lists all users who are currently defined for the selected access class, as well as their assigned access level. Fields are not navigable. This display is by chapter.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

3.5.3 Donor User Administration

Define Access Class (ACCESS)

Intended Use

This screen allows you to associate interdictions (and properties/attributes) to groups of users to enable user access to view, place and/or remove. Interdictions, etc., can overlap between groups when necessary. Also defined are other options to view data and/or extended capabilities.

Limitations

You must have an understanding of the Interdiction Codes (INTER) program functions to associate this access effectively.


Prerequisites

Your access groups must be defined in Donor Master Code type ACLAS. These can be defined by working/functional or as generic as required to fit your business needs.

Accessing the Screen

Access this screen from the User Access Administration menu or by entering the keyword `ACCESS`.

WellSky Corporation
Proprietary and confidential

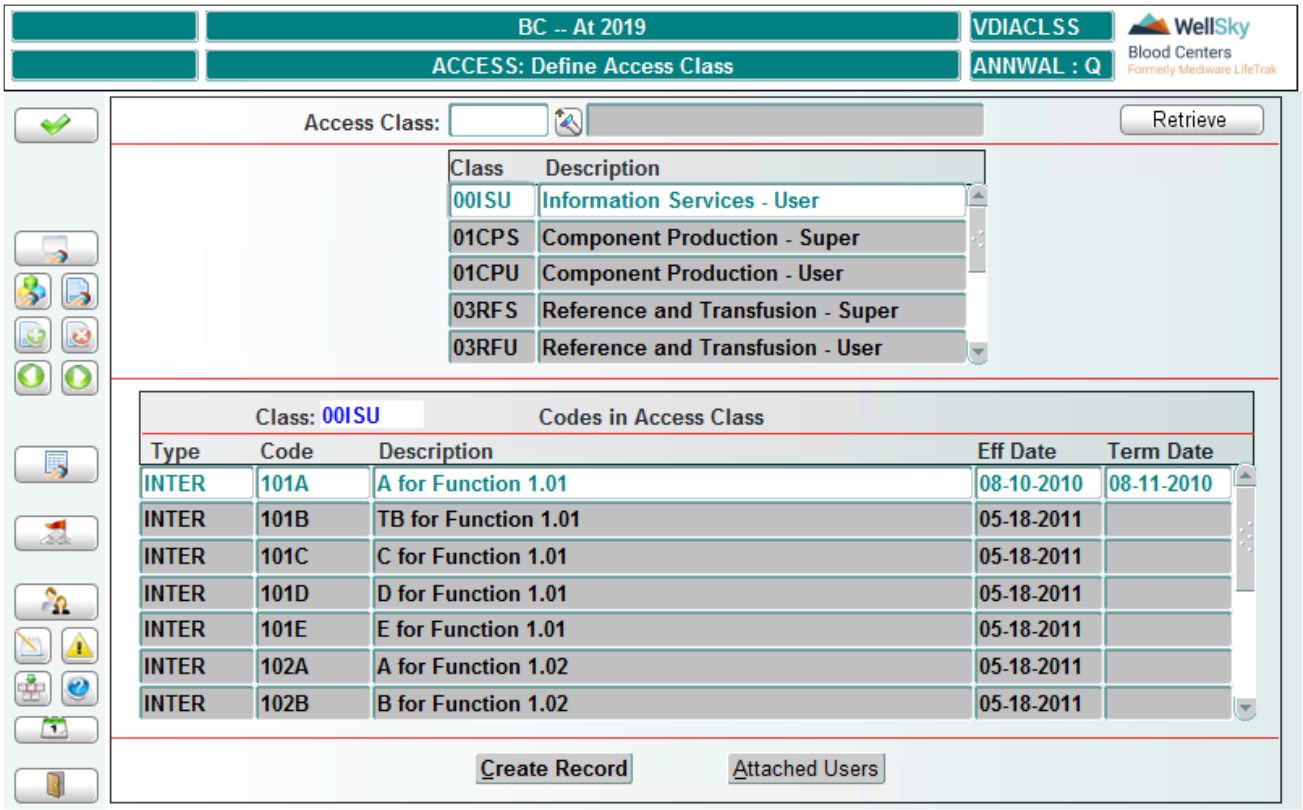

Control Block Fields and Definitions

Access Class

Entry is optional. Enter a class or select from LOV. If no class is entered or selected, all classes are retrieved.

Retrieving Data

Click **Retrieve** to display the classes in the Class/Description block. If multiple classes display, only the highlighted class displays in the Codes in Access Class block. The only field that can be modified for existing records is the *Term Date* field. Enter a termination date in MMDDYYYY format.

Creating New Records

Move to the *Type* field by placing the cursor in an empty field or clicking **Create Record**. Enter the following data:

Type

Entry is required. Enter the class type or select from the LOV. Selections are INTER and PROPR and are comprised of interdiction code types in the Interdiction Codes (INTER) table.

- INTER consists of interdictions where the interdiction code types are INTER, SURVE and/or HOLDS (critical test, surveillance or hold interdictions).
- PROPR consists of attributes where the interdiction code type is INFOR and/or DR. These code types are associated as properties in Master Codes (MASTER) in PROPR, Interdiction Code Types for Attributes.

NOTE – INTER and PROP are defined in ACDTY, Access Code Types, in Master Codes (MASTER).

Code

Enter the interdiction (attribute) code or use the LOV to allow single, random or multiple selection of the codes. The description automatically displays. If multiple codes are selected, a row populates for each code.

Eff Date


Enter the effective access date for each code in MMDDYYYY format.

Term Date

Enter the termination date of a code that must be removed from the associated class, using the MMDDYYYY format.

Viewing Attached Users

Click **Attached Users** to open the Users in Class window and view all users associated to the class and the access level within the class:

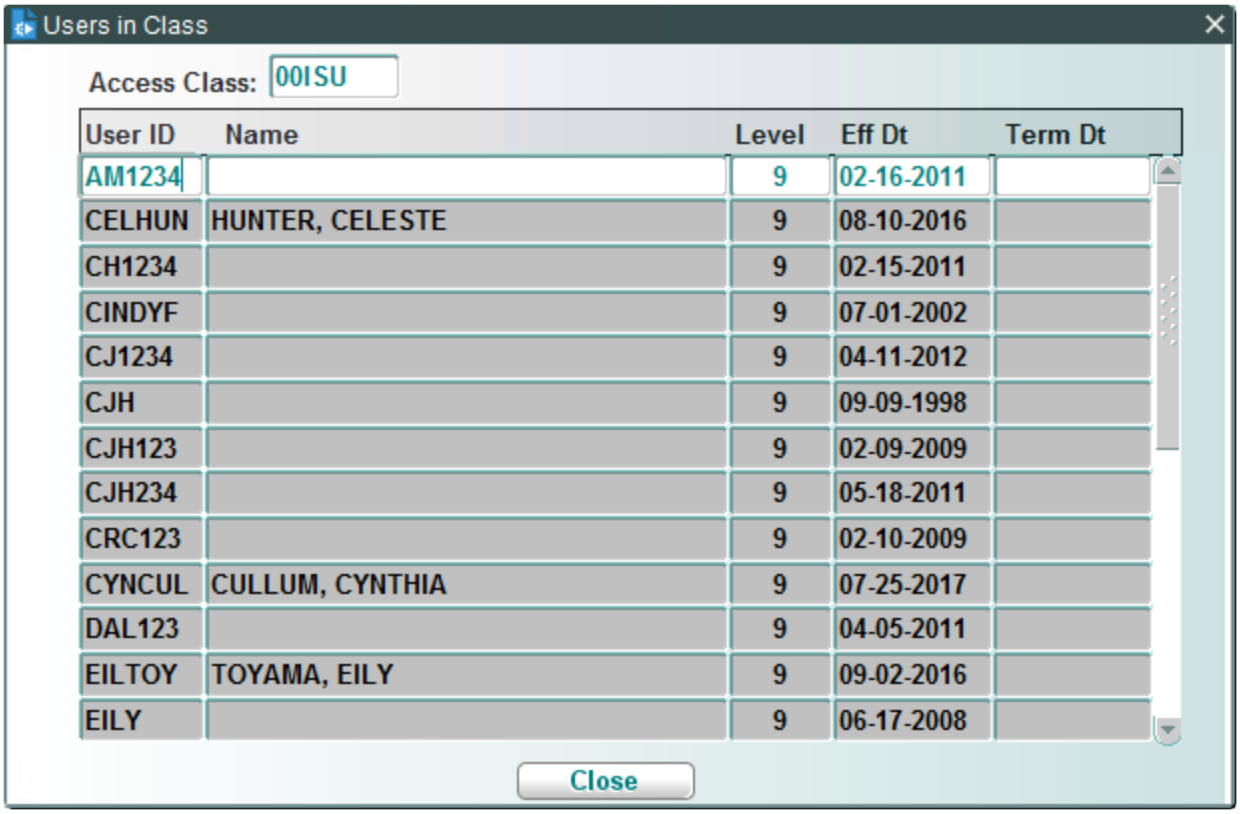

At Commit

Click the Commit icon to save changes to the database.

WellSky Corporation
Proprietary and confidential

What to Do Next

Once the classes have been identified, they can be associated to a defined system user in Define User Access (UACCESS).

Define User Access (UACCESS)

Intended Use

Use this screen to associate a user to classes of interdictions and/or properties (attributes), to establish the user's level of access for placing and releasing interdictions, and to grant access to view certain data or use extended capabilities.

Limitations

Without user association to an access class and level, the user will not have access to:


- View, place or release any interdictions or properties
- View other specialized data
- Some extended capabilities

Prerequisites

- The user must be defined in Add System User (ADDUSER)
- The Donor Master Code type ACLAS must be defined

Accessing the Screen

Access this screen from the User Access Administration menu or by entering the keyword `UACCESS`.

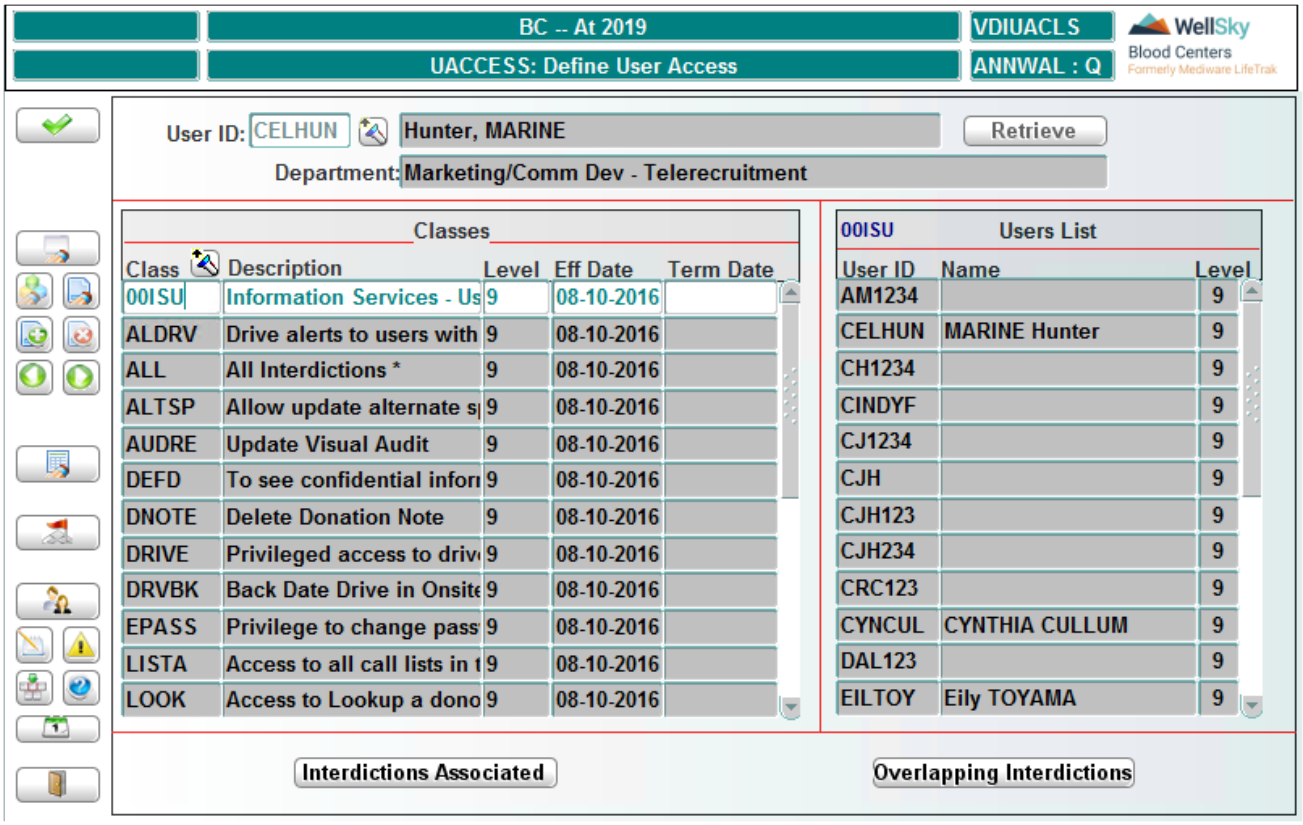

Control Block Fields and Definitions

User ID

Entry is required. Enter the user ID or select from the LOV. Once a valid user is selected or entered, the user's name and department automatically display.

Retrieving Data

Click **Retrieve** to display data for the user:

- In the Classes block, all access classes the user is associated to are retrieved.
- In the Users List block, all users and their access level within that class display for the selected access class.

Use this screen to do the following:

- Add new access class associations
- Grant new levels of access or modify existing access levels
- Terminate associations that are no longer required

Adding a New Access Class Association

Enter the following data:

Class

Entry is required. Enter the access class or select from the LOV. Once a valid non-duplicated class is entered or selected, the description automatically displays.

Level

Entry is required. Enter the access level - 0 through 9. An entry of 0 designates no access.

Eff Date

Entry is required. Enter the effective date for the new access in MMDDYYYY format.

Term Date


Entry is optional. Enter a date when the access ends in MMDDYYYY format.

NOTE – Some access classes are dynamic, while others should remain static. The dynamic access classes are those you define internally for your classes of interdictions or properties (attributes).

Access levels determine the ability to view, place or release interdictions or attributes. Each interdiction or attribute is assigned a level. (Refer to Interdiction Codes (INTER) in the *View* field of any code; levels 1-9.) Once the user is in the access class, view capability exists. The user must have at least the same access level (1-9) as the interdiction/attribute to place it. Users assigned a higher level of access than the interdiction/attribute may place or release it. This access control exists in every program or window that allows interdiction/attribute view, placement or release.

The Interdictions Associated Button


Click **Interdictions Associated** to open the Interdictions Attached window. Use this window to view all interdictions or attributes within the highlighted access class. The access level and the effective date in that class for each interdiction or attribute display.

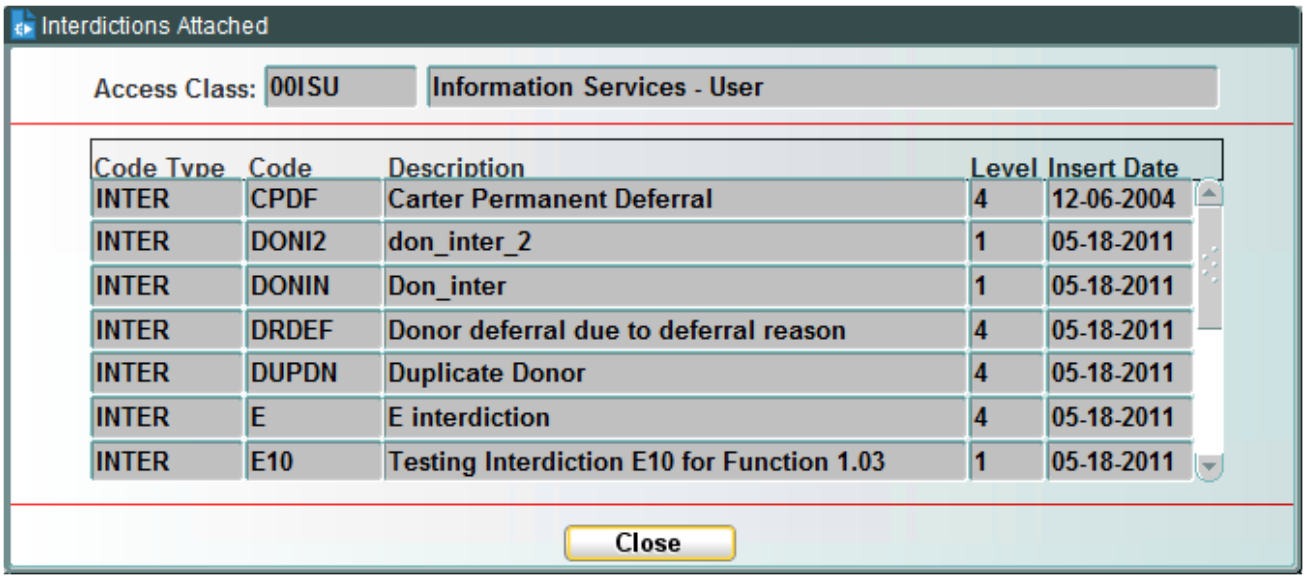

Code Type	Code	Description	Level	Insert Date
INTER	CPDF	Carter Permanent Deferral	4	12-06-2004
INTER	DONI2	don_inter_2	1	05-18-2011
INTER	DONIN	Don_inter	1	05-18-2011
INTER	DRDEF	Donor deferral due to deferral reason	4	05-18-2011
INTER	DUPDN	Duplicate Donor	4	05-18-2011
INTER	E	E interdiction	4	05-18-2011
INTER	E10	Testing Interdiction E10 for Function 1.03	1	05-18-2011

The Overlapping Interdictions Button

Click **Overlapping Interdictions** to open the Overlapping Interdictions window. Use this window to view the interdictions or attributes associated to more than one class.

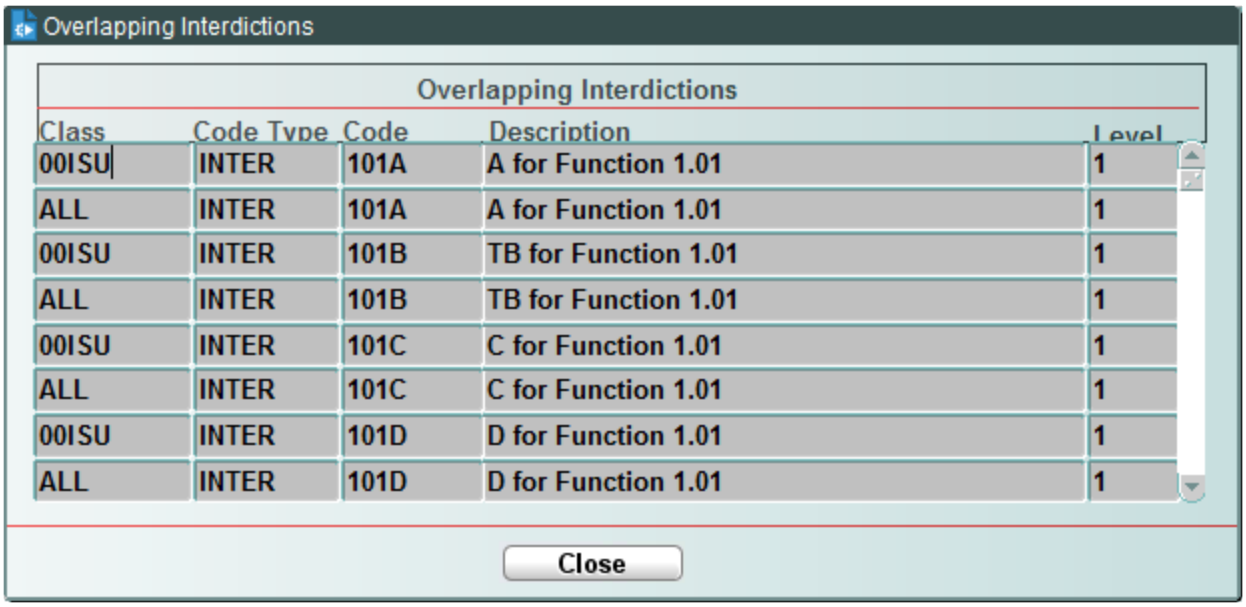

The following access classes must remain static due to their explicit functionality. With the exception of **ALL**, each can be associated to any access level.

Code	Access Class Description
ALL	Access to all interdictions (1-9 level)
ALTSP	Ability to update the alternate sponsor in the Registration program
DCLOG	Future enhancement
DNOTE	Delete notes to donation in Donation window
DRIVE	Ability to create and modify drives other than own
DRVBK	Allow the user to enter a drive date in the past in the On-Site Registration module only
EPASS	Ability to change laptop passwords for mobile staff
LISTA	Future enhancement
OSUPR	Supervisor override in the On-Site Registration module. Allows the user the ability to re-enter data for health history, physical findings and modify registration information
SPKEY	Ability to reprint a donor card in donor look-up
STAFF	Access to the drive sign-off process
TVIEW	Ability to view test results; view ability is associated to the view level, V Level field in Define Tests (TESTS)

WellSky Corporation
Proprietary and confidential

Code	Access Class Description
ULOCK	Allow the user to unlock donor that is locked in the On-Site module
UNLDF	Access to the Unlink Deferral button in function ONPUNTLK in On-Site
UNLUT	Access to Unlink a Unit ID in the function ONPUNTLK in On-Site
UNOTE	Add notes to donation in Donation window
VWSSN	Access to view the SSN of the donor in the list browser (DEIDONBR) program and programs being called from DEIDONBR. The following programs will check the access to SSN: DEIDONBR, DCWDCOMM, DNWDFIND, DPWDEMGR, DPWDNDTL, DPWELGBY, DRWENTRY, DSISCHLD, DRWDEFRL

At Commit

All changes are saved to the database upon commit.

What to Do Next

There is no next step.

Modify User Access within a Group (MUAG)

Intended Use

Use this screen to modify a user's access level within a working/functional group.

Limitations


Only the access level to functions within a working/functional group can be modified. If the user changes to a different working/functional group, you must use Add System User (ADDUSER).

Prerequisites

The user must already be associated to a working/functional group.

Accessing the Screen

Access this screen from the User Access Administration menu or by entering the keyword `MUAG`.

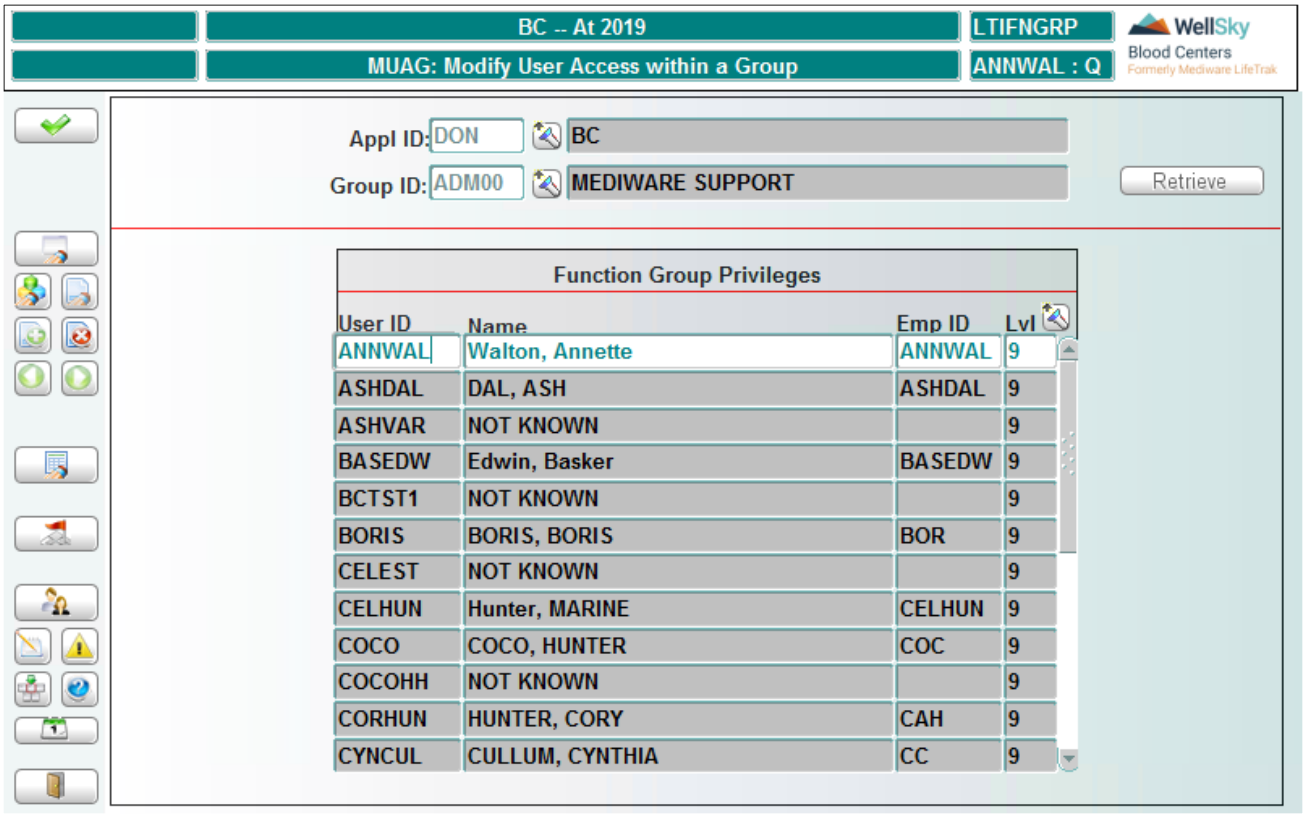

Control Block Fields and Definitions

Appl ID

Entry is required. Enter the application ID or select from LOV.

Group ID

Entry is required. Enter the user's working/functional group or select from the LOV.

Retrieving Data

Click **Retrieve** to display all of the users associated to that group and their level.

Only the *Level* field can be updated. To modify the level, enter the new level ID or select from the LOV.

At Commit

The user will have access associated to the designated group and level, as defined in Maintain Menu Items (MENUITM).

What to Do Next

There is no next step.

Access Class by Inter Code Query (ACCQ)

Intended Use

Use this query screen to view the access classes to which a particular interdiction or attribute is associated and the users and their access level in that class. Also, you can display all interdictions associated to the class.

Limitations


If an interdiction or attribute is not associated to a class the query will not retrieve data. This is a query only screen, no updates are allowed.

Prerequisites

Interdictions must be defined and associated to an access class.

Accessing the Screen

Access this screen from the User Access Administration menu or by entering the keyword ACCQ.

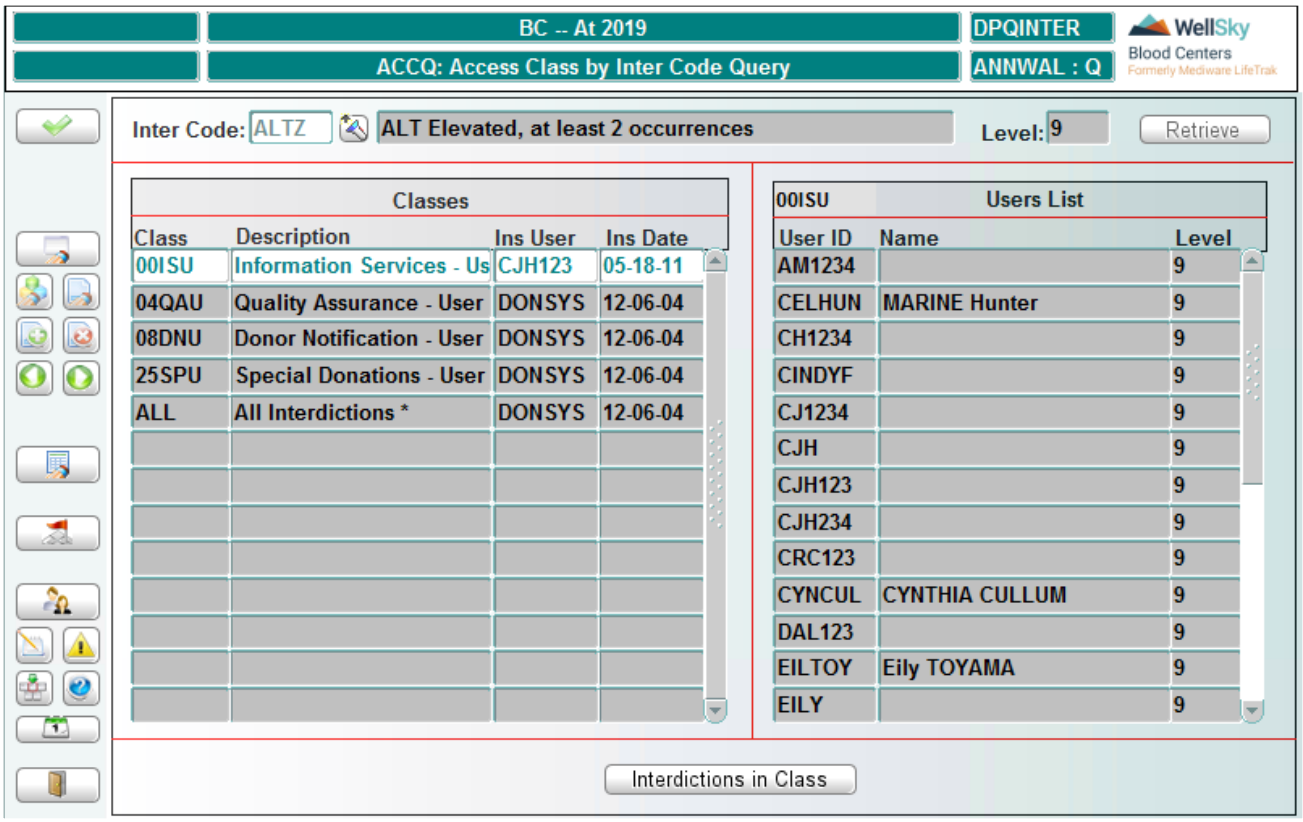

Control Block Fields and Definitions

Inter Code

Entry is required. Enter the interdiction (or attribute) code or select from the LOV. Once a valid code is entered or selected, the description and the level automatically display.


Click **Retrieve** to display the information associated with that code.

The Classes block displays the access classes to which the interdiction is associated, who made the association and the insert date.

The Users List block displays the users associated to the highlighted access class by user ID/name and their access level within that class.

The Interdictions in Class Button

Click **Interdictions in Class** to open the Interdictions Attached window and display all interdictions associated to the highlighted access class:

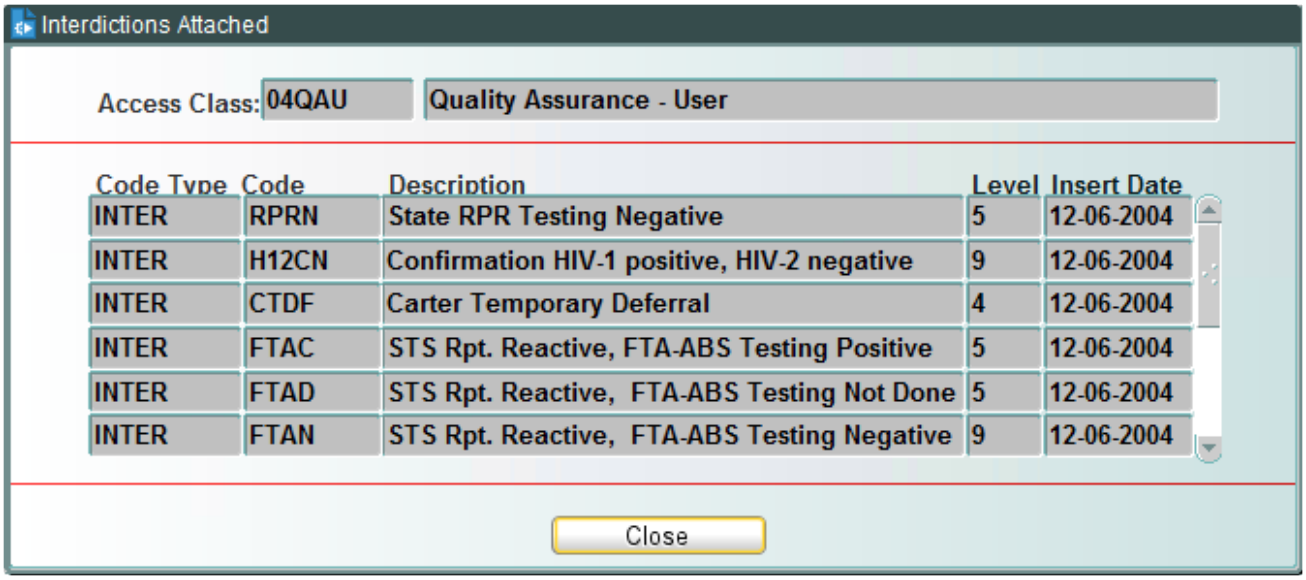

Code Type	Code	Description	Level	Insert Date
INTER	RPRN	State RPR Testing Negative	5	12-06-2004
INTER	H12CN	Confirmation HIV-1 positive, HIV-2 negative	9	12-06-2004
INTER	CTDF	Carter Temporary Deferral	4	12-06-2004
INTER	FTAC	STS Rpt. Reactive, FTA-ABS Testing Positive	5	12-06-2004
INTER	FTAD	STS Rpt. Reactive, FTA-ABS Testing Not Done	5	12-06-2004
INTER	FTAN	STS Rpt. Reactive, FTA-ABS Testing Negative	9	12-06-2004

What to Do Next

There is no next step.

User Access to Menus and Interdictions (MENUQ)

Intended Use

Use this query screen to view a user's association to a working/functional group, their level within the group, the programs in the group and the access class and level for the user. You can also display other users within the working/functional group, other users in the access class and interdictions associated to an access class. This is applicable to each Blood Centers subsystem - Donor, Lab, and Distribution.

Limitations

Query only; no updates allowed.

Interdiction access is limited to Donor only.


Prerequisites

The user must be associated to a working/functional group and an access class.

WellSky Corporation
Proprietary and confidential

Accessing the Screen

Access this screen from the User Access Administration menu or by entering the keyword MENUQ.

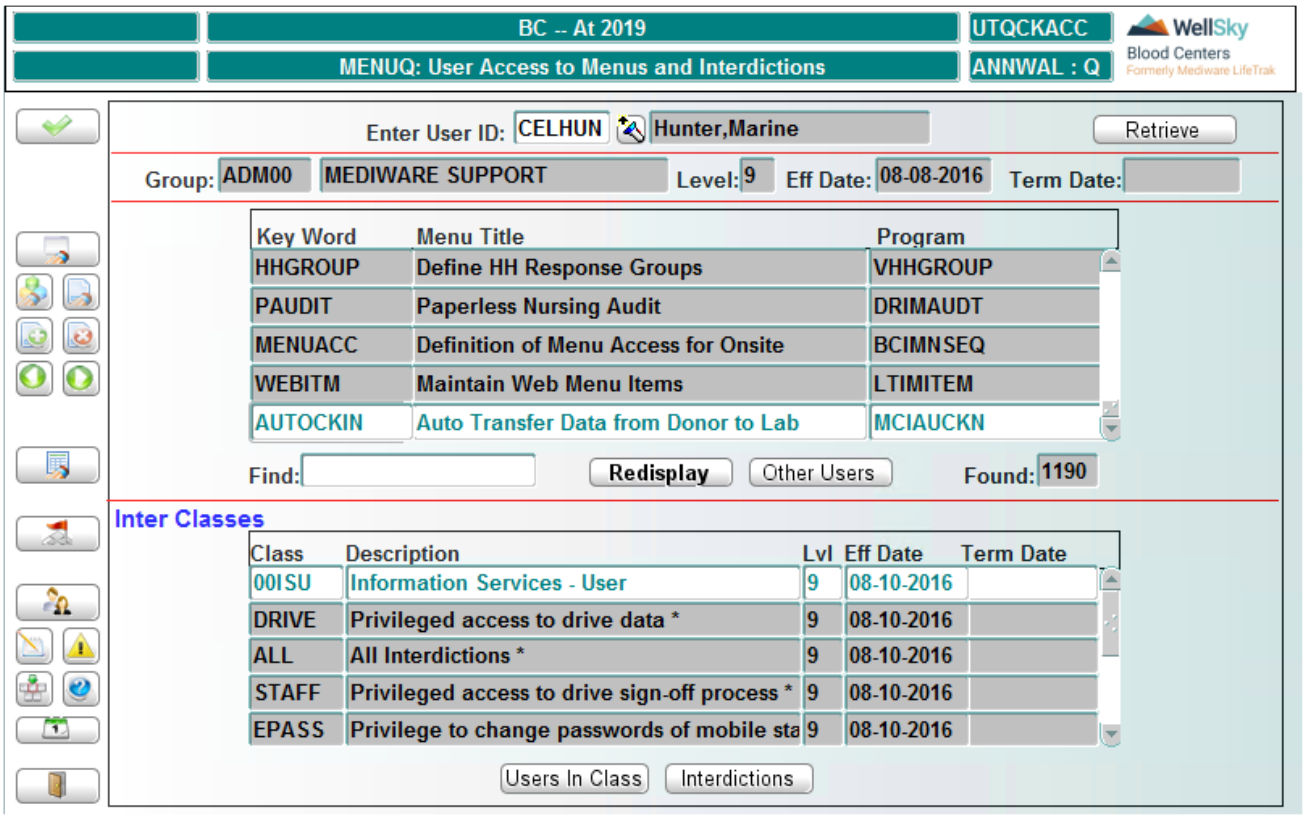

Control Block Fields and Definitions

Enter User ID

Entry is required. Enter the user ID or select from the LOV. Once a valid user ID is entered or selected, the user name automatically displays.

Retrieving Data

Click **Retrieve** to display full user access data by user group and access class.

In the User Group Block

Each menu item that is associated to the working/functional group displays by keyword, menu title and program. The number of menu items accessible displays in the *Found* field.

The Find Field


Enter identifying data in the *Find* field to narrow a search for a particular menu item and press **ENTER**. The items returned will contain the search criterion. The *Found* field will reflect the number of items in the shortened search.

The Redisplay Button

Click **Redisplay** to retrieve the original list.

The Other Users Button

Click **Other Users** to open the Other Users with this Menu Access Level window and display other users who have access to the selected menu item.

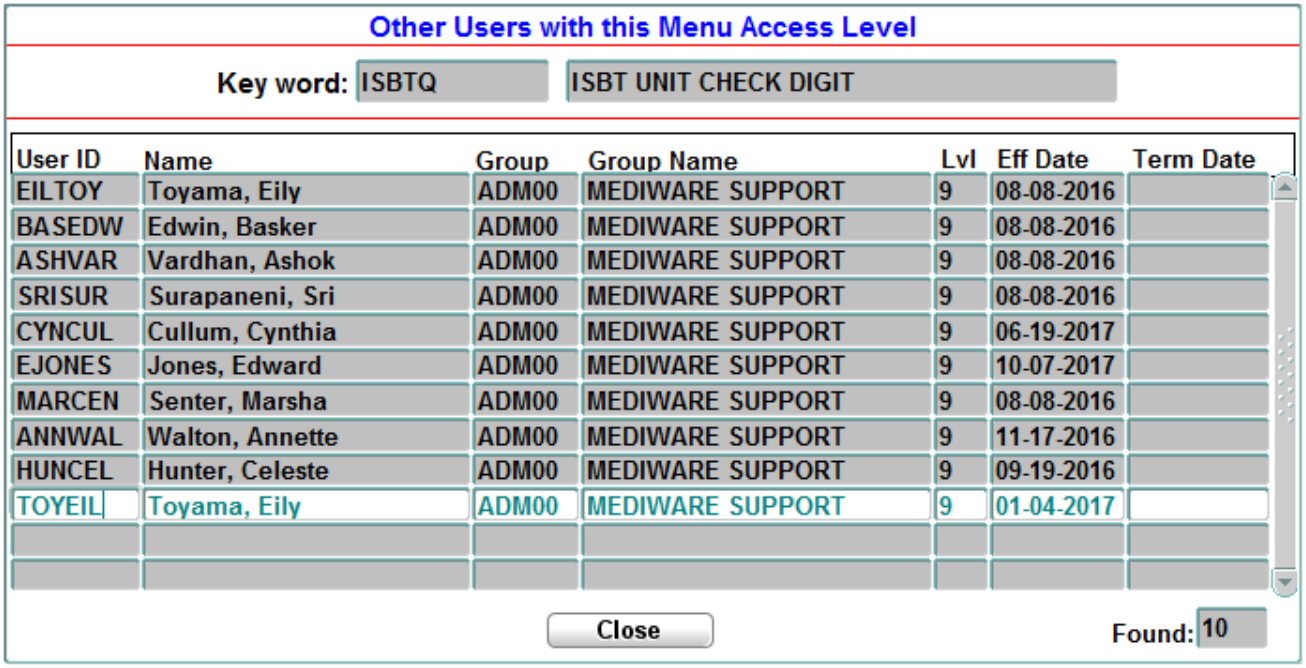

Other Users with this Menu Access Level

Key word: ISBTQ ISBT UNIT CHECK DIGIT

User ID	Name	Group	Group Name	Lvl	Eff Date	Term Date
EILTOY	Toyama, Eily	ADM00	MEDIWARE SUPPORT	9	08-08-2016	
BASEDW	Edwin, Basker	ADM00	MEDIWARE SUPPORT	9	08-08-2016	
ASHVAR	Vardhan, Ashok	ADM00	MEDIWARE SUPPORT	9	08-08-2016	
SRISUR	Surapaneni, Sri	ADM00	MEDIWARE SUPPORT	9	08-08-2016	
CYNCUL	Cullum, Cynthia	ADM00	MEDIWARE SUPPORT	9	06-19-2017	
EJONES	Jones, Edward	ADM00	MEDIWARE SUPPORT	9	10-07-2017	
MARCEN	Senter, Marsha	ADM00	MEDIWARE SUPPORT	9	08-08-2016	
ANNWAL	Walton, Annette	ADM00	MEDIWARE SUPPORT	9	11-17-2016	
HUNCEL	Hunter, Celeste	ADM00	MEDIWARE SUPPORT	9	09-19-2016	
TOYEIL	Toyama, Eily	ADM00	MEDIWARE SUPPORT	9	01-04-2017	

Close Found: 10


In the Inter Classes Block

In the Inter Classes block, each access class that is associated to the user displays by class, description, level, effective date, and termination date.

The Users in Class Button


Click **Users in Class** to open the Other Users in this Class window. The users display by user ID, name, group, group name, level and effective date:

WellSky Corporation
Proprietary and confidential

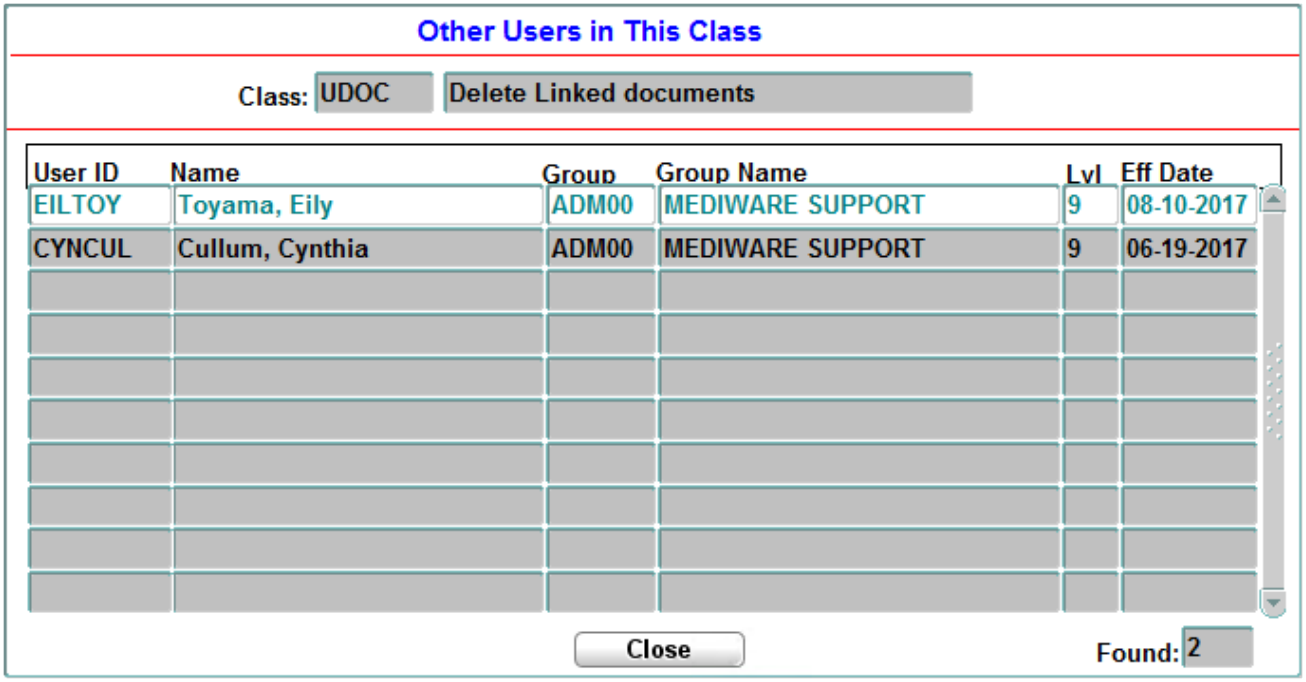

The Interdictions Button

Click **Interdictions** to open the Interdictions window and display all interdictions or attributes associated to the selected access class:

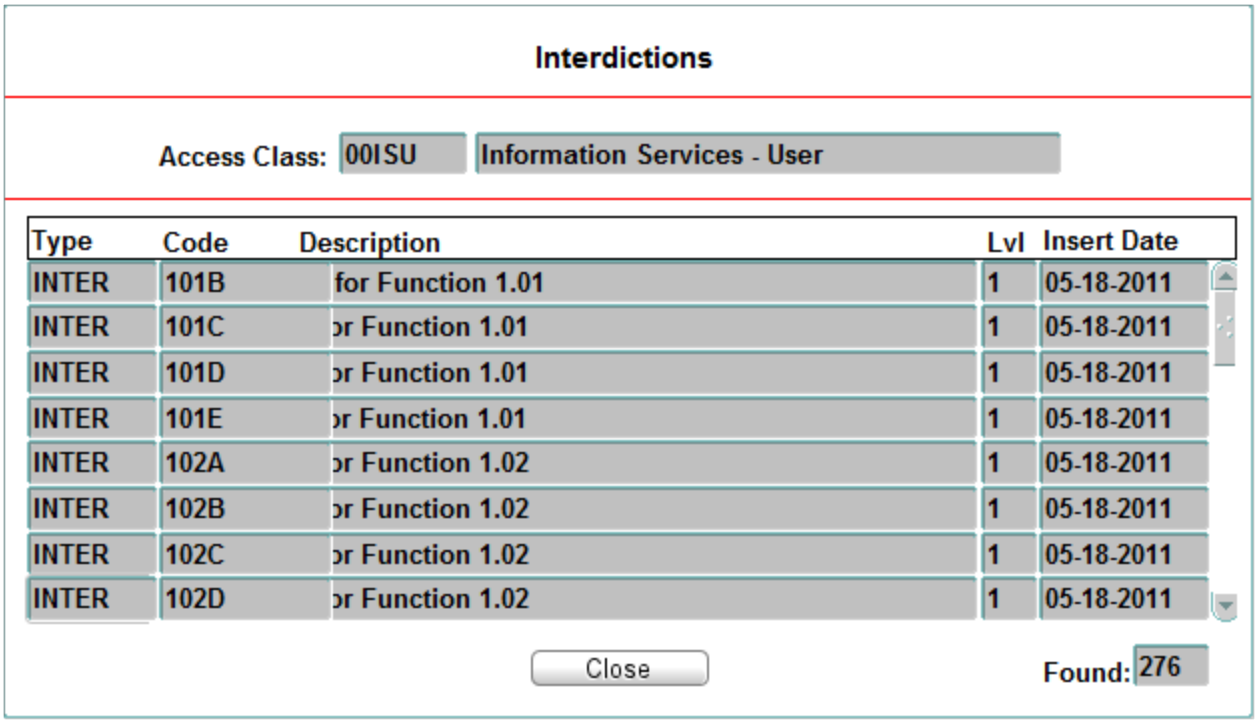

At Commit

No changes can be made in this screen.

What to Do Next

There is no next step.

WellSky Corporation
Proprietary and confidential

4

Chapter 4 - Recruitment Administration

4.1 Introduction 232
4.2 Recruitment Administration Functions 233
4.2.1 Define Resource Master List (ALLRES) 233
4.2.2 Define Resource Availability Rules (RESRULE) 235
4.2.3 Define Day Status Codes (DAYSTAT) 238
4.2.4 Create and Maintain Territories (TERINFO) 239
4.2.5 Define Collection Goals by Month (GOALMON) 241
4.2.6 Define Collection Goals by Date Range (GOALDT) 243
4.2.7 Define Default Drive Checklist (DEFCLIST) 246
4.2.8 Define Drive Category Rules (DRULE) 247
4.2.9 Maintain Vehicle Details (VEHICLE) 249

4.1 Introduction


The Recruitment Administration menu is that portion of Donor designed to do the following:

- Establish recruitment resources for use by recruitment users and supervisors on a daily/monthly/annual basis.
- Establish upper and lower limits for availability of recruitment resources.
- Establish valid territories to be associated to recruiters.
- Establish various goals for tracking and monitoring overall performance of the following:
  - Recruiter
  - Donor
  - Telerecruiter
  - Territory
  - Sponsor goals
  - Fixed site
  - Institution
  - Facility goals
  - Fixed goals
  - Field goals
- Establish a standard checklist of action items to be automatically assigned to newly created drives.
- Establish drive category rules that will or will not allow the creation of drives, based on user defined categories (for example, church, high school) and a specified number of drives allowed per category.

WellSky Corporation
Proprietary and confidential

4.2 Recruitment Administration Functions

These functions are accessed from the following menu:

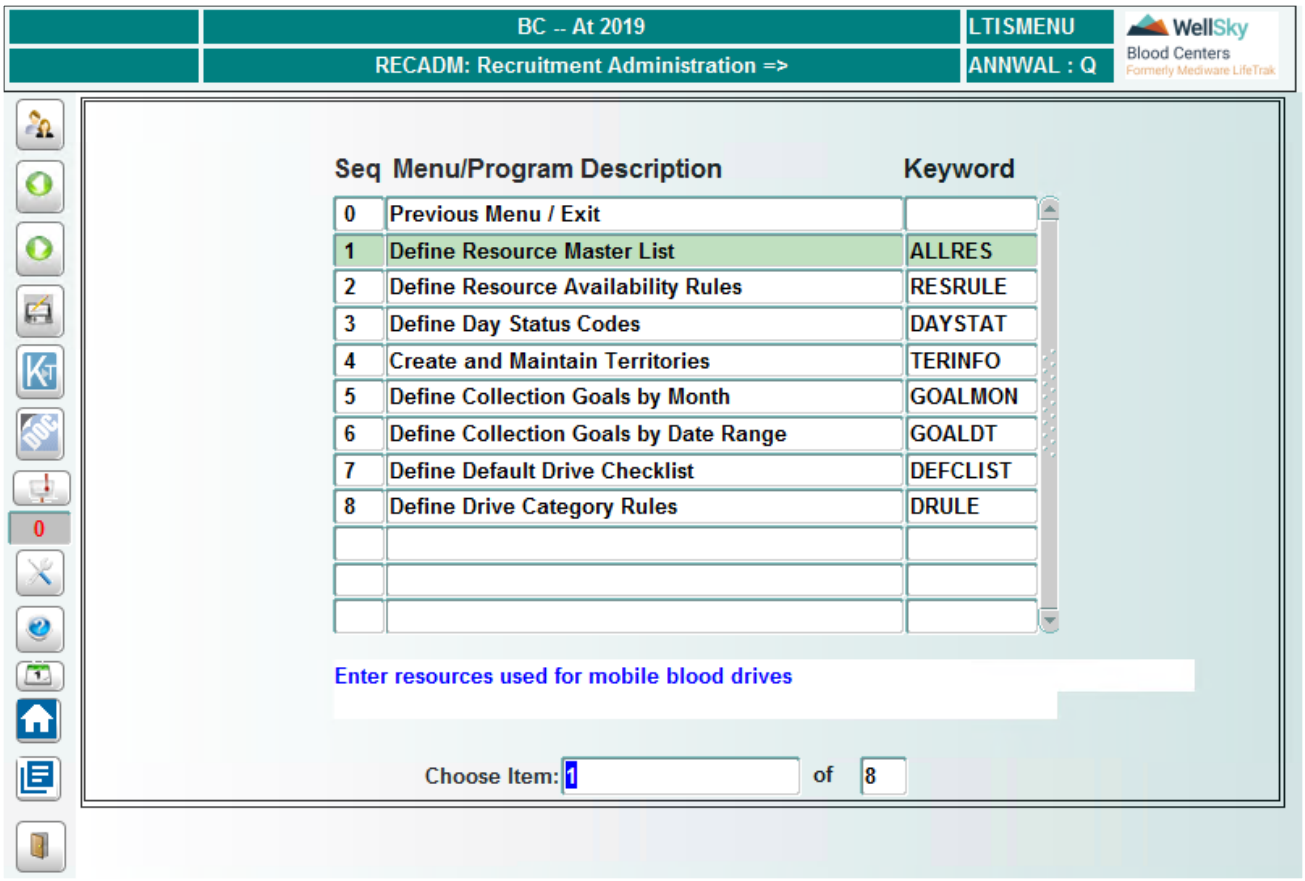

4.2.1 Define Resource Master List (ALLRES)

Intended Use

Use this screen to define the resource master list.

Limitations


None

Prerequisites

Source types must be defined in Master Code RESTY.

Accessing the Screen

Access this screen from the Recruitment Administration menu or by entering the keyword `ALLRES`.

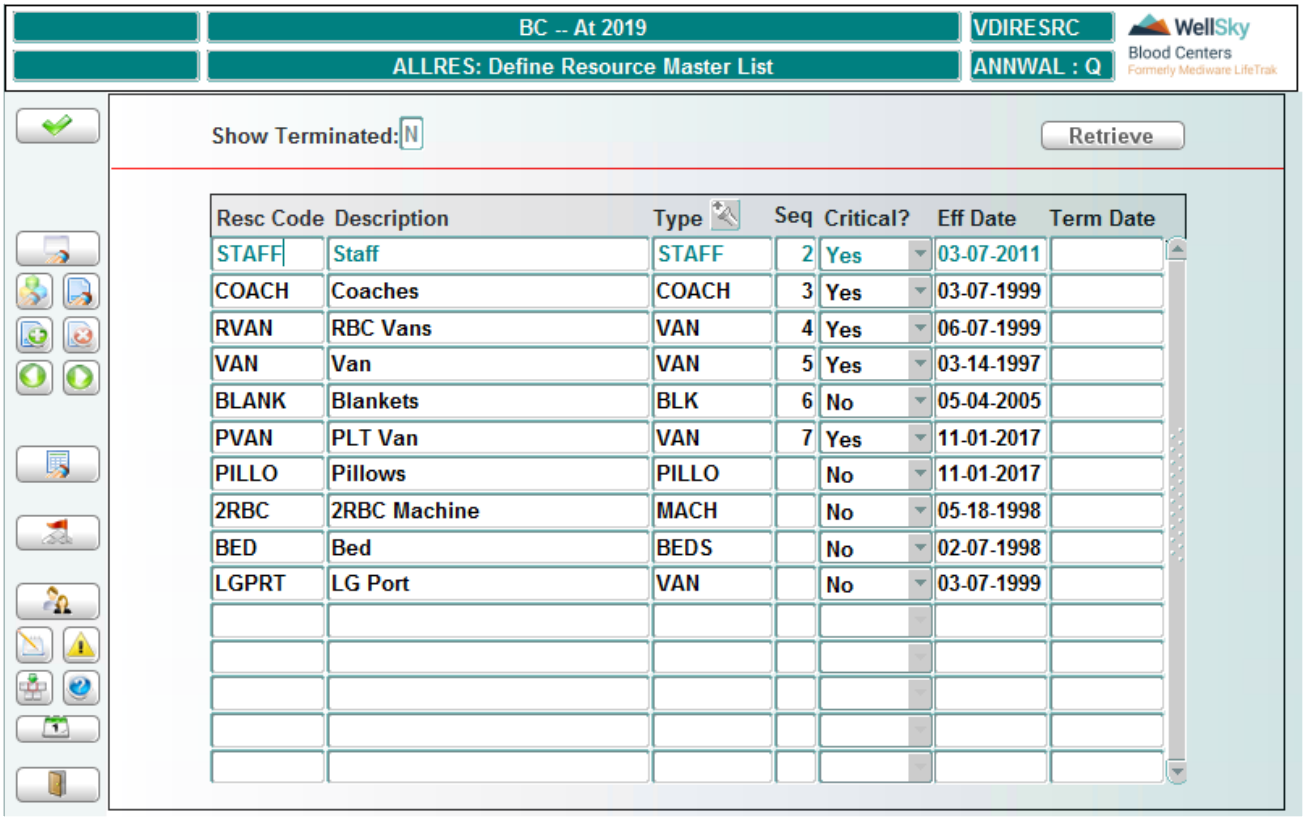

Control Block Fields and Definitions

Show Terminated

Entry is required. Default is N (No). Enter Y (Yes) to display terminated resource codes along with codes in effect.

Retrieving Data

Click **Retrieve** to display the resource codes.

To Add or Modify Data

Resc Code

Entry is required. Enter a resource code. This field cannot be modified for existing records.

Description

Entry is required. Enter a resource code description.

Type

Entry is required. Enter a resource type or select from the LOV.

Seq

Entry is optional. Enter a whole number for the sequence.

WellSky Corporation
Proprietary and confidential

Critical?
Entry is required. Select Yes or No from the LOV.

Eff Date
Entry is required. Enter the effective date in MMDDYYYY format. Must be a current or future date. This field cannot be modified for existing records.

Term Date
Entry is optional. Enter the termination date in MMDDYYYY format. Must be a current or future date. This field cannot be modified for existing records.

At Commit
All of the changes are saved to the database.

What to Do Next
There is no next step.

4.2.2 Define Resource Availability Rules (RESRULE)


Intended Use
Use this screen to specify the maximum number of resources (staff, vans, etc.) available each day of the week for scheduling drives.

NOTE – The system subtracts unavailable resources on any given date from the maximum number entered in this screen, thereby indicating reliable resource availability data for drive scheduling purposes.

Limitations
None

Prerequisites
For the resource code LOV to populate, the codes must be defined in Define Resource Master List (ALLRES).

Accessing the Screen
Access this screen from the Recruitment Administration menu or by entering the keyword `RESRULE`.

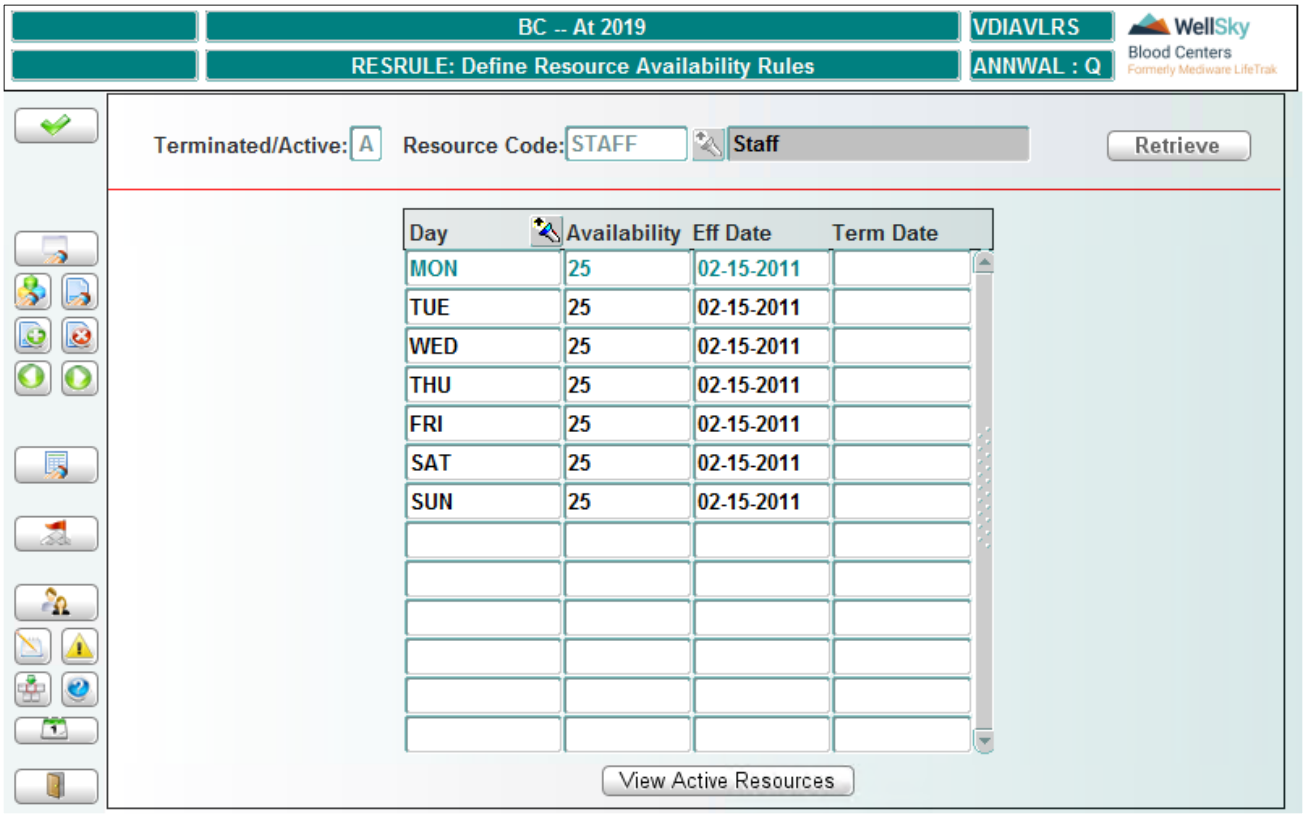

Control Block Fiends and Definitions

Terminated/Active

Entry is required. Enter `A` to view active resource availability days, `T` to view terminated resource days.

Resource Code

Entry is required. Enter a resource code or select from the LOV. Once a valid code is entered or selected, the description automatically displays.

Retrieving Data

Click **Retrieve** to display availability for the specified resource:

To Add or Modify Data

Day

Entry is required. Enter a day of the week or select from the LOV. This field cannot be modified for existing records.

Availability

Entry is required. Enter the maximum availability as a whole number.

WellSky Corporation
Proprietary and confidential

Eff Date


Entry is required. Enter the effective date in MMDDYYYY format. Must be a current or future date. This field cannot be modified for existing records.

Term Date

Entry is optional. Enter the termination date in MMDDYYYY format. Must be a current or future date. This field cannot be modified for existing records.

The View Active Resources Button

Click **View Active Resources** to open the Active Resources window:

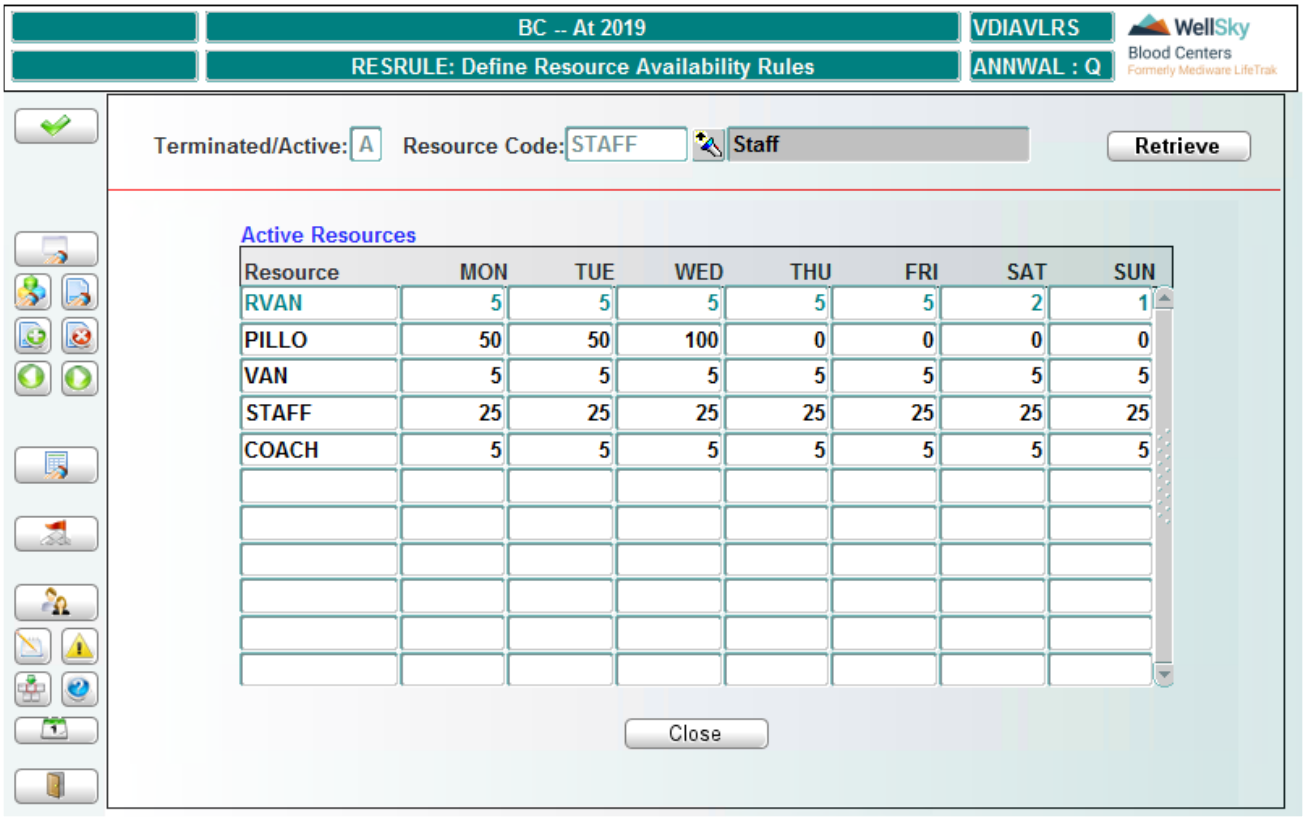

Use this window to view resources that are currently active for each day of the week. Click **Close** to return to the main screen.

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step.

4.2.3 Define Day Status Codes (DAYSTAT)

Intended Use

Use this screen to define the limits for each status for each resource code.

Limitations


New status code records cannot be created from this screen.

Prerequisites

- The resource must already be defined in Define Resource Master List (ALLRES).
- Day status codes must be defined in Master Code DYSTS.

Accessing the Screen

Access this screen from the Recruitment Administration menu or by entering the keyword `DAYSTAT`.

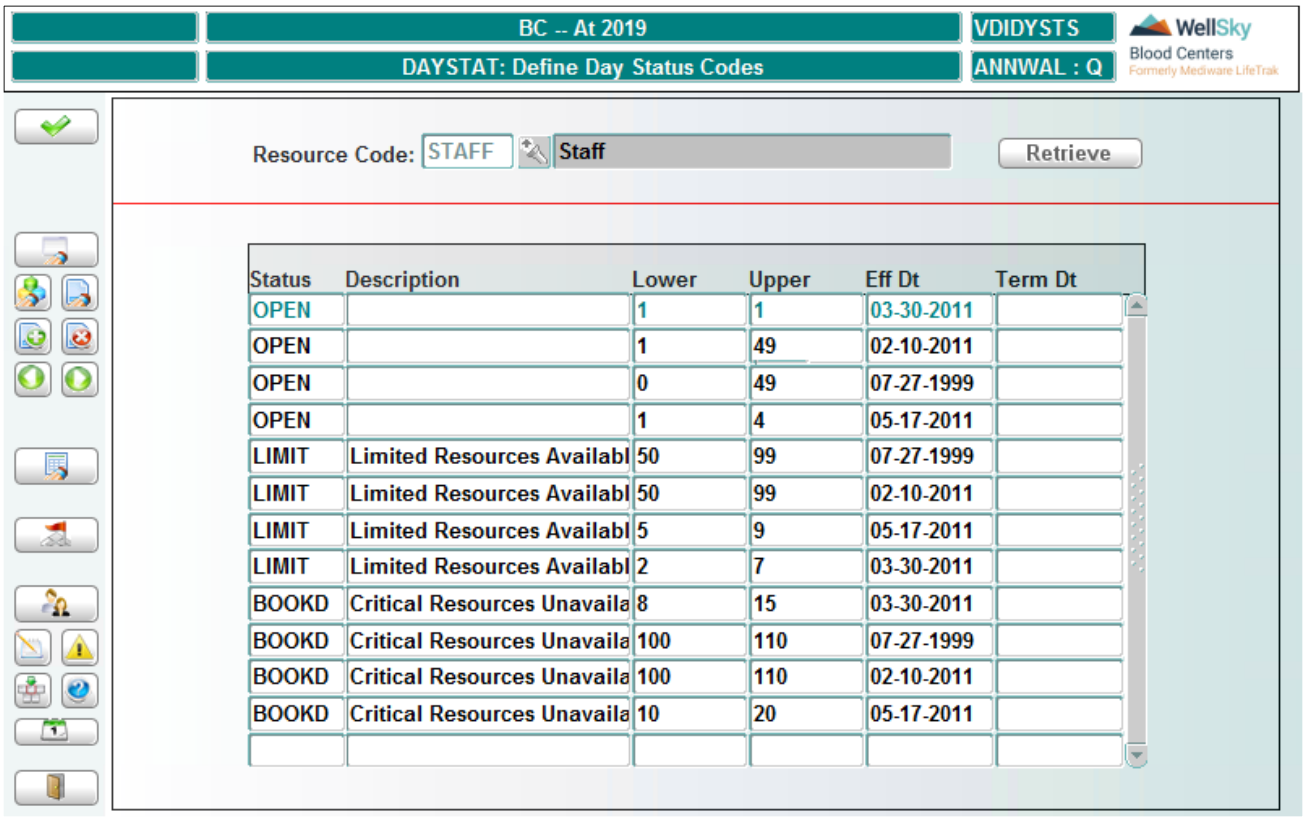

Control Block Fields and Definitions

Resource Code

Entry is required. Enter a resource code or select from the LOV.

WellSky Corporation
Proprietary and confidential

Retrieving Data

Click **Retrieve** to display records associated with the specified resource code.

To Modify Existing Data

Status

Display only. This field is protected against update. The system assigns each code three levels of status: open, limited, and booked.

Description

Display only. This field is protected against update.

Lower

Entry is required. Enter the value for the lower limit that defines that resource status.

Upper

Entry is optional. Enter the value for the upper limit that defines that resource status.

Eff Dt

Entry is required. Enter the effective date in MMDDYYYY format. Default is the system date.

Term Dt

Entry is optional. Enter the termination date in MMDDYYYY format.



NOTE – The lower limit for the Limited status and Booked status must be one higher than the upper limit for the previous status. For example, if you put 5 for the upper limit for the Open status, then the lower status for the Limited status must be 6.

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step.

4.2.4 Create and Maintain Territories (TERINFO)

Intended Use

Use this screen to create and maintain recruitment territories.

Limitations


None

Prerequisites

Group must be defined in Master Code TRGRP and types must be defined in Master Code TRRTY to apply in this screen.

Accessing the Screen

Access this screen from the Recruitment Administration menu or by entering the keyword `TERINFO`.

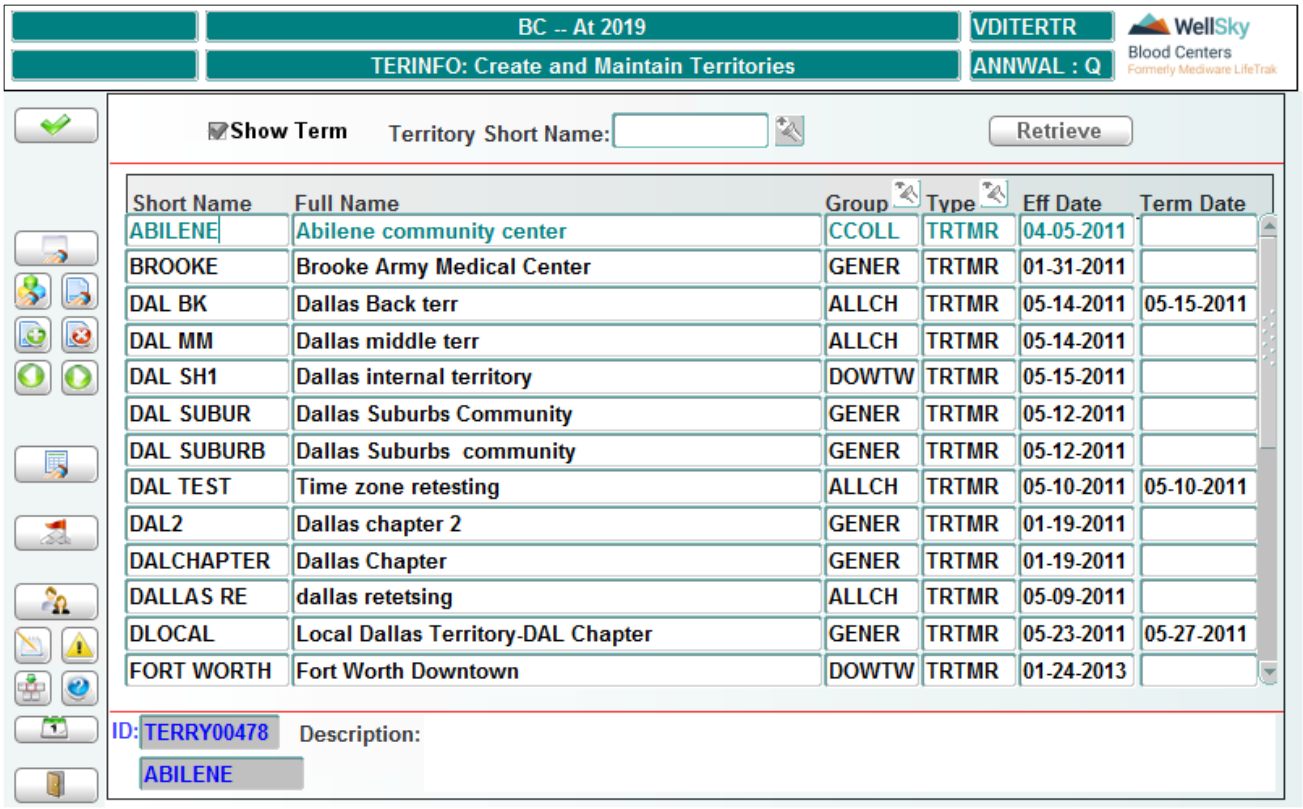

Control Block Fields and Definitions

Show Term

Check this option to show terminated territories.

Territory Short Name

Entry is optional. Enter a territory or select from the LOV to limit the data search results.

Retrieving Data

Click **Retrieve** to display territories according to the specified criteria.

WellSky Corporation
Proprietary and confidential

To Add or Modify Territories

All data can be modified for existing territories. To add a new territory, place your cursor on a blank line. When you click a blank line, a new territory ID is assigned and displays in the *ID* field in the lower left corner of the screen. Enter the following:

Short Name

Entry is required. Enter the short name for the territory, up to ten characters. Must not duplicate an existing territory's short name.

Full Name

Entry is required. Enter the full name for the territory.

Group

Entry is optional. Enter a territory group or select from the LOV.

Type

Entry is required. Enter a territory type or select from the LOV.

Eff Date

Entry is required. Enter the effective date in e MMDDYYYY format. Date cannot be prior to system date.

Term Date

Entry is optional. Enter the termination date in MMDDYYYY format.

Description

Entry is optional. Enter a free-form description for the territory, up to 248 characters.

At Commit

All of the changes are saved to the database.

What to Do Next

Sponsors may be assigned to territories listed in this screen that are within their effective dates.

4.2.5 Define Collection Goals by Month (GOALMON)

Intended Use

Use this screen to enter collection goals for recruiter, territory, sponsor, center, or donor. Field goals may also be entered.

Limitations


New goal types cannot be defined in this screen.

Prerequisites

- The entity for which collection goals are to be defined must exist in the database.
- Goal types must be defined in Master Code GOALS.

Accessing the Screen

Access this screen from the Recruitment Administration menu or by entering the keyword `GOALMON`.

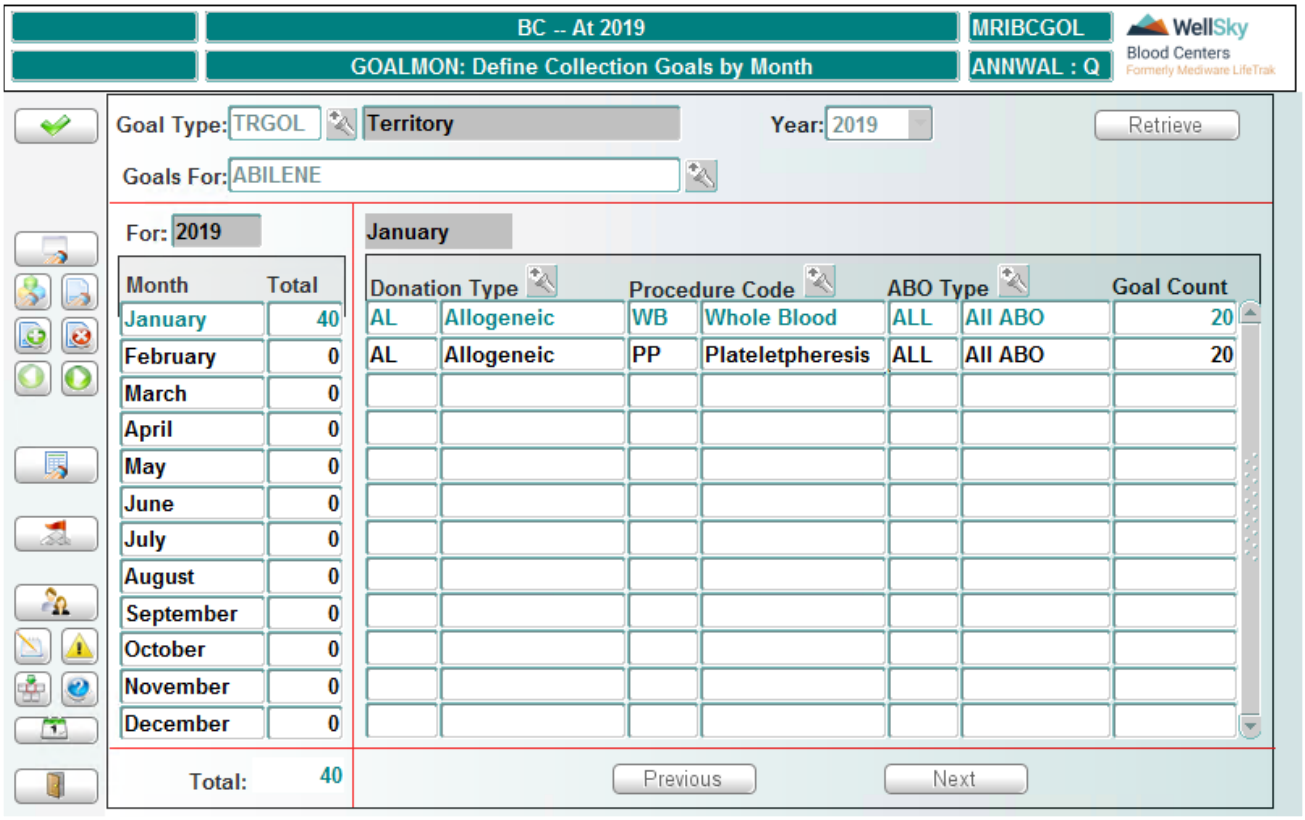

Control Block Fields and Definitions

Goal Type

Entry is required. Enter a goal type or select from the LOV. Once a valid goal type is entered or selected, the description automatically displays.

Year

Entry is required. Select a year from the LOV.

Goals For

Entry is required. Enter a valid code or select from the LOV. Valid entries for this field depend on the specified goal type. For some goal types, the *Goals For* field automatically displays a default.

WellSky Corporation
Proprietary and confidential

Retrieving Data

Click **Retrieve** to display records according to the specified criteria.

The existing total for each month displays on the left side of the screen in the List Block. Details display for the selected month in the Details Block.

To Add or Modify Data

Click to select a line in the Details Block and enter the following data:

Donation Type

Entry is optional. Enter a donation type or select from the LOV. Once a valid donation type is entered or selected, the description automatically displays.

Procedure Code

Entry is optional. Enter a procedure code or select from the LOV. Once a valid procedure code is entered or selected, the description automatically displays.

ABO Type

Entry is required. Enter an ABO type or select from the LOV. Once a valid ABO type is entered or selected, the description automatically displays. Default is NONE (No ABO).

Goal Count

Entry is required. Enter a whole number for the goal count.

After entering the goal count data, the new details are reflected in the monthly total in the List Block.

The Previous and Next Buttons

Click **Previous** and **Next**to move from month to month without moving the cursor from the Details Block.

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step.

4.2.6 Define Collection Goals by Date Range (GOALDT)

Intended Use

Use this screen to define collection goals for any time frame desired, such as the following:

- Date range
- Specific days of the week within a date range

- Donation type
- Procedure type
- Blood type

Limitations


New goal types cannot be defined in this screen.

Prerequisites

- The entity for which collection goals are to be defined must exist in the database.
- Goal types must be defined in Master Code GOALS.

Accessing the Screen

Access this screen from the Recruitment Administration menu or by entering the keyword `GOALDT`.

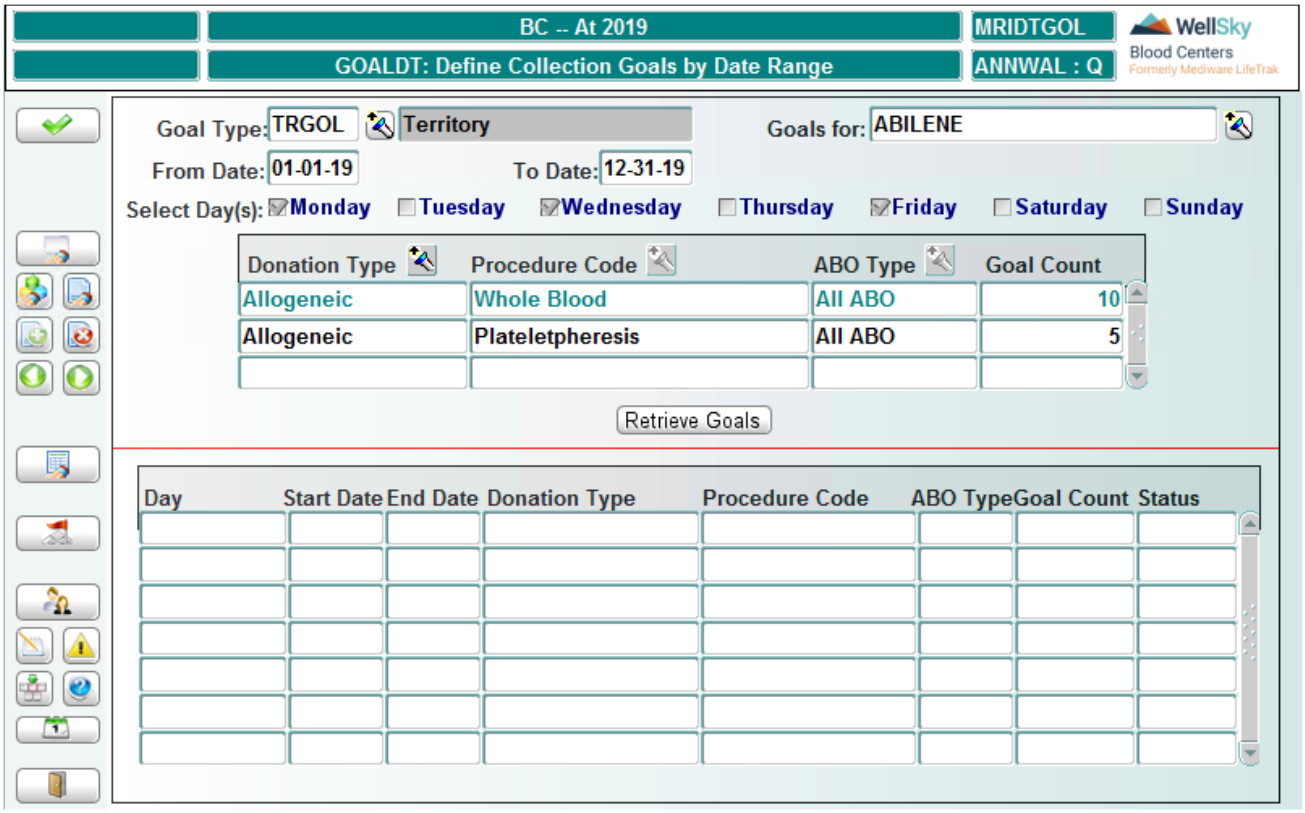

Control Block Fields and Definitions

Goal Type

Entry is required. Enter a goal type or select from the LOV. Once a valid goal type is entered or selected, the description automatically displays.

WellSky Corporation
Proprietary and confidential

Goals For
Entry is required. Enter a valid code or select from the LOV. Valid entries for this field depend on the specified goal type. For some goal types, the *Goals For* field automatically displays a default.

From Date
Entry is required. Enter a starting date for the search in MMDDYY format. Date cannot be prior to 365 days before the system date.

To Date
Entry is required. Enter an ending date for the search in MMDDYY format.

Retrieving Data
Click **Retrieve Goals** to display records according to the specified criteria.

To Add or Modify Data
Existing goals display in the Existing Goals Block. The only data field that can be modified in this block is Goal Count. To define goals for the specified date range, enter the following data in the Goal Definition Block:

Select Day(s)
Click in the box next to the days of the week to include. If no days are selected, the goals defined apply to all days within the specified date range.

Donation Type
Entry is required. Enter a donation type or select from the LOV.

Procedure Code
Entry is required. Enter a procedure code or select from the LOV.

ABO Type
Entry is required. Enter an ABO type or select from the LOV.

Goal Count
Entry is required. Enter a whole number for the goal count.

Committing the Goals
Click **Create Goals** to commit the new goals to the database. The new goal data displays in the Existing Goals Block with a status of NEW.

At Commit
All of the changes are saved to the database.

What to Do Next

There is no next step.

4.2.7 Define Default Drive Checklist (DEFCLIST)

Intended Use

Use this screen to maintain the default drive checklist that is generated with creation of all mobile drives.

Limitations


None

Prerequisites

Action codes must be defined in Master Code ACTCD.

Accessing the Screen

Access this screen from the Recruitment Administration menu or by entering the keyword `DEFCLIST`.

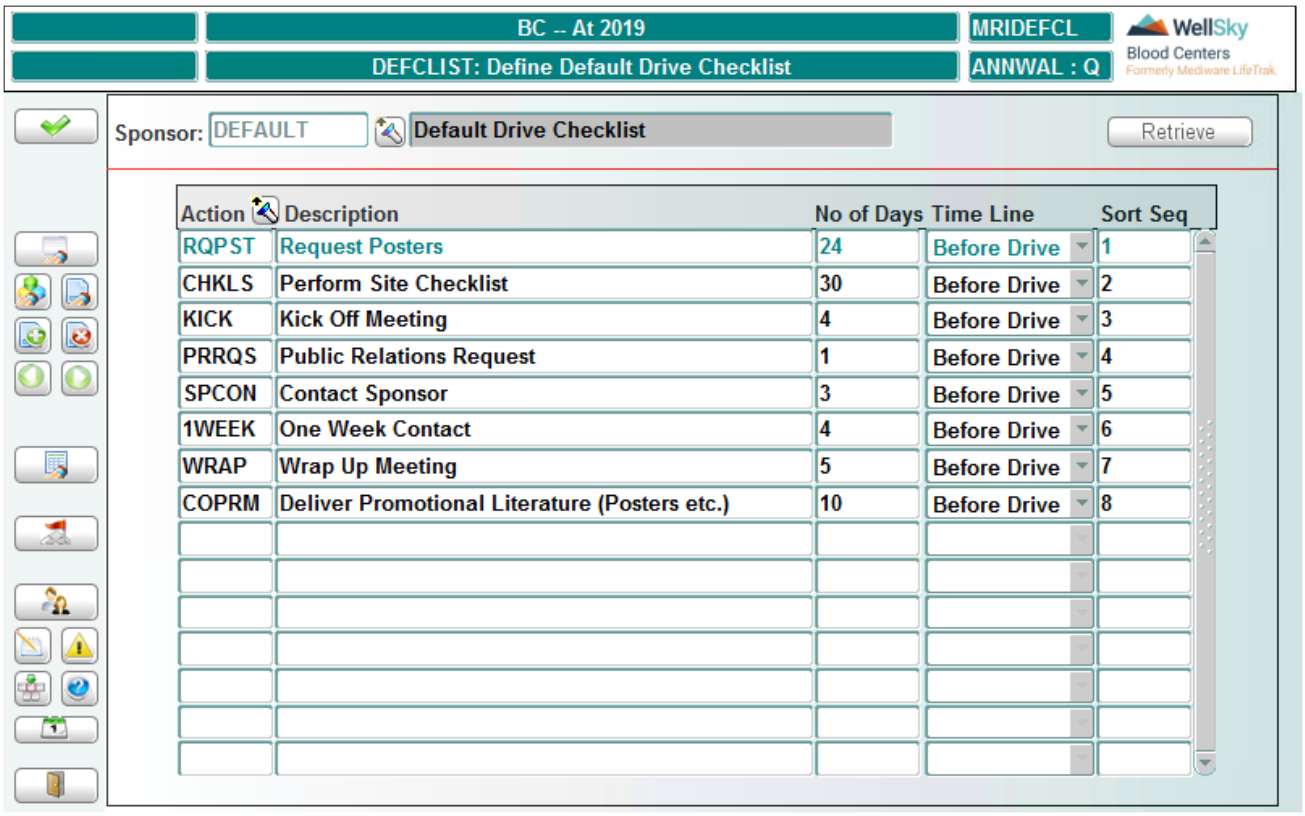

WellSky Corporation
Proprietary and confidential

NOTE – The default drive checklist data automatically displays. There is no data to enter in the Control Block.

To Modify or Add Data

Action

Entry is required. Enter an action or select from the LOV. Once a valid action is entered or selected, the description automatically displays. Duplicate action codes are not allowed.

No of Days

Entry is required. Enter the number of days to perform the action prior to or after the drive date. Enter `0` if you want the action to take place on the drive date.

Time Line

Entry is required. Select a time line from the drop-down list. If you entered 0 in the *No of Days* field, then you must select On Drive Date for the *Time Line* field.

Sort Seq

Entry is required. Default is the next available slot for the sort. For a different sort order, enter the sort sequence for the action.

At Commit

All of the changes are saved to the database.

What to Do Next

The default checklist is automatically assigned to each newly scheduled drive. The checklist may be modified for any sponsor by using the Customize Checklist for a Sponsor (SPONCHK) screen.

4.2.8 Define Drive Category Rules (DRULE)

Intended Use

Use this screen to establish system rules for the number of drives of specific drive category combinations that can be scheduled for a single day.

Limitations


None

Prerequisites

Drive categories must be defined in Master Code DRCAT.

Accessing the Screen

Access this screen from the Recruitment Administration menu or by entering the keyword DRULE.

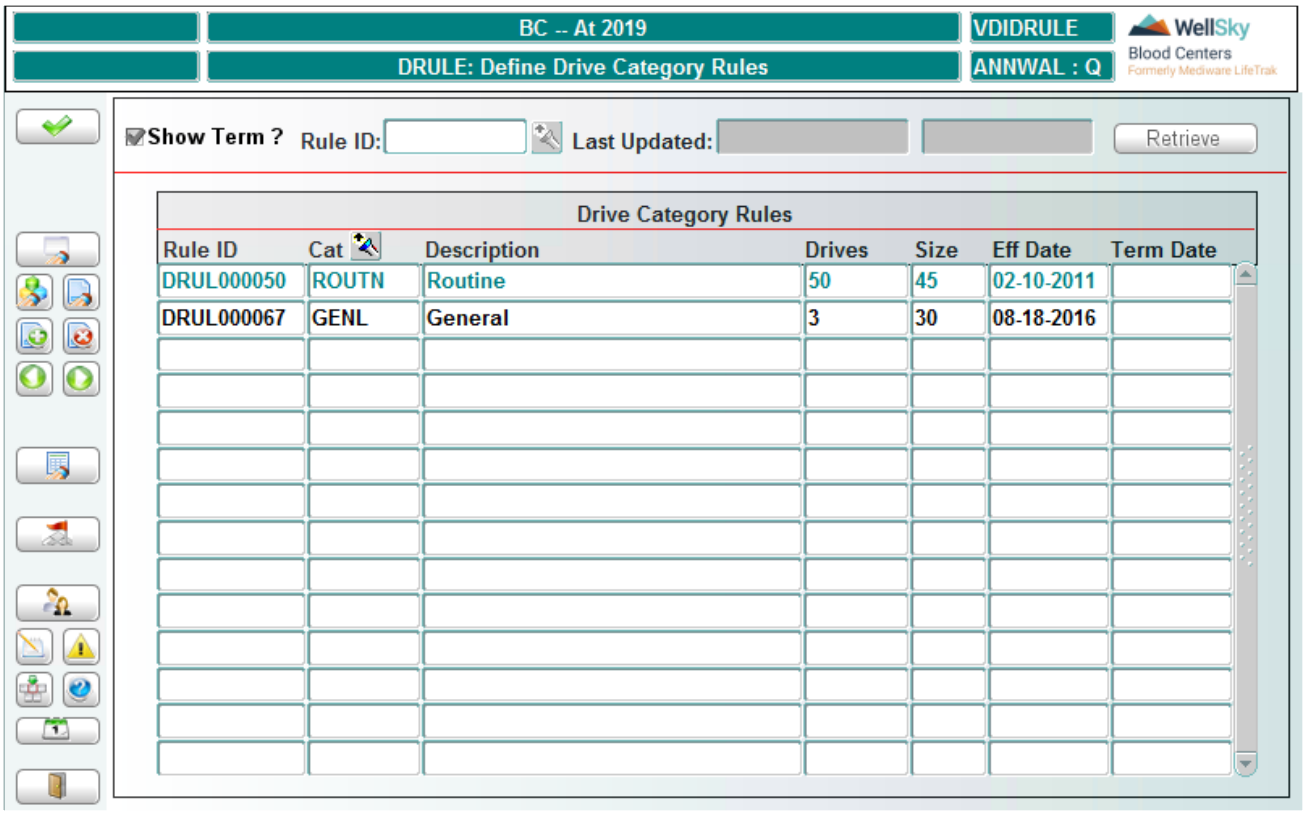

Control Block Fields and Definitions

Show Term

Selected by default to display terminated drive categories. Clear to show only active drive categories.

Rule ID

Entry is optional. Enter Rule ID or select from the LOV. Enter NEW to create a new rule.

Last Updated

Display only. Automatically populates with update information for the selected Rule ID.

Retrieving Data

Click **Retrieve** to display records according to the specified criteria.

WellSky Corporation
Proprietary and confidential

To Add or Modify Data

Rule ID

Display only. If creating a new rule, the system generates a new Rule ID. This field cannot be changed for existing or new records.

Cat

Entry is required. Enter a category or select from the LOV. Once a valid category is entered or selected, the description automatically displays.

Drives

Entry is optional. Enter a whole number for the maximum number of drives for the category.

Size

Entry is optional. Enter the maximum size for drives.

Eff Date

Entry is required. Enter the effective date in MMDDYYYY format. The default is the system date.

Term Date

Entry is optional. Enter the termination date in MMDDYYYY format.

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step.

4.2.9 Maintain Vehicle Details (VEHICLE)

Intended Use

Use this screen to add vehicles to inventory or modify details for existing vehicles.

Limitations


None

Prerequisites

Mster Code VETYP must be defined.

Accessing the Screen

Access this screen from the Prod Control & Transport Maintenance menu or by entering the keyword `VEHICLE`.

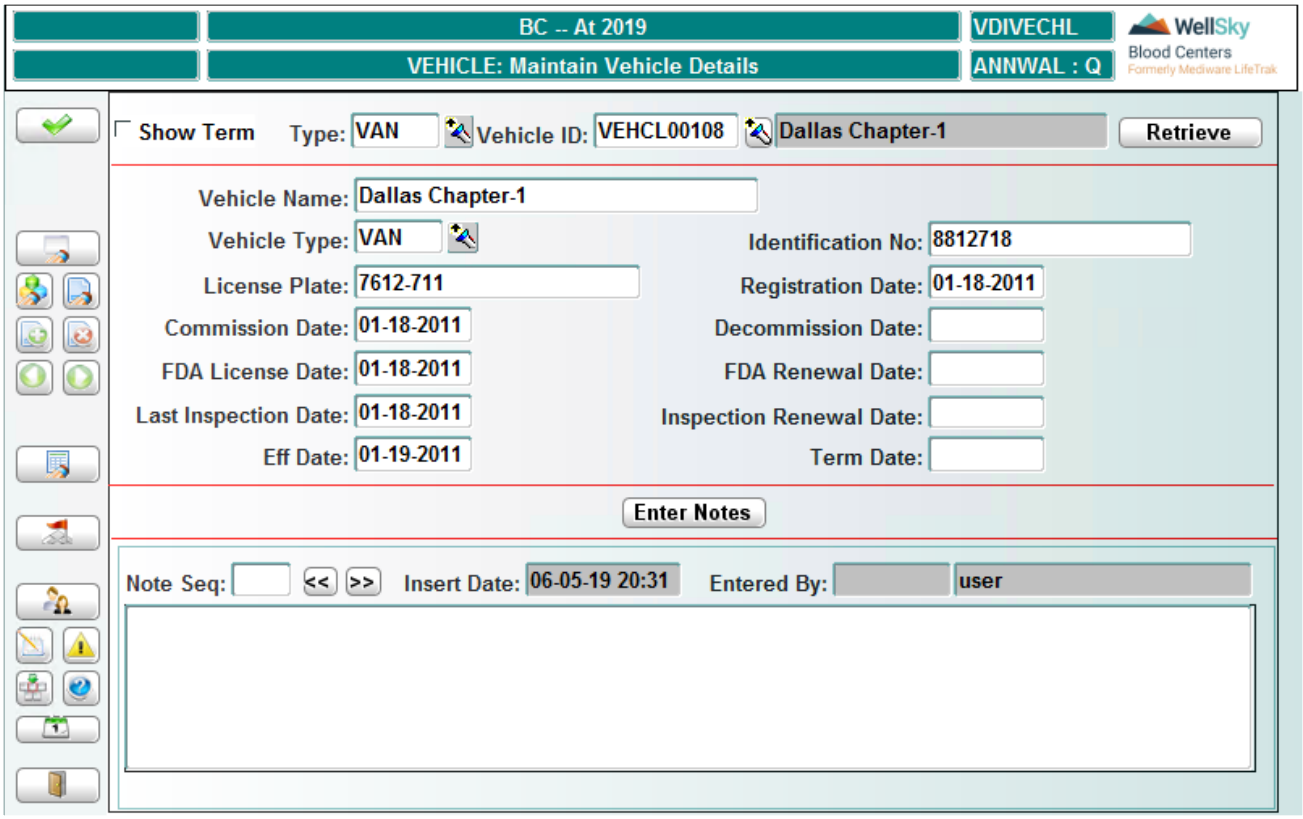

Control Block Fields and Definitions

Specify whether you are modifying details for an existing vehicle or creating a new vehicle record in the Donor system.

Show Term?

If this box is checked, which is the default, terminated vehicle as well as active vehicle records display in the Vehicle ID field. Click on the check box to remove the check to view only active vehicle records.

Type

Entry is optional. Enter vehicle type or select from the LOV.

Vehicle ID

Entry is required. Enter a valid vehicle ID or select from the LOV to modify details for an existing vehicle. Enter `NEW` to create a record of a new vehicle. When creating a new vehicle record, the system assigns the vehicle ID.

Retrieving Data

Click **Retrieve** to display details for an existing vehicle. The cursor automatically advances to the *Vehicle Name* field when creating record of a new vehicle. You may either enter new data or update existing data.

To Create a New Vehicle

Enter the following data to create a record for a new vehicle.

WellSky Corporation
Proprietary and confidential

Name
Entry is required. Enter a description of the vehicle. Up to 50 characters are accepted.

Vehicle Type
Entry is required. Select a valid vehicle type from the drop-down list in this field. As a shortcut, you may enter the first letter (C=Coach, V=Van) to make the entry.

Identification No
Entry is optional. Enter the vehicle identification number (VIN) for the vehicle. Up to 20 characters are accepted.

License Plate
Entry is optional. Make a free form entry of the vehicle license plate number. Up to 20 characters are accepted.

Registration Date
Entry is optional. Enter the vehicle's date of registration using the MMDDYYYY entry format. The date entered cannot be a future date.

Commission Date
Entry is optional. Enter the date the vehicle was or will be commissioned into service in MMDDYYYY format. A past, current, or future date can be accepted.

Decommission Date
Entry is optional. Enter the date the vehicle was or will be taken out of service in MMDDYYYY format. While the date entered can be a past, current, or future date, it must be later than the *Commission Date* field entry.

FDA License Date
Entry is optional. Enter the date of FDA licensing, if applicable, in MMDDYYYY format. The date entered cannot be a future date. This information is passed in the drive interface toLab.



NOTE – This information is used in determining if the product can be shipped out of state.

FDA Renewal Date
Entry is optional. Enter the date of the next scheduled FDA licensing renewal, using the MMDDYYYY format. The date entered must be later than the *FDA License Date* field entry.

Last Inspection Date
Entry is optional. Enter the date of the vehicle's last state inspection, using the MMDDYYYY format. The date cannot be a future date.

Eff Date
Entry is required. The default is the system date. You may modify that date to any future date.

Term Date

Entry is optional. Enter a date to terminate an existing vehicle record. The date must be equal to or later than both the system date and the effective date.

Viewing and Entering Notes

You may view existing notes and enter new notes for the specified vehicle by clicking **Enter Notes** . The cursor will advance to the Notes Block.

You may scroll through existing notes by clicking **<<** and **>>**. To enter a new note, scroll to the first blank note and click in the text (white) area. Make a free form entry of your note up to 240 characters in length. The date, time, and ID of the person inserting the note automatically displays.

What to Do Next

Vehicles entered and maintained in this screen may be scheduled for drives after commissioning and/or effective date entered. Use Assign Vehicle to a Drive (VEHDRV) to assign a specific vehicle to a drive.

WellSky Corporation
Proprietary and confidential

5

Chapter 5 - Donor Center Administration

5.1 Introduction 254
5.2 Donor Center Administration Functions 255
5.2.1 Define Donor Center (FSITE) 255
5.2.2 Enter Time Slots and Capacity (TIMESLOT) 260
5.2.3 Define Flexible Time Slots and Capacity (UCAP) 263
5.2.4 Open Appointment Calendar (OPENSITE) 267
5.2.5 Modify Calendar and Capacity (MODLOAD) 270

5.1 Introduction


The Donor Center Administration menu is that portion of Donor designed to do the following:

- Create a fixed site.
- Open time slots and procedures.
- Modify existing fixed site, time slot, or procedure information.

WellSky Corporation
Proprietary and confidential

5.2 Donor Center Administration Functions

These functions are accessed from the following menu:

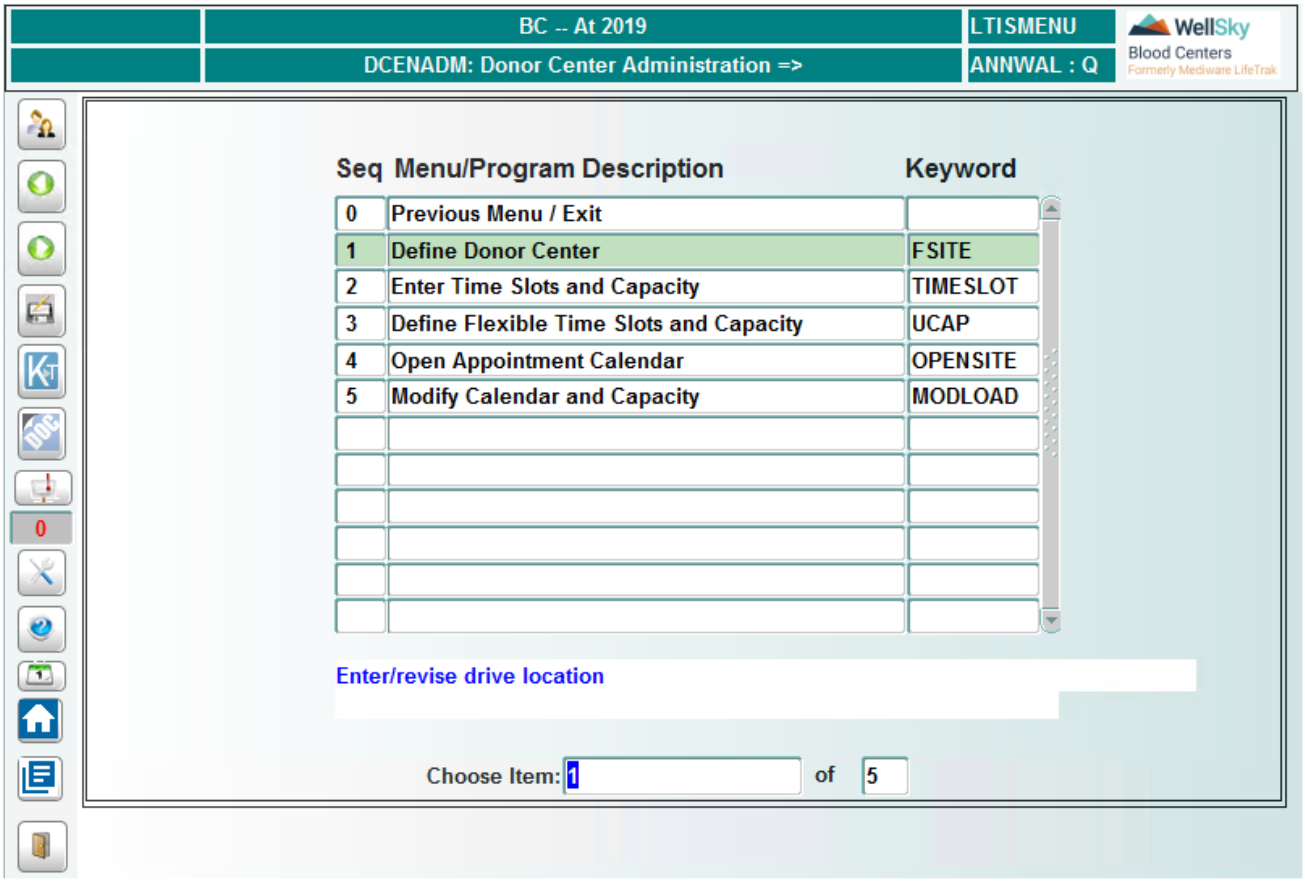

5.2.1 Define Donor Center (FSITE)

Intended Use

Use this screen to create a donor center and to establish permanent associations between drive sponsors and drive locations, and to maintain details for drive locations.

Limitations


Done by day for specific week intervals for each procedure code.

Prerequisites

Although sponsor is not required in this screen, sponsor must be created in Create Drive Sponsor Profile (SPON2) first.

Accessing the Screen

Access this screen from the Donor Center Administration menu or by entering the keyword FSITE.

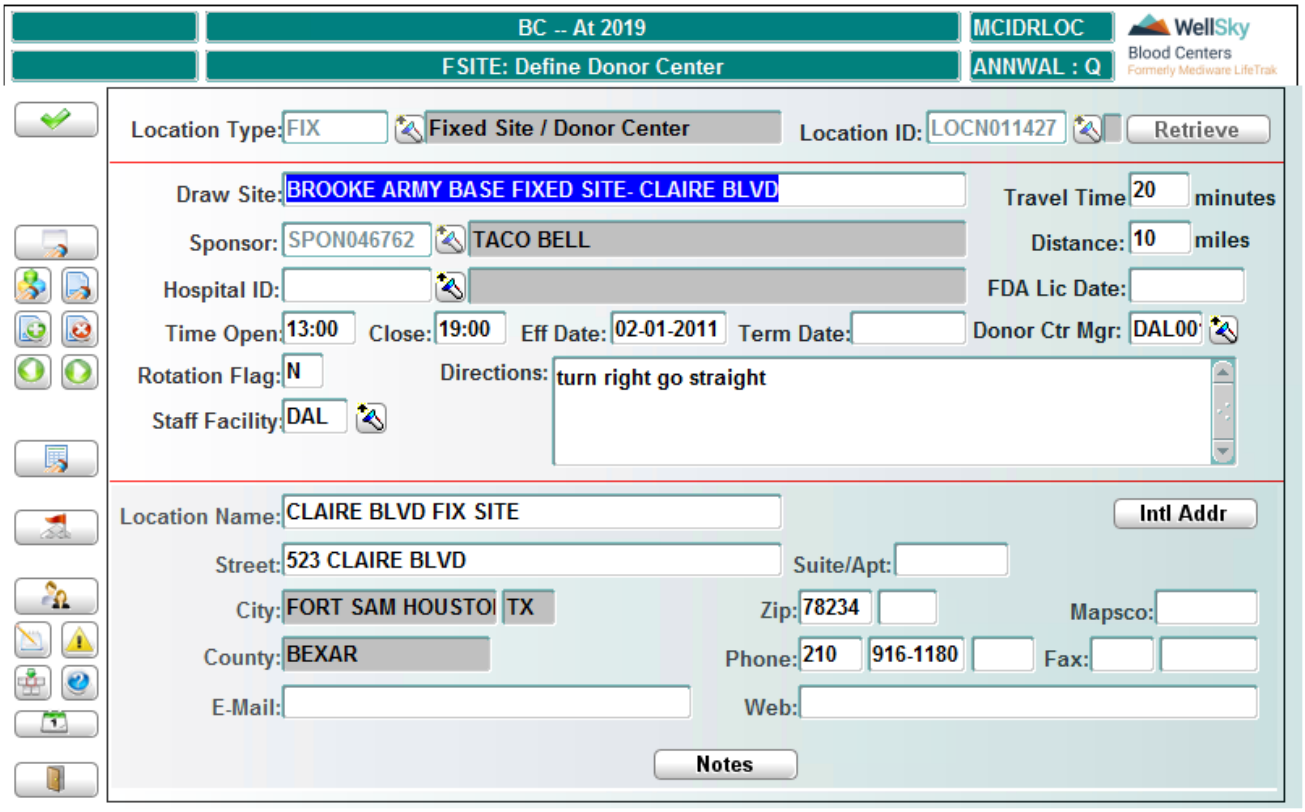

Control Block Fields and Definitions

Location Type

Entry is required. Enter a location type or select from the LOV.

Location ID

Entry is required. Enter a location ID or select from the LOV. The LOV only displays IDs associated with the selected location type. To create a new ID, enter NEW.

Retrieving Data

Click **Retrieve** to display the selected location data.

NOTE – If a new location is being created, the system generates a new location ID and displays it in the *Location ID* field.

WellSky Corporation
Proprietary and confidential

Add or Modify Data In the Drive Details Block

Draw Site

Entry is required. Enter the location name.

Sponsor

Entry is optional. Enter the sponsor ID or select from the LOV. Once a valid sponsor is entered or selected, the name automatically displays. Address, phone, and e-mail information already in the database for the selected sponsor automatically display in the lower part of the screen. This field cannot be modified for existing locations.

Hospital ID

Entry is optional. Enter the ID of the hospital closest to the location or select from the LOV. Once a valid hospital ID is entered or selected, the name automatically displays.

NOTE – This LOV is populated through Distribution consignees.

Travel Time

Entry is required. Enter the one-way travel time from the central facility to the location in minutes.

Distance

Entry is required. Enter the travel distance from the central facility to the location in miles.

FDA Lic Date

Entry is optional. Enter the FDA licensing number of the institution or of this site in MMDDYYYY format, if different.

NOTE – If the FDA license number is not entered, all products collected from this site will be labeled as unlicensed products.

Time Open

Entry is optional. Enter the time the location opens in HHMI format.

Close

Entry is optional. Enter the time the location closes in HHMI format.

Eff Date

Entry is required. Enter the effective date in MMDDYYYY format. Default is system date.

Term Date

Entry is optional. Enter the termination date in MMDDYYYY format.

Donor Ctr Mgr

Entry is optional. Enter staff ID or select from LOV.

Rotation Flag
Entry is optional. If location type is Fixed, enter `Y` in this field to create a rotating inside drive at this location.

Staff Facility
Entry is required. Enter the facility that will staff the location or select from the LOV.

Directions
Entry is required. Enter directions to the location.

Add or Modify Data In the Location Details Block
If creating a new location and the data in the Location Details Block that populates from the Sponsor ID is not accurate, enter the new correct data:

Location Name
Entry is optional. Enter the name of the location.

Street
Entry is required. Enter the location's street address.

Suite/Apt
Entry is optional. Enter the suite or apartment number for the location.

Zip
Entry is required. Once a valid zip code is entered, the *City*, *State*, and *County* fields automatically populate.

Mapsco
Entry is optional. Enter the Mapsco reference for the location.

Phone
Entry is optional. Enter the phone number for the location.


Fax
Entry is optional. Enter the location's fax number.

E-Mail
Entry is optional. Enter the e-mail address for the location.

Web
Entry is optional. Enter the Web site address for the location.

Intl Addr (Button)
Click **Intl Addr** to open the International Address window. Use this window to add international address, telephone, and e-mail information.

WellSky Corporation
Proprietary and confidential

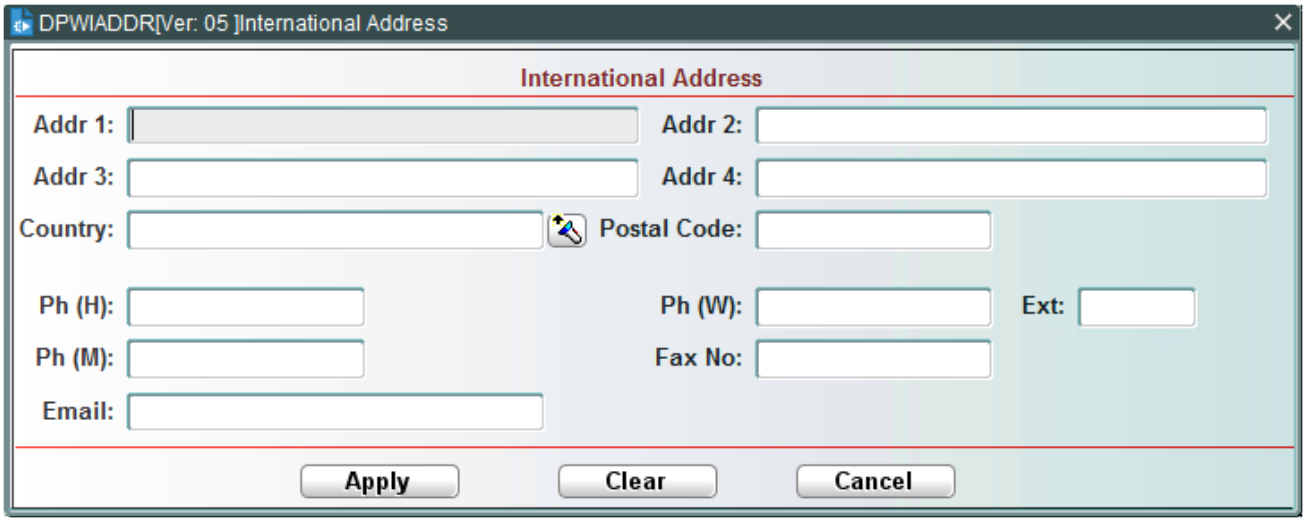

Addr 1

Entry is required. Enter first line of international address. Entry is limited to a maximum of 50 characters.

Addr 2, Addr 3, Addr 4

Entry is optional. Enter additional international address lines as needed. Entry is limited to a maximum of 50 characters in each field.

Country

Entry is required. Enter the country or select from LOV. Entry is limited to a maximum of 50 characters.

Postal Code

Entry is optional. Enter the international postal code. Entry is limited to a maximum of 14 characters.

Phone (H)

Entry is optional. Enter the international home phone number. Entry is limited to a maximum of 20 characters.

Phone (W)

Entry is optional. Enter the international work phone number. Entry is limited to a maximum of 20 characters.

Ext

Entry is optional. Enter the extension number. Entry is limited to a maximum of 8 characters.

Phone (M)

Entry is optional. Enter the international mobile phone number. Entry is limited to a maximum of 20 characters.

Fax No

Entry is optional. Enter the international Fax number. Entry is limited to a maximum of 20 characters.

Email

Entry is optional. Enter a valid e-mail address.


Implementing Address Information

After all address information is entered, click one of the following:

- **Apply** – Commit the international address information. The International Address window closes.
- **Clear** – Clear the contents of all fields. Re-enter information.
- **Cancel** – Close the International Address window without committing the information.

The Notes Button

Click **Notes** to open the Notes window:

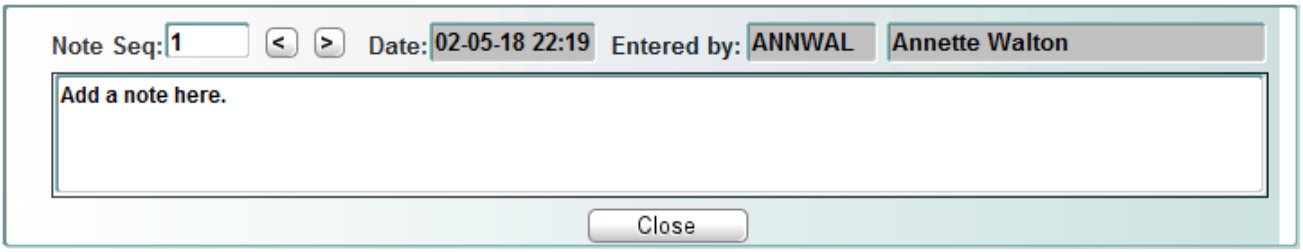

Use this window to enter notes that will be permanently associated with the drive location. When a note is added, the system automatically generates the sequence number, system date, and the user. Use the arrow buttons to move from note to note. Click **Close** to return to the main screen.

What to Do Next

Go to Enter Time Slots and Capacity (TIMESLOT), Define Flexible Time Slots and Capacity (UCAP), or Open Appointment Calendar (OPENSITE).

At Commit

All of the changes are saved to the database.

5.2.2 Enter Time Slots and Capacity (TIMESLOT)

Intended Use

Use this screen to enter donation time slots to fixed sites. Time slots may also be created or modified using Define Flexible Time Slots and Capacity (UCAP).

Limitations


Create the days of the week with the earliest times first, or create all timeslots for the donation/procedure for all the days of the week on the same day so that the insert date is the same in the timeslot table.

Prerequisites

Fixed site must be created in Define Donor Center (FSITE). Donation type groups must be active in Master Code DTGRP. Procedure codes must be valid in Define Procedure Codes (PROCS).

Accessing the Screen

Access this screen from the Donor Center Administration menu or by entering the keyword `TIMESLOT`.

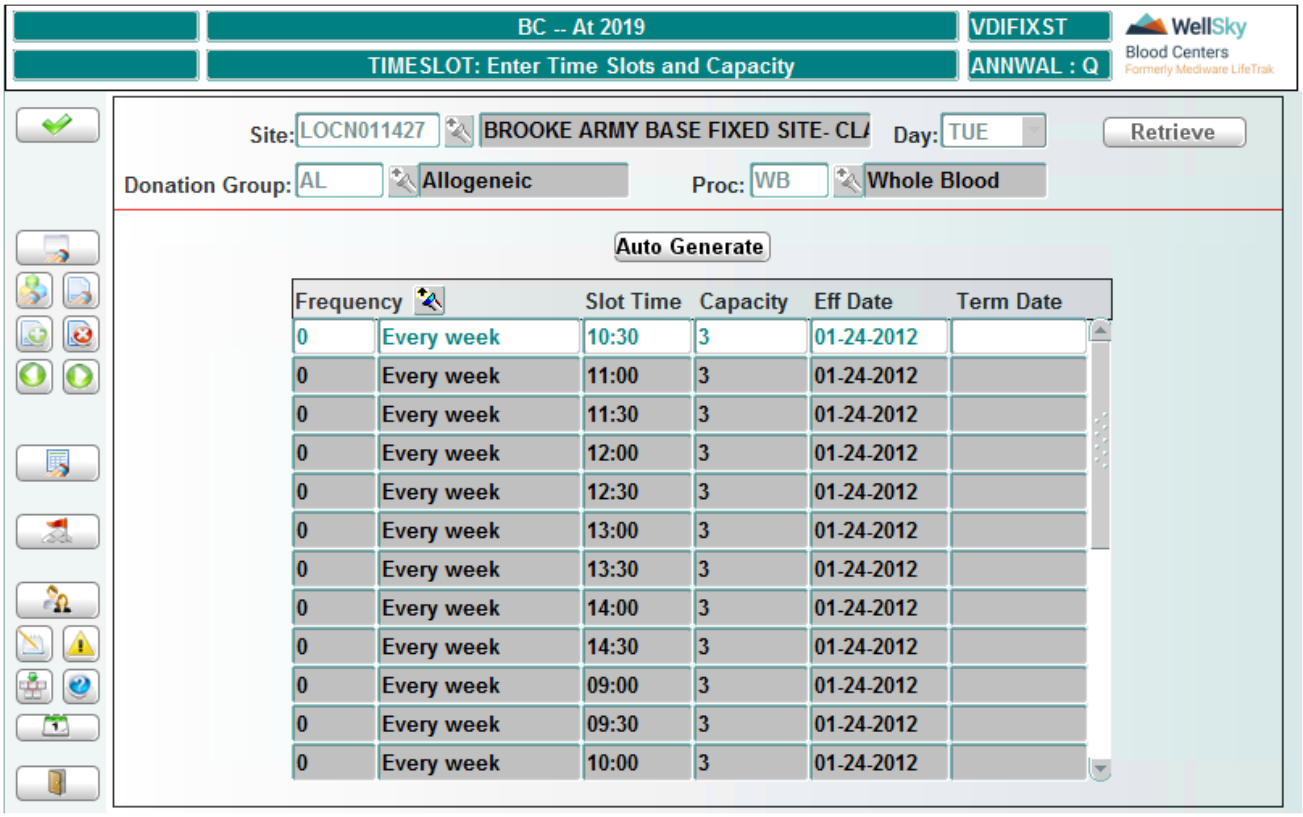

Control Block Fields and Definitions

Site

Entry is required. Enter a site ID or select from the LOV. Once a valid site ID is entered or selected, the name automatically displays.

Day

Entry is required. Select a day of the week from the drop-down list.

Donation Group

Entry is required. Enter a donation group or select from the LOV. Once a valid group is entered or selected, the description automatically displays.

Proc

Entry is required. Enter a procedure code or select from the LOV. Once a valid code is entered or selected, the description automatically displays.

Retrieving Data

Click **Retrieve** to display records that currently exist. If records already exist, the Auto Generate button cannot be invoked.

The following information displays if it exists in the database:

- Frequency code and description for procedure
- Slot times for procedure
- Maximum number of times procedure can be performed during the time slot
- Effective date for the procedure (cannot be modified for existing data)
- Termination date for the procedure

Existing Time Slots

Existing time slots can be:

- Modified at frequency, slot time, and/or capacity.
- Deleted using **CTRL**+ **F8** (Delete Record).
- Terminated.


Additional time slots may be added by using the DOWN  arrow to move the cursor to the bottom row.

Options for Creating Time Slots

For ease of defining multiple time slots, use the Auto Generate button, or move from field to field entering the time slot, data, and capacity for each row.

The Auto Generate Button

If slots do not already exist for the site, click **Auto Generate** to open the Auto Generate Slots window:

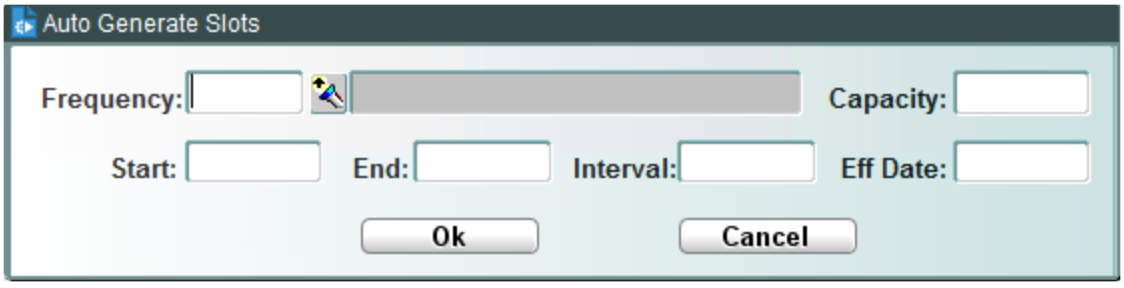

Frequency
Entry is required. Enter a frequency code or select from the LOV. Once a valid code is entered or selected, the description automatically displays.

Capacity
Entry is required. Enter the maximum number of times the specified procedure can be performed during the time slot.

Start
Entry is required. Enter the starting time for the time range in HHMI format.

End
Entry is required. Enter the ending time for the time range in HHMI format.

Interval
Entry is required. Enter the number of minutes of duration for each time slot.

Eff Date
Entry is required. Enter the effective date in MMDDYYYY format. Date must be current or future date.

Generating Time Slots
Click **OK** and the system automatically generates the time slots. The Auto Generate Slots window closes and the new slots display in the main screen.

Click **Cancel** to return to the main screen without generating any time slots.

At Commit
All of the changes are saved to the database.

What to Do Next
To make the time slots and capacity effective, use Open Appointment Calendar (OPENSITE).

5.2.3 Define Flexible Time Slots and Capacity (UCAP)

Intended Use
Use this screen to define flexible fixed-site hours and capacity. Time slots may also be created or modified using Enter Time Slots and Capacity (TIMESLOT).


Limitations
Done one day each week at a time for a specific procedure code.

Prerequisites

Fixed site must be created in Define Donor Center (FSITE). Donation type groups must be active in Master Code DTGRP. Procedure codes must be valid in Define Procedure Codes (PROCS).

Accessing the Screen

Access this screen from the Donor Center Administration menu or by entering the keyword `UCAP`.

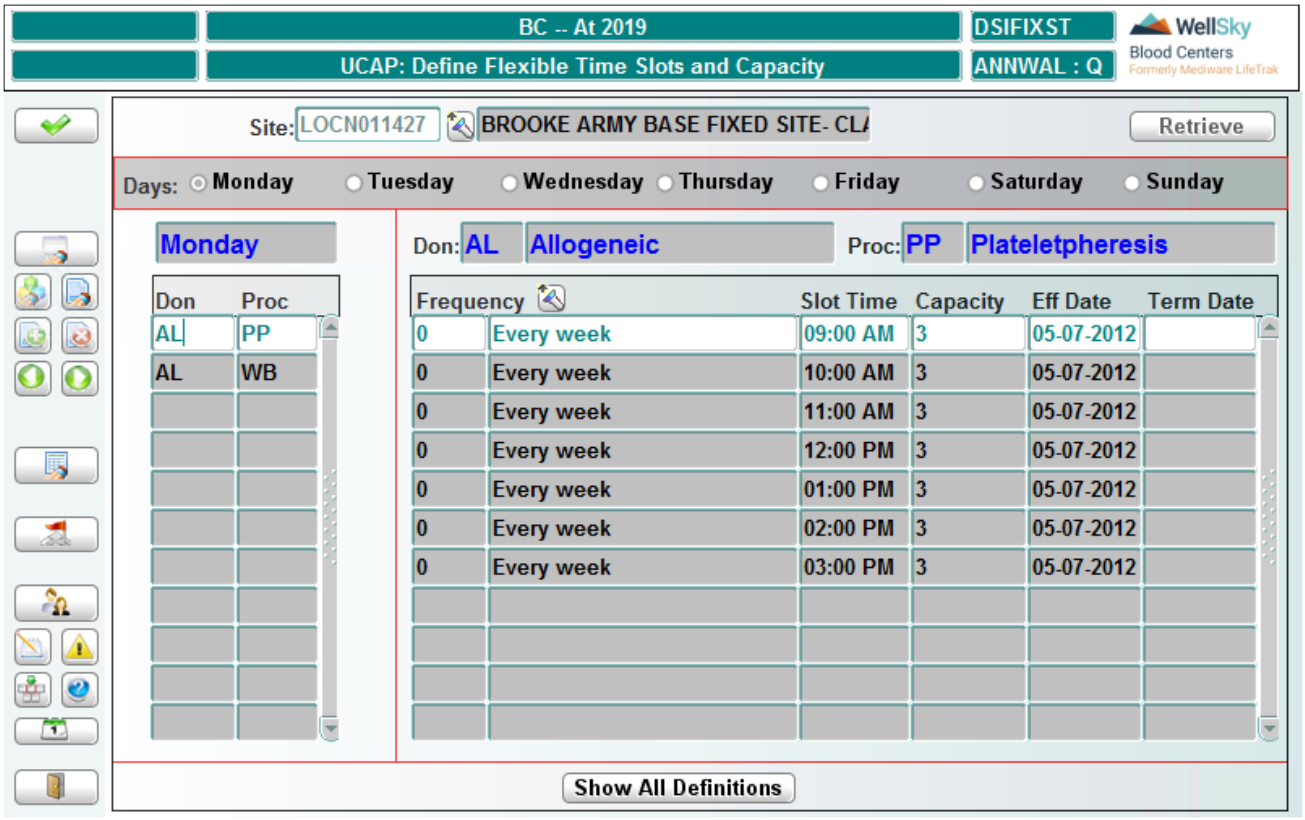

Control Block Fields and Definitions

Site

Entry is required. Enter fixed site ID or select from the LOV. Once a valid ID is entered or selected, the name automatically displays.

Retrieving Data


Click **Retrieve** to display time slots and capacity already entered for the selected site.

To Create, Add, or Modify Data

Click the desired day of the week to select that option and to display the existing time slots and capacity for that day.

WellSky Corporation
Proprietary and confidential

NOTE – Pause the cursor over the day of the week to activate the option before clicking.



Enter the following data:

Don
Entry is required. Enter the donation type or select from the LOV.

Proc
Entry is required. Enter the procedure code or select from the LOV.

Frequency
Entry is required. Enter the frequency code or select from the LOV.


Slot Time
Entry is required. Enter the slot time, using the HHMI format.

Capacity
Entry is required. Enter the number of procedures that can be performed during the time slot.

Eff Date
Entry is required. Enter the effective date in MMDDYYYY format. Date must be a current or future date.

Term Date
Entry is optional. Enter the termination date in MMDDYYYY format.

The Show All Definitions Button
Click Show All Definitions to view a list of all previously defined time slots and capacities:

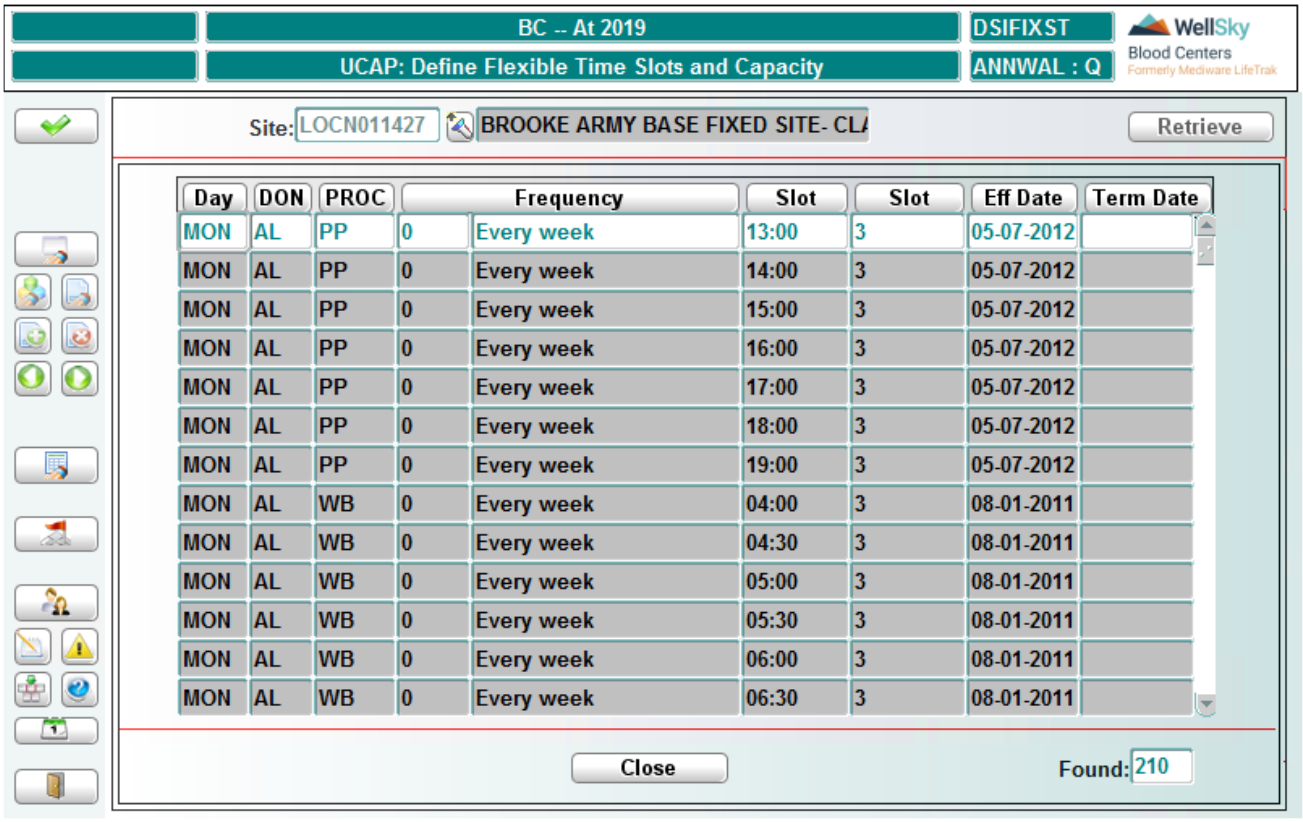

Day	DON	PROC		Frequency	Slot	Slot	Eff Date	Term Date
MON	AL	PP	0	Every week	13:00	3	05-07-2012	
MON	AL	PP	0	Every week	14:00	3	05-07-2012	
MON	AL	PP	0	Every week	15:00	3	05-07-2012	
MON	AL	PP	0	Every week	16:00	3	05-07-2012	
MON	AL	PP	0	Every week	17:00	3	05-07-2012	
MON	AL	PP	0	Every week	18:00	3	05-07-2012	
MON	AL	PP	0	Every week	19:00	3	05-07-2012	
MON	AL	WB	0	Every week	04:00	3	08-01-2011	
MON	AL	WB	0	Every week	04:30	3	08-01-2011	
MON	AL	WB	0	Every week	05:00	3	08-01-2011	
MON	AL	WB	0	Every week	05:30	3	08-01-2011	
MON	AL	WB	0	Every week	06:00	3	08-01-2011	
MON	AL	WB	0	Every week	06:30	3	08-01-2011	

The following data displays if it exists in the database:

- Day of the week
- Donation type
- Procedure code
- Frequency code and description
- Time slot and capacity
- Effective date
- Termination date

Click **Close** to return to the main view.

At Commit

All of the changes are saved to the database.

What to Do Next

Go to Open Appointment Calendar (OPENSITE).

5.2.4 Open Appointment Calendar (OPENSITE)

Intended Use

Use this screen to open and close fixed sites. This may also be used to create new or modify existing time slots.

Limitations


None

Prerequisites

Fixed site must be created in Define Donor Center (FSITE). Donation type groups must be active in Master Code DTGRP. Procedure codes must be valid in Define Procedure Codes (PROCS).

Accessing the Screen

Access this screen from the Donor Center Administration menu or by entering the keyword `OPENSITE`.

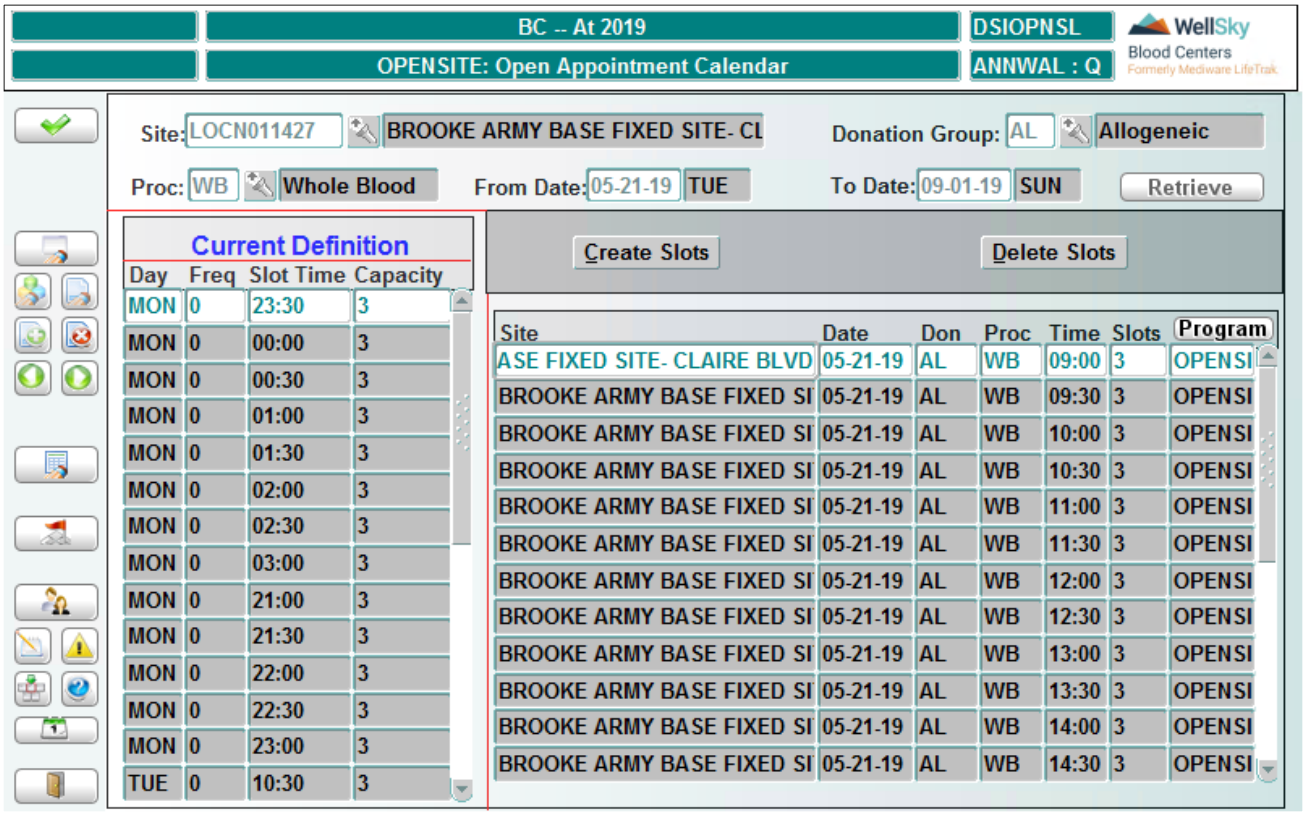

Control Block Fields and Definitions

Site

Entry is required. Enter a site ID or select from the LOV.

Donation Group
Entry is required. Enter a donation type or select from the LOV.

Proc
Entry is required. Enter a procedure code or select from the LOV.

From Date
Entry is required. Enter the starting date in format. Date cannot be prior to the system date.

To Date
Entry is required. Enter the ending date in MMDDYY format.

Retrieving Data
Click **Retrieve** to display existing records according to the specified criteria.

In the Current Definition Block
The following information displays:

- Day within date range.
- Frequency of procedure for that day.
- Time of procedure.
- Capacity of procedures for the time slot.


In the Define Appointments Block
The following information displays:

- Fixed drive site
- Date of created slot
- Donation type
- Procedure type
- Time periods
- Number of donation slots for each time period
- Program used to create the slot

Minor Changes to Time Slots
Time slot capacity may be modified individually or deleted using the Delete Record icon in the highlighted row.

The Create Slots Button
Click **Create Slots** to open the Create Ad Hoc Slots window:

WellSky Corporation
Proprietary and confidential

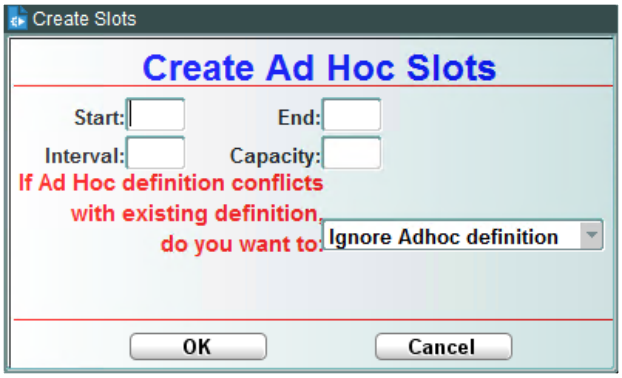

Use this window to create appointment slots or to modify or replace existing slots.

NOTE – If the site already has defined slots for the time range, an alert message pops up first.

Start

Entry is required. Enter the procedure start time in HHMI format.

End

Entry is required. Enter the procedure end time in HHMI format.

Interval

Entry is required. Enter the interval in whole minutes.

Capacity

Entry is required. Enter the capacity in a whole number.

If Ad Hoc entry is required, select an action from the list.


- Ignore Adhoc definition – Will not modify any existing definition for the same time period.
- Add Capacity to existing – Adds this time slot capacity to what is already there.
- Replace existing definition – Over-writes the existing definition with the new one.

Adding the Defined Slot

Click **OK** to add the defined slots to the Define Appointments block.

The Delete Slots Button

Click **Delete Slots** to delete slots that have been created. The following window opens:

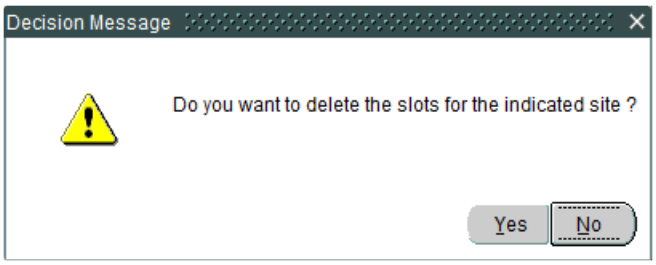

Click **Yes** to continue the process to delete slots. A confirmation message opens to confirm that the slots are deleted.

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step.

5.2.5 Modify Calendar and Capacity (MODLOAD)

Intended Use

Use this screen to modify the number of donation slots at a fixed site donor center. This screen can also be used to enter individual slots for a fixed site.

Limitations

Each time slot must be modified individually.


Prerequisites

Donor center must already exist in the database.

Accessing the Screen

Access this screen from the Donor Center Administration menu or by entering the keyword `MODLOAD`.

WellSky Corporation
Proprietary and confidential

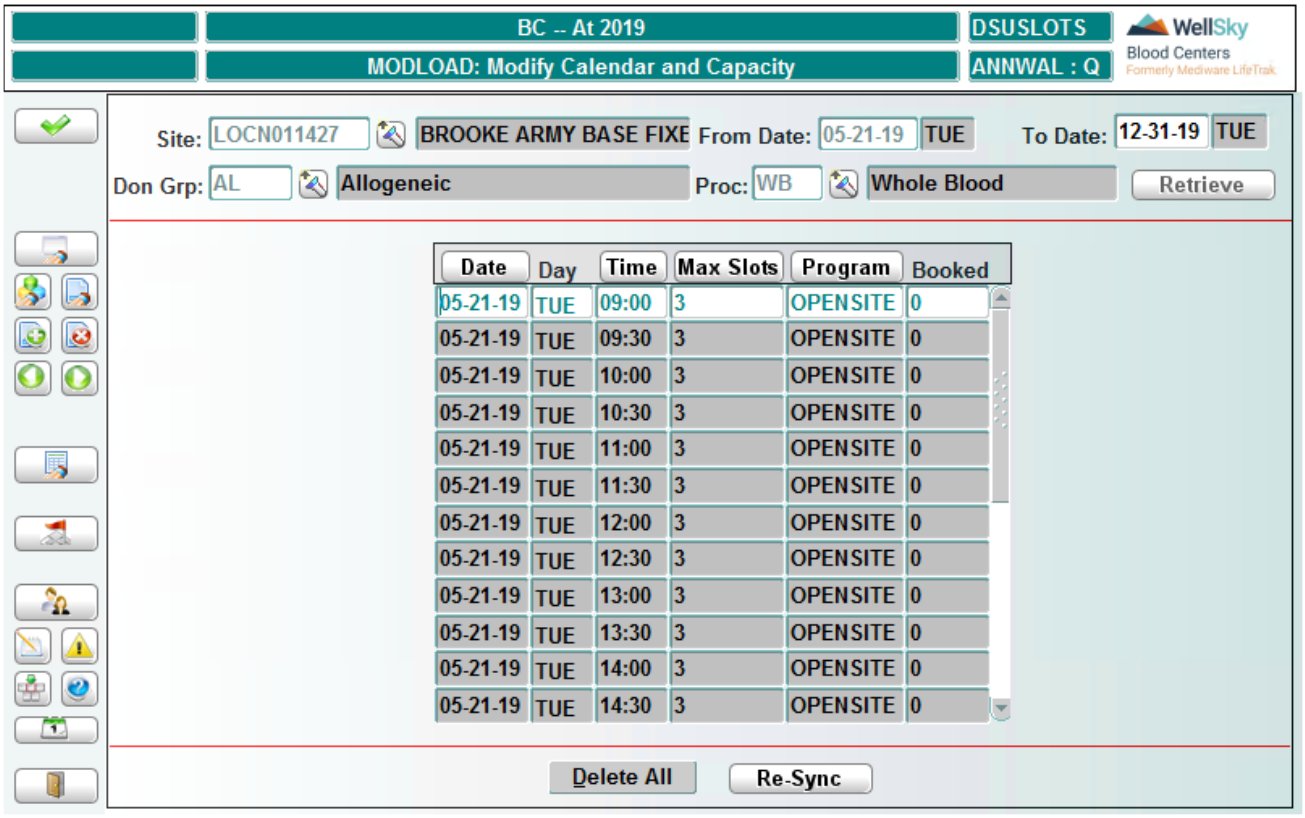

Control Block Fields and Definitions

Site

Entry is required. Enter a fixed site or select from the LOV.

From Date

Entry is required. Enter the starting date in MMDDYY format. Date cannot be prior to the system date.

To Date

Entry is required. Enter the ending date in MMDDYY format.

Don Grp

Entry is required. Enter a donation type or select from the LOV.

Proc

Entry is required. Enter a procedure code or select from the LOV.

Retrieving Data

Click **Retrieve** to display existing records according to the specified criteria.

The following information displays if it is available in the database:

- Date and day of the week
- Time slot
- Maximum number of donations to be scheduled during the time slot
- Program used to define the slot
- Number of donations booked for that time slot

Existing data can be modified or deleted.

To Enter a New Time Slot and Capacity

Date

Entry is required. Enter the date in MM-DD-YY format. The day of the week automatically displays.

Time

Entry is required. Enter the slot time in HHMI format.

Max Slots

Entry is optional. Enter the maximum number of donations that can be scheduled during the time slot.

Program

Do not enter. The system automatically populates this field when you commit the changes.

Booked

Do not enter. The system automatically populates this field when you commit the changes.


The Delete All Button

Click **Delete All** to delete all scheduled slots. A message displays, asking you to confirm that you want to delete all the slots.

An individual line can be deleted using the Delete Record icon.

The Re-Sync Button

Click **Re-Sync** to re-synchronize the calendar at the donor site after any changes have been made in the donor schedule. This will keep any slots with a donor scheduled. The following window opens:

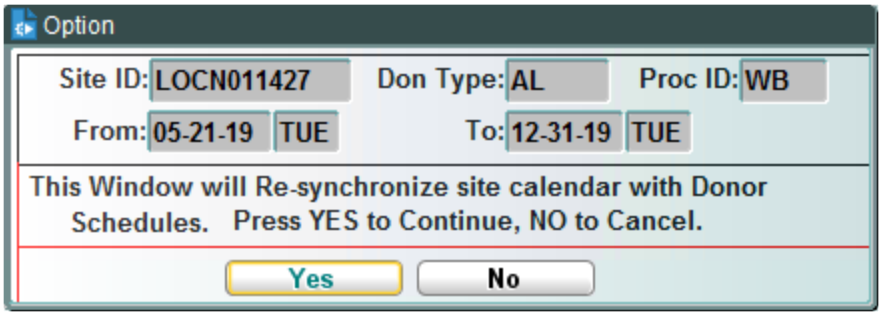

WellSky Corporation
Proprietary and confidential

Click **Yes** to continue with the re-synchronization.

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step.

This Page Intentionally Left Blank

6

Chapter 6 - Registration Administration

6.1 Introduction 276
6.2 Registration Administration Functions 277
6.2.1 Define Physical Findings Values (PHYRULE) 277
6.2.2 Create Physical Findings Template (PHYTEMP) 281
6.2.3 Health History Questions Bank (HHQBANK) 283
6.2.4 Define Health History Responses (HHR) 286
6.2.5 Create Health History Template (HHQTEMP) 290
6.2.6 Abbreviated Questionnaire Setup (ADHQ) 301
6.2.7 FastTrak Web Configuration (Onsite) (WEBCFG) 303
6.2.8 Alternate ID Configuration (ALTID) 307
6.2.9 Define HH Response Groups (HHGROUP) 309

6.1 Introduction


The Registration Administration menu is that portion of Donor designed to do the following:

- Be used with the long audit process.
- Create a physical findings template with responses.
- Create a health history template with responses.

WellSky Corporation
Proprietary and confidential

6.2 Registration Administration Functions

These functions are accessed from the following menu:

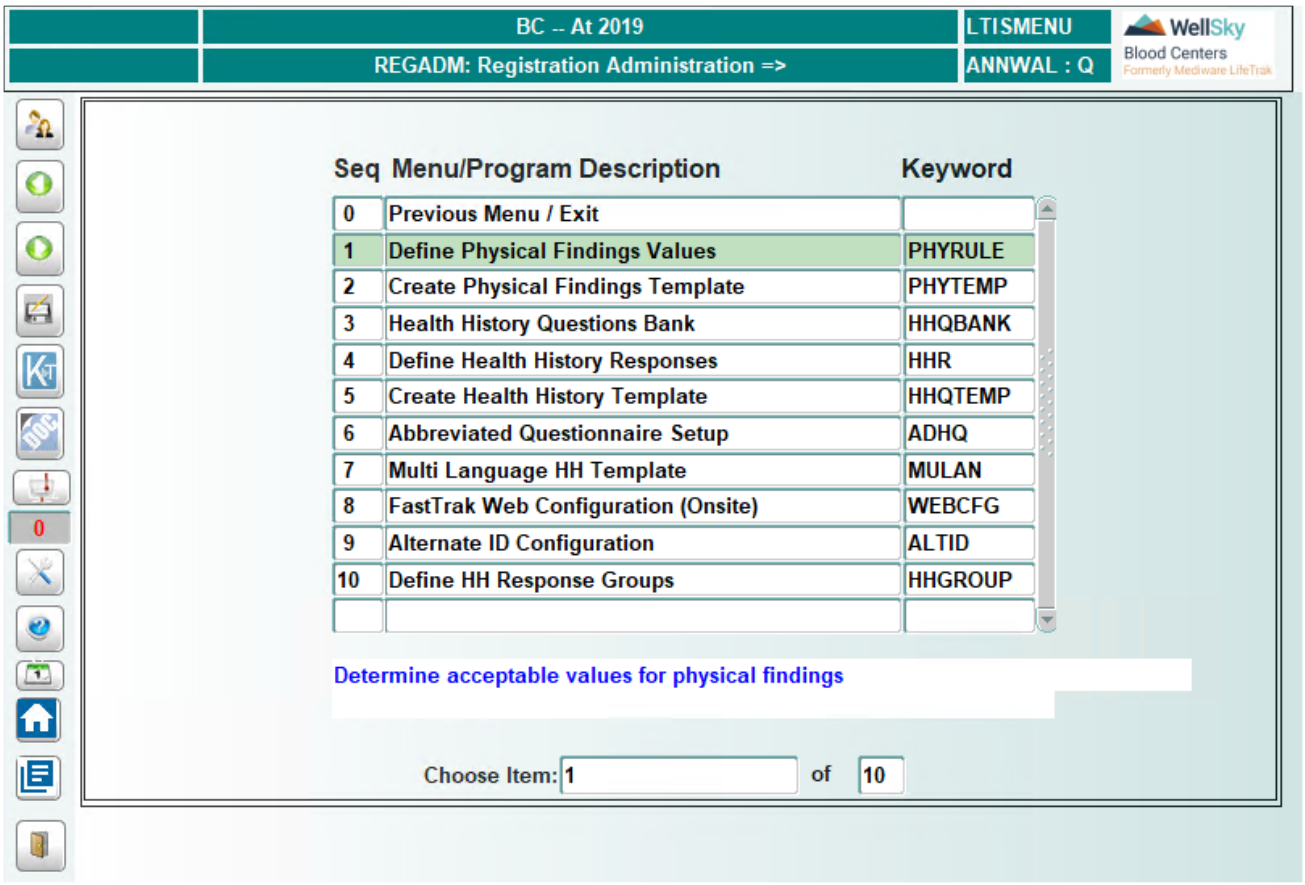

6.2.1 Define Physical Findings Values (PHYRULE)

Intended Use

Use this screen to define the values for physical findings for the long audit process.

Limitations

- System does not allow particular questions to be asked for only specific genders.
- Should only define the hematology tests that apply for the specific donation type and procedure code in the template.
- System disallows entry of duplicate rows in the table for numeric values.
- If the facility is using TBV, the Weight field should be set to Numeric data type.


Prerequisites

Valid data must exist in the following:

- Define Donation Types (DONS)
- Define Procedure Codes (PROCS)
- Master Code PHYCD (MASTER)
- Master Code EQUIP (MASTER)
- Interdiction Codes (INTER)

Accessing the Screen

Access this screen from the Registration Administration menu or by entering the keyword `PHYRULE`.

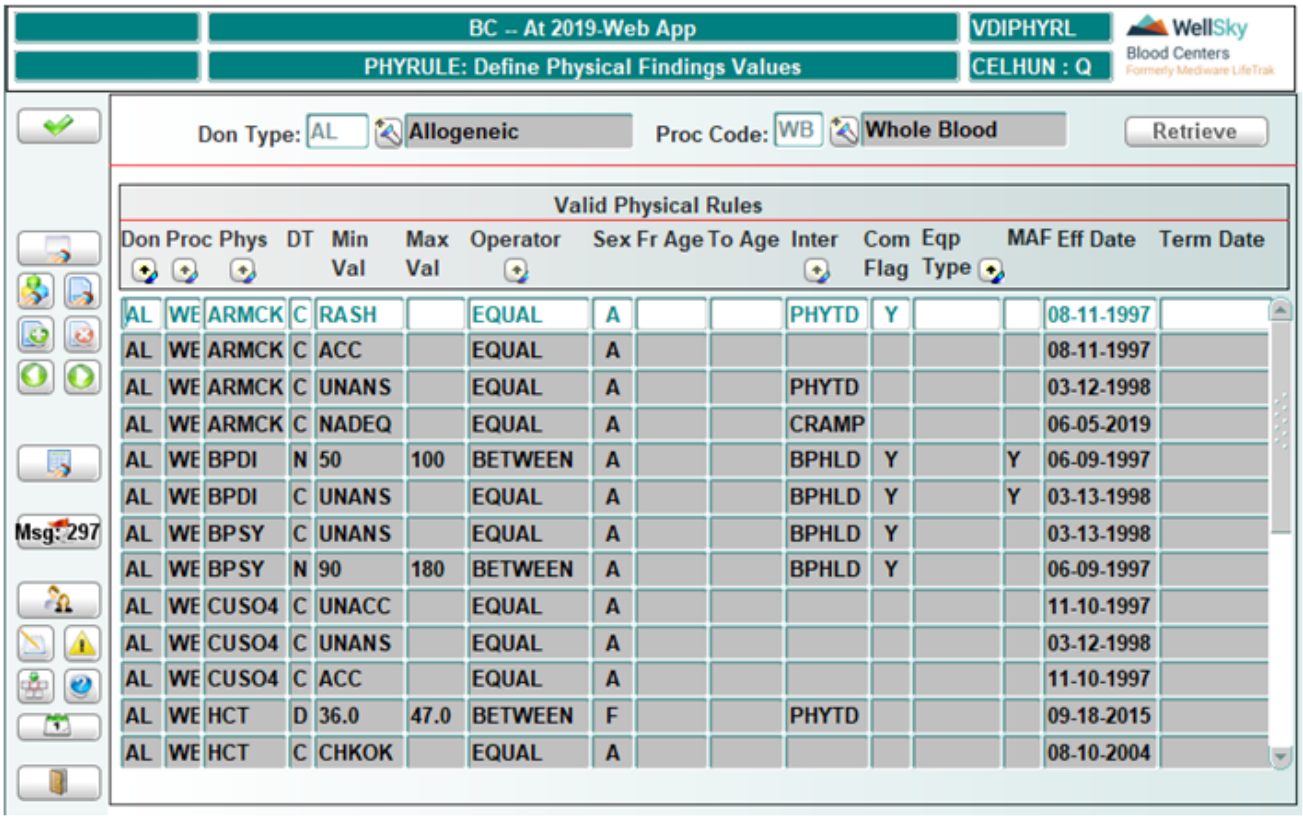

Don	Proc	Phys	DT	Min Val	Max Val	Operator	Sex	Fr Age	To Age	Inter	Com Flag	Eqp Type	MAF	Eff Date	Term Date
AL	WE	ARMCK	C	RASH		EQUAL	A			PHYTD	Y			08-11-1997	
AL	WE	ARMCK	C	ACC		EQUAL	A							08-11-1997	
AL	WE	ARMCK	C	UNANS		EQUAL	A			PHYTD				03-12-1998	
AL	WE	ARMCK	C	NADEQ		EQUAL	A			CRAMP				06-05-2019	
AL	WE	BPDI	N	50	100	BETWEEN	A			BPHLD	Y		Y	06-09-1997	
AL	WE	BPDI	C	UNANS		EQUAL	A			BPHLD	Y		Y	03-13-1998	
AL	WE	BPSY	C	UNANS		EQUAL	A			BPHLD	Y			03-13-1998	
AL	WE	BPSY	N	90	180	BETWEEN	A			BPHLD	Y			06-09-1997	
AL	WE	CUSO4	C	UNACC		EQUAL	A							11-10-1997	
AL	WE	CUSO4	C	UNANS		EQUAL	A							03-12-1998	
AL	WE	CUSO4	C	ACC		EQUAL	A							11-10-1997	
AL	WE	HCT	D	36.0	47.0	BETWEEN	F			PHYTD				09-18-2015	
AL	WE	HCT	C	CHKOK		EQUAL	A							08-10-2004	

Control Block Fields and Definitions

Don Type

Entry is optional. Enter a donation type or select from the LOV.

Proc Code

Entry is optional. Enter a procedure code or select from the LOV.

Retrieving Data

Click **Retrieve** to display records according to the specified criteria.

To Add or Modify Data

Don

Entry is required. Enter a donation type or select from the LOV. This field cannot be modified for existing records.

Proc

Entry is required. Enter a procedure code or select from the LOV.

Phys

Entry is required. Enter a physical code or select from the LOV.

DT

Entry is required. Enter the data type of the item value, as follows:

- `C` – character (for example, test type)
- `D` – numeric with a decimal point (for example, temperature value)
- `N` – numeric with no decimal point (for example, blood pressure value)

Min Val

Entry is required. Enter the minimum value for the physical code.

Max Val

Entry is optional. Enter the maximum value for the physical code.

Operator

Entry is required. Enter an operator (between, equal, less, or more) or select from the LOV.

Sex

Entry is required. Enter one of the following:

- `A` – all (both female and male)
- `F` – female only
- `M` – male only



NOTE – You cannot use both A and either F or M for the same physical finding.
If you want different values for female and male, configure separate entries, as shown in this example:

AL	CO	HGB	D	12.0	16.0	BETWEEN	F			PHYTD	09-18-2015	
AL	CO	HGB	D	13.0	18.0	BETWEEN	M			PHYTD	09-18-2015	

If you create a single configuration for only one gender, there will be no physical finding entry for the gender that is not configured.

Fr Age
Entry is optional. Enter the lower age limit.

To Age
Entry is optional. Enter the upper age limit.

Inter
Entry is optional. Enter the interdiction code or select from the LOV.

Com. Flag
Enter Y if the Comment field is required when the response is entered, or leave blank to not require an entry in the Comment field for the response.

Eqp. Type
Entry is optional. Enter the equipment type that is linked to the response. The LOV is populated from the master code EQUIP.

MAF
Leave the field blank, or enter Y to display for manual audit if this rule was not met.

Eff Date
Entry is required. Enter the effective date in e MMDDYYYY format. Date cannot be prior to system date. This field cannot be modified for existing records.

Term Date
Entry is optional. Enter the termination date in MMDDYYYY format. Termination date is effective after midnight of that date.

At Commit
All of the changes are saved to the database.

What to Do Next
Go to Create Physical Findings Template (PHYTEMP).

WellSky Corporation
Proprietary and confidential

6.2.2 Create Physical Findings Template (PHYTEMP)

Intended Use

Use this screen to create a template for physical findings for the long audit process.

Prerequisites

Valid data must exist in the following:


- Define Donation Types (DONS)
- Define Procedure Codes (PROCS)

Limitations

There can only be one active and one future template for a donation type/procedure code combination.

Accessing the Screen

Access this screen from the Registration Administration menu or by entering the keyword `PHYTEMP`.

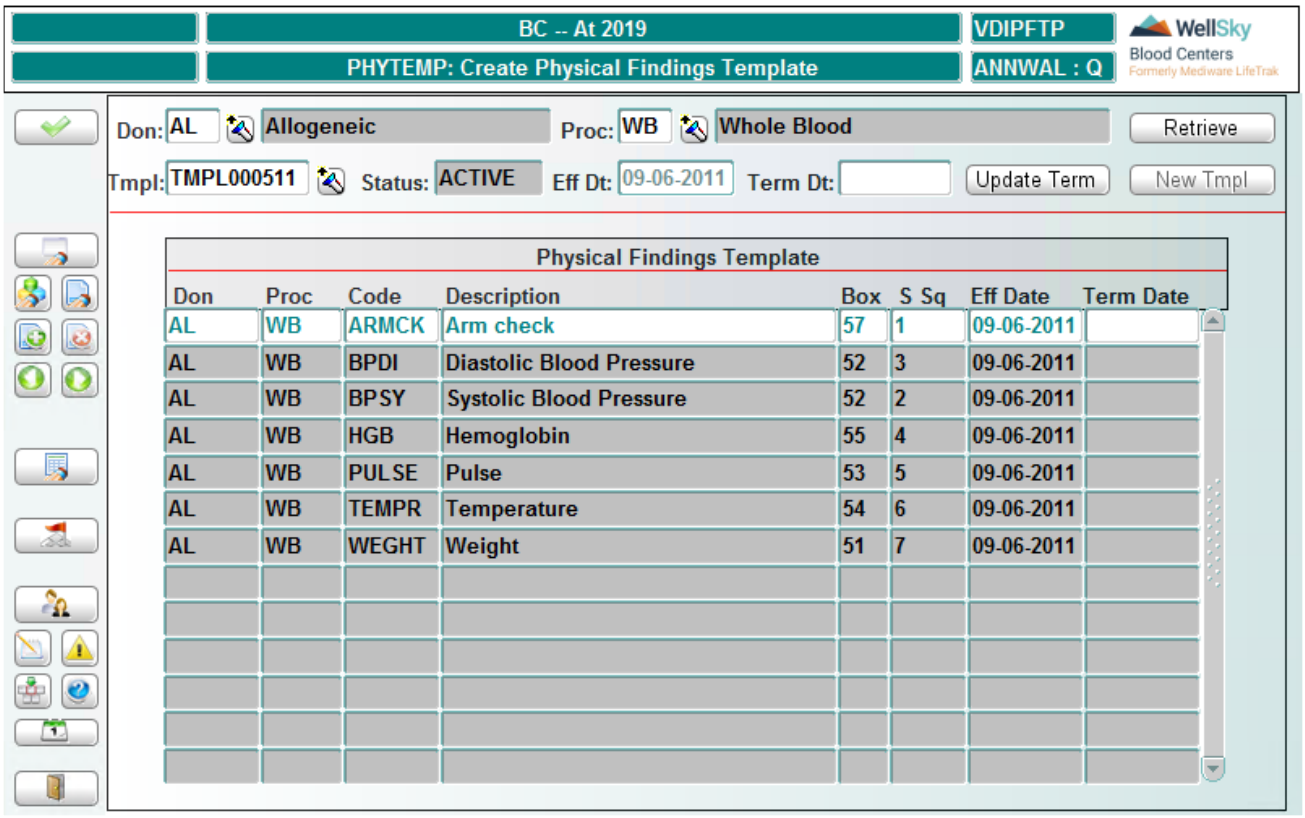

Control Block Fields and Definitions

Don

Entry is required. Enter a donation type or select from the LOV.

Proc

Entry is required. Enter a procedure code or select from the LOV.

Tmpl

Entry is required. Enter a template ID or select from the LOV. Enter `NEW` to create a new template. The status automatically displays.

NOTE – If creating a new template which conflicts with an active template, enter the termination date for the existing template, then click **Update Term**. If an inactive template was selected, the termination date automatically displays and cannot be changed.

Eff Dt

Entry is required.

If creating a new template, the system date automatically displays, but can be changed to a future date in MMDDYYYY format.

If an existing (active or inactive status) template is selected, the effective date automatically displays and cannot be changed.

Important! For those institutions that operate across multiple time zones, the effective date of the new template must accommodate the time difference(s). The effective date must be far enough in the future that it will become effective at or after midnight in the designated time zone. If the template becomes effective on a date that is already active in another time zone, there will be two active templates for a single collection date, causing errors in retrieval of a correct template.

Term Dt

Entry is optional. If entering a new template, you can enter a termination date in MMDDYYYY format.

To View Existing Templates

Click **Retrieve** to display records according to the specified criteria.

The following data displays for existing templates:

- Donation type
- Procedure
- Physical question code and description
- Box (for future use, please disregard)


WellSky Corporation
Proprietary and confidential

- Sort sequence
- Effective date
- Termination date

Existing data cannot be modified. The only way to change a template is to terminate it and start a new template.

To Create a New Template

Click **New Tmpl** to open the All Questions window:

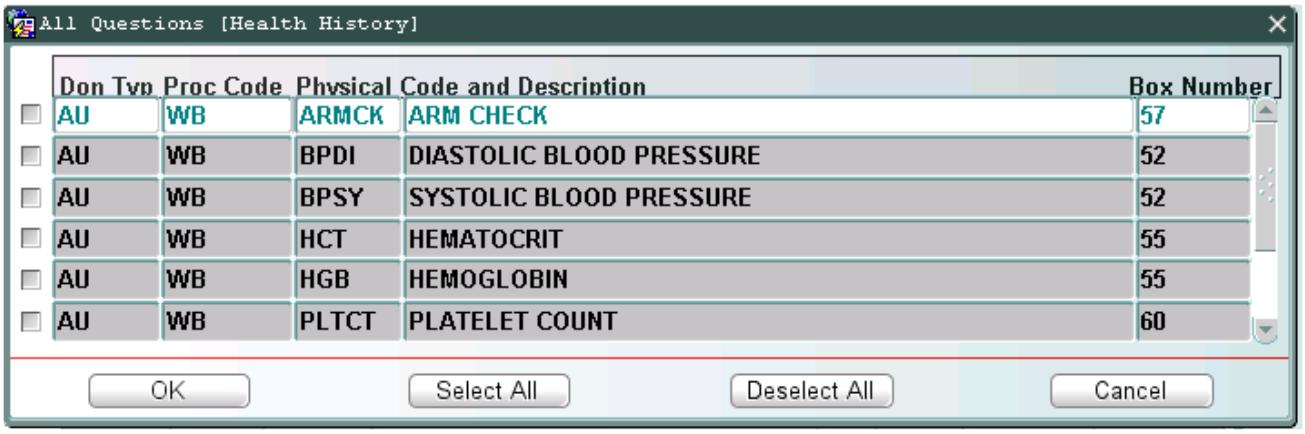

Select which questions to include in the template, and click **OK** to continue. The All Questions window closes and the questions display in the main screen.

S Sq

Entry is required. Enter the sort sequence for the questions.

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step.

6.2.3 Health History Questions Bank (HHQBANK)

Intended Use

Use this screen to create and modify health history questions for the long audit process.

Limitations


None

Prerequisites

None

Accessing the Screen

Access this screen from the Registration Administration menu or by entering the keyword HHQBANK.

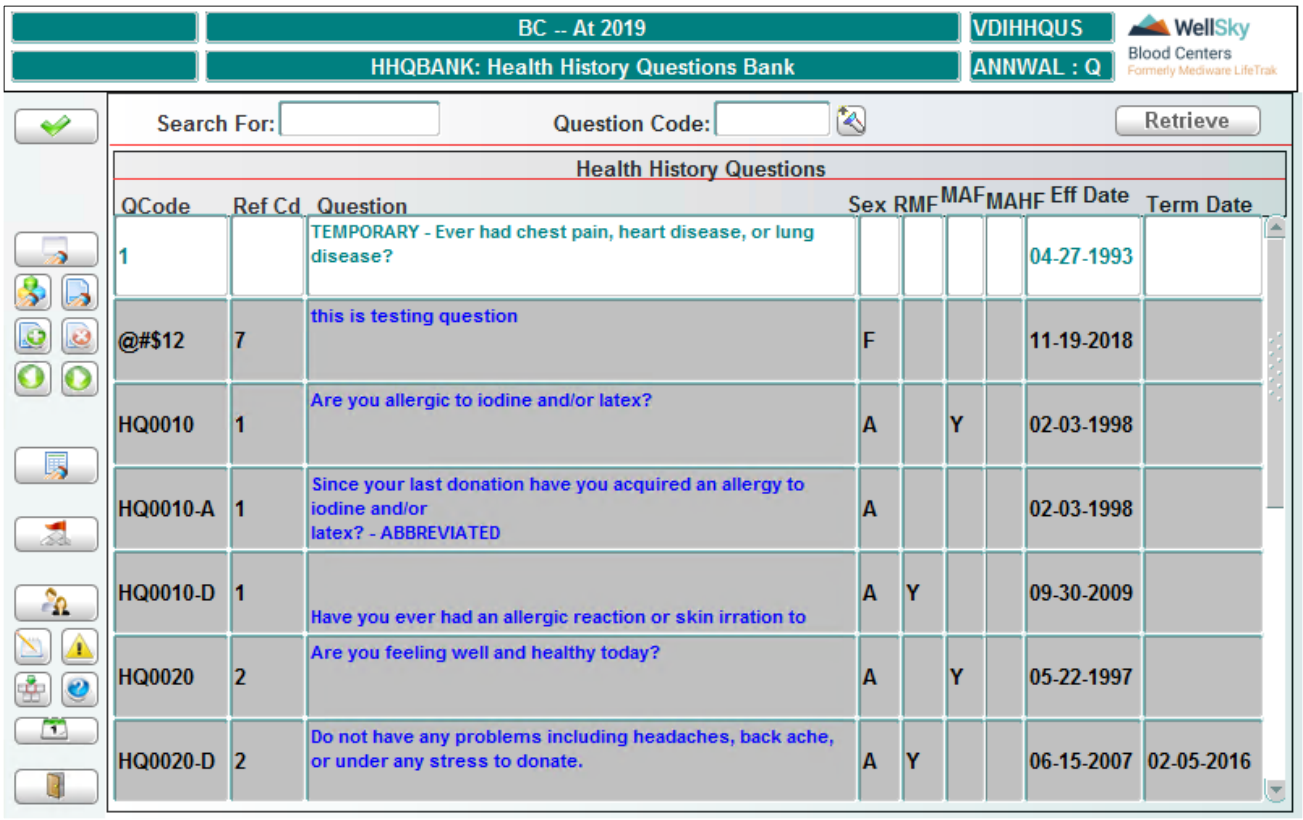

Control Block Fields and Definitions

Search For

Entry is optional. Enter a word for which to search.

Question Code

Entry is optional. Enter a question code or select from the LOV.

Retrieving Data

Click **Retrieve** to display records according to the specified criteria.

To Add or Modify Data

QCode

Entry is required. Enter a question code.

WellSky Corporation
Proprietary and confidential

A "-D" suffix is used when additional information needs to be provided in a separate Question Details window. The read more button is enabled allowing the donor to see additional information, or the additional information will automatically pop up.

The question code number for the basic question and the additional question must be the same, with the exception of the -D suffix.

Referring to the screen picture, Q Code H0010 is the basic question (Are you allergic to iodine and/or latex?). Q Code H0010-D asks for more detailed information, which appears in the Question Details window.

An "-A" suffix is used when the question is used in the abbreviated questionnaire. This allows for a different question description than what is in the full questionnaire (primary question). During the process of responding to an aDHQ, the donor will be presented with the "-A" question rather than the non-aDHQ primary question. Any question flagged for the aDHQ that does not have an "-A" question associated to the primary question will be presented with the primary question. Below is a representation of the build for the "-A" questions.

Health History Questions

QCode	Ref Cd	Question	Sex	RMF	Eff Date	Term Date
1		TEMPORARY - Ever had chest pain, heart disease, or lung disease?			04-27-1993	
HQ0010	1	Are you allergic to iodine and/or latex?	A		02-03-1998	
HQ0010-A	1	Since your last donation have you acquired an allergy to iodine and/or latex? - ABBREVIATED	A		02-03-1998	
HQ0010-D	1	Have you ever had an allergic reaction or skin irration to latex or products with latex such as bandages? If you have please answer YES and the screener will discuss with you.	A	Y	09-30-2009	

Ref Cd

Entry is required. Enter a reference code.

NOTE – Reference code is the data that is used in audit screens. This is the value that users see in other screens.

Question

Entry is required. Enter the full text of the question to ask.

Sex

Entry is required. Enter the gender which is to be asked the question: `M` (male), `F` (female), or `A` (all).

RMF

Entry is optional. Enter `Y` to enable the Read More button and cause the Question Details window to automatically pop up in the Donor Response screen. Enter `N` or leave blank to only enable the Read More button in the Donor Response screen. The Question Details window pops up when the Read More button is clicked.

NOTE – This field is used only when the Q Code has a -D suffix.

MAF

Leave this field blank, or enter `Y` to display for manual audit if the response to this question was changed by staff.

MAHF

Leave this field blank, or enter `Y` to display for manual audit if the historical response to this question was changed by staff.

Eff Date

Entry is required. Enter the effective date in MMDDYYYY format. This field cannot be modified for existing records.

Term Date

Entry is optional. Enter the termination date for the question in MMDDYYYY format.

NOTE – The termination date is set to date/hour, so the code will be active until midnight on the termination date.

At Commit

All of the changes are saved to the database.

What to Do Next

Go to Define Health History Response (HHR).

6.2.4 Define Health History Responses (HHR)

Intended Use

Use this screen to define the responses for health history questions for the long audit process.

Limitations

None


Prerequisites

Health history questions must already be defined and valid data must exist in Interdiction Codes (INTER).

Accessing the Screen

Access this screen from the Registration Administration menu or by entering the keyword `HHR`.

WellSky Corporation
Proprietary and confidential

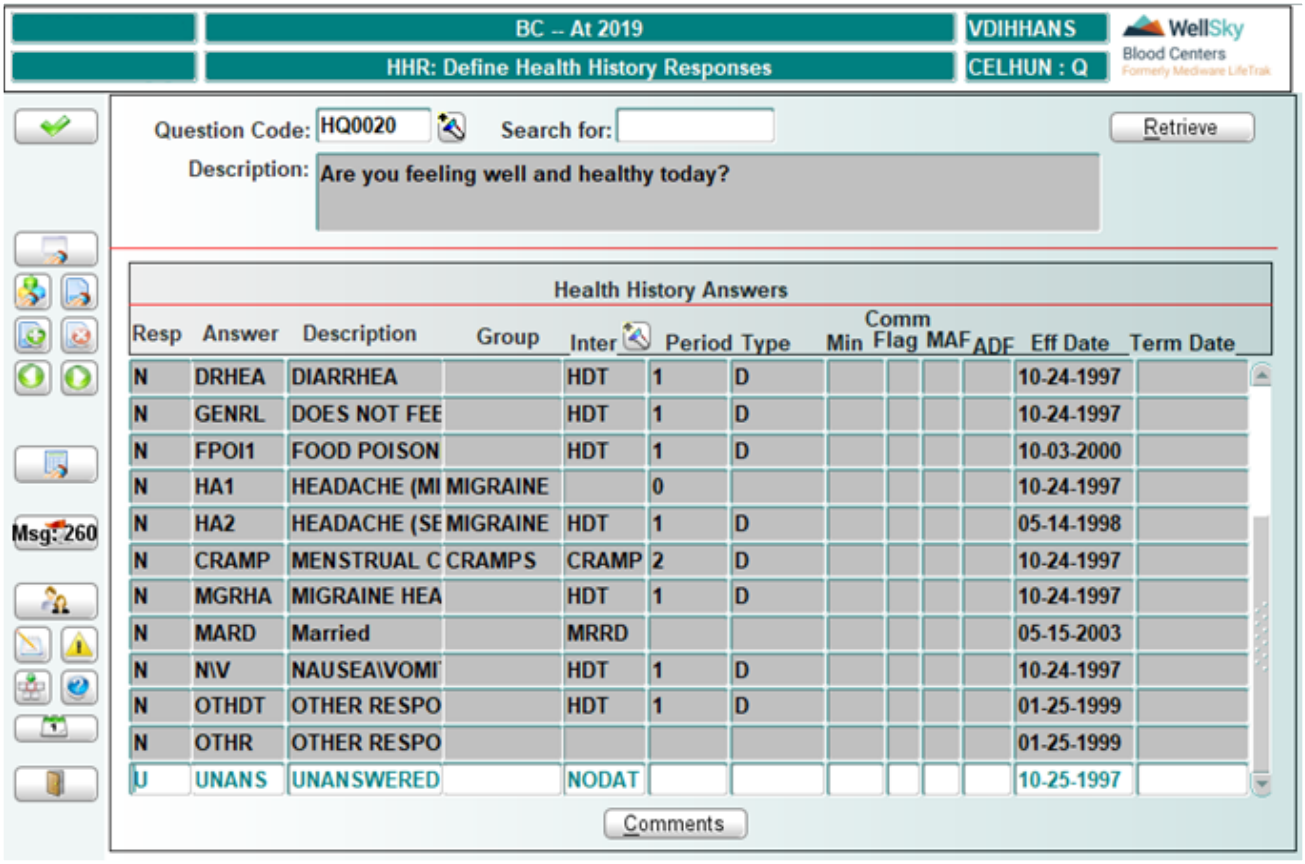

Control Block Fields and Definitions

Question Code

Entry is required. Enter a question code or select from the LOV. Once a valid question code is entered or selected, the description field automatically populates.

Search For

Entry is optional. Enter a word for which to search.

Retrieving Data

Click **Retrieve** to display records according to the specified criteria.

To Add or Modify Data

Resp

Entry is required. Enter a response: `Y` (yes), `N` (no), or `U` (unanswered). This field cannot be modified for existing records.

NOTE – Response of U must use the answer code of UNANS. This is static. The U is only used in Back Office audit programs. The U response is not used in the On-Site module.

Answer

Entry is required. Enter an answer code. This field cannot be modified for existing records. It can only be terminated.

Description

Entry is required. Enter a description for the answer code. The description will allow an entry that is a maximum of 1000 characters. Double-click to open the editor to view the entire description.

NOTE – Each carriage return (i.e. pressing ENTER) is also counted as a character, so maximum entry would be 990 characters with 10 carriage returns.

Group

Entry is not required. Enter a group code or select one from the LOV. The LOV is populated from the Health History Group Responses table.

Inter

Entry is optional. Enter an interdiction code or select from the LOV.

NOTE – A specific interdiction may have a specific deferral period associated to it. A generic interdiction (for example, HDT: Health History Deferral – Temporary) can have different deferral periods associated to the answer. Enter those deferral periods in the *Period* and *Type* fields.

Period

Entry is optional. Enter the numerical value for the deferral period length.

Type

Entry is required if an entry was placed in the *Period* field. Enter a period type (`days`, `weeks`, `months`, or `years`) or select from the LOV.

Min

Entry is optional. Enter a minimum period for which the interdiction cannot be over-ridden.

Comm Flag

Entry is optional. Enter `Y` to indicate a comment is required for this response. If the field is blank, the Comment field will be optional in all audit forms.

MAF Flag

Entry is optional. Leave the field blank, or enter `Y` if the response is entered during health history and manual audit is to be performed.

WellSky Corporation
Proprietary and confidential

ADF Flag

Entry is optional. Leave the field blank, or enter `Y` for additional date entry during health history.

Eff Date

Entry is required. Enter the effective date in MMDDYYYY format. Date cannot be prior to system date. This field cannot be modified for existing records.


Term Date

Entry is optional. Enter the termination date for the question in MMDDYYYY format.

Button

Comment

To define canned comments for specific responses, click **Comment** when you have the response selected. The following window will display:

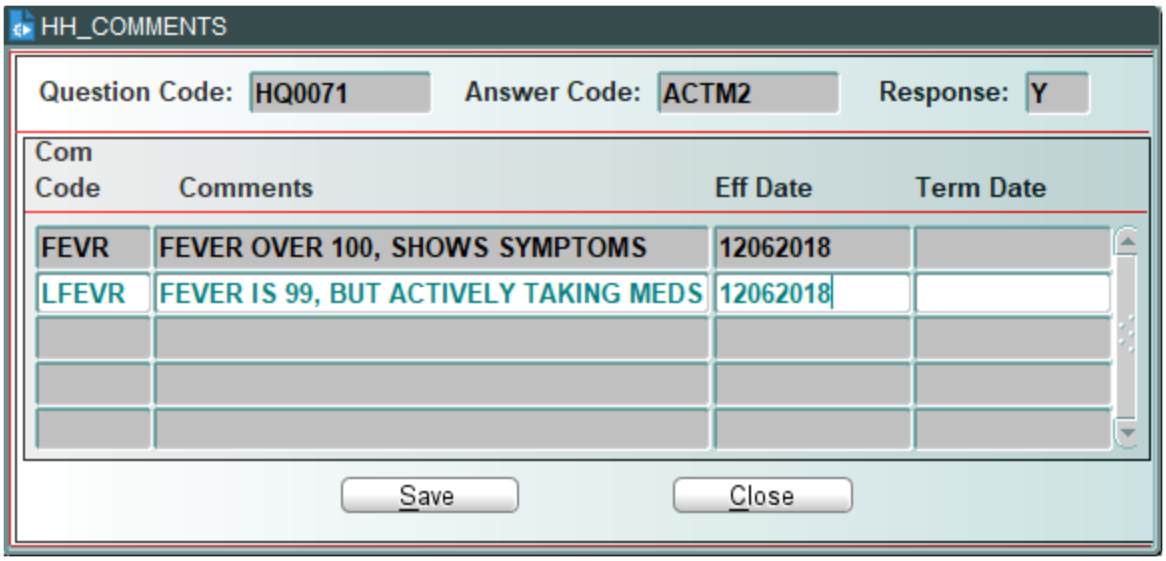

Question Code

The question code number displays in this field. This field is display only.

Answer Code

The answer code displays in this field. This field is display only.

Response

The response code displays in this field. This field is display only.

Com Code

The Comment Code field is a required field. A maximum of 5 characters is allowed.

Comments

Enter the comment details in this field. This field is a required field, and a maximum of 240 characters is allowed. The field allows alpha-numeric and special characters.

> **NOTE –** The Comment field in the audit screens will only accept a maximum of 240 characters, so WellSky suggests limiting the length of your comment if multiple comments are going to be allowed in the field.

Eff Date

Entry is required. Enter the effective date in MMDDYYYY format. The entered date cannot be prior to the system date. This field cannot be modified for existing records.

Term Date

Entry is optional. Enter the termination date for the question in MMDDYYYY format.

At Commit

All of the changes are saved to the database.

What to Do Next

Go to Create Health History Template (HHQTEMP).

6.2.5 Create Health History Template (HHQTEMP)

Intended Use

Use this screen to create a health history template for use in the long audit process.

Limitations

- There can only be one active and one future template for a donation type.
- The last question in the template cannot be a parent question.
- Randomization option of questions does not align with the presentation of questions for the Uniform Donor History Questionnaire (UDHQ).
- For parent/child questions, when the randomization option is set to Y, all questions in the template are presented to the donor.
- If a new question is added to the regular donation template, it is the facility's SOPs that will control whether or not the question should be added to the abbreviated questionnaire.
- If the last question that you have on your health history template is a child question, you must enter an answer to the question even if the question should not have been invoked.

WellSky Corporation
Proprietary and confidential


Prerequisites

Valid data must exist in the following:

- Define Donation Type (DONS)
- Health History Questions Bank (HHQBANK)
- Define Health History Responses (HHR)

Accessing the Screen

Access this screen from the Registration Administration menu or by entering the keyword `HHQTEMP`.

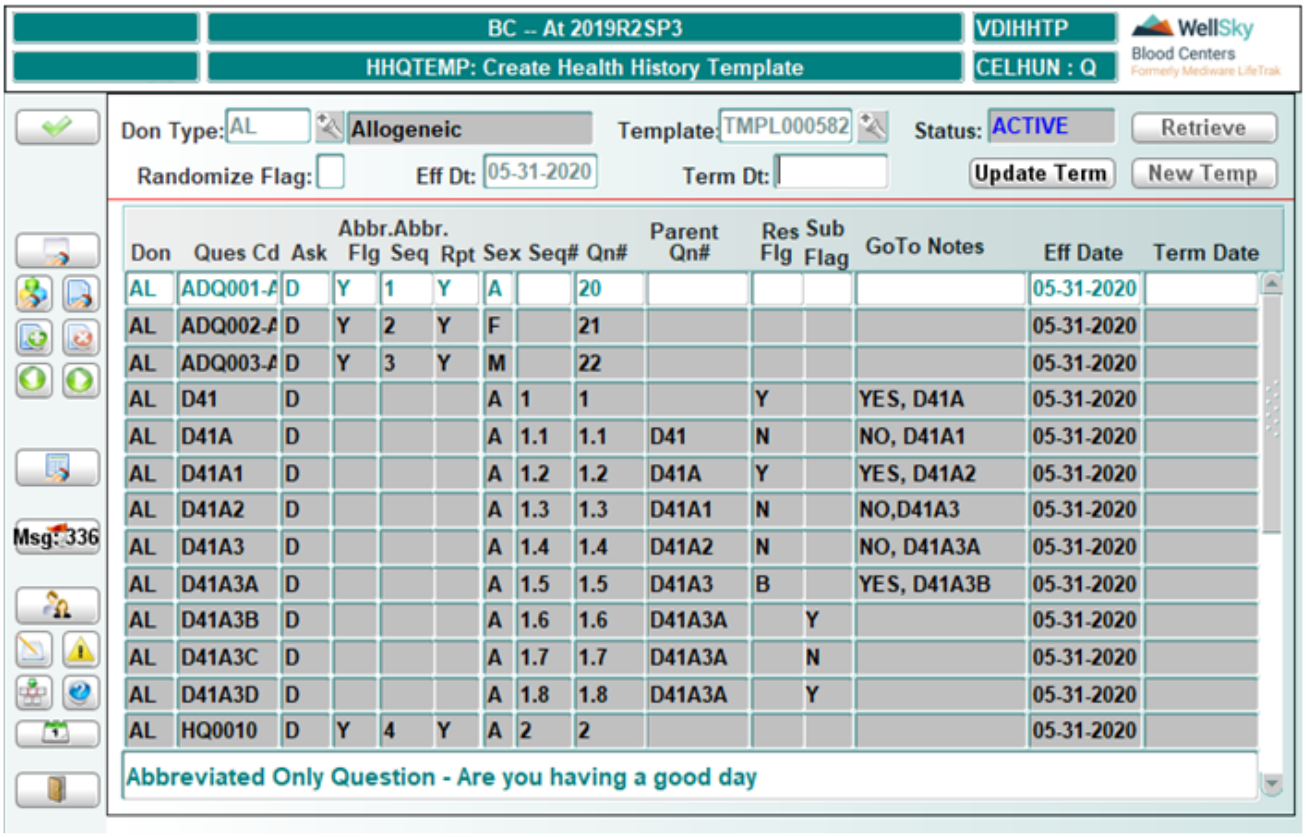

Don	Ques Cd	Ask	Abbr. Flg	Abbr. Seq	Rpt	Sex	Seq#	Qn#	Parent Qn#	Res Flg	Sub Flag	GoTo Notes	Eff Date	Term Date
AL	ADQ001-A	D	Y	1	Y	A		20					05-31-2020	
AL	ADQ002-A	D	Y	2	Y	F		21					05-31-2020	
AL	ADQ003-A	D	Y	3	Y	M		22					05-31-2020	
AL	D41	D				A	1	1		Y		YES, D41A	05-31-2020	
AL	D41A	D				A	1.1	1.1	D41	N		NO, D41A1	05-31-2020	
AL	D41A1	D				A	1.2	1.2	D41A	Y		YES, D41A2	05-31-2020	
AL	D41A2	D				A	1.3	1.3	D41A1	N		NO,D41A3	05-31-2020	
AL	D41A3	D				A	1.4	1.4	D41A2	N		NO, D41A3A	05-31-2020	
AL	D41A3A	D				A	1.5	1.5	D41A3	B		YES, D41A3B	05-31-2020	
AL	D41A3B	D				A	1.6	1.6	D41A3A		Y		05-31-2020	
AL	D41A3C	D				A	1.7	1.7	D41A3A		N		05-31-2020	
AL	D41A3D	D				A	1.8	1.8	D41A3A		Y		05-31-2020	
AL	HQ0010	D	Y	4	Y	A	2	2					05-31-2020	

Control Block Fields and Definitions

Don Type

Entry is required. Enter a donation type or select from the LOV.

Template

Entry is required. Enter a template ID or select from the LOV. Enter `NEW` to create a new template. The status automatically displays.

NOTE – If creating a new template which conflicts with an active template, enter the termination date for the existing template, then click **Update Term**. If an inactive template was selected, the termination date automatically displays and cannot be changed.

Status

Displays the status of the selected template. Field is non-navigable.

Randomize Flag

Enter `Y` to randomize questions in the donor response screen. Enter `N` or leave blank to have the questions appear in order.

NOTE – As stated in the Limitations, randomization of questions does not align with the Uniform Donor History Questionnaire (UDHQ).

NOTE – As stated in the Limitations, for Parent/Child questions , when the randomization option is set to 'Y' all questions in the template are presented to the donor.

Eff Dt

Entry is required under the following circumstances:

- If creating a new template, the system date automatically displays, but can be changed to a future date, in MMDDYYYY format.
- If an existing (active or inactive status) template is selected, the effective date automatically displays and cannot be changed.

Important! For those institutions that operate across multiple time zones, the effective date of the new template must accommodate the time difference(s). The effective date must be far enough in the future that it will become effective at or after midnight in the designated time zone. If the template becomes effective on a date that is already active in another time zone, there will be two active templates for a single collection date, causing errors in retrieval of a correct template.

Term Dt

Entry is optional. If entering a new template, you can enter a termination date in MMDDYYYY format.

To View Existing Templates

Click **Retrieve** to display records according to the specified search criteria.


The following fields display for existing templates:

Don

Donation type.

WellSky Corporation
Proprietary and confidential


The donation type also displays in the Donation Type field of the Donation Deferral Audit Details screen, which is accessible from the Donor Detail Query (SDONQ) screen by clicking Donations.

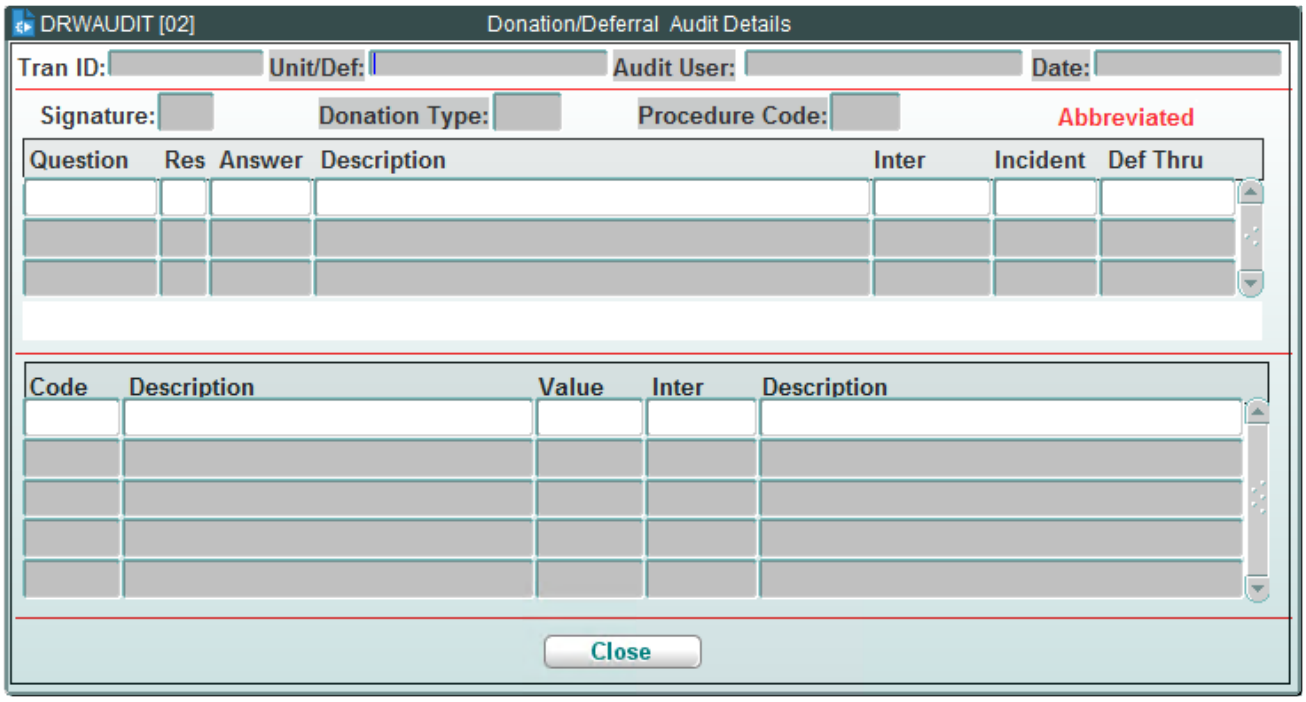

Ques Cd

The question code from the Health History Questions Bank.

The question code also displays in the Health History Responses screen, which is accessible from the Health History and Physical Findings (HHPF) screen by clicking Health History.

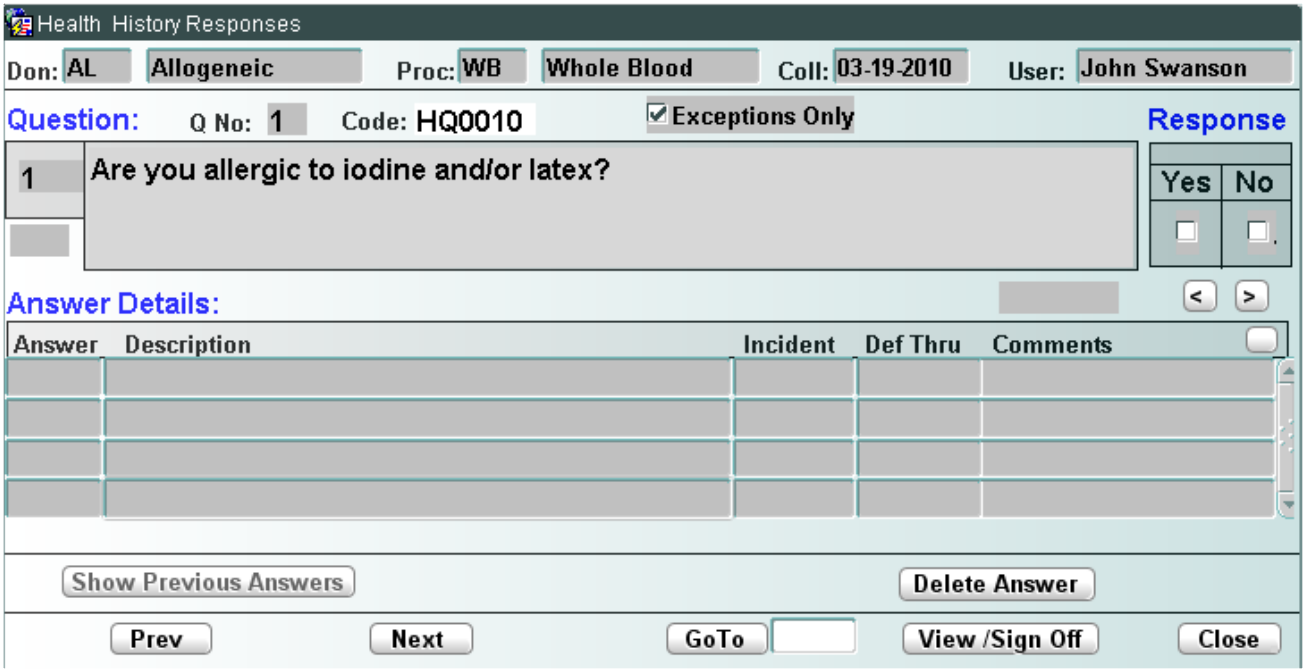

Description

The text of the question from the Health History Questions Bank.

Ask

If the question is or is not to be asked by the screener. A D displays if the question is to be asked.

Abbr. Flag

Enter `Y` to select the question to appear in the abbreviated questionnaire set. Enter `N` or leave blank to select the question to not appear in the abbreviated questionnaire set.

Abbr. Seq

A sequence number that indicates the order in which the abbreviated questions are sorted and displayed. The sequence number also displays in the following locations:

- Question Number field of the Blood Centers Donor Self-Response screen, which is accessible from the Health History and Physical Findings page (.net) by selecting the Donor Responses, and in the Health History page (.net).

NOTE – The entry of abbreviated sequence is only used in the On-Site (.net) module; it is not used in the Oracle On-Site module.

Rpt

If the question is to be repeated when the donor returns from being on hold in the On-Site Registration module.

Sex

If the question is for male donors only (M), female donors only (F), or all genders (A).

Seq


A sequence number that indicates the order in which the questions are sorted and displayed.

The sequence number also displays in the following locations:


- Question Number field of the Blood Centers Donor Self-Response screen, which is accessible from the Health History and Physical Findings (HHPF) screen by clicking Donor Responses.

NOTE – The sequence number will be left blank if the question is not part of the general health history questionnaire.

WellSky Corporation
Proprietary and confidential

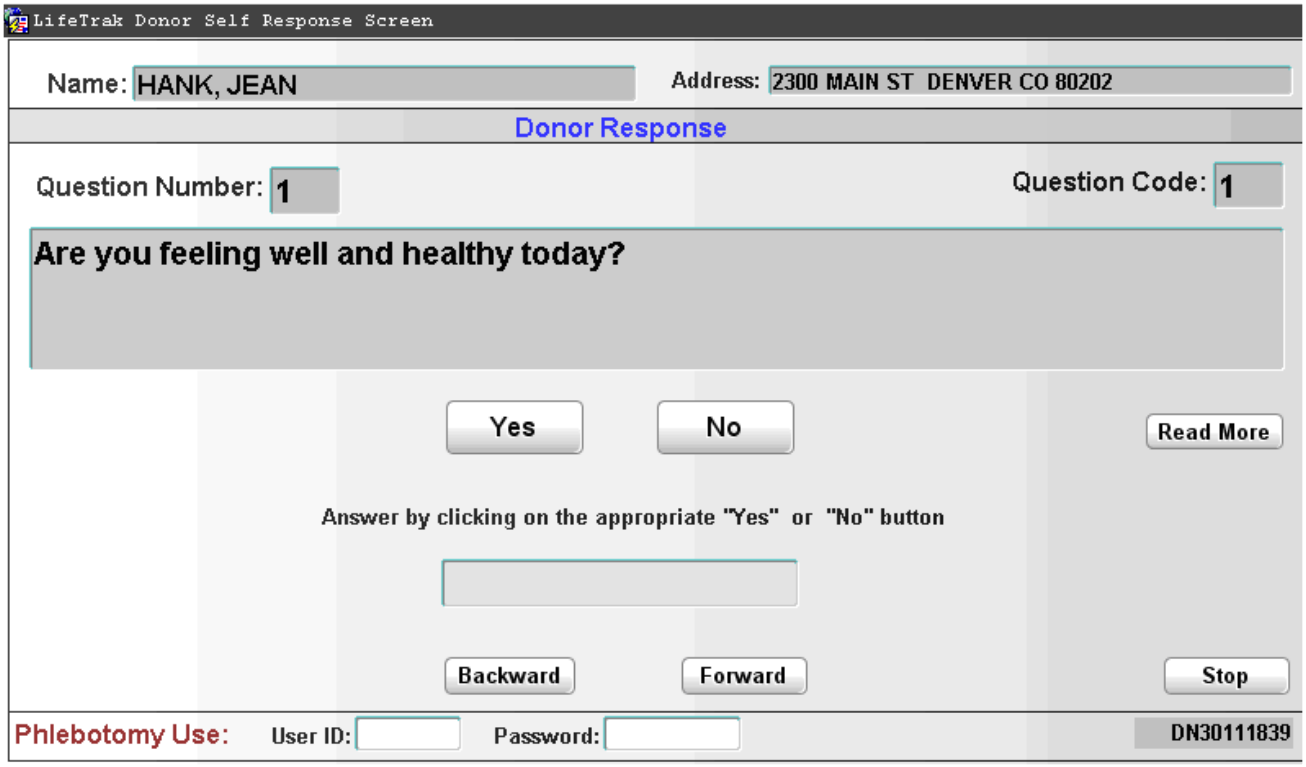

- Q No field of the Health History Responses screen, which is accessible from the Health History and Physical Findings (HHPF) screen by clicking Health History.

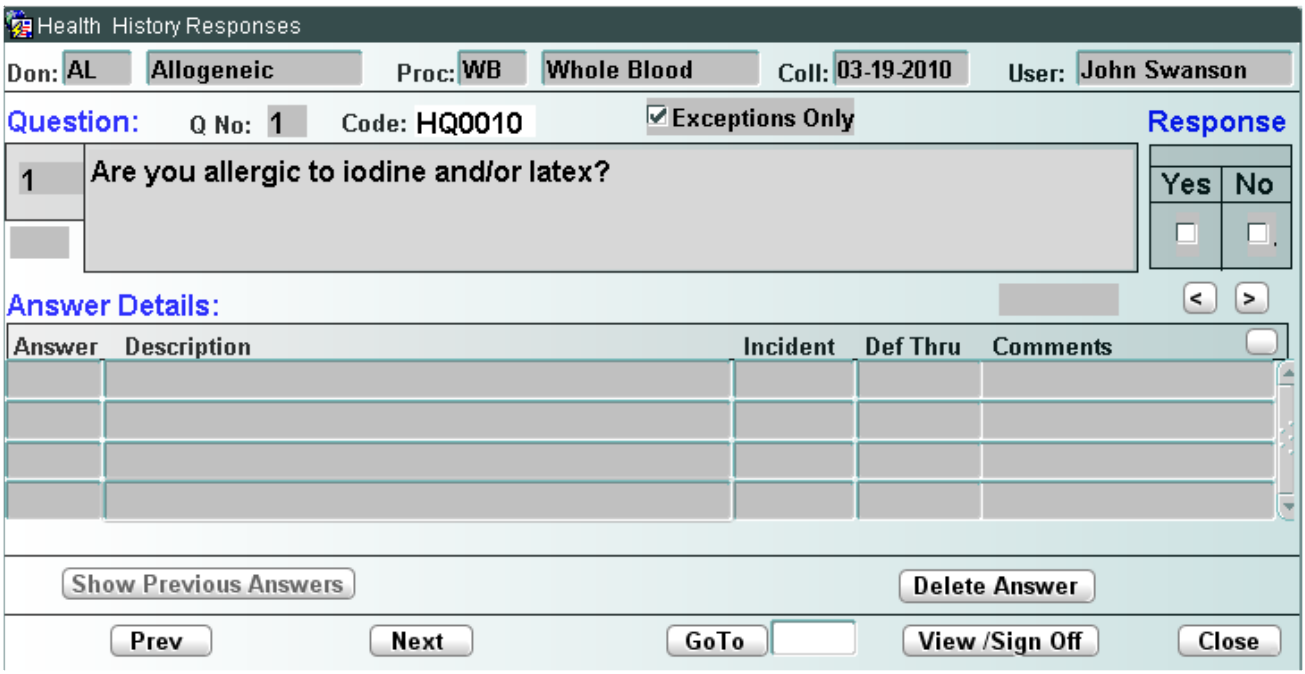


Qn#

The corresponding question number from the donor record.


The question number also displays in the following locations:

- Question Code field of the Blood Centers Donor Self-Response screen, which is accessible from the Health History and Physical Findings (HHPF) screen by clicking **Donor Responses.**


> **NOTE –** The question number cannot be duplicated; it must be unique. So, if there are abbreviated questions that are not part of the general questionnaire, WellSky recommends that those be put at the end of the question number sequence.

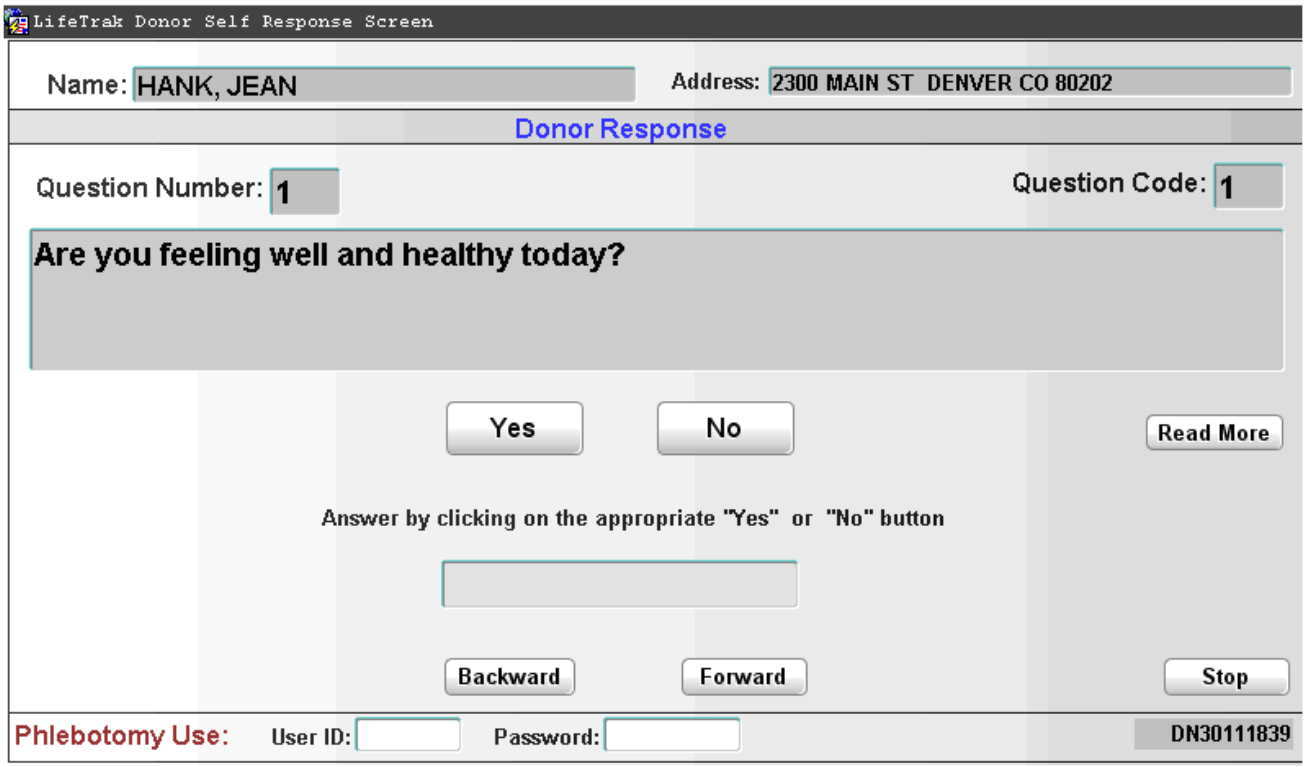

- Question field of the Health History Responses screen, which is accessible from the Health History and Physical Findings (HHPF) screen by clicking **Health History**.

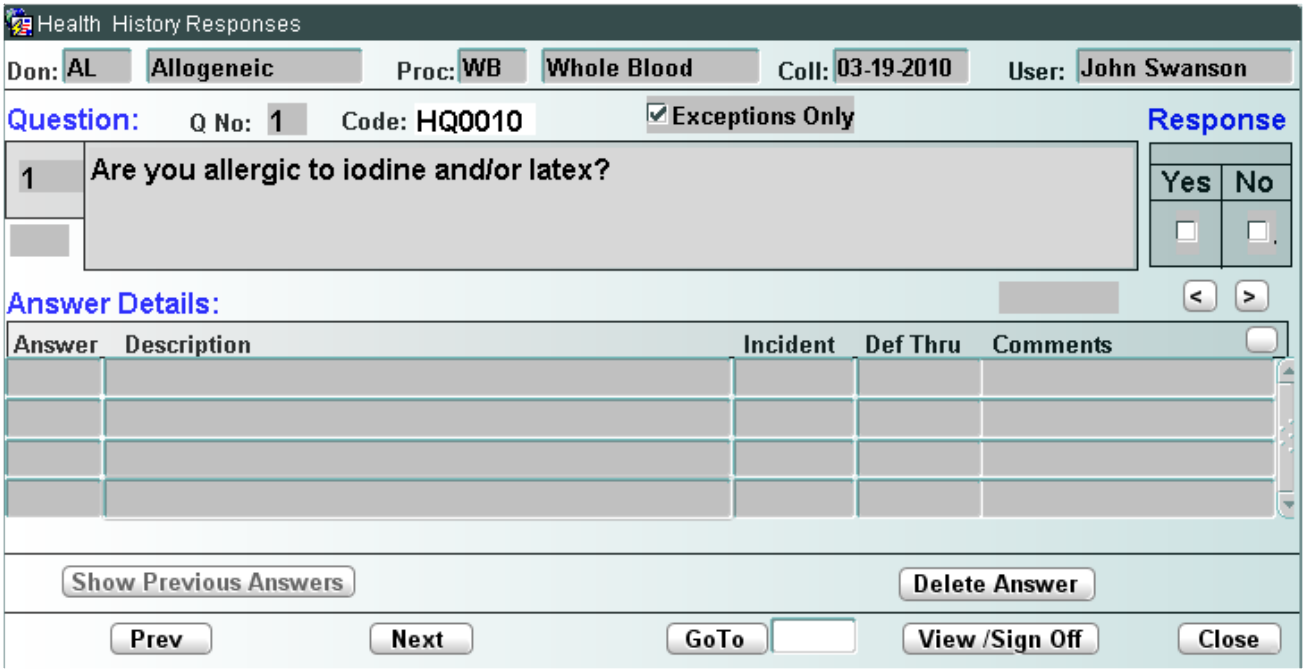

- Question field of the Donation Deferral Audit Details screen, which is accessible from the Donor Detail Query (SDONQ) screen by clicking **Donations**.

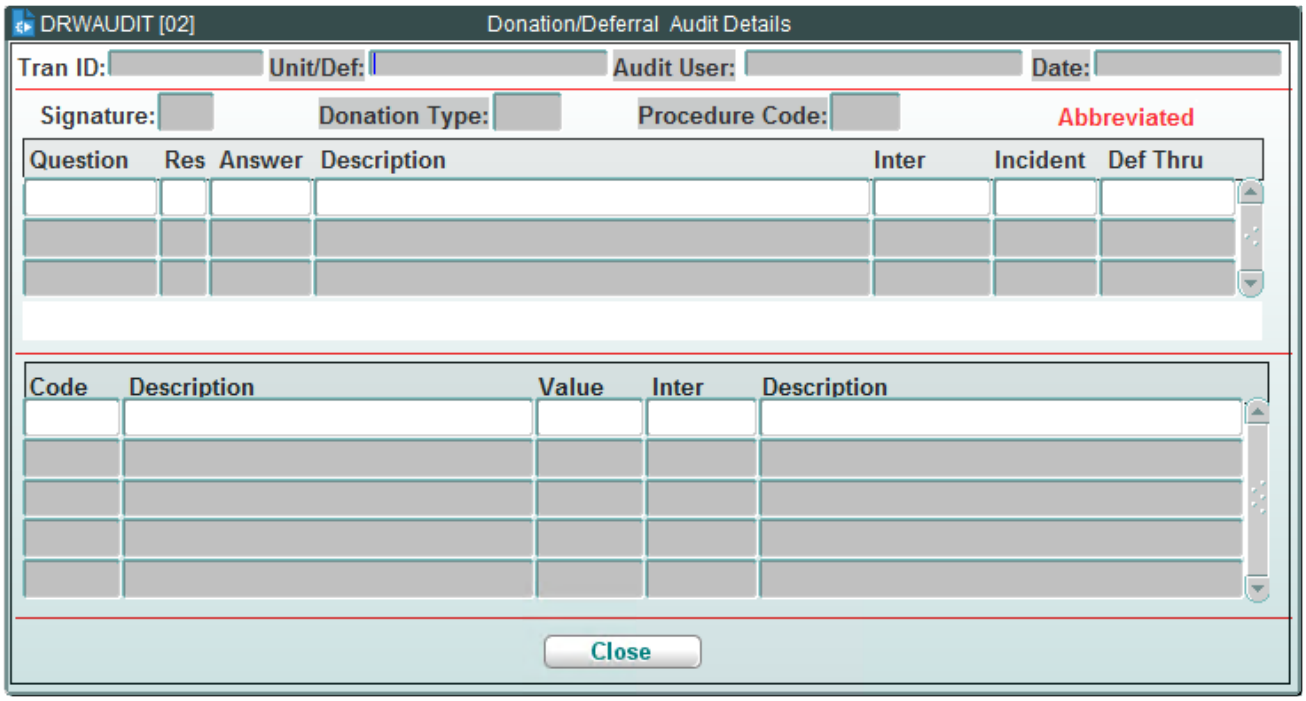

Parent Qn

The question code for the parent question if the question is a child question.

Resp Flg

Response flag that will invoke the child questions associated to the question. Enter **Y**, **N**, or **B** (either response will invoke the child question).

Sub Flag

Enter the response [**Y** or **N**] for which this sub-question is to be called if the parent has the option of Both (B).

Go To Notes

Enter a comment to aid in defining the descendent question sequence. A maximum of 100 characters is allowed in this field.

Eff Date

Effective date.

Term Date


Termination date.

Changing an Existing Template

Existing data cannot be modified. The only way to change a template is to terminate it and start a new template.

To Create a New Template

Click New Temp to open the All Questions window:

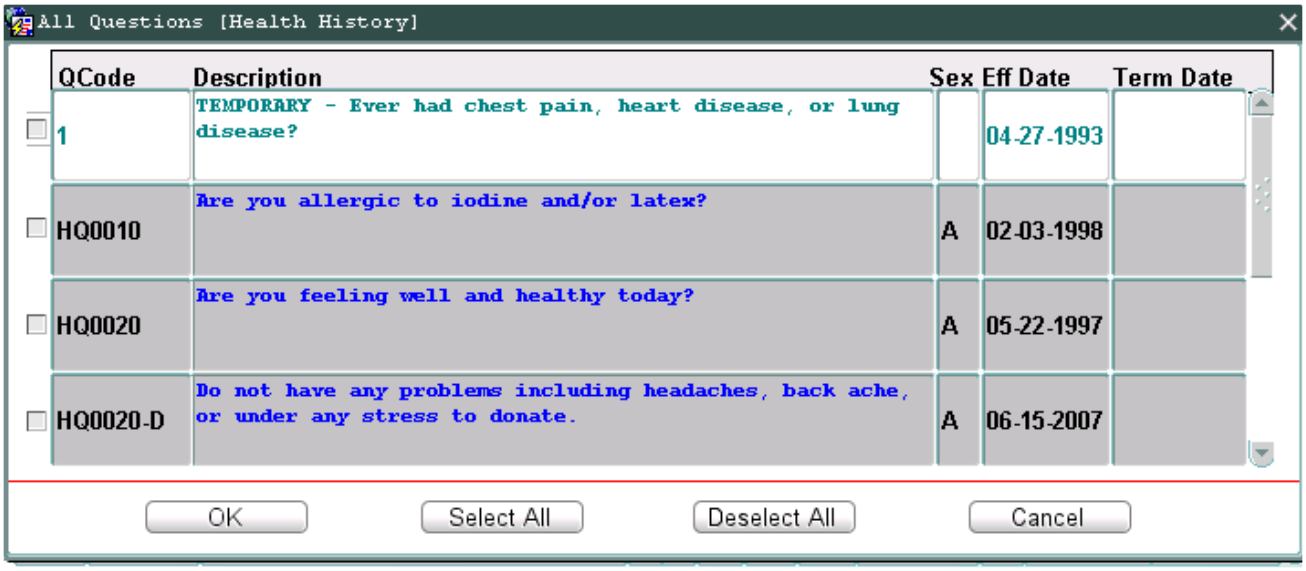

Select which questions to include in the template and click OK to continue. The All Questions window closes and the questions display in the main screen.

WellSky Corporation
Proprietary and confidential

NOTE – Do not include question codes with a '-D' suffix . This will cause the same question to display two times in a row.

Detail Block Fields and Definitions

Don
Display only field. Donation type populated from control block.

Ques Code
Display only field. Question code is populated with the question code from the Health History Questions Bank (HHQBANK).

Description
Display only field. Description is populated with the question description from the Health History Questions Bank (HHQBANK).

Ask
Entry is not required. Enter `D` if the donor will answer this question through the Donor Health History Responses window, otherwise leave field blank.

Rpt
Enter `Y` if the question is to be repeated when the donor returns from being on hold in the On-Site Registration module.

Sex
Enter `F` for questions for female donors only, enter `M` for questions for male donors only, enter `A` if the question will apply to all genders.

Seq#
Enter sequence in which you want the questions to be sorted and displayed.

Qn#
Enter the corresponding question number from the donor record.

Parent Qn
Enter the Question code for the parent question if the question is a child question. Otherwise, leave the field blank.

Resp Flg
Response flag that will invoke the child questions associated to the question. Enter **`Y`**, **`N`**, or **`B`** (either response will invoke the child question).

Sub Flag
Enter the response [**`Y`** or **`N`**] for which this sub-question is to be called if the parent has the option of Both (B).

Go To Notes

Enter a comment to aid in defining the descendent question sequence. A maximum of 100 characters is allowed in this field.

Eff Date


Entry is required. The system date automatically displays, but can be changed to a future date in MMDDYYYY format.

Term Date

Entry is optional. You may enter a termination date in MMDDYYYY format.

View Question When Configuring

After selecting the question or viewing the question in the template, highlight the row, and it will display all of the questions below it.

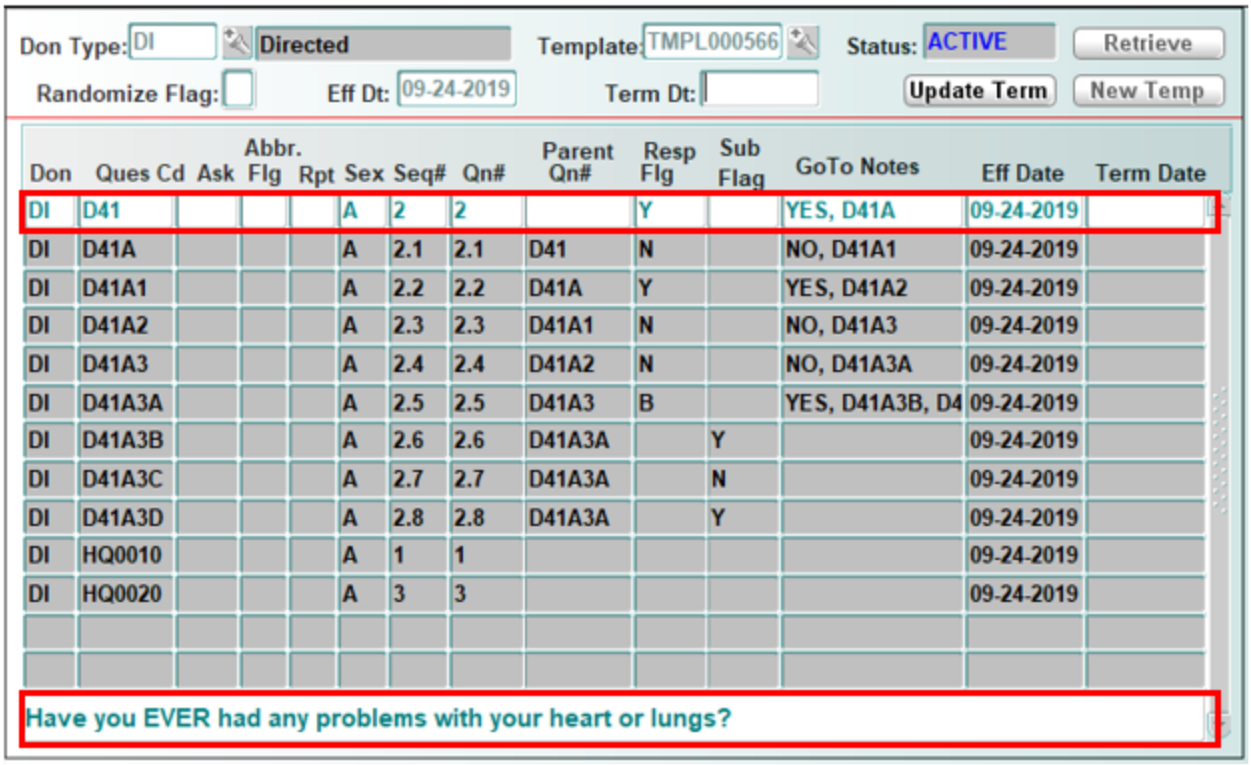

Don	Ques Cd	Ask	Abbr. Flg	Rpt	Sex	Seq#	Qn#	Parent Qn#	Resp Flg	Sub Flag	GoTo Notes	Eff Date	Term Date
DI	D41				A	2	2		Y		YES, D41A	09-24-2019	
DI	D41A				A	2.1	2.1	D41	N		NO, D41A1	09-24-2019	
DI	D41A1				A	2.2	2.2	D41A	Y		YES, D41A2	09-24-2019	
DI	D41A2				A	2.3	2.3	D41A1	N		NO, D41A3	09-24-2019	
DI	D41A3				A	2.4	2.4	D41A2	N		NO, D41A3A	09-24-2019	
DI	D41A3A				A	2.5	2.5	D41A3	B		YES, D41A3B, D4	09-24-2019	
DI	D41A3B				A	2.6	2.6	D41A3A		Y		09-24-2019	
DI	D41A3C				A	2.7	2.7	D41A3A		N		09-24-2019	
DI	D41A3D				A	2.8	2.8	D41A3A		Y		09-24-2019	
DI	HQ0010				A	1	1					09-24-2019	
DI	HQ0020				A	3	3					09-24-2019	

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step.

WellSky Corporation
Proprietary and confidential

6.2.6 Abbreviated Questionnaire Setup (ADHQ)

Intended Use

Use this screen to set the parameters for the abbreviated questionnaire. Donors should be permitted to complete the abbreviated questionnaire if they meet the criteria that are set up in the screen. The following examples illustrate typical scenarios:



EXAMPLE – A donor has two donations within a six month period and completes the full questionnaire both times. The donor can complete the abbreviated questionnaire at his or her next donation.



EXAMPLE – A donor has one donation and one deferral (of less than six month), and then another donation within six months, and completes full questionnaire for both donations. The donor can complete the abbreviated questionnaire at his or her next donation.

If the health history template has changed since the last qualification for the abbreviated questionnaire, the donor must start the qualification process again.

Limitations


This screen does not determine if a new question has been entered in the template and should be included in the abbreviated questionnaire. The facility's SOP should define this.

Prerequisites

None

Accessing the Screen

Access this screen from the Registration Administration menu or by entering the keyword `ADHQ`.

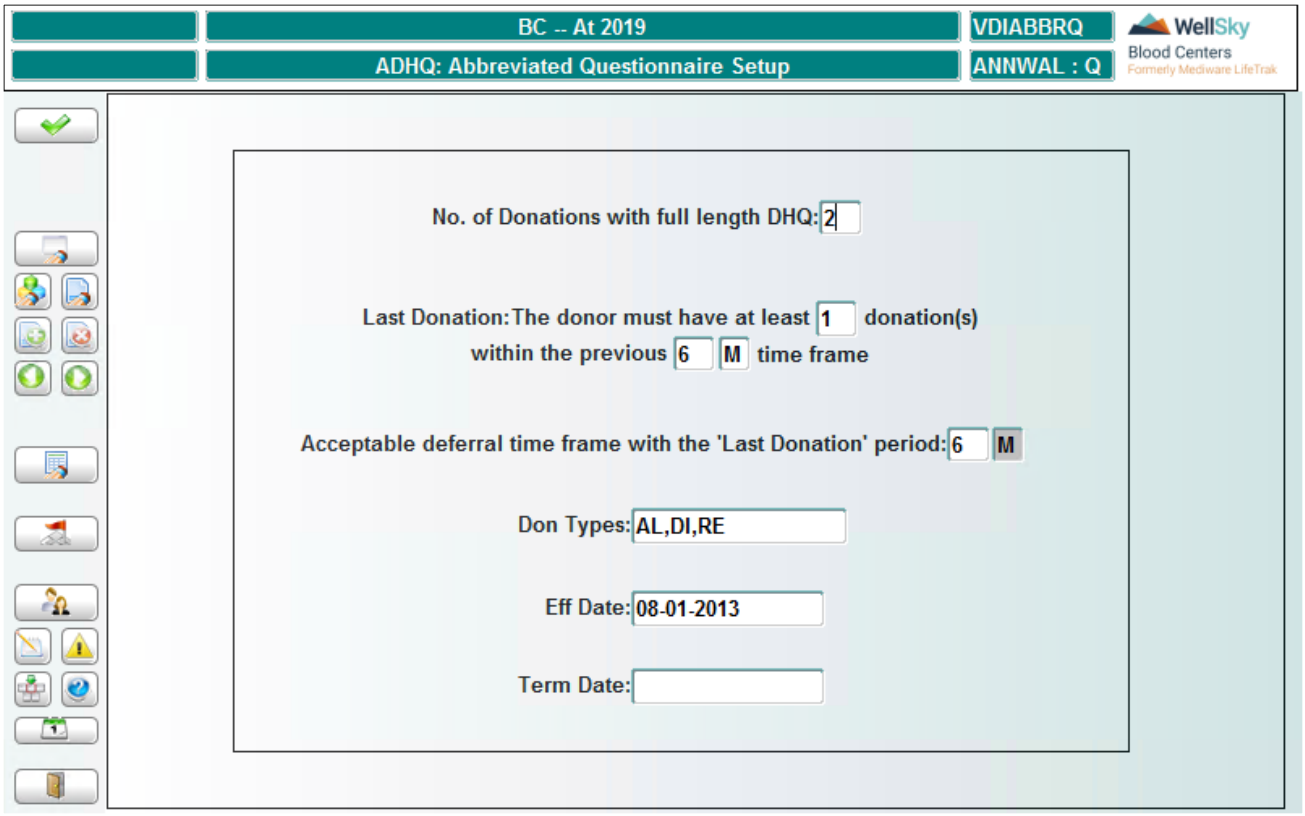

Fields and Definitions

No. of Donations with full length DHQ

Entry is required. Enter the number of donations using the full length questionnaires that donors must have completed before they are permitted to use the abbreviated questionnaire.

Last Donation (Block)


Enter the number of donations donors must have completed within a specified time period before they are eligible for the abbreviated questionnaire. You must enter this information into three fields, as follows:

NOTE – All fields are required.

- *The donor must have at least x donation(s)*, where x is the number of donations.
- *within the previous y*, where y is the time frame.
- *z time frame*, where z is the time frame unit, as follows:
  - `D` – day
  - `W` – week
  - `M` – month
  - `Y` – year

WellSky Corporation
Proprietary and confidential

To require donors to have at least 2 donations within the previous year before they are eligible for the abbreviated questionnaire, enter the following:



Acceptable deferral time frame with the 'Last Donation' period

Entry is required. Enter the deferral period for abbreviated eligibility criteria.

NOTE – This should be the same time frame as defined in last donation statement.

Don Type

Entry is required. Enter donation type code or select from the LOV. To enter multiple codes, separate each code with a comma. If you select the codes from the LOV, the system automatically inserts the comma. The donation types will be considered to determine if the abbreviated questionnaire requirements have been meet.

Include allogenic and directed donations but do not include autologous donations.

Eff Date

Enter the effective date in MMDDYYYY format.

Term Date

Enter the termination date in MMDDYYYY format.

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step.

6.2.7 FastTrak Web Configuration (Onsite) (WEBCFG)

Intended Use

Use this screen to configure the OnSite FastTrak Donor Response system online response and multi-language flags.

Limitations

- For On-Site (.net), if the WELCOME page has links, it will automatically place check boxes in front of the description. This is coded within the WELCOME page, and this is the only page that has check boxes in front of descriptions.
- Check boxes will never show on specific questions, only on the WELCOME page.
- Printing Not Supported on Android, Firefox, and iPad/iPhone.

- Printing Not Directly Supported, but you can use the browser menu to print on iPad/iPhone and Firefox.
- Saving Not Directly Supported on iPad/iPhone, Firefox, and Chrome.


Prerequisites

If the *Multi Language Flag* field is set to Y, questions must have been translated using the JSON files.

If the JSON files are not loaded into the directory (refer to the *WellSky® Blood Centers Installation Guide*), the donor will not be able to select a language and view the questions in the expected language (On-Site .net).

Accessing the Screen

Access this screen from the Registration Administration menu or by entering the keyword `WEBCFG`.

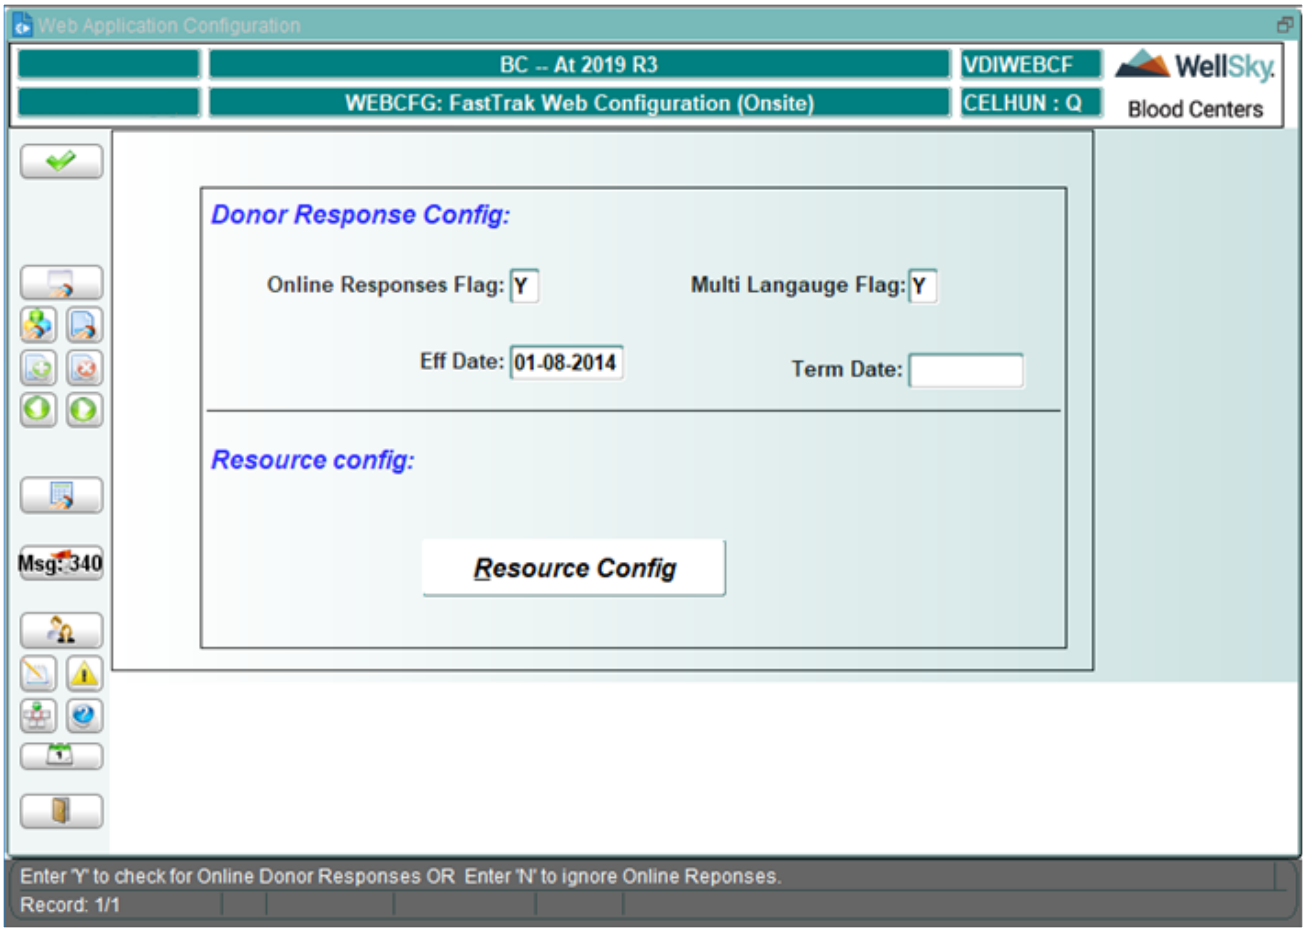

WellSky Corporation
Proprietary and confidential

Fields and Definitions

Donor Response Config

Online Responses Flag

Checks if Online Responses have to be considered or not. Enter one of the following:

- `Y` – user can download online responses from the OnSite FastTrak Donor Response system, if donor has already completed the Donor Questionnaire online. If the donor has completed the Donor Questionnaire online, the system will set the *Web Responded* field in the Health History and Physical Findings (HHPF) screen to Yes.
- `N` – user cannot download online responses from the OnSite FastTrak Donor Response system for either a donor center or a fixed site.

Multi Language Flag

Indicates if the multi-language option is enabled in Donor and the OnSite FastTrak Donor Response system. Enter one of the following:

- `Y` – multi-language option is enabled and the languages are configured in Master Code MLANG. The donor can select any configured language using the OnSite FastTrak Donor Response system, or at a donor center, fixed site, or mobile site.
- `N` – multi-language option is disabled. Questions are available only in English, which is the default language.

Eff Date

Enter the effective date in MMDDYYYY format. Field is required.

Term Date

Enter the termination date in MMDDYYYY format.

Resource Config

To open the form, use the mouse to click **Resource Config** or use the hot key `ALT+R`.

Type

Select the option to select where the link will be placed:

- **Question –** This option will allow you to enter a health history question code in the Code field, and it will populate the list of values for the Code field.
- **Others –** This option refers to a location such as a page where links can be entered.


Code (Control Block)

Entry in this field is determined by the Type selection.

- If **Question** is selected, then the Code field will be validated against the Health History Questions table.
- If **Other** is selected, then the Code field will be validated against the master code FTMLC. The list is populated from the master code.

Code (Detail Block)

This field defaults to the value entered in the Control Block for Code. If the user tries to change the value to something different from what is in the Control Block, the following error displays:

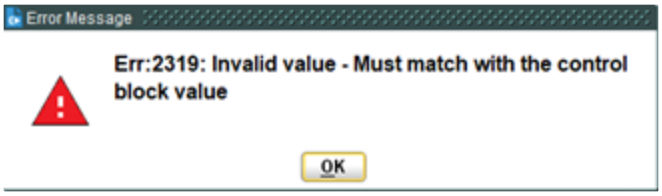

Location Link


The Location Links can be a location where documents are stored or a specific URL. This field will accept a maximum of 1000 characters.

- Documents should be placed in the /assets directory, or wherever the UI is installed.
- URLS

NOTE – PDF files can be hosted anywhere on the internet, but the recommended location is alongside the FastTrak UI in the /BC-FastTrak-UI/assets/pdfs/folder. If a pdf is hosted in that folder with the name "sample.pdf", then the RESOURCE_LINK in the database for the associated VALID_HH_RESOURCES record should be set to "/assets/pdfs/sample.pdf".

NOTE – If a link to a document or URL is placed in the OTHER location of the WELCOME screen, a check box will automatically appear in front of the designated description.

Examples of URLs and Documents

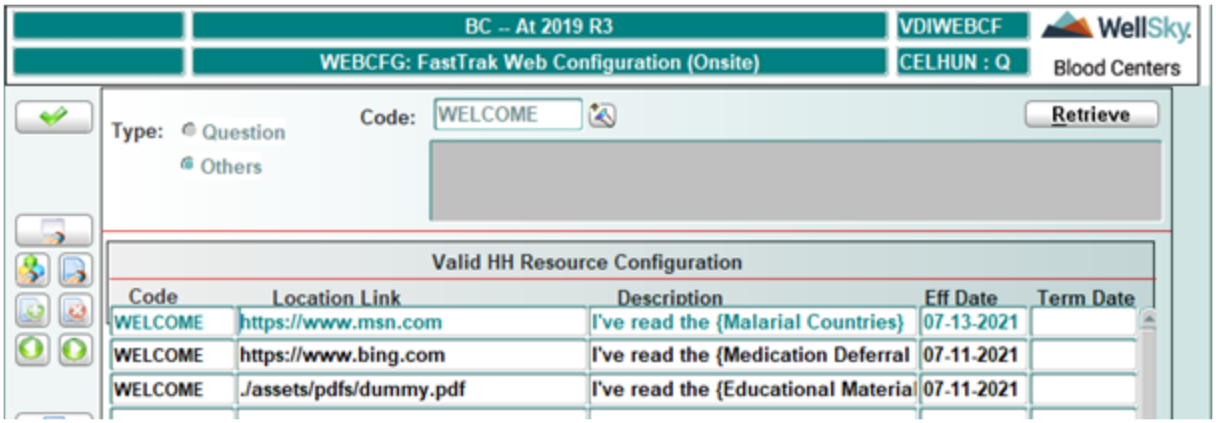

Description

Entry is required in the Description field, and a maximum of 1000 characters is accepted. To allow the user to click on the link, enclose words with brackets {example}, and the link will automatically be placed between the brackets.

Example:
I've read the {Malarial Countries}.

WellSky Corporation
Proprietary and confidential

Eff Date

Enter the effective date in MMDDYYYY format. Entry is required in this field.

Term Date

Enter the termination date in MMDDYYYY format.

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step.

6.2.8 Alternate ID Configuration (ALTID)

Intended Use

Use this screen to insert, update, or delete the Key grade for a donor in the Find Donor window. This will allow the presentation of the donor to a different grade based on key data and the alternate ID match.

Limitations


None

Prerequisites

Donor Grading Matrix (GRADMAT) must be completed.

Accessing the Screen

Access this screen from the Registration Administration menu or by entering the keyword `ALTID`.

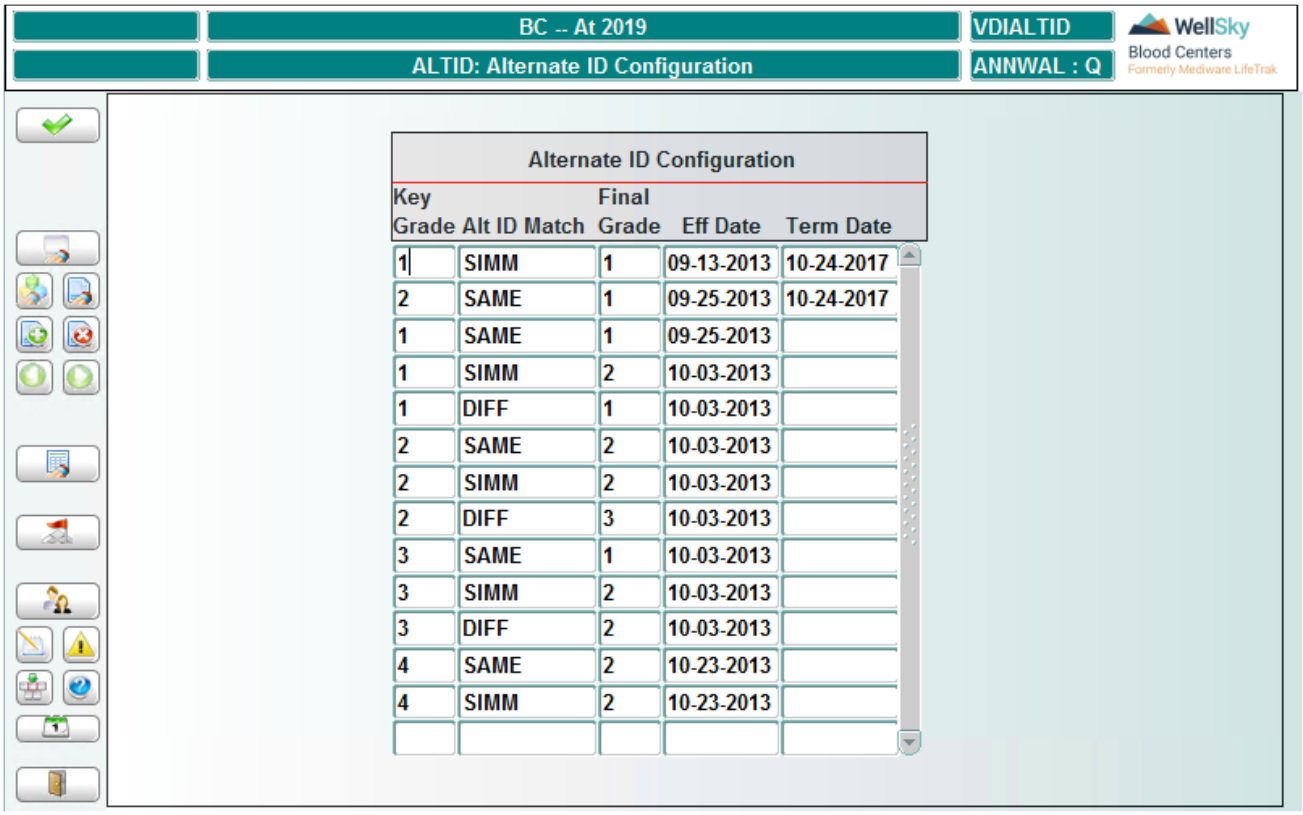

Fields and Definitions

Key Grade

Enter the key grade (1 -4). This key grade is the original grade calculated from the Donor Grading Matrix.

Alt ID Match

Enter the alternate ID match, as follows:

- `SAME` – the match is the same (identical)
- `SIMM` – the match is similar
- `DIFF` – the match is different

Final Grade

Enter the final grade. This is based on the alternate ID match and the key data (from donor grading). Enter the grade you want it to be changed to instead of what is defined in the donor grading matrix table.

Eff Date

Entry is required. Enter the effective date in MMDDYYYY format.

Term Date

Entry is optional. Enter the termination date in MMDDYYYY format.

WellSky Corporation
Proprietary and confidential

At Commit

All changes are saved to the database.

What to Do Next

There is no next step.

6.2.9 Define HH Response Groups (HHGROUP)

Intended Use

Use this screen to define a group name where specific health history responses will be configured. This grouping will be used to narrow selections when answering questions.

Limitations


N/A.

Prerequisites

Health History Question Bank (HHQBANK) needs to have questions defined.

Accessing the Screen

Access this screen from the Registration Administration menu or by entering the keyword HHGROUP.

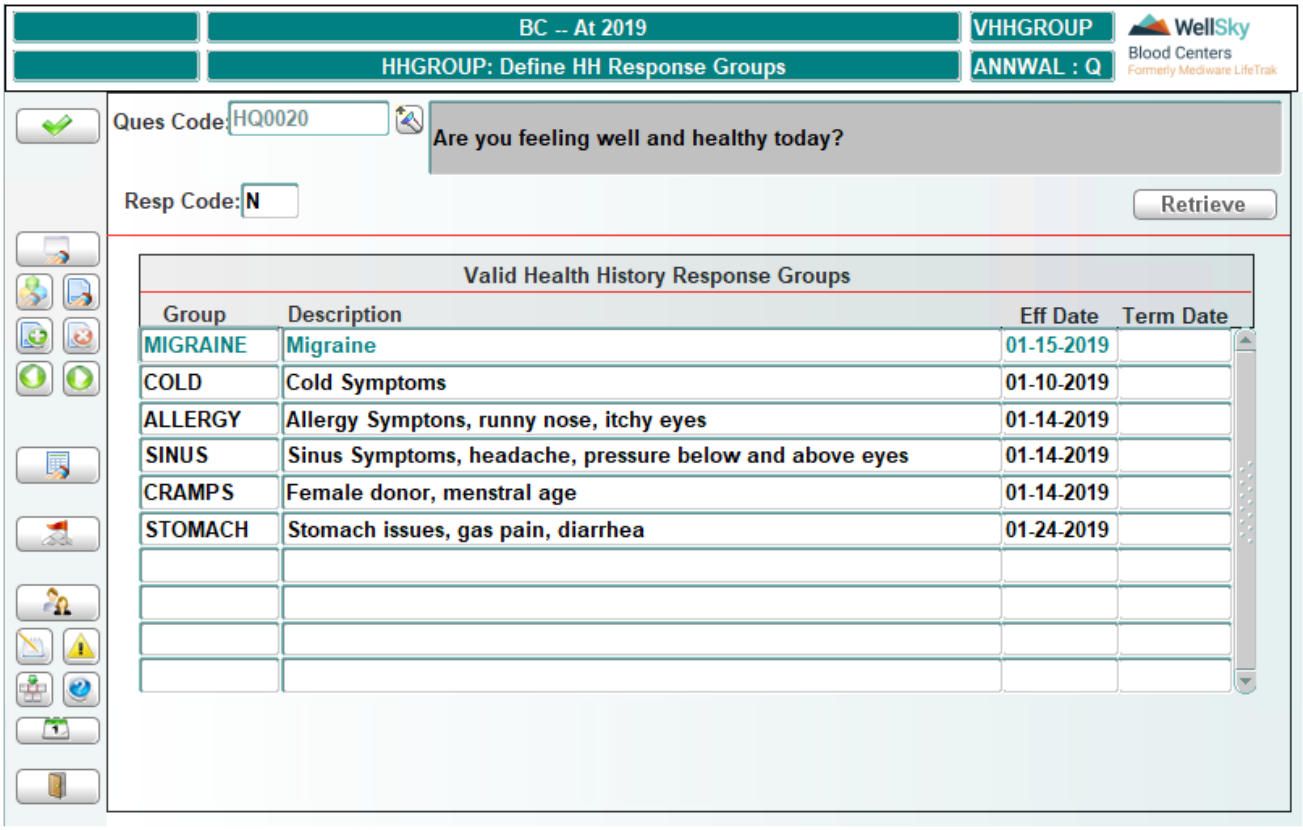

Control Block Fields and Definitions

Ques Code

Entry is required. Manually enter a question code or select one from the LOV. The LOV is populated from the Health History Question Bank (HHQBANK) table. Once the question is selected, the description of the question will display.

Resp Code

Entry is required. Manually enter a response code of Y, N or U.

Group

Entry is required. Enter a group code that contains only alphanumeric characters. A maximum of 30 characters is allowed in this field.

NOTE – Special characters are not allowed.

Description

Entry is required. A maximum of 240 characters is allowed in this field. Alphanumeric and special characters are allowed. To view the entire 240-character field, double-click in the Description field to display the following window:



NOTE – The editor will display the entire 240-character entry. If you enter the description through the editor, it will allow more than 240 characters, so it will not stop the entry after 240 characters.

Eff Date

Entry is required. Enter the effective date in MMDDYYYY format. The effective date cannot be prior to the system date. This field cannot be modified for existing records.

Term Date

Entry is optional. Enter the termination date for the question in MMDDYYYY format.

At Commit

All of the changes are saved to the database.

What to Do Next

Go to Define Health History Responses (HHR) to define responses and assign groups.

Start date	End date	
01/18/2018	03/18/2018 –	1 year deferral - 03/18/2019

Current:

Incident Date: triggers the deferred thru date and places interdiction.

02/02-2019

Proscar

Start date	Ends
02/2018	11/2018

BDR include the start / stop for responses for meds, and travel.

WellSky Corporation
Proprietary and confidential

7

Chapter 7 - Notification Administration


7.1 Introduction 314
7.2 Notification Administration Functions 314
7.2.1 Define Notification Letters (DEFLET) 314
7.2.2 Associate Letter to Interdiction (INTERLET) 324
7.2.3 View Letter Templates (VDRVWLT2) 325
7.2.4 Valid Notification Letters (VDRNTLTR) 325

7.1 Introduction

The Notification Administration menu is that portion of Donor designed to create regulatory letters to donors.

7.2 Notification Administration Functions

These functions are accessed from the following menu:

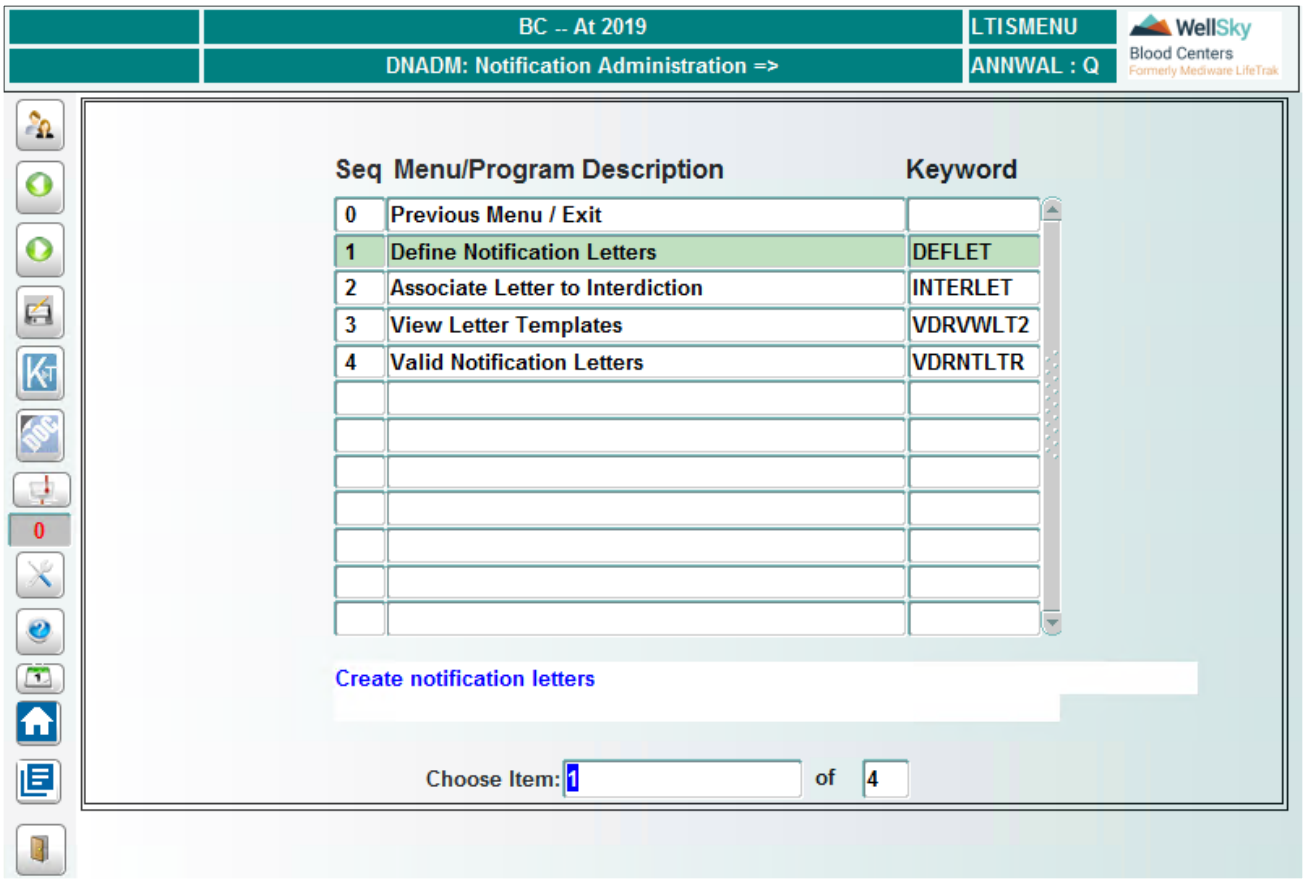

7.2.1 Define Notification Letters (DEFLET)

Intended Use

Use this screen to do the following:

- create, view, and revise notification letters
- define specific information on the FastTrak Donor Response Web Page, using the WEB_WELCME, WEB_CONTNT, WEB_THANQU, WEB_TITLE, and WEB_LOGOUT letter types

WellSky Corporation
Proprietary and confidential

- define the On-Site donor consent text, using the ONSITE letter type

> **NOTE –** You cannot use template codes to automatically insert date from the database into the ONSITE letter type.

Limitations


If a letter is terminated in 'Define Notification Letters' (DEFLET) and is still defined in 'Associate a Letter to Interdiction' (INTERLET) the letter will display in 'Prepare Donor Notification' (DONNOTE). User must terminate the letter in 'Associate a Letter to Interdiction' (INTERLET) and associate the interdiction to the new letter code.

Prerequisites

- Training on how data is retrieved from the database and inserted into the letter using the '&' character.
- If the display of education material is intended to be used for ONSITE, then it must be given the ONSITE code.

Accessing the Screen

Access this screen from the Notification Administration menu or by entering the keyword `DEFLET`.

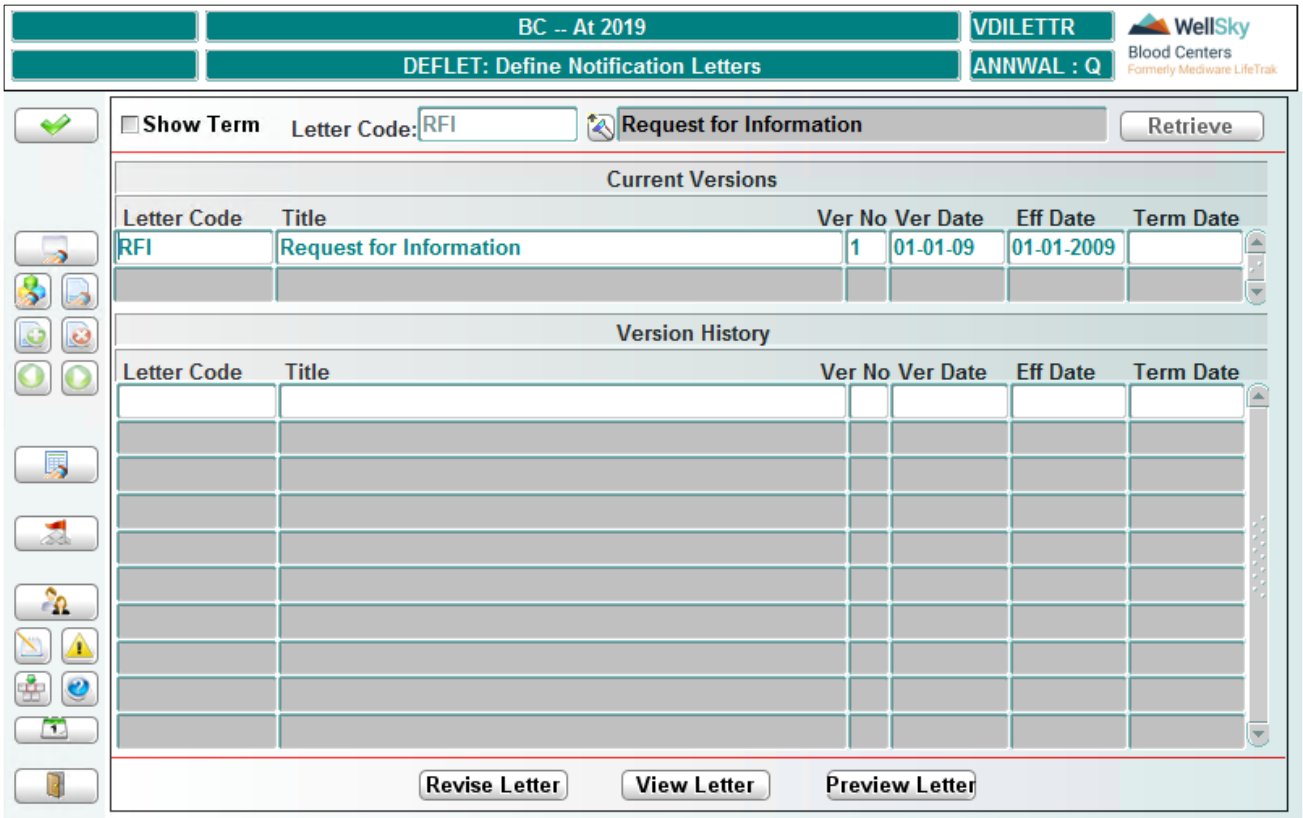

Control Block Fields and Definitions

Show Term

Select the check box to show terminated notification letters.

Letter Code

Entry is optional. Enter a letter code or select from the LOV. Enter `NEW` to create a new letter.

NOTE – Letter code has a character limit of 5 characters. This letter code will be inserted into the notification communications log.

How to Automatically Insert Data from the Database

The following codes are used to substitute data from the database, into the notification letters:

Template Code	What is Substituted into Letter Body
&&PrintDate&&	Current date printed on letter (day of generation)
&&DonorName&&	First name + middle name + last name + last name suffix
&&SDonorName&&	Dear + Mr./Mrs. + Last name
&&DonorAddress1&&	Street Name + Suite/Apt
&&DonorAddress2&&	City, + State + Zip Code
&&Signature&&	Authorized signature (requires setup in SYSPARM_DNSUP)
&&DonorID&&	Donor ID
&&UnitID&&	ID of last unit collected
&&DonationDate&&	Date of last donation
&&DonDate56d&&	56 days from last donation
&&DonDate6m&&	6 months from last donation
&&DonDate12m&&	12 months from last donation
&&ABO&&	Donor's blood type from donor record.

Test IDs	What is Substituted into Letter Body
&&ALT&&	Alt Level
&&CHOL&&	Cholesterol Level

WellSky Corporation
Proprietary and confidential

Theoretically the other test IDs will give you either a POSITIVE / NEGATIVE result based upon the values in the REAC code_type of the valid master codes table. The test is specified as ALL CAPS, with no spaces. If there is a Dash '-' in the test name, it is spelled out as DASH, and if there is a slash '/' in the test name, it is spelled at as BY. (e.g., The result for the HIV-1/2 will be substituted for the string &&HIVDASH1BY2&&)

NOTE – In the body of the letter, line 53 is the last line on the first page which will end the page break and line 54 will start the second page.

To Modify Existing Letters


Click **Retrieve** to display records according to the specified criteria.

For existing letters, the following data displays for the current version and the version history:

- Letter code
- Title of the letter
- Version number of the letter
- Date version was created
- Effective date of the letter
- Termination date of the letter

The data cannot be modified for existing records from this view.

To modify existing data, click **Revise Letter** to open the Letter Details window:

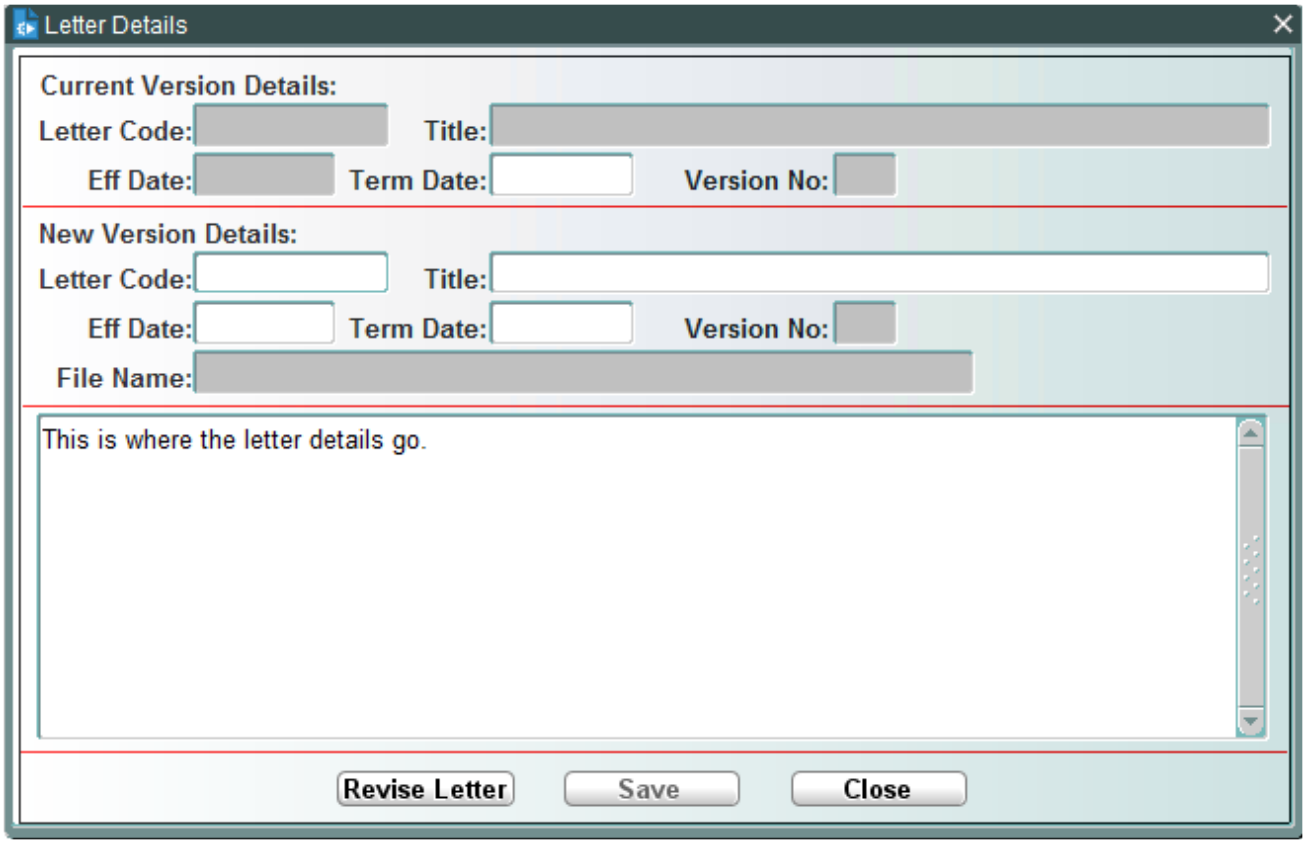

NOTE – The Revise Letter button is only enabled if the cursor is in the Current Versions block.

To revise the data and create a new version, enter the following:

Title

This field can be modified, or you can leave it as is.

Eff Date

Entry is required. Enter the effective date in MMDDYYYY format. Date cannot be prior to system date. When you enter the effective date, the *Term Date* field in the Current Version Details block automatically populates with the same date.

Term Date


Entry is optional. Enter the termination date in MMDDYYYY format.

Committing the Revision


Edit the letter template content; then click **Revise Letter**. Click **Save** to commit the new version to the database. The Letter Details window closes, and you return to the main screen.

To Create a New Letter

After entering NEW in the Control Block, press **ENTER** and the following window opens:

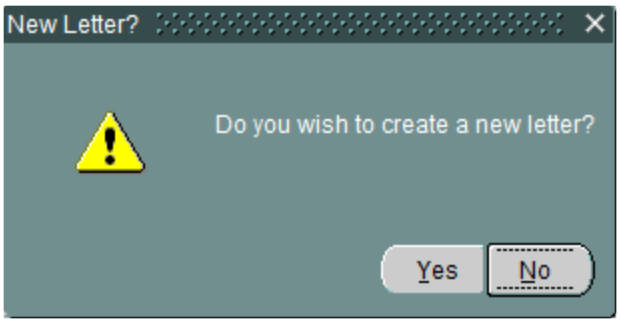

Click **Yes** to open the Letter Details window opens:

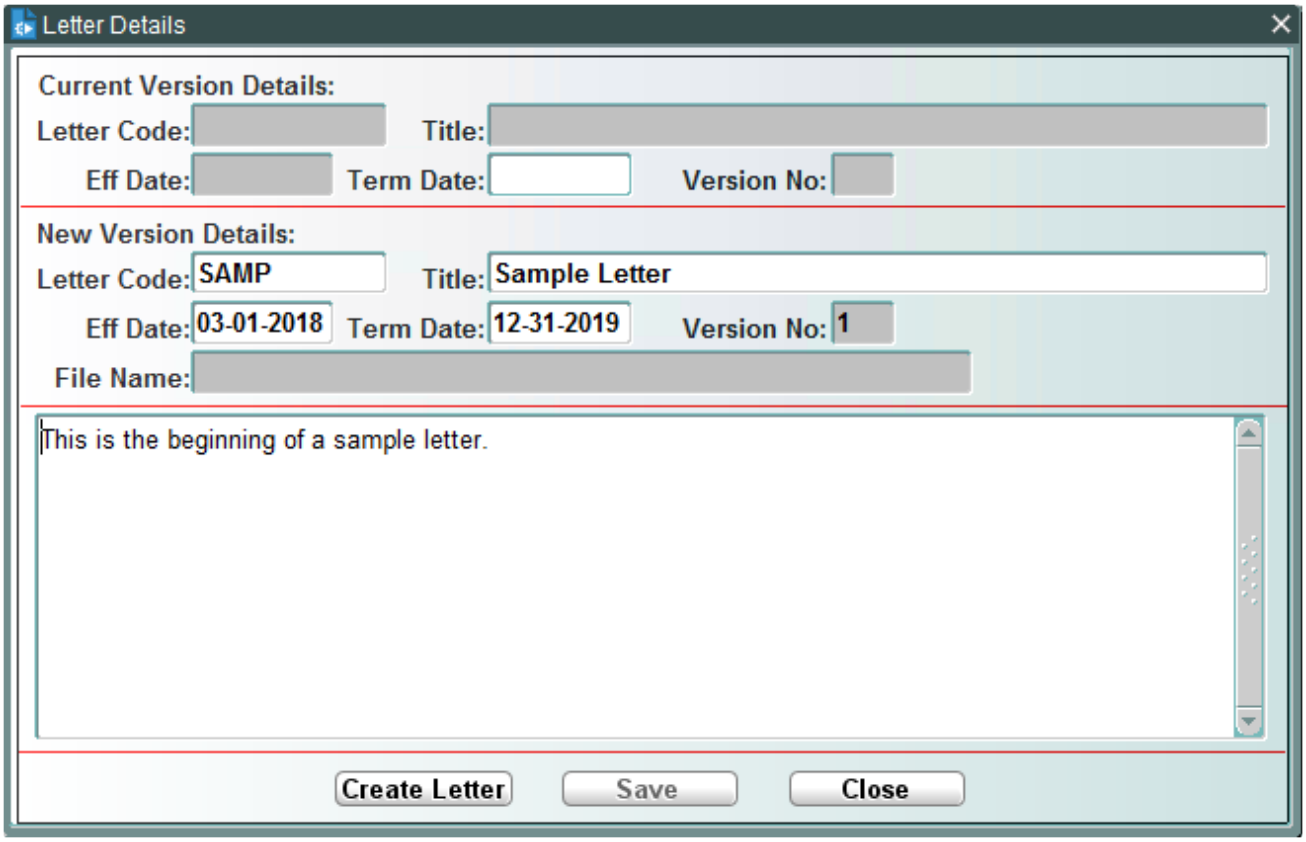

The grayed out areas cannot be entered or changed. Enter the following data in the New Version Details block:

Letter Code

Entry is required. Enter the letter code for the new record. A maximum of 5 characters should be used.

Title

Entry is required. Enter the title for the new record.

Eff Date

Entry is required. Enter the effective date in MMDDYYYY format. Date cannot be prior to system date.

Term Date


Entry is optional. Enter the termination date in MMDDYYYY format.

Entering Content

Enter the letter template content, using && symbols to designate the start and end of parameters. After finishing the letter template, click **Create Letter**. Click **Save** to commit the new letter to the database. The Letter Details window closes and you return to the main screen.

The View Letter Button

Click View Letter to open the text of the selected letter:

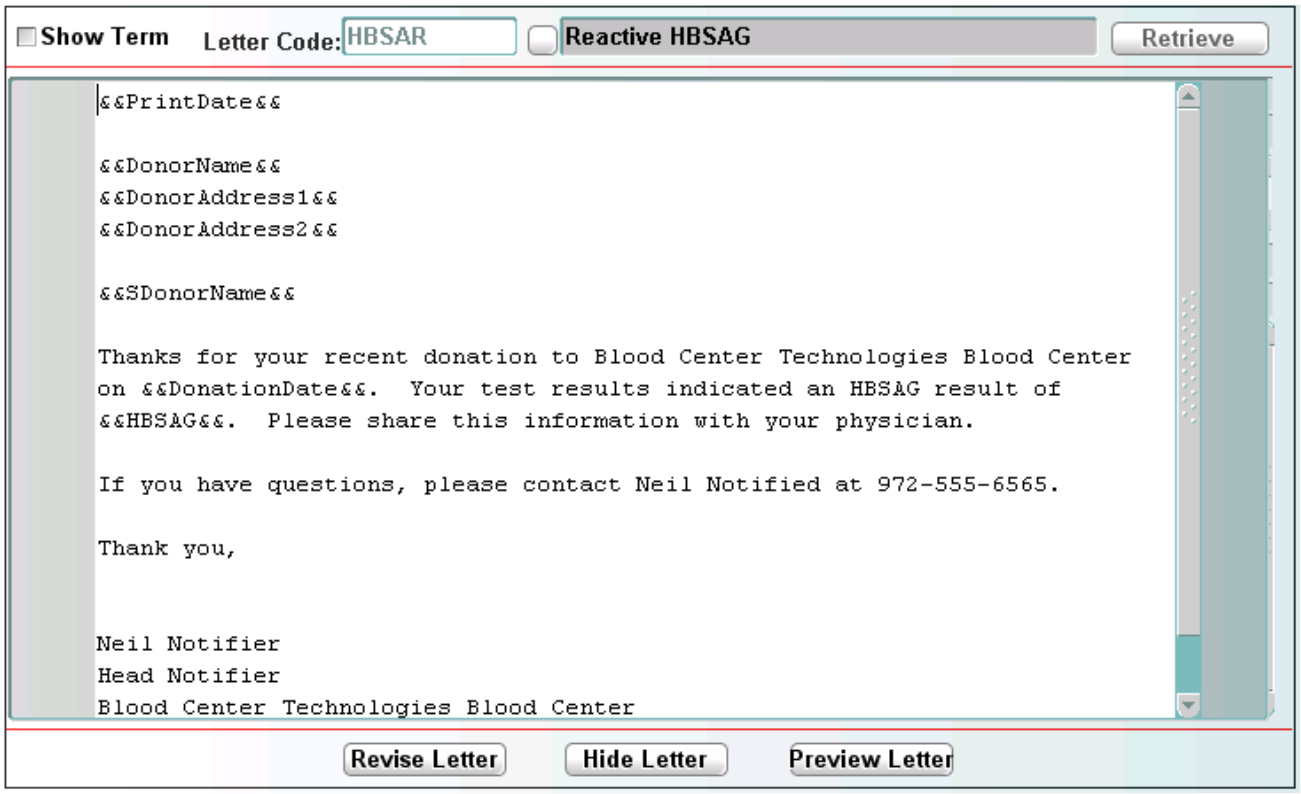

Modifications cannot be made from this window. Click **Hide Letter** to return to the main screen.

The Preview Letter Button

Click **Preview Letter** to see what the letter will look like when printed.


NOTE – The Preview Letter button is only enabled if the cursor is in the Current Versions block.


FastTrak Donor Response Set-up

The FastTrak Donor Response website allows donors to complete donor responses from any computer prior to going to their donor center for their donation. They must complete the responses within 24 hours prior to their donation.

The following letter types are used to configure the text for the FastTrak Donor Response website. Refer to the screen pictures for the location of these text elements.

- WEB_WELCME – configures the welcome text that appears at the top of each page
- WEB_CONTNT – configures the content text that appears on the first page
- WEB_THANQU – configures the thank you text that appears after the donor completes the responses
- WEB_LOGOUT – configures the content text in the message that appears to the donor when the process is completed and **EXIT** is clicked.

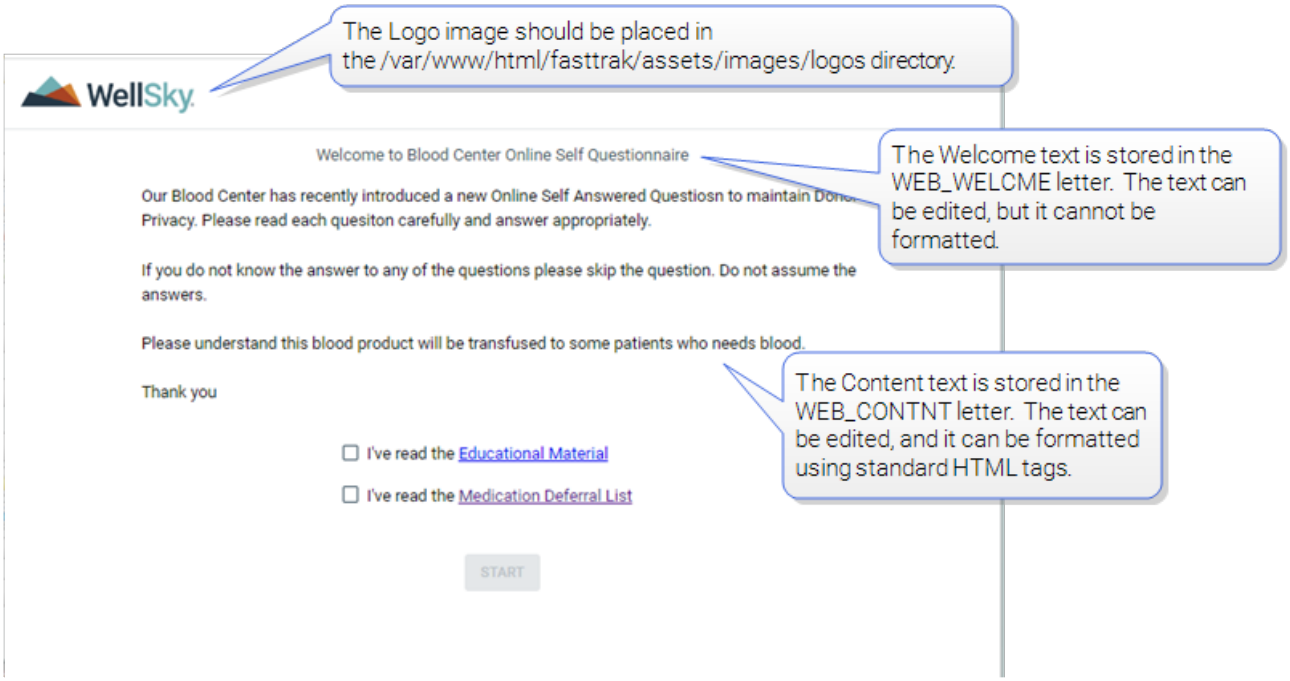


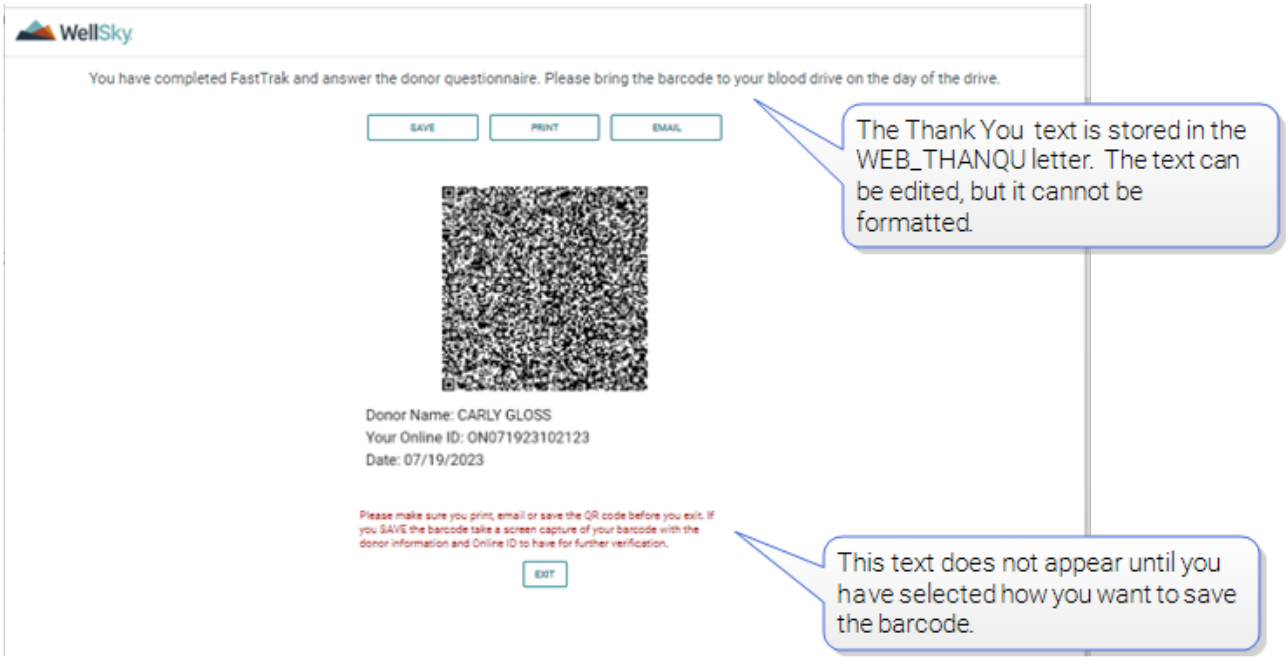


In addition, the logo image on the first page should be placed in the /var/www/html/fasttrak/assets/images/logos directory. Refer to Section 9.3, "Deploy Blood Centers FastTrak Application" in the *WellSky® Blood Centers Installation Guide*.

Formatting Text (WEB_CONTNT Letter Only)

For the WEB_CONTNT letter only, you can embed standard HTML tags within the text to control formatting, as shown:

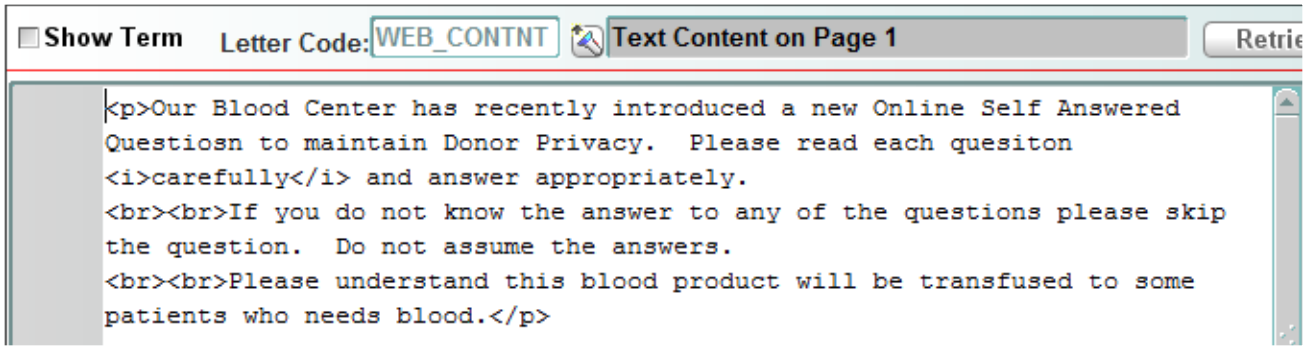

The donor's web browser will the display the formatted text, as shown:

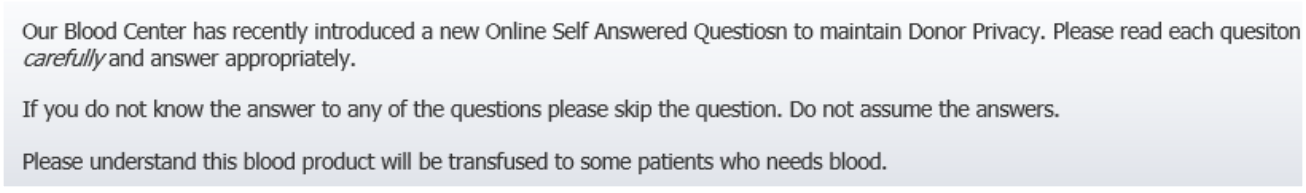

In this example, the following HTML tags are used:

- `<p> </p>` – The text between these tags is formatted as a paragraph. Text in letter code WEB_CONTNT must be enclosed in paragraph tags. Any multiple spaces, tabs and extra blank lines in the text will be ignored by the browser when the page is displayed. The width of the user's browser window determines where the lines of text will break by default.
- `<i> </i>` – The text between these tags is formatted in italic.
- `<br>` – This tag breaks the text and begins a new line. Putting two tags together creates a blank line.

Any standard HTML tag can be used in the letter. There are many books and web sites available that explain how to use HTML tags.


NOTE – You should limit the content text to two or three short paragraphs. Otherwise, the formatting of the first page may be affected.

Formatting Text (WEB_LOGOUT Letter Only)

The entry for this letter displays in the message to the user at the end of the FastTrak process. The message deals with printing the barcode.

Message example: "Your answers will not be saved if you don't print or email the barcode displayed at the end of the questionnaire."

When **EXIT** is clicked at the end of the FastTrak process, the message configured in WEB_LOGOUT will display to the user.

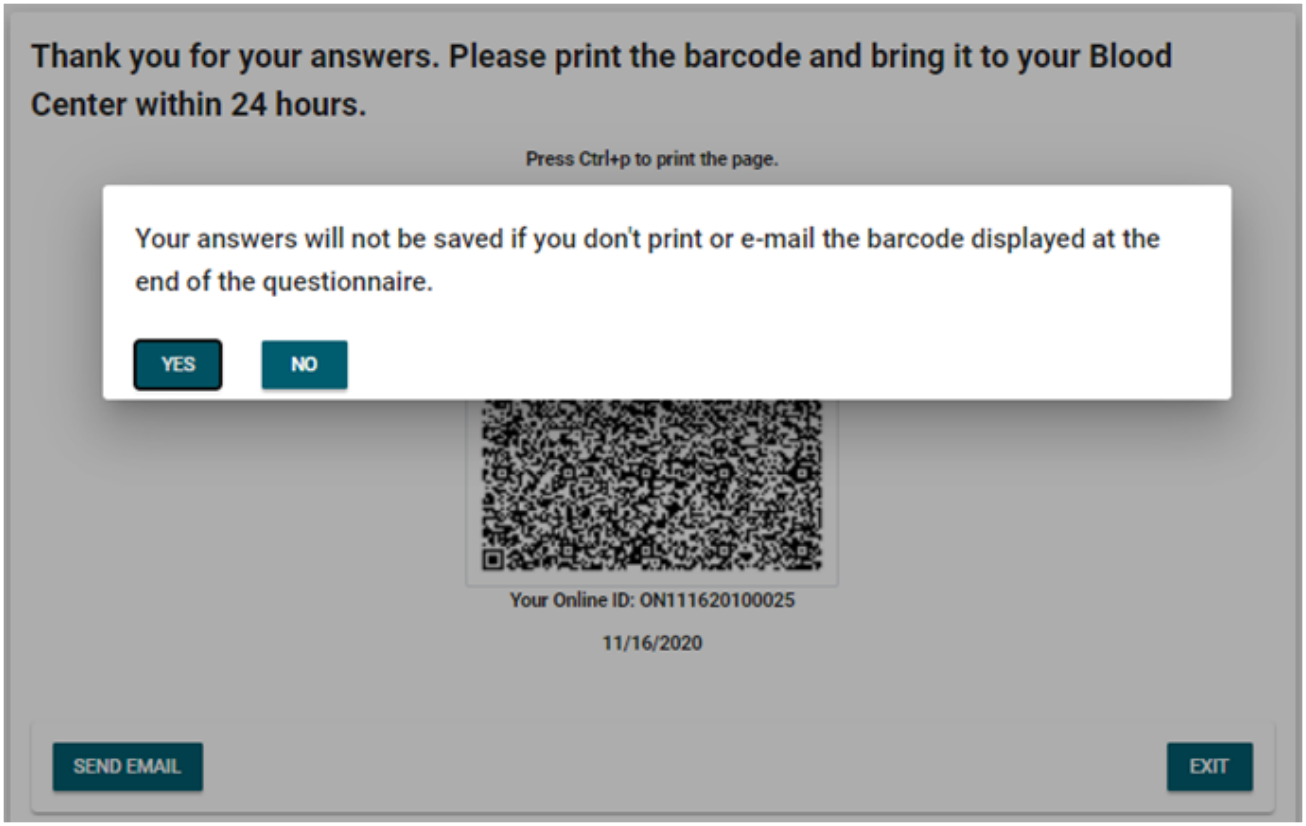

At Commit

All of the changes are saved to the database.

What to Do Next

Go to Associate Letter to Interdiction (INTERLET).

7.2.2 Associate Letter to Interdiction (INTERLET)

Intended Use

Use this screen to associate a donor notification or communication letter to an interdiction and donation type.

Limitations


Only one notification letter code can be associated with an interdiction and donation type combination.

Prerequisites

Letter code must already be defined in Define Notification Letters (DEFLET).

Accessing the Screen

Access this screen from the Notification Administration menu or by entering the keyword `INTERLET`.

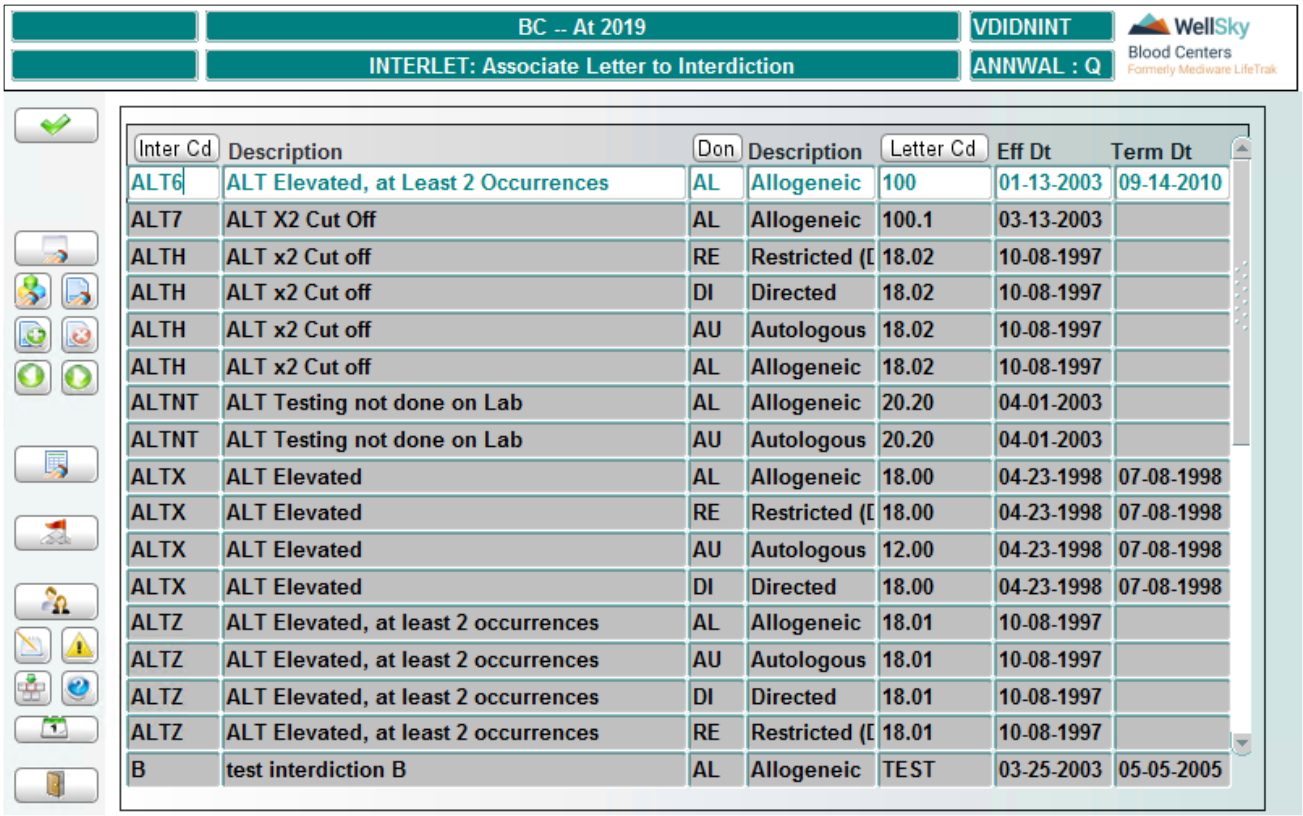

Inter Cd	Description	Don	Description	Letter Cd	Eff Dt	Term Dt
ALT6	ALT Elevated, at Least 2 Occurrences	AL	Allogeneic	100	01-13-2003	09-14-2010
ALT7	ALT X2 Cut Off	AL	Allogeneic	100.1	03-13-2003	
ALTH	ALT x2 Cut off	RE	Restricted (I	18.02	10-08-1997	
ALTH	ALT x2 Cut off	DI	Directed	18.02	10-08-1997	
ALTH	ALT x2 Cut off	AU	Autologous	18.02	10-08-1997	
ALTH	ALT x2 Cut off	AL	Allogeneic	18.02	10-08-1997	
ALTNT	ALT Testing not done on Lab	AL	Allogeneic	20.20	04-01-2003	
ALTNT	ALT Testing not done on Lab	AU	Autologous	20.20	04-01-2003	
ALTX	ALT Elevated	AL	Allogeneic	18.00	04-23-1998	07-08-1998
ALTX	ALT Elevated	RE	Restricted (I	18.00	04-23-1998	07-08-1998
ALTX	ALT Elevated	AU	Autologous	12.00	04-23-1998	07-08-1998
ALTX	ALT Elevated	DI	Directed	18.00	04-23-1998	07-08-1998
ALTZ	ALT Elevated, at least 2 occurrences	AL	Allogeneic	18.01	10-08-1997	
ALTZ	ALT Elevated, at least 2 occurrences	AU	Autologous	18.01	10-08-1997	
ALTZ	ALT Elevated, at least 2 occurrences	DI	Directed	18.01	10-08-1997	
ALTZ	ALT Elevated, at least 2 occurrences	RE	Restricted (I	18.01	10-08-1997	
B	test interdiction B	AL	Allogeneic	TEST	03-25-2003	05-05-2005

WellSky Corporation
Proprietary and confidential

Click the **Inter Cd**, **Don**, or **Letter Cd** column header to sort the data by that column. Click the same column heading again to reverse the sort order.

Term Dt is the only field that can be updated for existing records.

To Associate a Letter to an Interdiction

Scroll to the last entry and press DOWN  arrow to activate an empty line. Enter the following data:

Inter Cd

Entry is required. Enter the interdiction code or select from the LOV. Once a valid code is entered or selected, the description automatically displays.

Don

Entry is required. Enter the donation type or select from the LOV. Once a valid type is entered or selected, the description automatically displays.

Letter Cd

Entry is required. Enter the letter code or select from the LOV.

Eff Dt

Entry is required. Enter the effective date in MMDDYYYY format. Date cannot be prior to system date.

Term Dt

Entry is optional. Enter the termination date in MMDDYYYY format.

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step.

7.2.3 View Letter Templates (VDRVWLT2)

Refer to the WellSky Blood Centers Reports Guide for use of this report.

7.2.4 Valid Notification Letters (VDRNTLTR)

Refer to the WellSky Blood Centers Reports Guide for use of this report.

This Page Intentionally Left Blank



Chapter 8 - Donor Communication Administration


8.1 Introduction 328
8.2 Donor Communication Administration Functions 328
8.2.1 Define Communication Types (COMTYPE) 328
8.2.2 Define Communication Letters (COMLET) 331

8.1 Introduction

The Donor Communication Admin. menu is that portion of Donor designed to create general donor communication types and letters.

8.2 Donor Communication Administration Functions

These functions are accessed from the following menu:

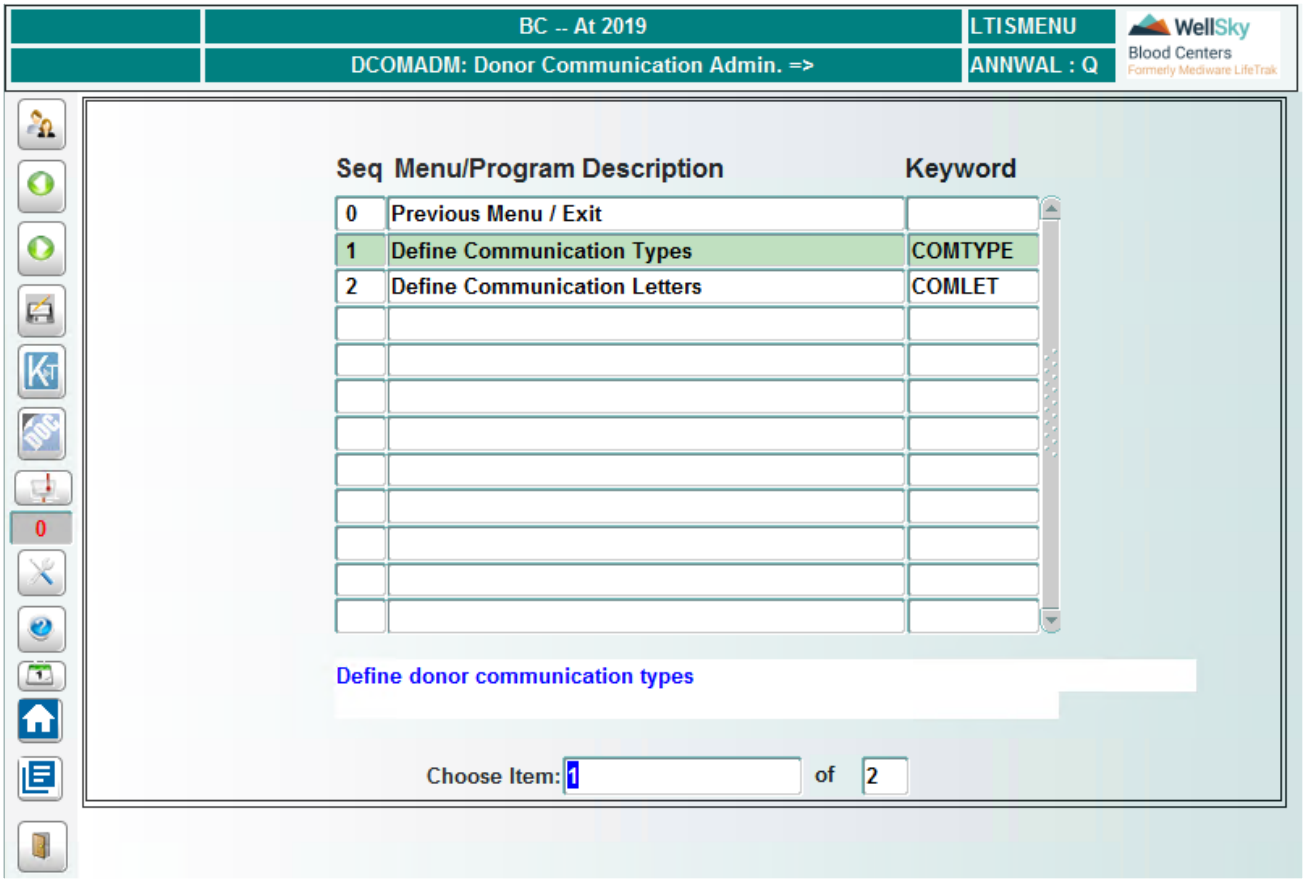

8.2.1 Define Communication Types (COMTYPE)

Intended Use

Use this screen to define communication types and attach communication codes to each type.

Limitations

Refer to Appendix H: Donor Miscellaneous Static Values for restrictions on existing codes.


WellSky Corporation
Proprietary and confidential

Prerequisites

None


Accessing the Screen

Access this screen from the Donor Communication Admin. menu or by entering the keyword COMTYPE.

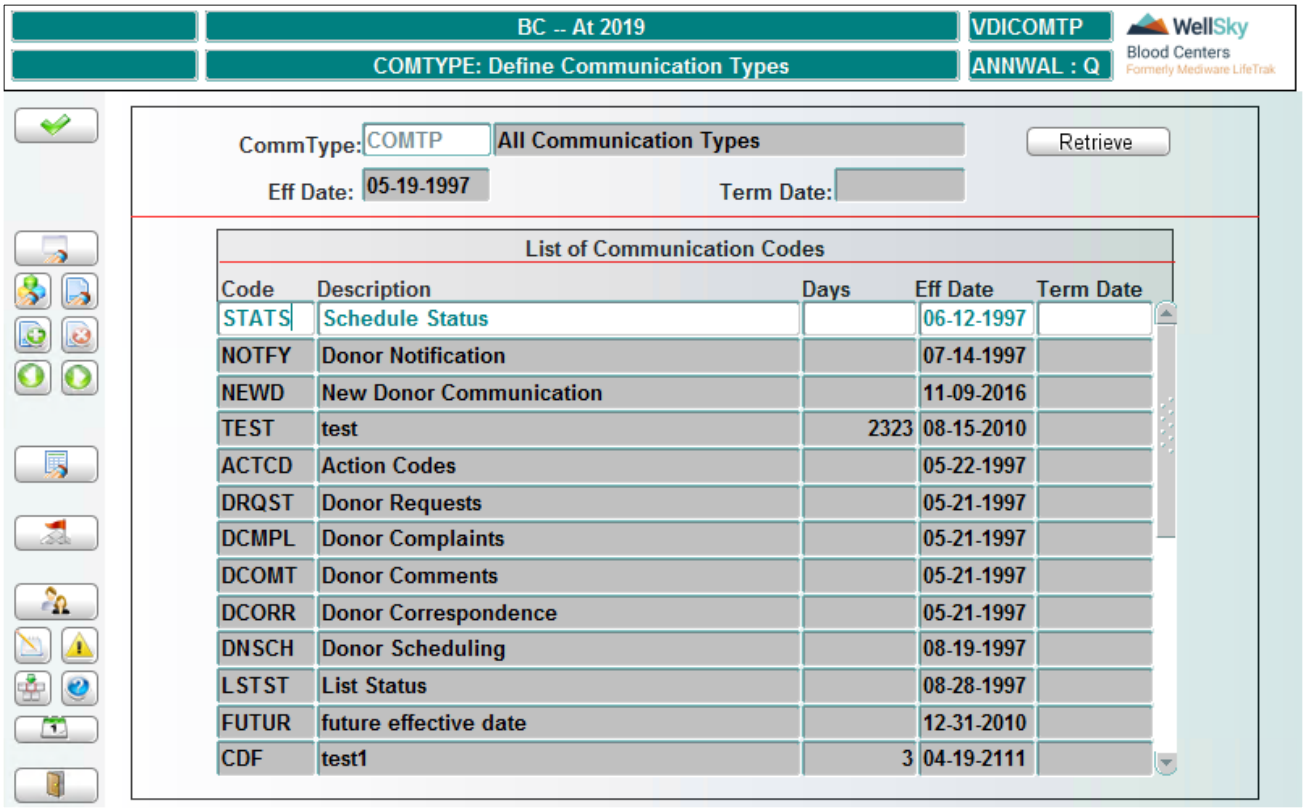

Viewing Codes

All communication types automatically display. To view a list of codes within a type, select the type and double-click or press **CTRL + e** (Edit):

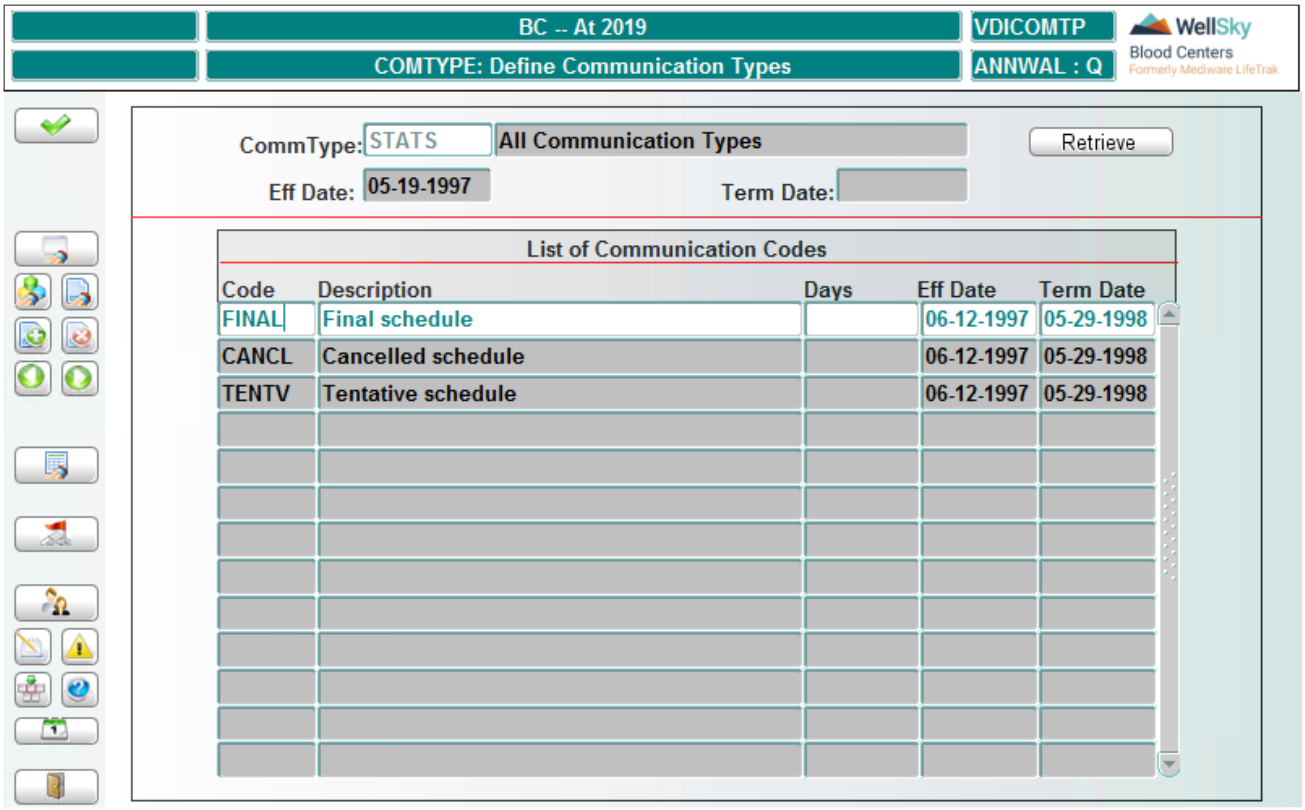

To return to the main view, click the Clear Form icon on the toolbar.

To Define a New Code

Use this procedure to define a brand new communications type, or to define a new code within a communications type.

Scroll to the last entry in the list and press DOWN arrow to activate an empty line. Enter the following data:

Code

Entry is required. Enter the communication code. This field cannot be modified for existing records.

Description

Entry is required. Enter the description for the code.

NOTE – If you are defining a brand new communications type, the description is limited to a maximum of 30 characters. If you are defining a new code within a communications type, the description is limited to a maximum of 50 characters.

Days

Entry is optional. Enter the number of days for follow-up.

WellSky Corporation
Proprietary and confidential

Eff Date

Entry is required. Enter the effective date in MMDDYYYY format. The date cannot be prior to the system date. This field cannot be modified for existing records.

Term Date

Entry is optional. Enter the termination date in MMDDYYYY format.

At Commit

All of the changes are saved to the database.

What to Do Next

Go to Define Communication Letters (COMLET).

8.2.2 Define Communication Letters (COMLET)

Intended Use

Use this screen to do the following:

- create, view, and revise communication letters
- define donor consent text, using the DCON2 and DCONTST letter types

> **NOTE –** You cannot use template codes to automatically insert date from the database into the DCON2 and DCONTST letter types.

Limitations


None

Prerequisites

None

Accessing the Screen

Access this screen from the Donor Communication Admin. menu or by entering the keyword `COMLET`.

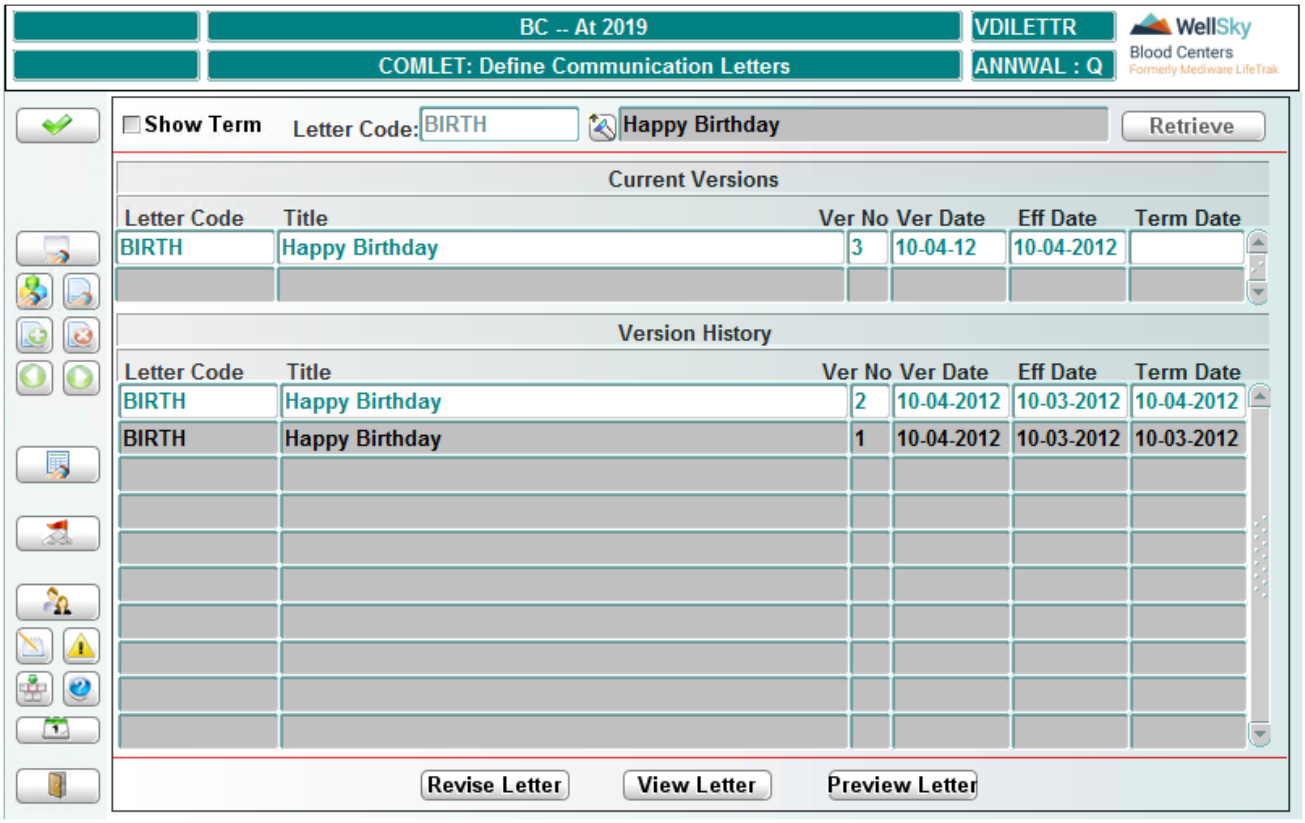

Control Block Fields and Definitions

Show Term

Check this option to show terminated communication letters.

Letter Code

Entry is optional. Enter a letter code or select from the LOV. Enter `NEW` to create a new letter.

To Modify Existing Letters

Click **Retrieve** to display records according to the specified criteria.

For existing letters, the following data displays for the current version and the version history:

- Letter code
- Title of the letter
- Version number of the letter
- Date version was created
- Effective date of the letter
- Termination date of the letter

The data cannot be modified for existing records from this view.

WellSky Corporation
Proprietary and confidential


How to Automatically Insert Data from the Database

The following codes are used to substitution data from the database, into the notification letters:

Template Code	What is Substituted into Letter Body
&&Salutation&&	Salutation
&&DonorFullName&&	Donor's full name
&&DonorLastName&&	Donor's last name
&&DonorSSN&&	Social Security number
&&Address1&&	First address field
&&Address2&&	Second address field
&&HisHer&&	His/Her (depending on gender in the database)
&&FirstdonationYear&&	Year of first donation
&&DonationHistory&&	Donation history (prints list of donations)

To Modify Existing Data

To modify existing data, click **Revise Letter** to open the Letter Details window:

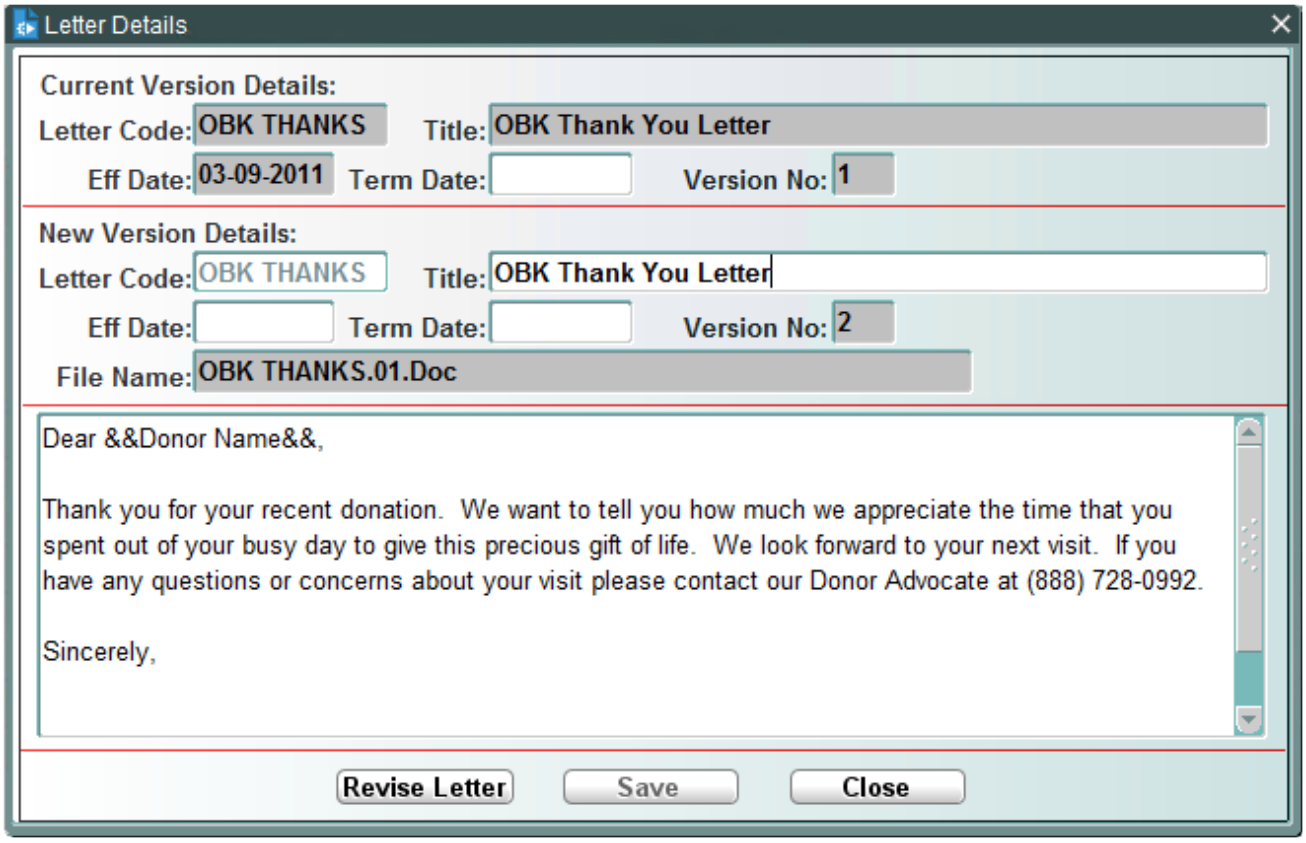

NOTE – The Revise Letter button is only enabled if the cursor is in the Current Versions block.

To revise the data and create a new version, enter the following:


Title
This field can be modified, or you can leave it as is.

Eff Date
Entry is required. Enter the effective date in MMDDYYYY format. Date cannot be prior to system date. When you enter the effective date, the *Term Date* field in the Current Version Details block automatically populates with the same date.


Term Date
Entry is optional. Enter the termination date in MMDDYYYY format.

Saving the Letter
Edit the letter template content; then click **Revise Letter**. Click **Save** to commit the new version to the database. The Letter Details window closes and you return to the main screen.

To Create a New Letter
After entering `NEW` in the Control Block, press the **ENTER** key and the following window opens:

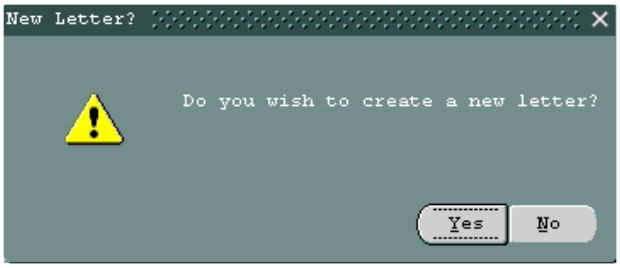

Click **Yes** to open the Letter Details window:

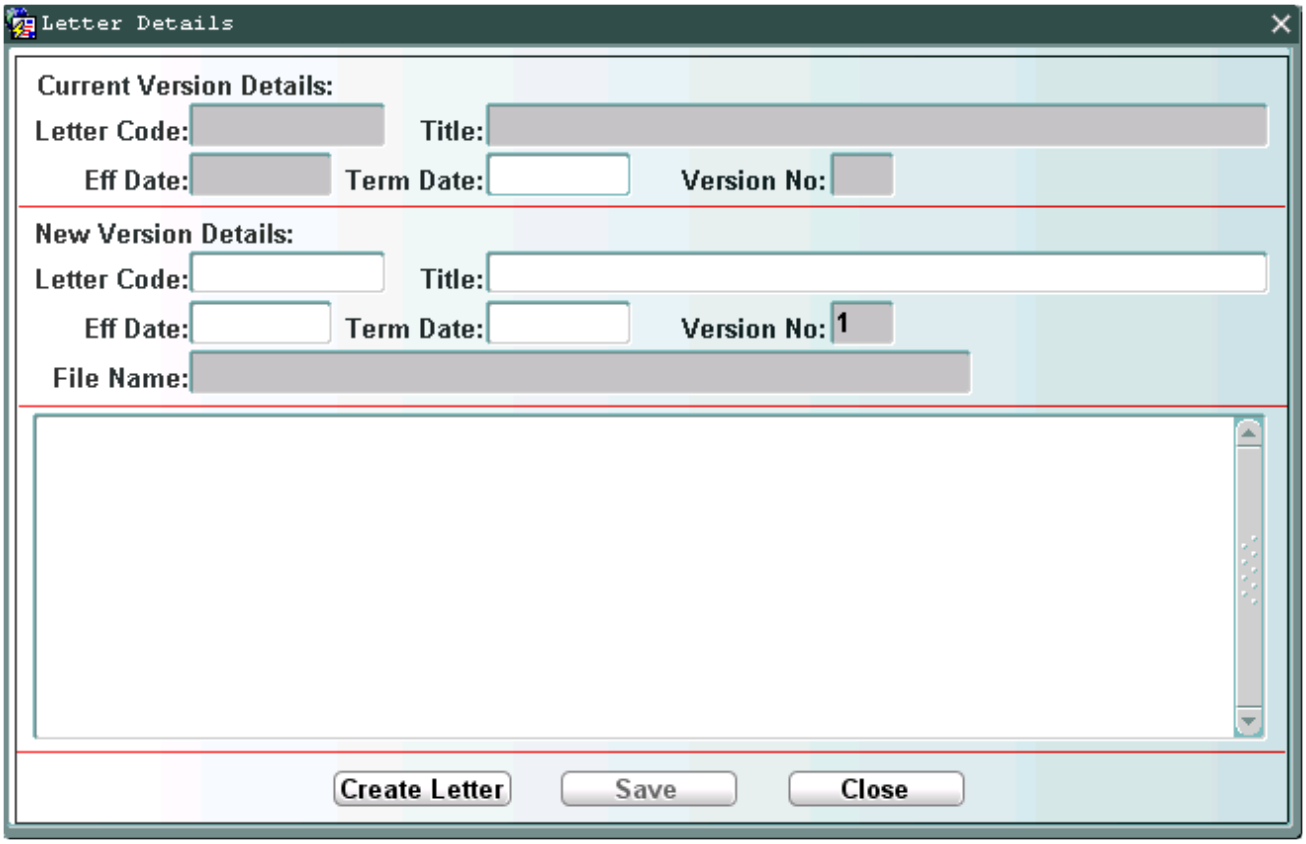

You cannot make entries or modify existing data in gray fields. Enter the following data in the New Version Details block:

Letter Code

Entry is required. Enter the letter code for the new record.

Title

Entry is required. Enter the title for the new record.

Eff Date

Entry is required. Enter the effective date in MMDDYYYY format. Date cannot be prior to system date.

Term Date


Entry is optional. Enter the termination date in MMDDYYYY format.

Saving the Letter

Enter the letter template content, using && symbols to designate the start and end of parameters. After finishing the letter template, click **Create Letter**. Click **Save** to commit the new letter to the database. The Letter Details window closes and you return to the main screen.

The View Letter Button

Click View Letter to open the text of the selected letter:

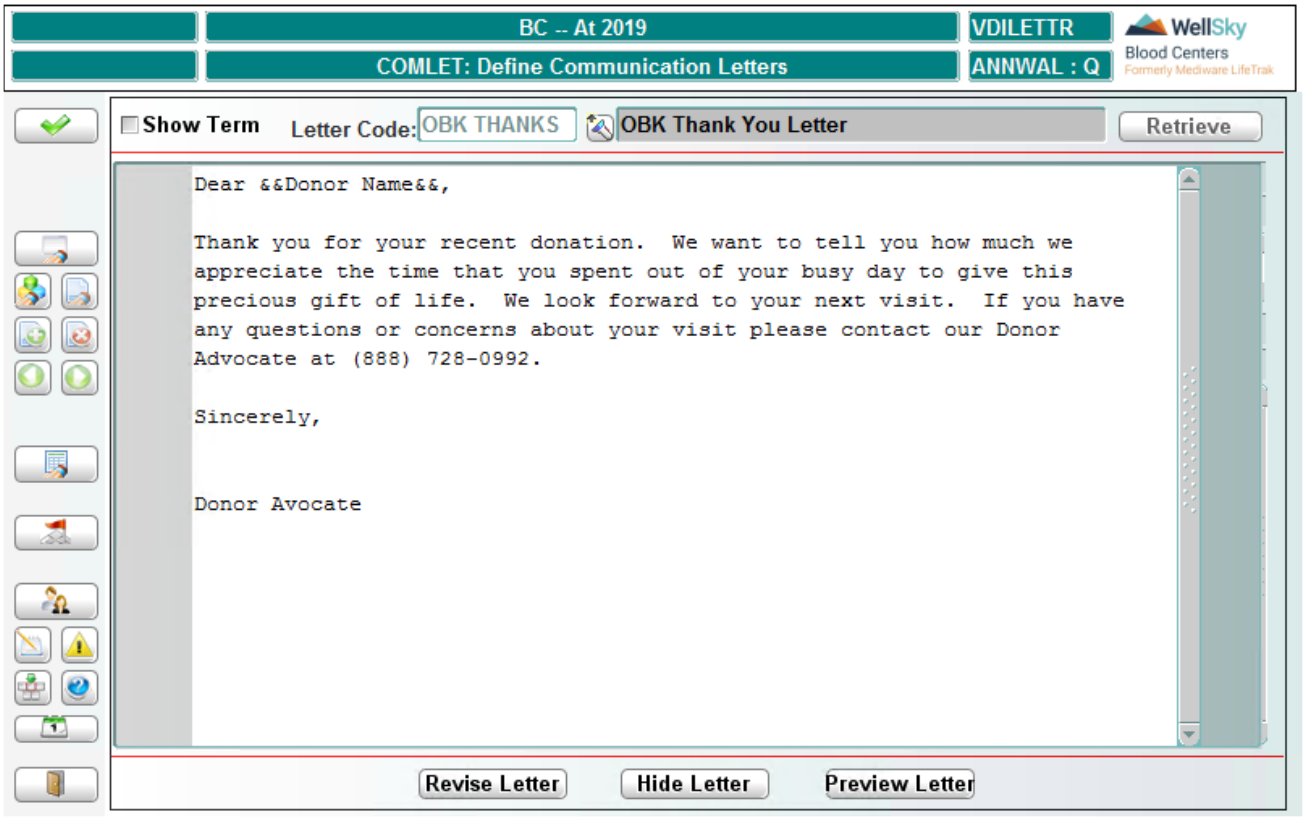

Modifications cannot be made from this window. Click **Hide Letter** to return to the main screen.

The Preview Letter Button

Click **Preview Letter** to see what the letter will look like when printed.

> **NOTE –** The Preview Letter button is only enabled if the cursor is in the Current Versions block.

At Commit

All of the changes are saved to the database.

What to Do Next

There is no next step.



Chapter 9 - WellSky Blood Centers API/Vista Interface


9.1 Introduction - Vista Interface 338
9.1.1 Vista Interface Administration Functions 338
9.2 Introduction - WellSky Blood Centers API 342
9.2.1 Convert External Data to Blood Centers Data (APICONV) 342

9.1 Introduction - Vista Interface

The Vista Interface menu is that portion of Donor designed to administer the Donor Vista Interface.

9.1.1 Vista Interface Administration Functions

These functions are accessed from the following menu:

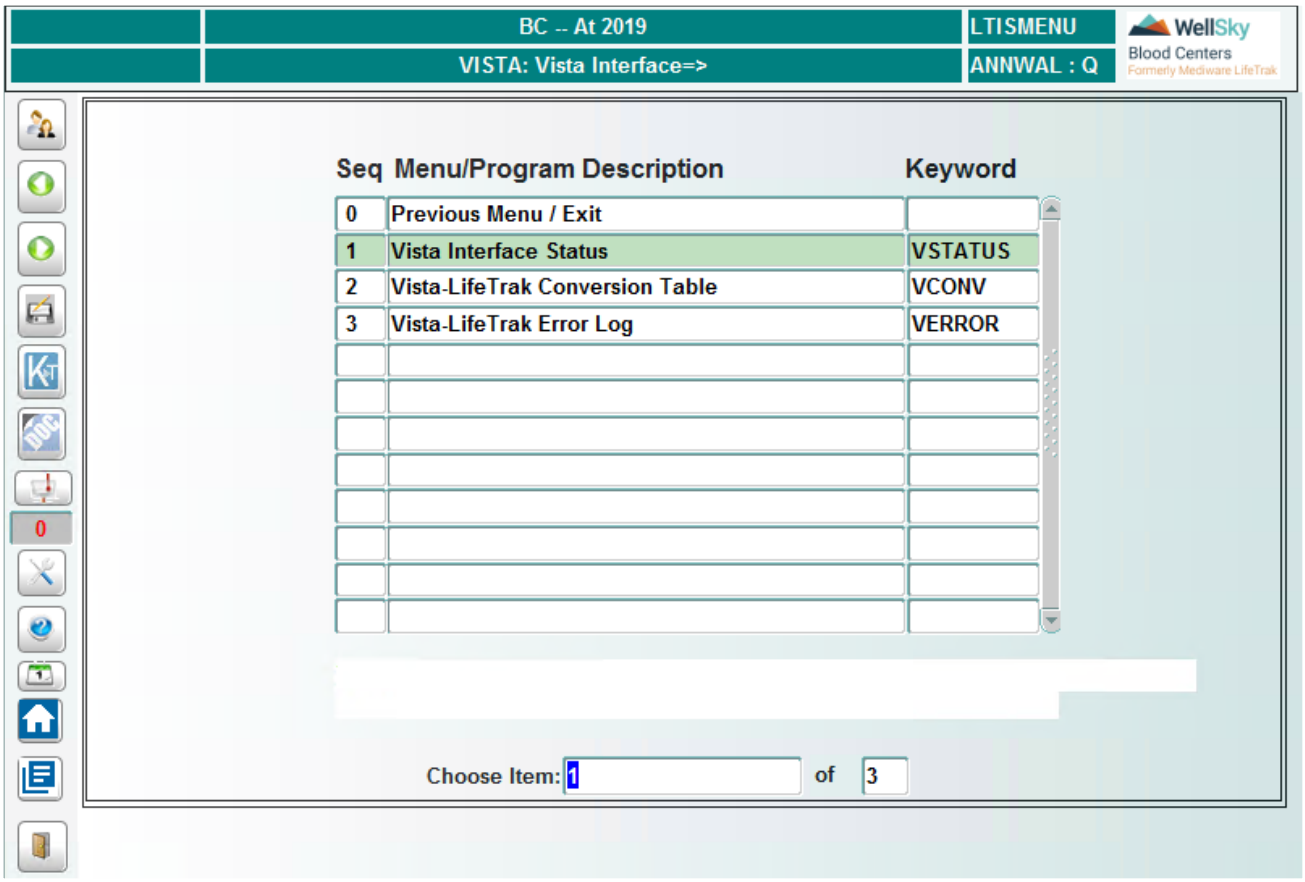

NOTE – Vista Interface Status (VSTATUS) and Vista-Blood Centers Error Log (VERROR) are described in the WellSky Blood Centers User Guide.

Vista-WellSky Blood Centers Conversion Table (VCONV)

Intended Use

Use this screen to configure Vista data and convert it to an acceptable value in Donor. Data entry is associated to effective and termination dates to determine active configuration.

WellSky Corporation
Proprietary and confidential

Limitations

- You cannot enter duplicate values for the combination of same source ID, target ID, source type, source value, target type and target value.
- If the hematocrit and hemoglobin are both sent in the same file, Vista manages only one or the other and not both. Hematocrit is the primary value, and hemoglobin is the secondary value.

Prerequisites

The following master codes must be defined:

- IDPDR – Vista directory name (where files will be placed).
- IDPEP – list of procedure codes that will require equipment. When message is received from Vista and contains equipment information it will upload it.

> **NOTE –** The type, serial number and ID must defined in the Vista conversion table (VCONV), and the equipment must be defined in EQUIPMENT in Lab to generate the reference ID and serial number.

- IDPEX – procedures that will not be collected through the VISTA interface.
- IDPSR – IDP source type used in the *Source* field in the External to Blood Centers Data Translation (APICONV) screen. These source types should match data that is coming from the other system.
- IDPTP – external interface source type. The fields within the Vista in which data will be mapped to Blood Centers from Vista.
- IDPTR – Vista or IDP target ID. This will be populated with Blood Centers. Data going out of Vista to what application.
- IDPTV– internal application target type. The fields in Blood Centers that will be configured to match in Vista. These are static values and cannot be modified.
- ACLAS – access classes. These are need to add in the access class VSTAT (Vista Change To Status).
- APISC– API source description and codes used in APIQLOG.
- APITY– type of ID described using APICONVQ.


The following system parameters must be defined:

- IDP_FCN – set to Y to turn on the VISTA function.
- IDPNR – the status will be change to NR after this number of hours.
- CUE_LOC – determine where the *Cue* field will be entered: ONIBLEED or ONUNTLNK.
- VHEMAT – hematocrit value entered here must match the value defined in physical findings values (VDIPHYRL).
- VHEMOG – hemoglobin value entered here must match the value defined in Donor Physical Findings values (VDIPHYRL).

- VPLATE– platelet code that must match the value defined in Donor Physical Findings Values (VDIPHYRL).
- VRBCRT – RBC Return Physical code , which is defined in Donor Physical Findings Values (VDIPHYRL).
- IDP_PURGE – file is purged according to days listed in system parameter

Accessing the Screen

Access this screen from the Vista Interface menu or by entering the keyword VCONV.

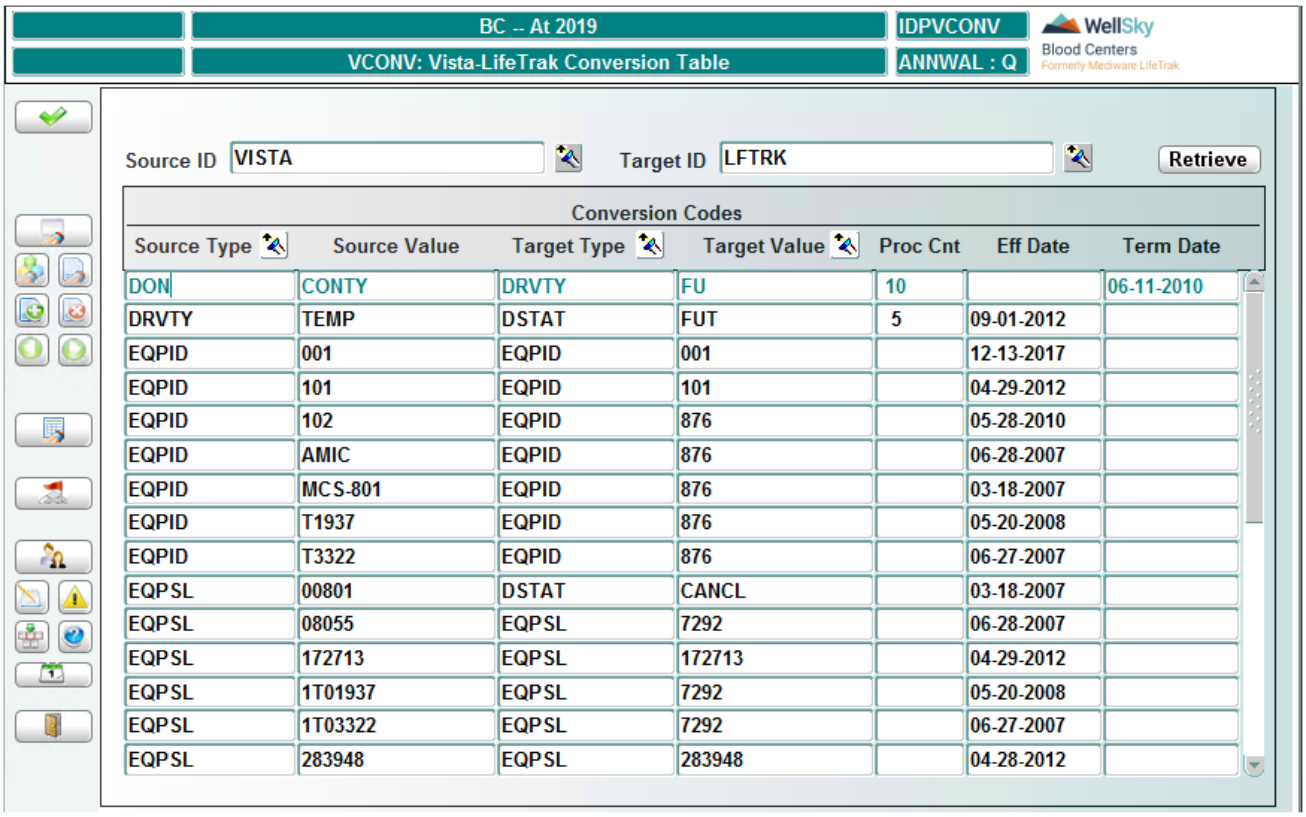

Control Block Fields and Definitions

Source ID

Enter source ID or select from LOV. Entry is required.

Target ID

Enter target ID or select from LOV. Entry is required.

Retrieving Data

Click **Retrieve** to display records.

Detail Block Fields and Definitions

The system displays the following information for each existing record. To modify existing records, click in the desired field and modify as needed. To create a new record, click **INSERT** .

WellSky Corporation
Proprietary and confidential

Source Type

Enter source type or select from LOV. Field is required.

Source Value

Enter source value. Field is required.

Target Type

Enter target type, or select from LOV. Field is required.

Target Value

Enter target value or select from LOV. Field is required.

Proc Cnt

Enter procedure count. Field is required if Procedure Code (PROC) is selected as the target type.

Eff Date

Enter effective date in MMDDYYYY format.

Term Date

Enter termination date in MMDDYYYY format.

At Commit

All new or updated data is committed to the database.

What to Do Next

There is no next step.

9.2 Introduction - WellSky Blood Centers API

The WellSky Blood Centers API is that portion of Donor designed to administer the WellSky Blood Centers API Interface.

9.2.1 Convert External Data to Blood Centers Data (APICONV)

Intended Use

Use this screen to convert the outside source application data to data that can be processed by Blood Centers in the API interface.

This screen is only available from Distribution.

Limitations

- This form will work for conversions from an outside application to only the WellSky Blood Centers application.
- The combination of Source ID, Target ID, Source Value, Target Value and Target Type should not be duplicated. There cannot be two similar source records that are active.


Prerequisites

Master Codes (MASTER), code types:

- OSAPP – Define source ID.
- LTTYP – Define target type.

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

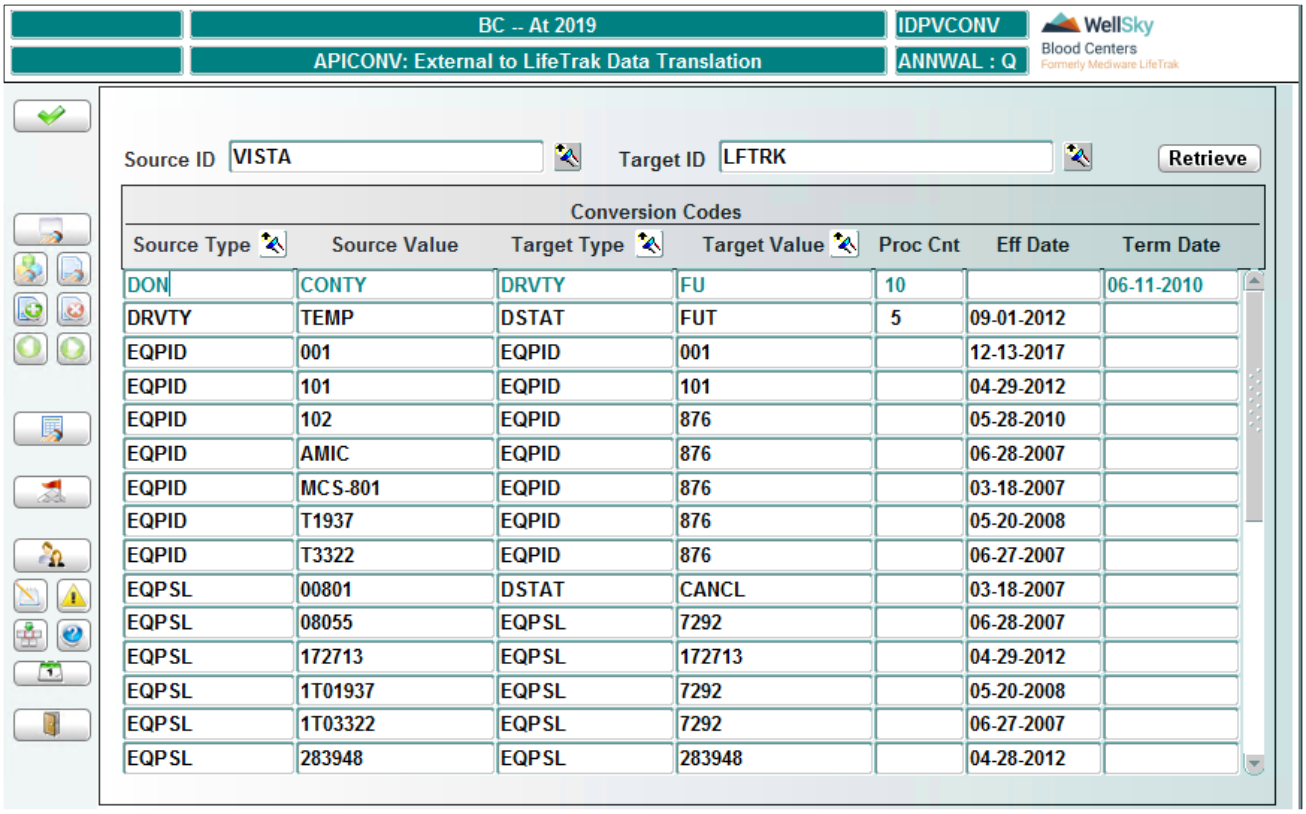

In the Control Block

Source ID

Enter source ID or select from LOV.

Target ID

System displays LT – LifeTrak, since this is the only application that the API will interface.

In the Detail Block

Source Value

Enter source value coming from external application.

Target Value

Enter target value used by Blood Centers. These values must be valid. The codes cannot be terminated, or not effective in the Blood Centers system.

Target Type

Enter target type or select from LOV.

NOTE – These values come from Master Code LTTYP.

Effective Date

Enter effective date in DDMONYYYY format.

Term Date

Enter termination date in DDMONYYYY format.

Last Mod Date

Field automatically populates with the date modifications were last made.

Press **F12** (Commit) to save changes.

What to Do Next

There is no next step for this screen.

WellSky Corporation
Proprietary and confidential

10

Chapter 10 - Lab Functions - Component Administration


10.1 Screens and Descriptions 347
10.1.1 Attribute Codes (ATTRIB) 347
10.1.2 Smart Manufacture Attribute Configurator (ATRCFG) 351
10.1.3 Valid Catalog Numbers (CATALOG) 353
10.1.4 Lot Details for Bags (LOTS) 357
10.1.5 Valid Filters (FILTERS) 361
10.1.6 Product Codes (PRODUCT) 362
10.1.7 Licensed Products (LICPROD) 370
10.1.8 Default Product Code Attribute –ISBT (PRDTYAT) 373
10.1.9 Product Type Attributes (ISBT/Codabar) (PRDATTR) 375
10.1.10 Valid Attribute Matrix – ISBT (ATTRMAT) 377
10.1.11 Product Type Data - (Codabar/ISBT) (PRDTYPE) 379
10.1.12 Product/Procedure Matrix - Pheresis (PRODPROC) 381
10.1.13 Procedure Attribute/Equipment Matrix (ATTREQUP) 383
10.1.14 Equipment/Product cGMP Matrix (EQUIPROD) 385
10.1.15 Product Conversions (ISBT 'SP'/Codabar) (PRODCONV) 387
10.1.16 'SP' Special Processing Master Codes (FRMASTER) 389
10.1.17 'SP' Processes and Stages (PROCSTAG) 390
10.1.18 'SP' Products and Special Processes (SPPROC) 392
10.1.19 'SP' Antigen Group Definitions (ANTGGRP) 394
10.1.20 'SP' Antigen Rarity Combinations (RARITY) 396
10.1.21 Valid Pool ABO Values (POOLSLD) 397
10.1.22 Attribute Expiration Override - ISBT (OVR) 399
10.1.23 CRYO Methods (CRYOMET) 401
10.1.24 Pre-Printed Product Labels – ISBT (PREPRINT) 403
10.1.25 Configure Interdiction Placement (CIP) 405
10.1.26 Valid Aliquots (VALALI) 407
10.1.27 Valid Product Code Attributes (ATTRPRD) 409
10.1.28 Product Combinations (PRODCOM) 411

10.1.29 Delete Product Combination (DPRODCOM) 413
10.1.30 Product Bags (PRODBAG) 414

WellSky Corporation
Proprietary and confidential

10.1 Screens and Descriptions

These functions are accessed from the following menu:

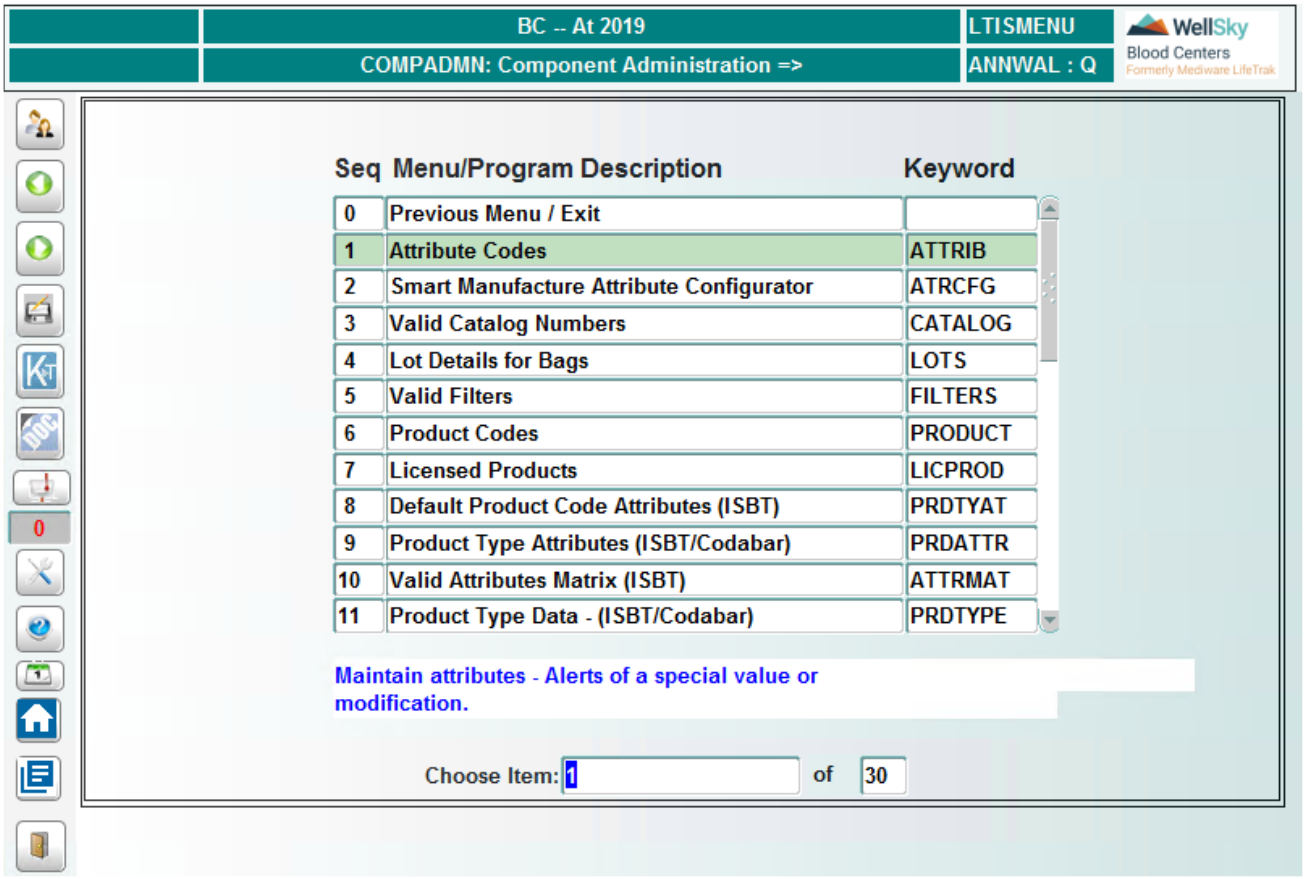

10.1.1 Attribute Codes (ATTRIB)

Intended Use

This screen is used to identify valid attribute codes and billing, interdictions, etc., associated with the interdiction.

This screen is only available from Lab.

Limitations


- Only HOLD and NFT interdictions can be added when attributes are placed. Refer to Appendix O – Lab Static Interdictions for static attribute values that cannot be changed or terminated in the system.

Prerequisites

- Lab Master Codes (LMASTER), code ATTR – Define valid attribute groups.

- Lab Interdiction Codes (LINTER) – Define valid interdictions.
- VENI attribute descriptions should have the same meaning in both this screen and in the Venipuncture Attributes (VENATTR) screen in Donor. Refer to Appendix J - Venipuncture Codes for additional information.

Entering/Viewing Data

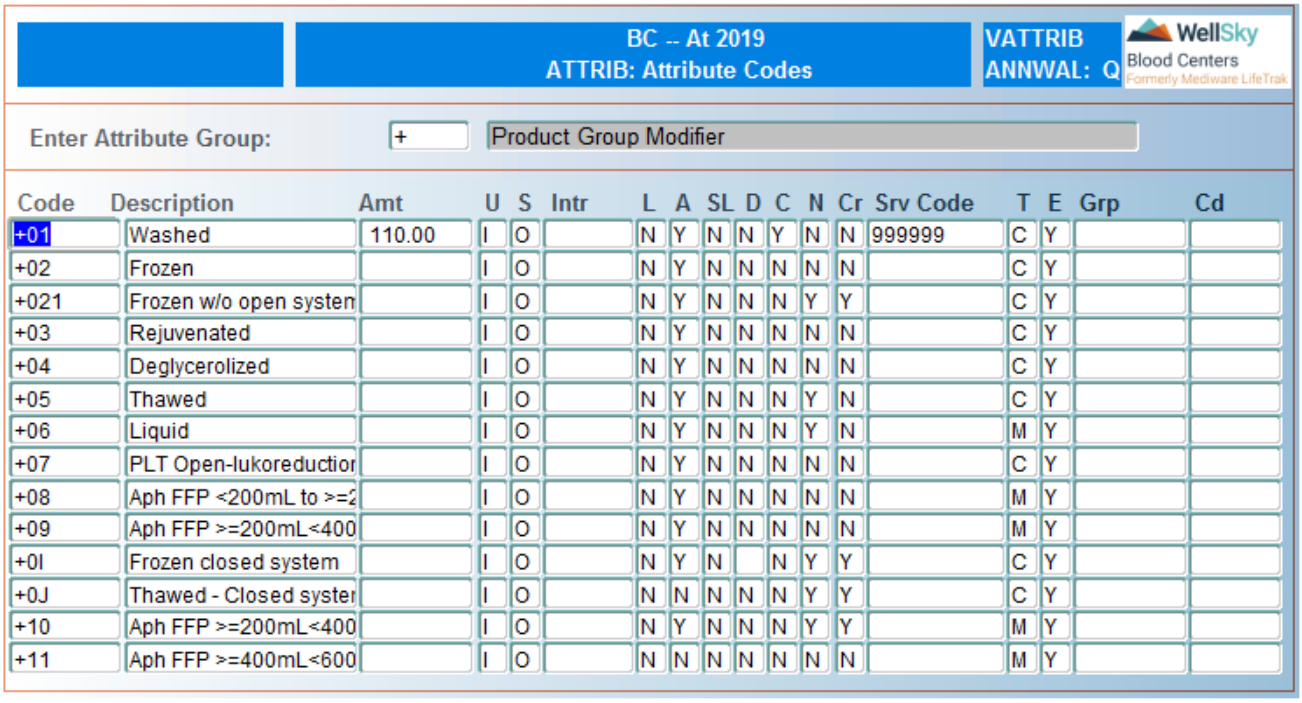

Code	Description	Amt	U	S	Intr	L	A	SL	D	C	N	Cr	Srv Code	T	E	Grp	Cd
+01	Washed	110.00	I	O		N	Y	N	N	Y	N	N	999999	C	Y		
+02	Frozen		I	O		N	Y	N	N	N	N	N		C	Y		
+021	Frozen w/o open systen		I	O		N	Y	N	N	N	Y	Y		C	Y		
+03	Rejuvenated		I	O		N	Y	N	N	N	N	N		C	Y		
+04	Deglycerolized		I	O		N	Y	N	N	N	N	N		C	Y		
+05	Thawed		I	O		N	Y	N	N	N	Y	N		C	Y		
+06	Liquid		I	O		N	Y	N	N	N	Y	N		M	Y		
+07	PLT Open-lukoreductior		I	O		N	Y	N	N	N	N	N		C	Y		
+08	Aph FFP <200mL to >=2		I	O		N	Y	N	N	N	N	N		M	Y		
+09	Aph FFP >=200mL<400		I	O		N	Y	N	N	N	N	N		M	Y		
+0I	Frozen closed system		I	O		N	Y	N		N	Y	Y		C	Y		
+0J	Thawed - Closed syster		I	O		N	N	N	N	N	Y	Y		C	Y		
+10	Aph FFP >=200mL<400		I	O		N	Y	N	N	N	Y	Y		M	Y		
+11	Aph FFP >=400mL<600		I	O		N	N	N	N	N	N	N		M	Y		

Enter Attribute Group

Enter attribute group or select from LOV. All existing codes for the group entered populate the screen.

Code

Enter attribute code or select from LOV. This attribute will be included under the attribute group entered in the *Attribute Group* field.

NOTE – If the code is to be placed by testing, it should be part of the ALERT group.

Description

Enter attribute code description. A maximum of 50 characters is allowed.

Amt

Enter charges associated with the attribute. Leave blank if the attribute charge is included in the product code price.

U

Enter unit scheme type, as follows:

- C – Codabar
- I – ISBT

S

Enter attribute status, as follows:

- H – Hold
- N – NFT
- O – OK
- A – Antigen

Intr

If the status is H or N, enter an interdiction code or select from LOV.

> **NOTE –** The interdiction entered in this column will be automatically placed when the attribute is added.

L

Enter one of the following:

- Y – prevent ABO labeling
- N – allow ABO labeling

> **NOTE –** Labeling will be stopped if the attribute is not present on a product that is defined for specific product types in Product Type Attributes (PRDATTR) when that attribute is present at unit level.

A

Enter one of the following:

- Y – Attribute can be added to a UNIT either after it has been ABO labeled or the QC on the check-in is done

  > **NOTE –** In addition, the attribute must be SP group, and it must have an entry in the PRDATTR table.

- N – Attribute cannot be added to a UNIT either after it has been labeled or the QC on the check-in is done

SL

Enter one of the following:

- Y – Attribute is to be displayed when performing ABO labeling
- N – Attribute is not to be displayed when performing ABO labeling

NOTE – Only ALERT type attributes can be displayed during ABO labeling.

D

Enter one of the following:

- N – Prevent the attribute from being deleted in the Delete Component Attribute (CPICRATT) function
- Y (or leave blank) – Allow the attribute to be deleted in the Delete Component Attribute (CPICRATT) function

C

Products ordered in SPECIAL order. Enter one of the following:

- Y – Attribute can be ordered in the SPECIAL order entry screen
- N – Attribute is not available for order in the SPECIAL screen

NOTE – If you enter Y, you must have a price and service code for the attribute.

N

Enter one of the following:

- Y – Attribute can be ordered in the ORDER and EXPORT order entry screens
- N – Attribute is not available for order in the ORDER and EXPORT screens

NOTE – If you enter Y, the attribute will be orderable using the Regular Order (ORDER) screen in Distribution. You must have a price and service code for the attribute.

Cr

Enter one of the following:

- Y – Attribute can be credited when specifically ordered and subsequently returned
- N – Credit cannot be given

Srv Code

Enter a service code for billing, if applicable. A maximum of 7 characters is allowed.

NOTE – A service code must be associated to the attribute if it is required to fulfill a customer order.

T

Enter one of the following attribute types:

WellSky Corporation
Proprietary and confidential

- C – Conversion (for example leukoreduction or washing)
- M – Modification (for example Irradiation)
- A – Simple (ASA free)

NOTE – Conversion attributes are used when addition of this product requires the product to be transferred to a new bag with a new product code.

Modification attributes are to be used when addition of the attribute can change the product code, but the product remains in the same bag.

Simple attributes are to be for information notice only. The product code does not change, and the product does not change bags.

E

For ISBT attributes only, enter Y if the attribute code is mutually exclusive within the attribute group. Enter N for all Codabar attributes and for ISBT attributes that are not mutually exclusive.

NOTE – If an attribute is mutually exclusive, only one attribute code from that attribute group can be added to a component or unit.

Grp

Field not utilized.

Cd

Field not utilized.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

What to Do Next

There is no next step.

10.1.2 Smart Manufacture Attribute Configurator (ATRCFG)

Intended Use

Use this screen to configure the attributes that can be placed in that function.


Limitations

None.

Prerequisites

- Define Lab Master Codes (LMASTER), code ATRCF – Attribute Configurator Function names
- Define Lab Master Codes (LMASTER), code CLASS – Product class
- Define Lab Master Codes (LMASTER), code PMDFR – Product modifier
- Attribute Codes (ATTRIB) – define attribute codes that can be applied in the functions.

Entering/Viewing Data

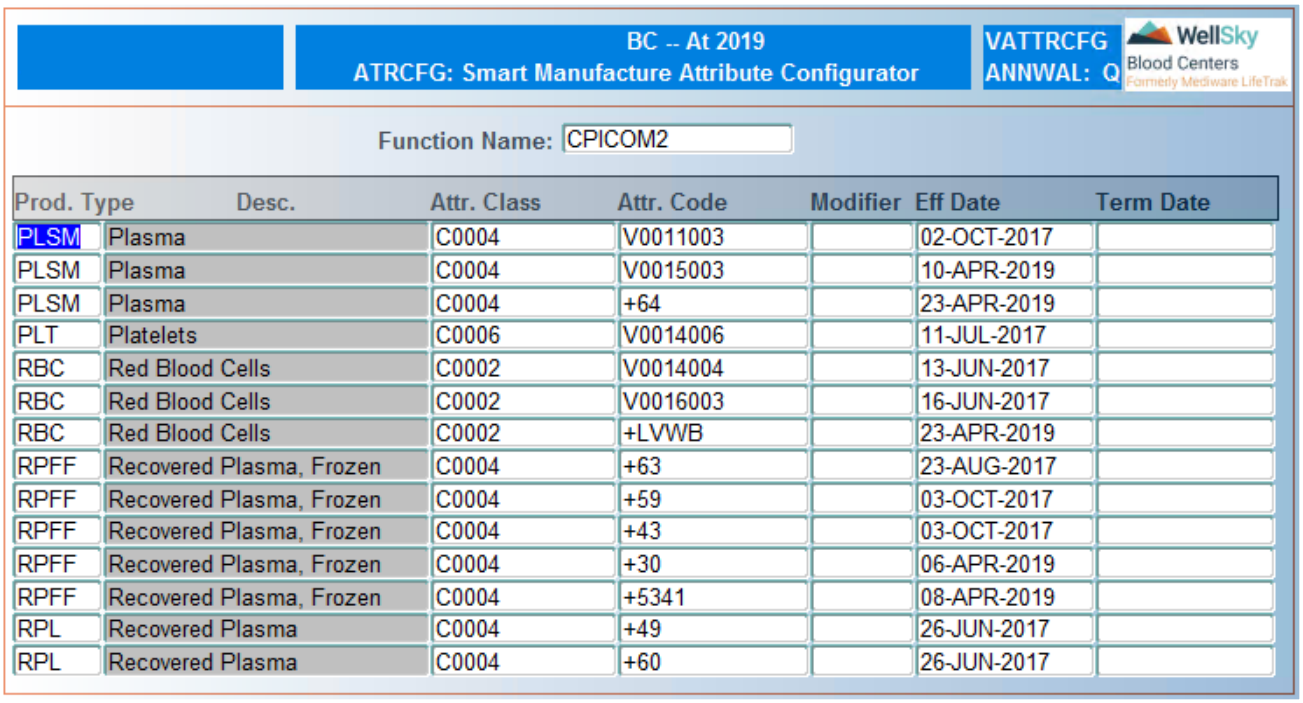

Prod. Type	Desc.	Attr. Class	Attr. Code	Modifier	Eff Date	Term Date
PLSM	Plasma	C0004	V0011003		02-OCT-2017	
PLSM	Plasma	C0004	V0015003		10-APR-2019	
PLSM	Plasma	C0004	+64		23-APR-2019	
PLT	Platelets	C0006	V0014006		11-JUL-2017	
RBC	Red Blood Cells	C0002	V0014004		13-JUN-2017	
RBC	Red Blood Cells	C0002	V0016003		16-JUN-2017	
RBC	Red Blood Cells	C0002	+LVWB		23-APR-2019	
RPFF	Recovered Plasma, Frozen	C0004	+63		23-AUG-2017	
RPFF	Recovered Plasma, Frozen	C0004	+59		03-OCT-2017	
RPFF	Recovered Plasma, Frozen	C0004	+43		03-OCT-2017	
RPFF	Recovered Plasma, Frozen	C0004	+30		06-APR-2019	
RPFF	Recovered Plasma, Frozen	C0004	+5341		08-APR-2019	
RPL	Recovered Plasma	C0004	+49		26-JUN-2017	
RPL	Recovered Plasma	C0004	+60		26-JUN-2017	

Control Block Fields and Definitions

Function Name

Enter the function name (program) or use the LOV. This is a required field. The LOV is populated from the Lab master code ATRCF.

Detail Block Fields and Definitions

Prod Type and Description

Enter a valid product type or select from LOV. The LOV is populated through the Product Type Data (PRDTYPE) table.

WellSky Corporation
Proprietary and confidential

Attr Class
Enter the product class or select from LOV. The LOV is populated from the master code CLASS.

Attr Code
Enter the attribute code or select from the LOV. The LOV is populated from the Attribute Codes (ATTRIB) table.

Modifier
This field is not currently used, but the LOV is populated from the master code PMDFR.

Eff Date
Enter the effective date in DD-MON-YYYY format.

Term Dt
Enter the termination date in DD-MON-YYYY format.

At Commit
Entries are saved to the database.

What to Do Next
There is no next step for this screen.

10.1.3 Valid Catalog Numbers (CATALOG)


Intended Use
Use this screen to define and view the manufacturer catalog numbers of bags, sterile connection wafers, needles, segments, and filters used in component production and modification. This screen also allows entry of the anticoagulant, additive solutions, manufacturer, and number of bags in the set, where applicable.

Limitations
This program is not used for entering reagent information.

Prerequisites
Refer to Lab Master Codes (LMASTER), codes:

- BAGID – Define wafers, filters, segments, and needle.
- ADDTV – Define additives.
- ACOAG – Define anticoagulants.
- MFGCD – Manufacturer bag codes
- CONID – Container ID used in the catalog numbers

Entering/Viewing Data

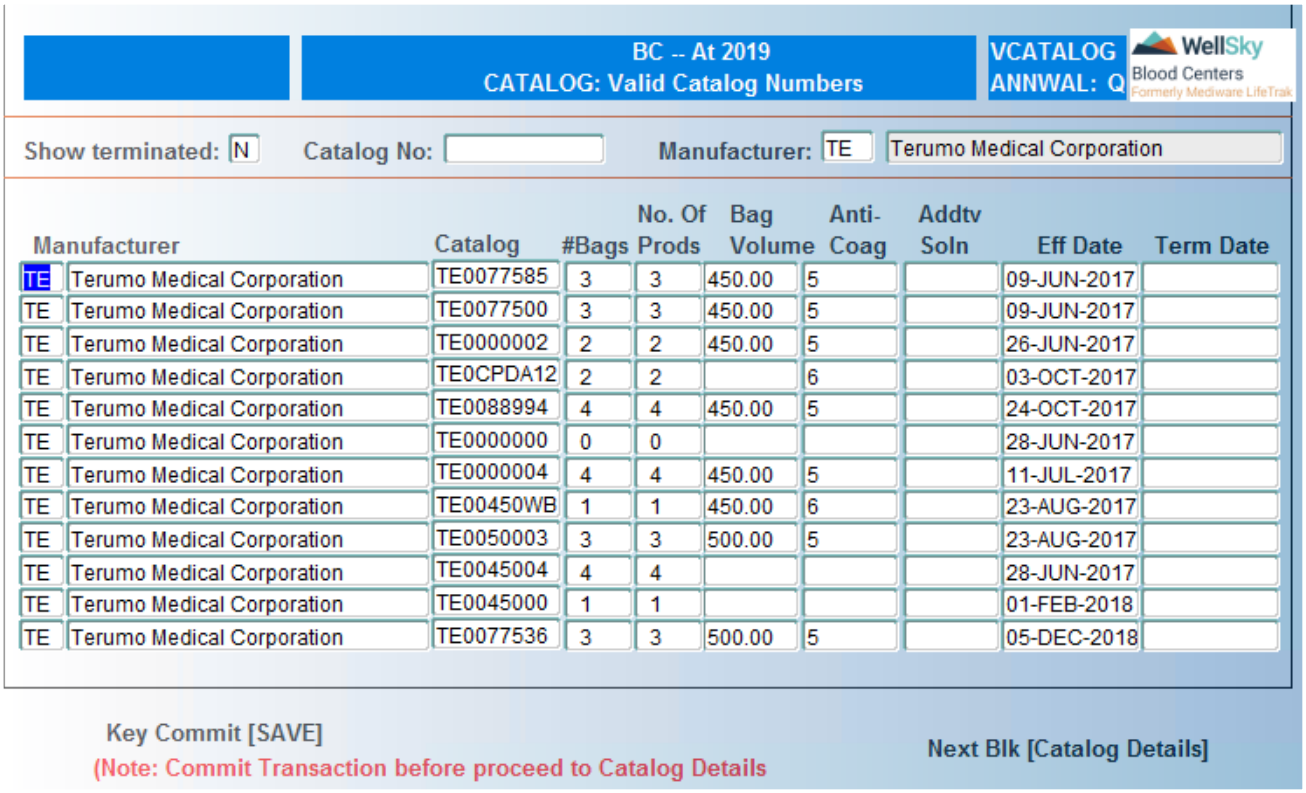

Control Block:

Show Terminated

Enter one of the following:

- `Y` – Display terminated catalog numbers.
- `N` – Display only non-terminated catalog numbers.

Catalog No

Enter the catalog number to be displayed or select from LOV. Leave blank to view all catalog numbers.

Manufacturer

Leave field blank to enter a new catalog number and manufacturer. To query existing catalogs for a manufacturer, enter the manufacturer code manually or use the LOV. The LOV is created from the Lab master code MFGCD.

NOTE – The manufacturer codes are supplied by ICCBBA.

Detail Block:

Press **CTRL** + **F2** (Create Record) to add a new catalog number and continue as described below.

WellSky Corporation
Proprietary and confidential

Manufacturer and Description

This is a required field. Enter the manufacturer code manually or use the LOV. The LOV is created from the Lab master code MFGCD.

Catalog No

The catalog number is a 7-digit number with the manufacturer code prefixed to the number.

Bags

Enter the total number of bags in the set.

No. of Prods

Enter the number of products that can be made from the bag set.

Bag Volume

Enter the bag volume. Leave blank if not applicable.

NOTE – If the volume is not entered for ISBT bags, the volume will not be considered for entries in Default Product Type Attributes – ISBT (PRDTYAT) when determining possible core conditions for ISBT products. If a volume is defined for ISBT bags, the volume must be defined in Default Product Type Attributes – ISBT (PRDTYAT) when determining possible core conditions for ISBT products. WellSky recommends that *Bag Volume* be left blank for apheresis bags.

Anticoagulant

Enter the anticoagulant code or select from LOV. Leave blank if not applicable. The LOV is populated from master code ACOAG.

Addtv Soln

Enter the additive solution code or select from LOV. Leave blank if not applicable. This field is not currently used.

Eff Date

Enter catalog effective date in DD-MON-YYYY format.

Term Date


Enter catalog termination date in DD-MON-YYYY format.

Press F12 (Commit) to save entries.

Catalog Details Section:

To complete this section, the initial form must be completed and committed using F12. Once the initial screen is committed, use Next Block (CTRL + F3) to move to the details section about the catalog bags.

Entering/Viewing Data

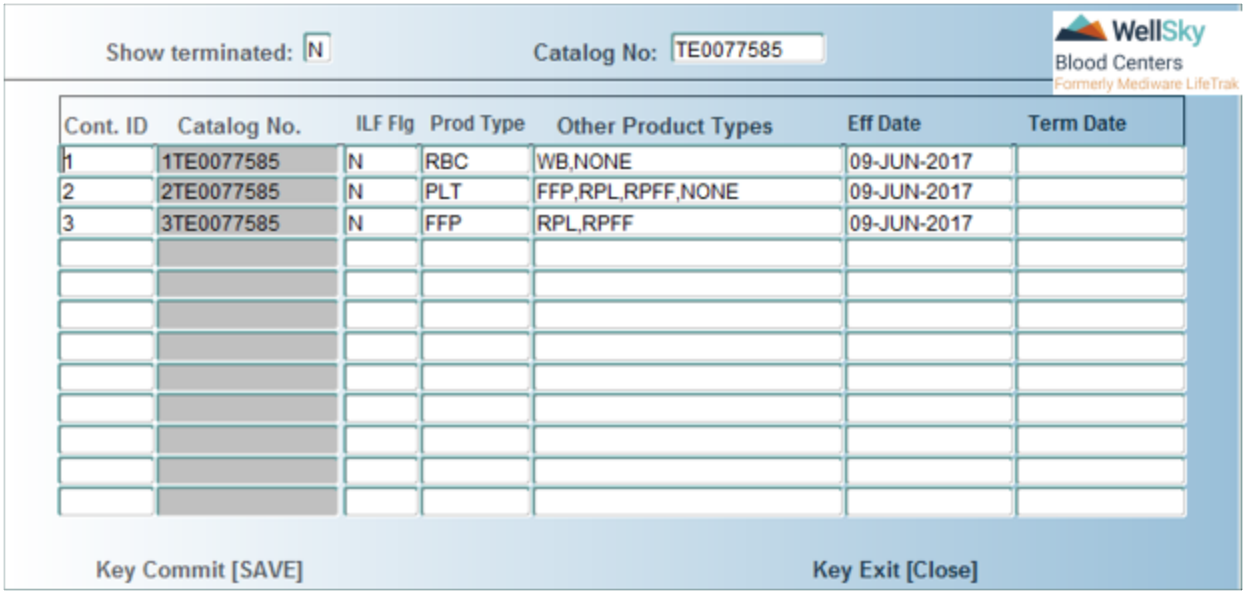

Control Block:

Show Terminated

Enter one of the following:

- `Y` – Display terminated catalog numbers.
- `N` – Display only non-terminated catalog numbers.

Catalog No

The catalog number the cursor was on will automatically display in the field, but it can be changed. Enter the catalog number to display or select from LOV.

Detail Block:

Cont. ID

Enter the container number you are defining, or select from the LOV. The LOV is populated from master code CONID.

Catalog No

The catalog number is read-only. It is calculated using the container number and appended on the catalog number in the control block.

ILF Flg

This is a required field. Enter `Y` or `N` for inline filter linked to bag. Currently this field is not being used.

Prod Typ

Enter the product type that will be made in the bag. The LOV is coming from the Product Type Data (PRDTYPE) table.

WellSky Corporation
Proprietary and confidential

NOTE – If the bag is not going to have any product defined in it, enter NONE.

Other Product Types

Enter the product type that will be made in the bag. Define NONE to allow the bag to be rejected in CPIREJ.

NOTE – All containers should have NONE defined either in the *Prod Typ* or in the *Other Product Types* field.

Eff Date

Enter catalog effective date in DD-MON-YYYY format.

Term Date

Enter catalog termination date in DD-MON-YYYY format.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

- Define valid filters in Valid Filters (Filters).
- Define lot numbers in Lots (LOTS).

10.1.4 Lot Details for Bags (LOTS)

Intended Use

Use this screen to define lot numbers of bags, filters, needles, segments, and sterile connection wafers used in component production and modification.

Limitations


- This program is not used for entering reagent information.
- Only two special characters are allowed: the hyphen (-) and the underscore (_). No other special characters can be used.

Prerequisites

- Lab Master Codes (LMASTER)
- BAGID – define filters and wafers.
- CMC - define component containers that are used in special process programs. This narrows down the list of values the user sees.

- VTYSST - different type sets used for pathogen reduction
- Valid Catalog Numbers (CATALOG) – define catalog numbers.
- Valid Filters (FILTERS) – define valid filters.

Accessing the Screen

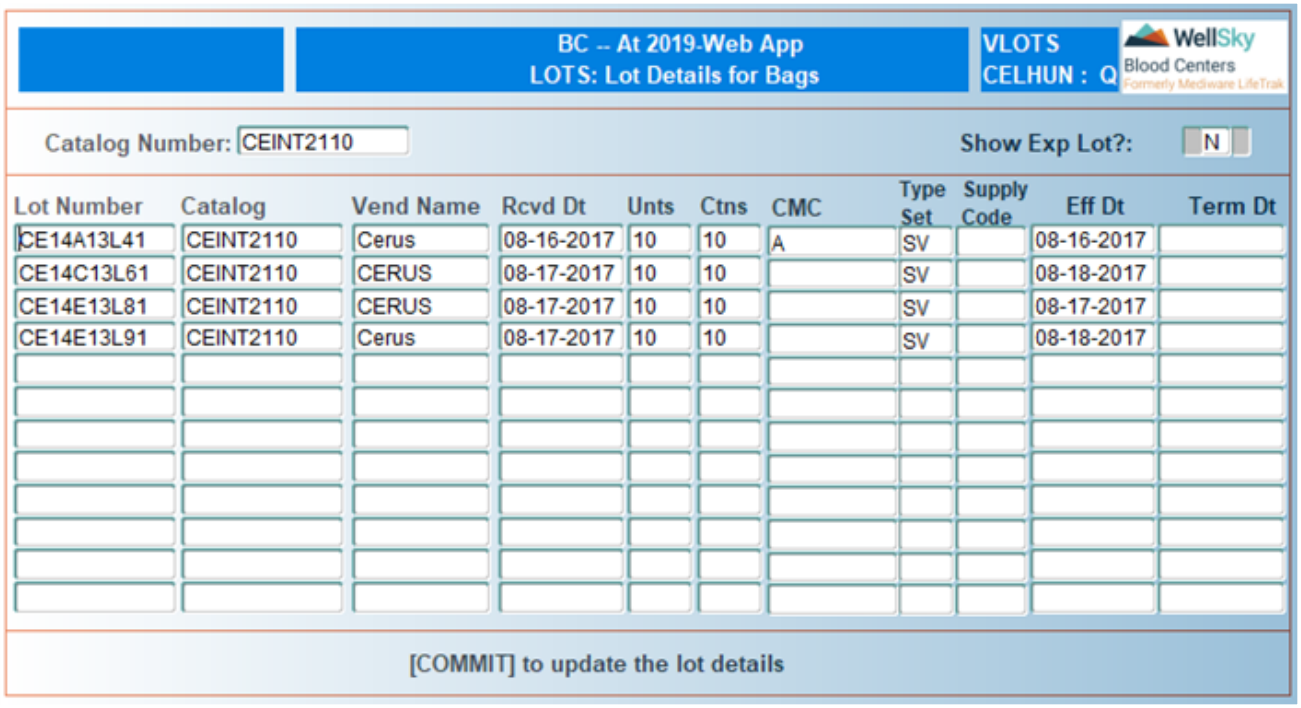

Control Block Fields and Definitions

To add a new record, press CTRL + F2 (Create Record).

Catalog

Enter the catalog number, or select it from the LOV. The LOV is populated from the catalog screen. Leave the field blank to pull all catalog numbers to the detail block.

Show Exp Lot?

Enter one of the following:

- Y – display terminated catalog numbers.
- N – display only non-terminated catalog numbers.

Detail Block Fields and Definitions

Lot Number

Enter the bag lot number. The lot number must be 10 characters. If the lot number is not 10 characters, append on leading zeros to make the number 10 characters in length. A maximum of 30 characters is allowed.

WellSky Corporation
Proprietary and confidential

Catalog

If a catalog number is not selected in the control block, enter the catalog number, or select it from the LOV. If the catalog number is entered in the control block, it will automatically display in the field.

Vend Name

Enter the vendor name. A maximum of 50 characters is allowed.

Rcvd Dt

Enter the receipt date in DD-MON-YYYY format.

Unts

Enter the number of units received.

Ctns


Enter the number of cartons received.

CMC

Enter the container restriction value, or select it from the LOV. This flag will narrow down entries in the LOVs for programs such as FRICON2, CPIPOOL, CPISDDFN, and CPISDAL2.


NOTE – See master code CMC for the list of values.

The LOV allows multiple selections:

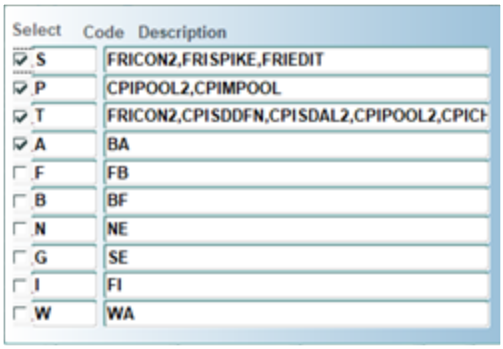

NOTE – You are not able to use the ↑ to move back up the list. You must exit the list and go back in to the LOV.

Once the codes are selected, press F8 (Exit Screen) to exit from the LOV and to populate the CMC field.

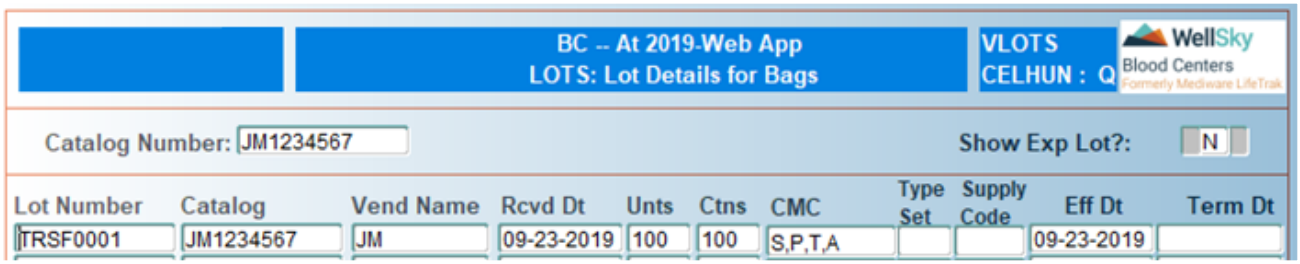

Type Set


Optional entry. Enter the volume set type, or select it from the LOV. This flag will only be used for pathogen reduction bag set types.

NOTE – See master code VTYST for the list of values.

Supply Code

Optional entry. Enter the supply code, or select it from the LOV. This supply code entry is for any supply code that is not used for a collection bag.

NOTE – The supply code should only be entered if the lot number is linked to supply codes in the Donor application. If the catalog and lot number is used as the bag for collections, then the supply code should be left blank.

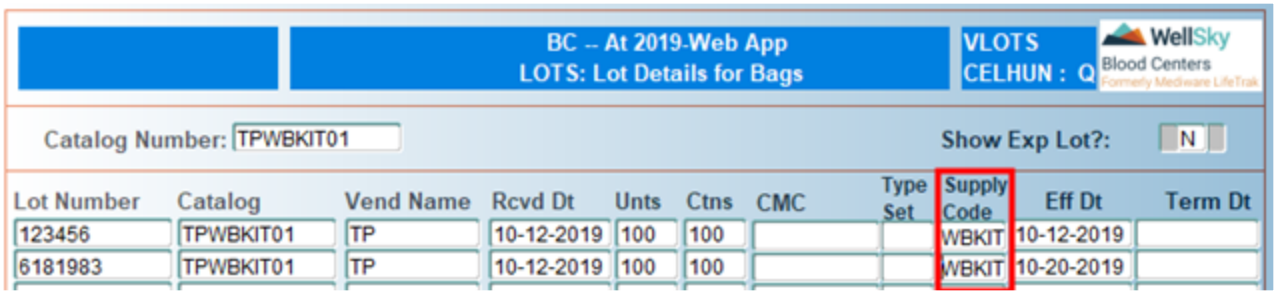

Eff Dt

Enter the effective date in DD-MON-YYYY format.

Term Dt

Enter the termination date in DD-MON-YYYY format.

Press **F12** (Commit) to save entries.

At Commit

Entries are saved to the database.

WellSky Corporation
Proprietary and confidential

What to Do Next

There is no next step for this screen.

10.1.5 Valid Filters (FILTERS)

Intended Use

Use this screen to define or update filter information. This screen allows definition of valid product types to be used with different filters. Time restrictions are also entered into this screen for different filters; interdictions are placed on units violating information entered in this screen.


Limitations

This program is to be used for entering leukoreduction filter information only.

Prerequisites

- Valid Catalog Numbers (CATALOG) – Define catalogs numbers.
- Lab Master Codes (LMASTER), code PRDTY – Define product types.

Entering/Viewing Data

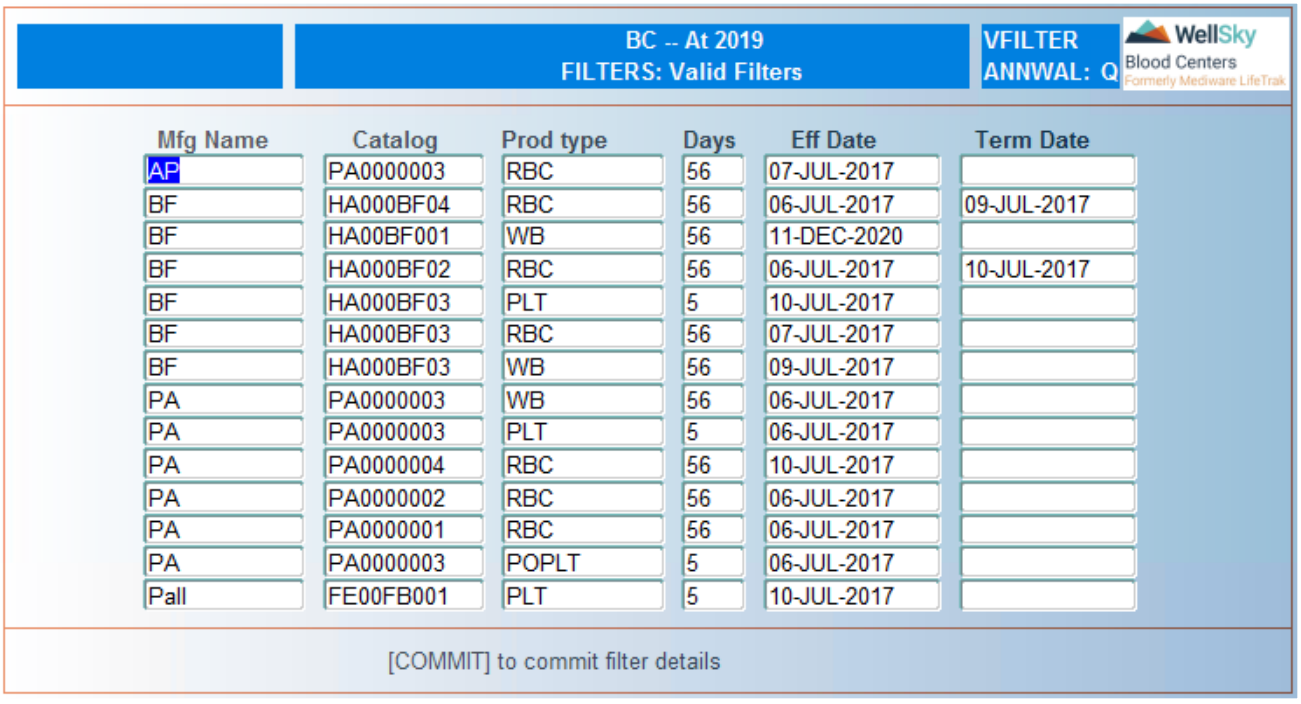

Mfg Name	Catalog	Prod type	Days	Eff Date	Term Date
AP	PA0000003	RBC	56	07-JUL-2017	
BF	HA000BF04	RBC	56	06-JUL-2017	09-JUL-2017
BF	HA00BF001	WB	56	11-DEC-2020	
BF	HA000BF02	RBC	56	06-JUL-2017	10-JUL-2017
BF	HA000BF03	PLT	5	10-JUL-2017	
BF	HA000BF03	RBC	56	07-JUL-2017	
BF	HA000BF03	WB	56	09-JUL-2017	
PA	PA0000003	WB	56	06-JUL-2017	
PA	PA0000003	PLT	5	06-JUL-2017	
PA	PA0000004	RBC	56	10-JUL-2017	
PA	PA0000002	RBC	56	06-JUL-2017	
PA	PA0000001	RBC	56	06-JUL-2017	
PA	PA0000003	POPLT	5	06-JUL-2017	
Pall	FE00FB001	PLT	5	10-JUL-2017	

To add a new record, press **CTRL** + **F2** (Create Record).

Mfg Name

Enter filter manufacturer name. A maximum of 50 characters is allowed.

Catalog
Enter the manufacturer's catalog number or select from LOV.

Prod type
Enter product type for which the filter may be used or select from LOV.

> **NOTE –** Only one product type can be entered per line. If a filter can be used on more than one product type, the additional valid product type must be entered on separate lines.

Days
Enter manufacturer's suggested maximum acceptable product age that can be filtered using the filter entered.

> **NOTE –** If the filter is used for a product that exceeds the maximum product age defined in this screen, a FILT interdiction is automatically placed on the product.

Eff Dt
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date in DD-MON-YYYY format.

Press **F12** (Commit) to save entries.

At Commit
Entries are saved to the database.

What to Do Next
Define filter lots in Lot Details for Bags (LOTS).

10.1.6 Product Codes (PRODUCT)

Intended Use
This screen is used to define Codabar and ISBT product code information. Interdictions are automatically placed on components with data that violates criteria defined in this screen.

Limitations
The following are static product types that cannot be changed or terminated in the system:

- CRYO — Cryoprecipitate
- DUFFP — Dummy FFP or Cryo-Destined Plasma
- FFP — Fresh Frozen Plasma

WellSky Corporation
Proprietary and confidential

- GRAN — Granulocyte
- LYMPH — Lymphocytes
- PLSM — Cryo-depleted or cryo poor plasma
- PLT — Platelet
- RBC — Red Blood Cells
- RPFF — Recovered Plasma, Fresh Frozen
- RPL — Recovered Plasma, Liquid
- WB — Whole Blood


Product code 18201 cannot be changed or terminated in the system, as the Component Production Summary Report (CPRPRSUM) and the Components Suitable for Conversion Report (CPRABOFR) are hard coded for these values.

Product types are static in the Lab subsystem. If a new product type is required, it must be validated by the facility for their internal use.

Prerequisites

- Lab Master Codes (LMASTER), code PRDTY – Define product types.
- Lab Master Codes (LMASTER), code INVCL – Define inventory classes.
- Lab Master Codes (LMASTER), code CLASS – Define product class.
- Lab Master Codes (LMASTER), code PMDFR – Product modifiers.
- Attribute Codes (ATTRIB) – Define ISBT attribute codes that are included as part of a product's formula.

Accessing the Screen

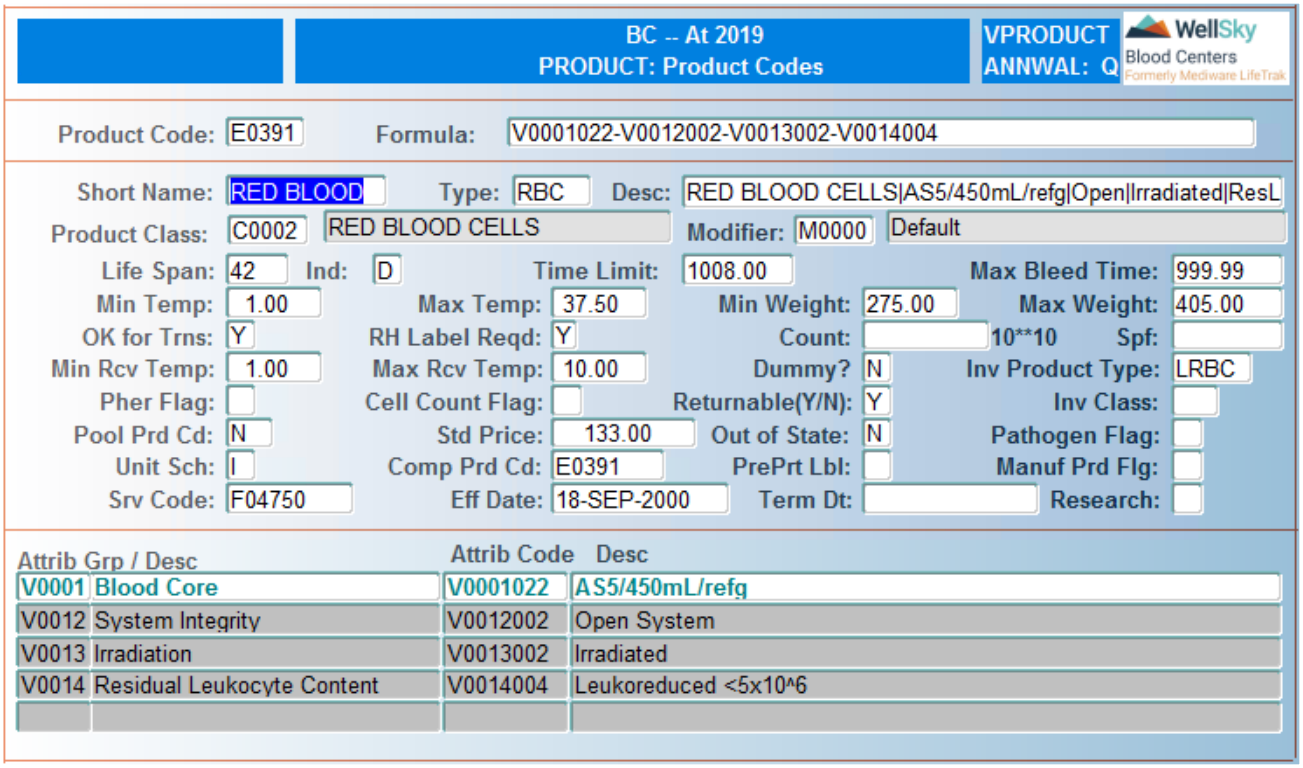

Control Block Fields and Definitions

Product Code

Enter product code or select from LOV to select existing code. A maximum of 5 characters is allowed.

Formula

This field must be entered only for ISBT product codes. Enter the attribute code for the core condition followed by any attributes associated to the attribute code. The attribute block automatically populates after the formula is entered. The formula must begin with the core condition (V0001 attribute), followed by the other applicable attributes. A hyphen should be included between the core condition attribute and all the other attributes. The attributes should be entered in numerical order.

Short Name

Enter a short name for the product code. A maximum of 10 characters is allowed.

Type

Enter valid product type for the product code. A maximum of 5 characters is allowed. Valid Product Types to be used are associated to Master Codes, code type PRDTY. Lab product type is more specific to the manufacturing of the product.

WellSky Corporation
Proprietary and confidential

Desc

Enter product description. A maximum of 250 characters is allowed.

Product Class

Enter the product class or use the LOV. The LOV is populated from the master code CLASS.

Modifier

Enter the product modifier or use the LOV. The LOV is populated from the master code PMDFR.

Life Span

Enter product life span.

Ind

Enter product life span indicator:

- `H` – Hours
- `D` – Days
- `Y` – Years

NOTE – Observe the following when calculating life span during a leap year: The system calculates product life span by month. For example, if you enter the expiration of 1 year, the date is calculated as the last day of the same month of the next year. If you enter 365 days, the system calculates exactly 365 days from the system date. You should consider business rules when defining the life span and indicator calculation for products with 1 year expirations.

Time Limit

Enter time limit (from collection) for defining product or leave blank for no limitation. CMTI interdiction is placed when the time is exceeded for making a product.

Max Bleed Time

Field not utilized.

Min Temp

Enter minimum acceptable check-in temperature (^{O}C). This is the temperature of units after collection when received by material check-in and component manufacturing.

NOTE – CMT interdiction is automatically placed on components made from unit with check-in temperature lower than the minimum temperature.

Max Temp

Enter maximum acceptable check-in temperature (°C). This is the temperature of units after collection when received by material check-in and component manufacturing.

NOTE – CMT interdiction is automatically placed on components made from unit with check-in temperature greater than the maximum temperature.

Min Weight

Enter minimum acceptable weight (g) for the product code.

NOTE – CMW interdiction is automatically placed on components made from unit with weights less than the minimum weight.

Pheresis product weights may be overridden by the weight cGMP table.

Max Weight

Enter maximum acceptable weight (g) for the product code.

NOTE – CMW interdiction is automatically placed on components made from unit with weights more than the maximum weight.

Pheresis product weights may be overridden by the weight cGMP table.

OK for Trns

Enter one of the following:

- `Y` – Product is approved for transfusion.
- `N` – Product is not approved for transfusion.

NOTE – If the flag is set to N, the product cannot be labeled with a valid ABO (that is, O Positive, AB Negative, etc.). The flag must be set to N for manufacturing products.

RH Label Reqd

Enter one of the following:

- `N` – Rh should not be included in the ABO.
- `Y` – Rh should be included in the ABO.

NOTE – This field must be completed identical for all product codes with the same product type.

WellSky Corporation
Proprietary and confidential

Count

Enter minimum product cell yield ($x10^{10}$). If count not required, leave field blank. CMCO interdiction is automatically placed on products with counts less than the value entered in the field.

If the count for a product is $3.2x10^{11}$, then 32 should be entered.

Spf

Enter product specific gravity (g/mL).

NOTE – This value is used throughout the system to convert volume (mL) to weight (grams) and vice versa.

Min Rcv Temp

Enter the minimum acceptable import check-in temperature (^{o}C).

NOTE – CMT interdiction is automatically placed on components made from unit with import check-in temperature lower than the minimum temperature.

Max Rcv Temp

Enter the maximum acceptable import check-in temperature (^{o}C).

NOTE – CMT interdiction is automatically placed on components made from unit with import check-in temperature greater than the maximum temperature.

Dummy

Enter one of the following:

- `Y` – Product code is a dummy product code.
- `N` – Product code is not a dummy product code.

NOTE – Product codes identified as dummy products are intermediate product codes (that is, a product code for a cryo-destined plasma). They cannot be labeled with valid ABO labels.

Inv Product Type

Enter inventory product type. A maximum of 5 characters is allowed. Valid inventory product types are associated in Master Codes, code type PRTYP in Distribution. These types are considered a category to place common products together.

Pher Flag

Enter one of the following:

- Y – Product code is for a product collected using apheresis technology.
- N (or leave blank) — Product was not collected using apheresis technology.

Cell Count Flag

Enter one of the following:

- Y – Cell count is required for the product code.
- N (or leave blank) – Cell count is not required.
- O – Cell count is optional.

NOTE – A count should only be entered in this field if the Pher Flag is set to 'Y'.

Returnable

Field not utilized.

Inv Class

Enter inventory class to which the product should belong or select from LOV.

Pool Prd Cd

Enter one of the following:

- Y – Product code is for a pooled product.
- N – Product code is not for a pooled product.

Std Price

Used only if there is not a standard price in Inventory Product Type (PRODTYP) in Distribution.

Out of State

Enter one of the following:

- Y – Product can be shipped out of state.
- N (or leave blank) – Product cannot be shipped out of state.

NOTE – Other factors are considered for determining the licensure status of products, including site, drive, product/equipment cGMP matrix, and equipment used for the collection.

Pathogen Flag

Enter Y or leave blank.

- Y is used to establish the product is the initial product code that will be created in the pathogen inactivation suitability screen when Psoralen is added to the component. The products will appear in the LOV in

WellSky Corporation
Proprietary and confidential

CPIPRMGR for suitability intermediate product code.

- Blank represents that it is not an initial pathogen component.

NOTE – The final pathogen components should not have the pathogen flag set; it is only for intermediate products created during suitability.

Unit Sch

Enter product code unit scheme:

- `C` – Codabar
- `I` – ISBT

Comp Prd Cd

This field is mandatory for ISBT product codes only and is used for internal processing. Enter the code that was entered in *Product Code* field. This field is not used for codabar units.

NOTE – When querying a product code, if the preprinted label flag is N, then it will not allow the user to go to the field and update. The PrePrt Label flag will have to be updated to Y to allow the update of the Comp Prd Cd field.

PrePrt Lbl

This field is to be used for ISBT product codes only. Enter one of the following:

- `Y` – Label printing is not required (for example, the label is pre-printed on the bag) when defining products with this product code. This identifies labels that do not print from Blood Centers (that is, purchased, pre-printed labels). The product label will not print from Blood Centers because it is generated or purchased externally.
- `N` – Label printing is required. If N is entered the previous field, navigation will return the cursor to *Unit Sch* field and skip the *Comp Prd Cd* field.

NOTE – If N is entered in this field, the system also considers data defined in Pre-Printed Product Labels – ISBT (PREPRINT) to determine if labels are not to be printed. A specific product code, bag, and catalog number combination can be entered into the PREPRINT screen to exclude label printing even if PrePrt Lbl is set to N.

Manuf Prd Flg

Enter one of the following:

- `Y` – Product is for manufacturing.
- `N` (or leave blank) – Product is not for manufacturing.

NOTE – For ISBT products only, if the flag is set to Y, the product cannot be labeled as a valid ABO (for example, A Positive, B Negative, etc.).

Srv Code

Enter service code used for billing. A maximum of 7 characters is allowed.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Research

Enter one of the following:

- `Y` – The product is a research product.
- `N` (or leave blank) – The product is not a research product.

What to Do Next

There is no next step for this screen.

10.1.7 Licensed Products (LICPROD)

Intended Use

This screen is used to select and modify the list of licensed products available to a given chapter. This function is utilized instead of the *Out of State* field in the PRODUCTS table for all licensed products.

All of the facility's licensed products must be entered in this table with an OSOK flag set to Y. Internally collected products follow all checks to determine final licensure status of the product. Imported and modified products use the OSOK flag and the import licensure status to determine final licensure status of the product.

It is not necessary to enter the products that are not licensed (OSOK = N). If those products are not identified in this table, it is assumed the licensure status is unlicensed.

Limitations

All facilities installed with LifeTrak 2013 or above should have the multi-chapter flag set to Y at installation. Do not use this table if the multiple chapter flag is set to N at installation.

Prerequisites


- This table is used *only* when the multiple chapter flag is set to Y.
- If you have multiple chapters, this table is used to identify licensed products that are identified with the

WellSky Corporation
Proprietary and confidential

PRODUCT table in the *Out of State* field.

- Apheresis products use the cGMP table for equipment, equipment table and checks sites and drives.

Entering/Viewing Data

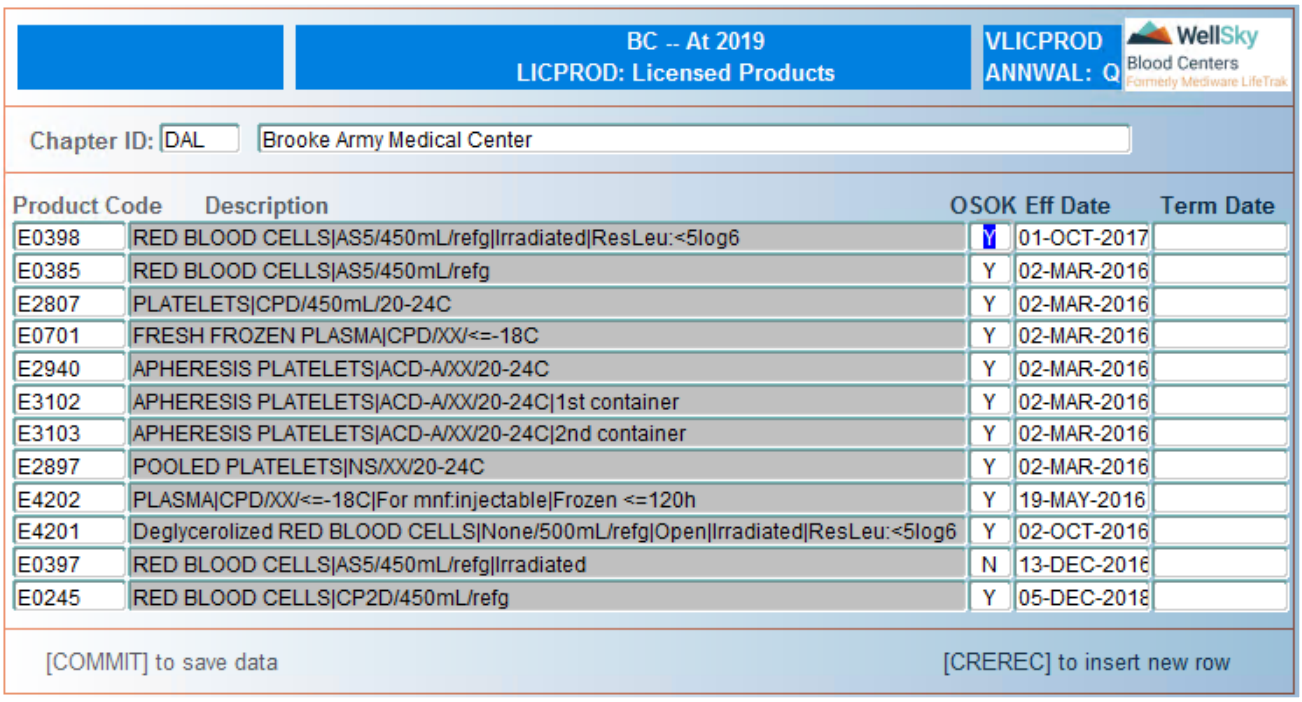

BC -- At 2019
LICPROD: Licensed Products
VLICPROD
ANNWAL: Q
WellSky Blood Centers Formerly Mediware LifeTrak

Chapter ID: DAL Brooke Army Medical Center

Product Code	Description	OSOK	Eff Date	Term Date
E0398	RED BLOOD CELLS|AS5/450mL/refg|Irradiated|ResLeu:<5log6	Y	01-OCT-2017	
E0385	RED BLOOD CELLS|AS5/450mL/refg	Y	02-MAR-2016	
E2807	PLATELETS|CPD/450mL/20-24C	Y	02-MAR-2016	
E0701	FRESH FROZEN PLASMA|CPD/XX/<=-18C	Y	02-MAR-2016	
E2940	APHERESIS PLATELETS|ACD-A/XX/20-24C	Y	02-MAR-2016	
E3102	APHERESIS PLATELETS|ACD-A/XX/20-24C|1st container	Y	02-MAR-2016	
E3103	APHERESIS PLATELETS|ACD-A/XX/20-24C|2nd container	Y	02-MAR-2016	
E2897	POOLED PLATELETS|NS/XX/20-24C	Y	02-MAR-2016	
E4202	PLASMA|CPD/XX/<=-18C|For mnf:injectable|Frozen <=120h	Y	19-MAY-2016	
E4201	Deglycerolized RED BLOOD CELLS|None/500mL/refg|Open|Irradiated|ResLeu:<5log6	Y	02-OCT-2016	
E0397	RED BLOOD CELLS|AS5/450mL/refg|Irradiated	N	13-DEC-2016	
E0245	RED BLOOD CELLS|CP2D/450mL/refg	Y	05-DEC-2018	

[COMMIT] to save data [CREREC] to insert new row

In the Control Block

Chapter ID

Enter the chapter ID or select from LOV. The chapter ID name automatically displays.

In the Detail Block

Product Code Description

Enter product code or select from LOV. A description of the selected product automatically displays.

OSOK

Determines whether or not the product can be shipped out of state. Enter one of the following:

- `Y` – Product can be shipped out of state.
- `N` – Product cannot be shipped out of state.

> **NOTE –** If a product is not licensed it does not need to be defined in the table.

The default value is Y.

Eff Date
Enter effective date in DD-MON-YYYY format.

Term Date
Enter termination date in DD-MON-YYYY format.

Press **CTRL** + **F2** (Create Record) to start a new line and add additional product codes.

After all product codes have been entered, press **F12** (Commit).

Additional Information on Determining Product License

Internal Units - Non-Pheresis Products
The system checks the LICPROD table to determine whether or not the product code being labeled is licensed.

- If product code is not found in the table, the system sets the OSOK_flag to N, and no further checks are made.
- If the product code is found in the table and is set Y, the system checks the OSOK_FLAG for the Drive and Group/Site. The system then proceeds with the current logic in determining the licensure.
- If the product code is found in the table and set to N, the system sets the OSOK_FLAG to N, and no further checks are done.

Internal Units -Pheresis Products
The system checks the LICPROD table to determine whether or not the product code being labeled in LAILABE2 is licensed.

- If product code is not found in the table, the system sets the OSOK_flag to N, and no further checks are made.
- If the product code is found in the table with the OSOK_FLAG set to Y, the system checks Drive, Group/Site, cGMP for equipment and the equipment table.
- If the product code is found in the table and set to N, the system sets the OSOK_FLAG to N, and no further checks are done.

Imported Units
If the converted product being labeled is an imported unit and the new product code is located in the LICPROD table, the internal license flag (OSOK_FLAG) will be equal to what is set in the LICPROD table.

If the converted product being labeled is an imported unit and the new product code is not located in the LICPROD table, the internal license flag (OSOK_FLAG) will be set to N.

Once the internal license flag (OSOK_FLAG) is determined, the system checks the Import license flag for the unit and product to determine the printing of the license number, as follows:

Import Contract Product Licensure	Current Blood Center – Manufacturer	Printed on Label
Y	Y	Both license numbers must appear on the label

WellSky Corporation
Proprietary and confidential

Import Contract Product Licensure	Current Blood Center – Manufacturer	Printed on Label
Y	Modified to a product that Is not licensed = N	No license number
N	Modified to a licensed product = Y	No license number

Pooled Components

The system checks to see if the component is defined in LICPROD table, If the component is not defined in the LICPROD table, the system will check the PRODUCTS table to print the license number for the manufacturing facility.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.8 Default Product Code Attribute –ISBT (PRDTYAT)

Intended Use

Use this screen to define default core conditions to be used when determining possible ISBT product codes.

Limitations

None


Prerequisites

Lab Master Codes (LMASTER), code types:

- ACOAG – Define valid anticoagulants.
- PRDTY – Define valid product types.
- ATTR – Defined valid attribute groups.
- CLASS – Product class
- PMDFR – Product modifier

Attribute Codes (ATTRIB) – Define valid V0001 Group attribute codes

Entering/Viewing Data

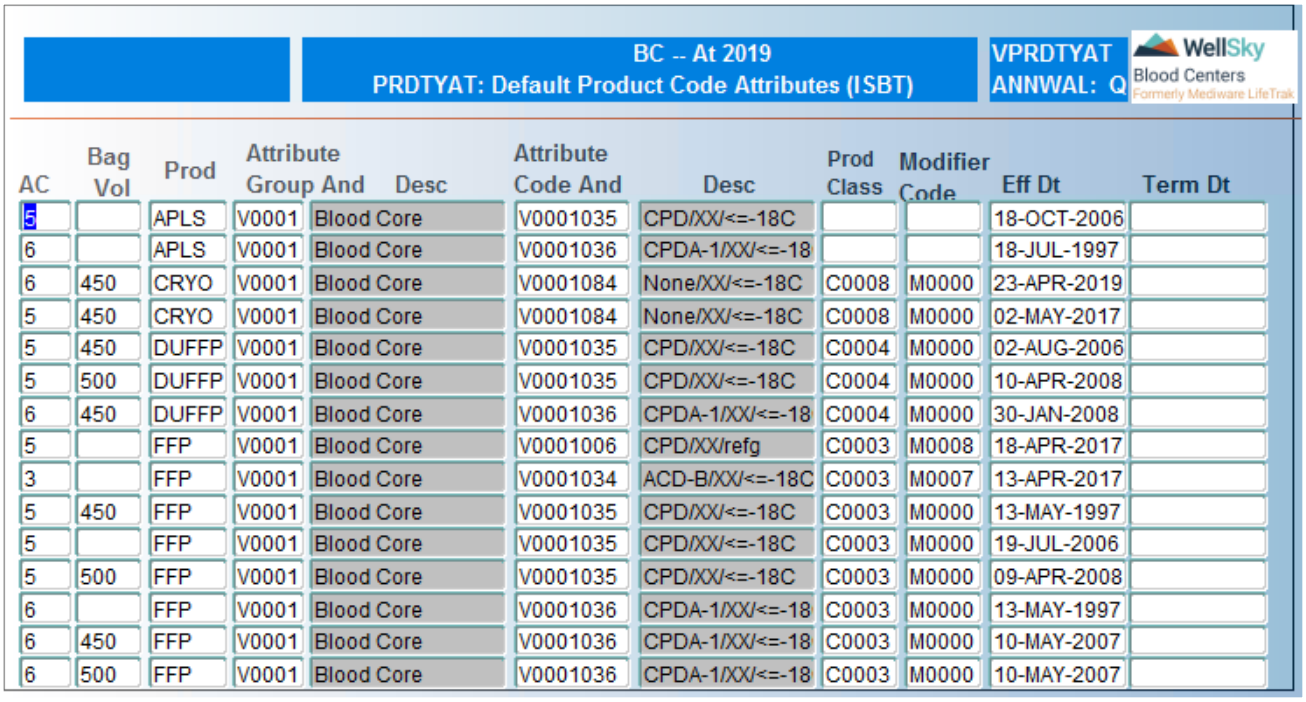

BC -- At 2019
PRDTYAT: Default Product Code Attributes (ISBT)
VPRDTYAT
ANNWAL: Q

AC	Bag Vol	Prod	Attribute Group And	Desc	Attribute Code And	Desc	Prod Class	Modifier Code	Eff Dt	Term Dt
5		APLS	V0001	Blood Core	V0001035	CPD/XX/<=-18C			18-OCT-2006	
6		APLS	V0001	Blood Core	V0001036	CPDA-1/XX/<=-18			18-JUL-1997	
6	450	CRYO	V0001	Blood Core	V0001084	None/XX/<=-18C	C0008	M0000	23-APR-2019	
5	450	CRYO	V0001	Blood Core	V0001084	None/XX/<=-18C	C0008	M0000	02-MAY-2017	
5	450	DUFFP	V0001	Blood Core	V0001035	CPD/XX/<=-18C	C0004	M0000	02-AUG-2006	
5	500	DUFFP	V0001	Blood Core	V0001035	CPD/XX/<=-18C	C0004	M0000	10-APR-2008	
6	450	DUFFP	V0001	Blood Core	V0001036	CPDA-1/XX/<=-18	C0004	M0000	30-JAN-2008	
5		FFP	V0001	Blood Core	V0001006	CPD/XX/refg	C0003	M0008	18-APR-2017	
3		FFP	V0001	Blood Core	V0001034	ACD-B/XX/<=-18C	C0003	M0007	13-APR-2017	
5	450	FFP	V0001	Blood Core	V0001035	CPD/XX/<=-18C	C0003	M0000	13-MAY-1997	
5		FFP	V0001	Blood Core	V0001035	CPD/XX/<=-18C	C0003	M0000	19-JUL-2006	
5	500	FFP	V0001	Blood Core	V0001035	CPD/XX/<=-18C	C0003	M0000	09-APR-2008	
6		FFP	V0001	Blood Core	V0001036	CPDA-1/XX/<=-18	C0003	M0000	13-MAY-1997	
6	450	FFP	V0001	Blood Core	V0001036	CPDA-1/XX/<=-18	C0003	M0000	10-MAY-2007	
6	500	FFP	V0001	Blood Core	V0001036	CPDA-1/XX/<=-18	C0003	M0000	10-MAY-2007	

To add a new record, press CTRL + F2 (Create Record).

AC

Enter valid anticoagulant code or select from LOV.

Bag Vol

Enter appropriate collection bag volume (mL) or leave field blank. Entry in this field is not required.

NOTE – If the bag volume is not associated with the bag catalog number in Valid Catalog Numbers (CATALOG), the volume will be disregarded when determining the default attribute.

Prod

Enter valid product type or select from LOV.

Attribute Group And Desc

Enter valid attribute group or select from LOV in the first field.

NOTE – The only attribute group that should be entered in this field is V0001.

Attribute Code And Desc

Enter valid core condition attribute code or select from LOV.

WellSky Corporation
Proprietary and confidential

The description from Attribute Codes (ATTRIB) that corresponds to the attribute code automatically displays in the second field. This field is not navigable.

Prod Class

This is a required field. Enter the product class or select from LOV. The product class LOV is populated from the master code CLASS.

Modifier Code

This is a required field. Enter the product modifier or select from LOV. The product modifier LOV is populated from the master code PMDFR.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Date

Enter termination date in DD-MON-YYYY format. Entry not required in this field.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.9 Product Type Attributes (ISBT/Codabar) (PRDATTR)

Intended Use

This screen is used to define attributes that can be added to specific product types.


Limitations

None

Prerequisites

- Define Lab Master Codes (LMASTER), codes:
  - PRDTY – Define valid product types.
  - ATTR – Define valid attributes.
- Attribute Codes (ATTRIB) – Define valid attribute codes.
- Product type must be defined in the Product Type Data table (PRDTYPE)

Entering/Viewing Data

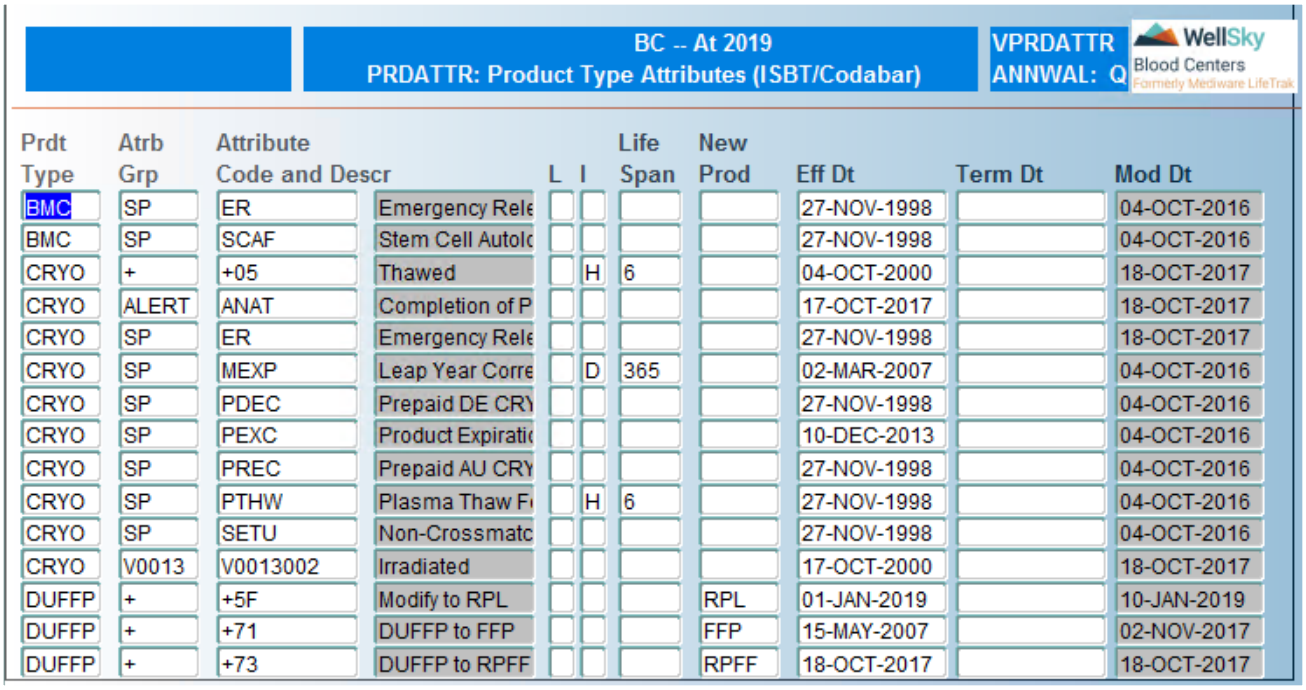

Prdt Type	Atrb Grp	Attribute Code and Descr		L	I	Life Span	New Prod	Eff Dt	Term Dt	Mod Dt
BMC	SP	ER	Emergency Rele					27-NOV-1998		04-OCT-2016
BMC	SP	SCAF	Stem Cell Autolo					27-NOV-1998		04-OCT-2016
CRYO	+	+05	Thawed		H	6		04-OCT-2000		18-OCT-2017
CRYO	ALERT	ANAT	Completion of P					17-OCT-2017		18-OCT-2017
CRYO	SP	ER	Emergency Rele					27-NOV-1998		18-OCT-2017
CRYO	SP	MEXP	Leap Year Corre		D	365		02-MAR-2007		04-OCT-2016
CRYO	SP	PDEC	Prepaid DE CRY					27-NOV-1998		04-OCT-2016
CRYO	SP	PEXC	Product Expiratio					10-DEC-2013		04-OCT-2016
CRYO	SP	PREC	Prepaid AU CRY					27-NOV-1998		04-OCT-2016
CRYO	SP	PTHW	Plasma Thaw Fo		H	6		27-NOV-1998		04-OCT-2016
CRYO	SP	SETU	Non-Crossmatc					27-NOV-1998		04-OCT-2016
CRYO	V0013	V0013002	Irradiated					17-OCT-2000		18-OCT-2017
DUFFP	+	+5F	Modify to RPL				RPL	01-JAN-2019		10-JAN-2019
DUFFP	+	+71	DUFFP to FFP				FFP	15-MAY-2007		02-NOV-2017
DUFFP	+	+73	DUFFP to RPFF				RPFF	18-OCT-2017		18-OCT-2017

To add a new record, press CTRL + F2 (Create Record).

Prdt Type

Enter product type or select from LOV.

Atrb Grp

Enter attribute group or select from LOV.

Attribute Code and Description

Enter attribute code that can be placed on the product type entered, or select from LOV. Description field automatically populates after the attribute code is entered.

NOTE – The PEXC (product expiration calculation) attribute code must be configured for each product type.

L

Enter one of the following:

- Y – The attribute is mandatory for labeling.
- N (or leave blank) – The attribute is not mandatory for labeling.

If the addition of the attribute alters the product expiration date, enter the measure of time:

WellSky Corporation
Proprietary and confidential

- H – Hours
- D – Days
- Y – Years

Life Span
If the addition of the attribute alters the product expiration date, enter the numeric measure of time.

> **NOTE –** Entry in this field is only allowed if the *Life Span indicator* field was populated.

New Prod
If the addition of the attribute changes the product type, enter the new product type or select from LOV.

> **NOTE –** This LOV is populated from the Product Type Data table (PRDTYPE).

Eff Date
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date Din D-MON-YYYY format.

Mod Dt
Field automatically populates with the date modifications were last made. Field is not navigable.

Press **F12** (Commit) to save entries.

At Commit
Entries are saved to the database.

What to Do Next
Define Valid Attributes Matrix – ISBT (ATTRMAT) table for ISBT only.

10.1.10 Valid Attribute Matrix – ISBT (ATTRMAT)

Intended Use
Use this screen to define attributes that when added, should either cause another attribute to be placed or cause the core condition of a product to be changed.

Limitations
This program is to be used for ISBT.

Prerequisites

- Define Lab Master Codes (LMASTER), code type ATTR – Define attribute groups.
- Define Lab Master Codes (LMASTER), code type PMDFR – Product modifiers.
- Attribute code (ATTRIB) – Define attribute codes.

Entering/Viewing Data

BC -- At 2019
ATTRMAT: Valid Attributes Matrix (ISBT)
VATTRMAT
ANNWAL: Q

<-----Attribute to be added----->				<-Deleted->		<--Added-->			
Attr Group		Attr Code		Modifier	Attr Code	Modifier	Attr Code	Eff Dt	Term Dt
+	Product Group Mo	+01	Washed				V0012002	19-JAN-2007	
+	Product Group Mo	+01	Washed	M0007	V0001073	M0012	V0001071	04-OCT-2000	
+	Product Group Mo	+01	Washed	M0000	V0001022	M0001	V0001017	19-JAN-2007	
+	Product Group Mo	+02	Frozen	M0000	V0001018	M0002	V0001143	09-NOV-2007	
+	Product Group Mo	+02	Frozen			M0011	V0012002	01-FEB-2019	
+	Product Group Mo	+02	Frozen	M0001	V0001017	M0002	V0001143	05-JUL-2017	
+	Product Group Mo	+02	Frozen	M0007	V0001073	M0012	V0001143	09-NOV-2007	
+	Product Group Mo	+02	Frozen	M0007	V0001054	M0011	V0001143	01-FEB-2019	
+	Product Group Mo	+02	Frozen	M0007	V0001135	M0011	V0001143	18-FEB-2019	
+	Product Group Mo	+02	Frozen	M0000	V0001003	M0002	V0001143	09-NOV-2007	
+	Product Group Mo	+02	Frozen	M0000	V0001007	M0002	V0001143	09-NOV-2007	
+	Product Group Mo	+02	Frozen	M0000	V0001019	M0002	V0001143	09-NOV-2007	
+	Product Group Mo	+02	Frozen	M0000	V0001022	M0002	V0001143	11-SEP-2007	
+	Product Group Mo	+02	Frozen	M0000	V0001020	M0002	V0001143	09-NOV-2007	

To add a new record, press CTRL + F2 (Create Record).

Attribute to be Added

Attr Group and Desc

Enter the attribute group that will be added to the product or select from LOV. The description will populate once the group is selected.

Attr Code and Desc

Enter the attribute code that will be added to the product or select from LOV. The description will populate once the code is selected.

Attribute to be Deleted

Modifier

Enter theproduct modifier that will be removed or deleted when adding the attribute or select from LOV. Entry is not required. The LOV is populated from the master code PMDFR.

WellSky Corporation
Proprietary and confidential

Code

Enter the attribute code that will be removed when the new attribute is added or select from LOV. Entry is not required in this field.

Attribute to be Added

Modifier

Enter theproduct modifier attribute group that will be removed or deleted when adding the attribute or select from LOV. Entry is not required in this field. The LOV is populated from the master code PMDFR.

Code

Enter the attribute code that will be added after removing the old attribute or select from LOV.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format. Entry is not required in this field.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.11 Product Type Data - (Codabar/ISBT) (PRDTYPE)

Intended Use

This screen is used to define attributes that can be added to specific product types.


Limitations

None

Prerequisites

- Define Lab Master Codes (LMASTER), codes PRDTY – Define valid product types.
- Define Lab Master Codes (LMASTER), codes CLASS – Product classes.

Entering/Viewing Data

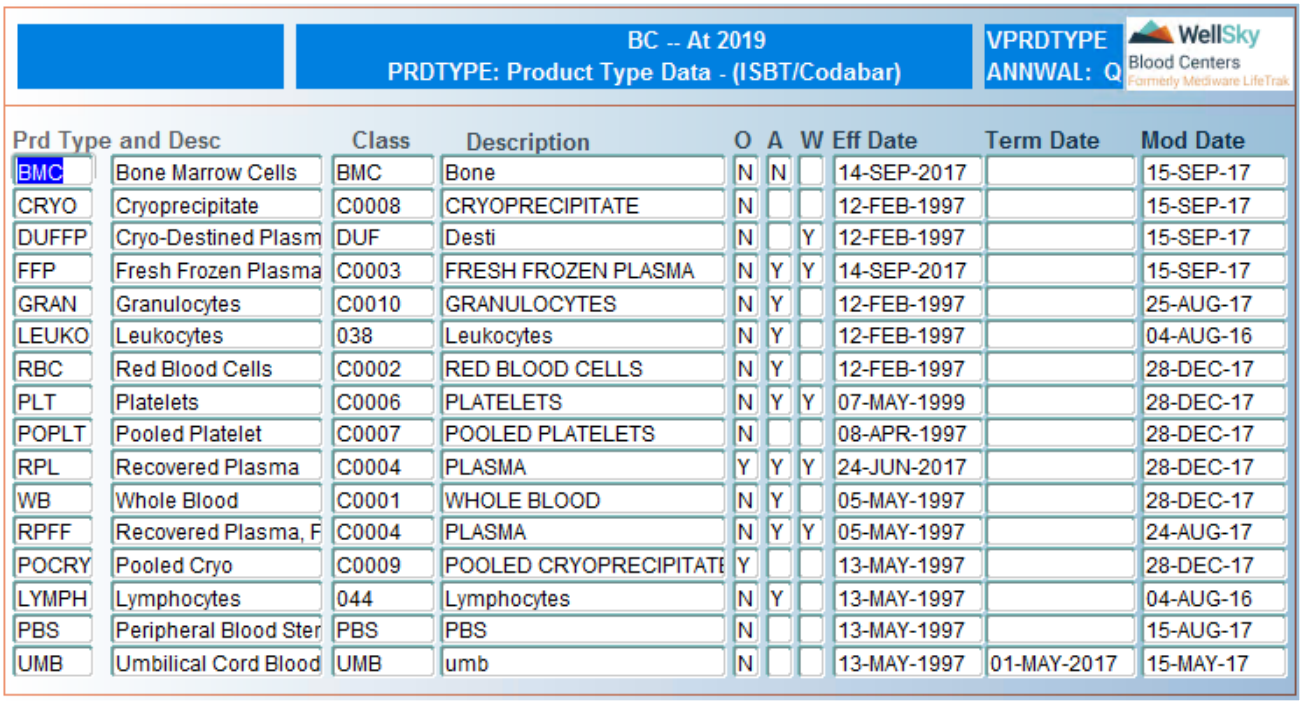

BC -- At 2019
PRDTYPE: Product Type Data - (ISBT/Codabar)
VPRDTYPE
ANNWAL: Q
WellSky Blood Centers Formerly Mediware LifeTrak

Prd Type and Desc		Class	Description	O	A	W	Eff Date	Term Date	Mod Date
BMC	Bone Marrow Cells	BMC	Bone	N	N		14-SEP-2017		15-SEP-17
CRYO	Cryoprecipitate	C0008	CRYOPRECIPITATE	N			12-FEB-1997		15-SEP-17
DUFFP	Cryo-Destined Plasm	DUF	Desti	N		Y	12-FEB-1997		15-SEP-17
FFP	Fresh Frozen Plasma	C0003	FRESH FROZEN PLASMA	N	Y	Y	14-SEP-2017		15-SEP-17
GRAN	Granulocytes	C0010	GRANULOCYTES	N	Y		12-FEB-1997		25-AUG-17
LEUKO	Leukocytes	038	Leukocytes	N	Y		12-FEB-1997		04-AUG-16
RBC	Red Blood Cells	C0002	RED BLOOD CELLS	N	Y		12-FEB-1997		28-DEC-17
PLT	Platelets	C0006	PLATELETS	N	Y	Y	07-MAY-1999		28-DEC-17
POPLT	Pooled Platelet	C0007	POOLED PLATELETS	N			08-APR-1997		28-DEC-17
RPL	Recovered Plasma	C0004	PLASMA	Y	Y	Y	24-JUN-2017		28-DEC-17
WB	Whole Blood	C0001	WHOLE BLOOD	N	Y		05-MAY-1997		28-DEC-17
RPFF	Recovered Plasma, F	C0004	PLASMA	N	Y	Y	05-MAY-1997		24-AUG-17
POCRY	Pooled Cryo	C0009	POOLED CRYOPRECIPITATE	Y			13-MAY-1997		28-DEC-17
LYMPH	Lymphocytes	044	Lymphocytes	N	Y		13-MAY-1997		04-AUG-16
PBS	Peripheral Blood Ster	PBS	PBS	N			13-MAY-1997		15-AUG-17
UMB	Umbilical Cord Blood	UMB	umb	N			13-MAY-1997	01-MAY-2017	15-MAY-17

To add a new record, press CTRL + F2 (Create Record).

Prd Type and Description

Enter product type or select from LOV. Product type description displays after code is entered.

Class

Although this field is not utilized, entry is required. Enter the class or use the LOV. The LOV is populated from master code CLASS.

O

Enter one of the following:

- Y – Products within this product type are labeled with the ABO group only.
- N – Products within this product type are labeled with ABO and Rh.

A

Enter one of the following:

- Y – Attributes can be assigned to products of this type during component definition.
- N – Attributes cannot be assigned during definition.

NOTE – Entry in this field is used only for ISBT product definition.

WellSky Corporation
Proprietary and confidential

W

Enter one of the following:

- `Y` – Weight is required when defining and labeling products of this type.
- `N` – Weight is not required.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Date

Enter termination date in DD-MON-YYYY format.

Mod Date

Field automatically populates with the date modifications were last made. Field is not navigable.

Press **F12** (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.12 Product/Procedure Matrix - Pheresis (PRODPROC)

Intended Use

This screen is used to query and define product types that can be collected from specific apheresis procedures.


Limitations

Products from whole blood collections are not defined in this screen.

Prerequisites

- Lab Master Codes (LMASTER), codes PRDTY – Define valid product types.
- Procedure Attribute/Equipment Matrix (ATTREQUP) – Define procedures and the equipment used.

Entering/Viewing Data

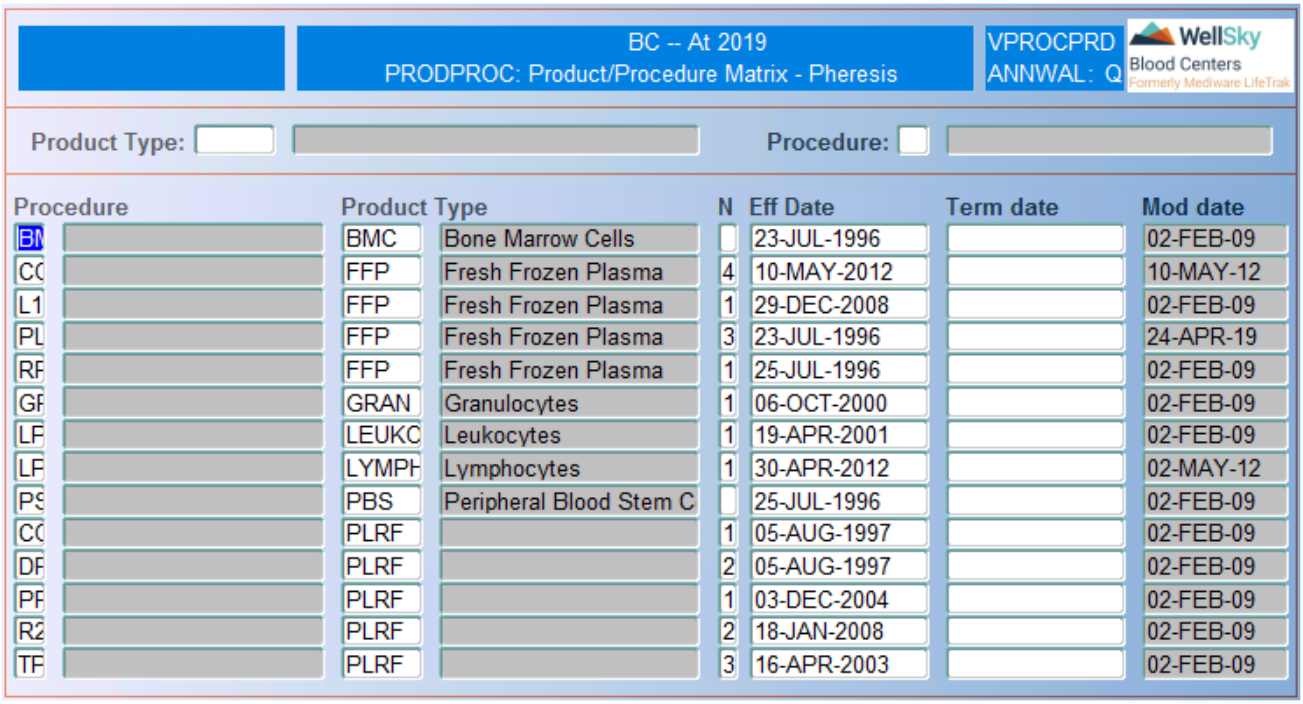

In the Control Block

Product Type

Enter procedure code or select from LOV. Leave field blank to query by procedure only.

Procedure (Procedure Block)

Enter procedure code or select from LOV. Leave field blank to query by product type only.

NOTE – If both fields are left blank, all entries are retrieved.

In the Detail Block

Procedure

Enter procedure code or select from LOV. The description field automatically populates after the procedure code is entered.

Product Type

Enter code or select from LOV for product type that can be made from the procedure code entered. The description field automatically populates after the product type code is entered.

WellSky Corporation
Proprietary and confidential

N

Enter the number of products that can be made from this procedure type or leave blank for 1. A maximum value of 4 can be entered.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Mod Dt

Field automatically populates with the date modifications were last made. Field is not navigable.

Press **F12** (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.13 Procedure Attribute/Equipment Matrix (ATTREQUP)

Intended Use

This screen is used to define valid attributes for equipment used in the collection of apheresis products.


Limitations

Products from whole blood collections are not handled in this screen.

Prerequisites

- Enter Equipment Master Codes (EQMASTER), codes EQUIP – Define valid equipment types.
- Lab Master Codes (LMASTER), code CGMP – Define cGMP parameters.
- Product Codes (PRODUCT) – Define valid product codes and information.

Entering/Viewing Data

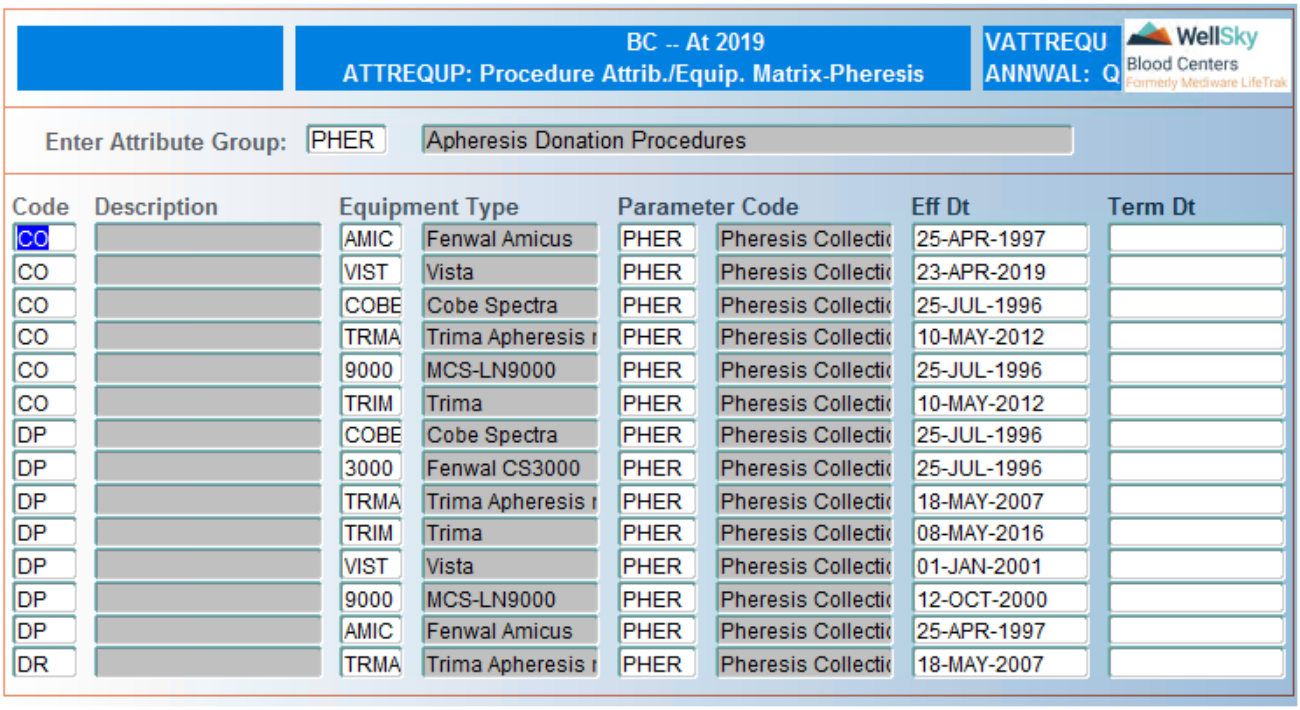

To add a new record, press CTRL + F2 (Create Record).

In the Control Block

Enter Attribute Group

Enter attribute group or select from LOV.

Code

Enter procedure code or select from LOV.

Description

The *Description* field automatically populates after the procedure code is entered. Field is not navigable.

Equipment Type

Enter equipment type or select from LOV. The equipment description automatically populates after the equipment code is entered.

Parameter Code

Enter parameter code to be associated or select from LOV. The description automatically populates after the parameter is entered.

Eff Date

Enter effective date in DD-MON-YYYY format.

WellSky Corporation
Proprietary and confidential

Term Dt

Enter termination date in DD-MON-YYYY format.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.14 Equipment/Product cGMP Matrix (EQUIPROD)

Intended Use

This screen is used to define and query cGMP parameters for products collected by apheresis. This screen provides a mechanism to enter data that is specific for products collected by different apheresis technologies. Information entered in this screen overrides the data entered in Product Codes (PRODUCT).


Limitations

Products from whole blood collections are not handled in this screen.

Prerequisites

- Enter Equipment Master Codes (EQMASTER), codes EQUIP – Define valid equipment types.
- Lab Master Codes (LMASTER), code CGMP – Define cGMP parameters.
- Procedure Attribute/Equipment Matrix (ATTREQUP) – Define procedures and the equipment used.
- Product Codes (PRODUCT) – Define valid product codes and information.

Entering/Viewing Data

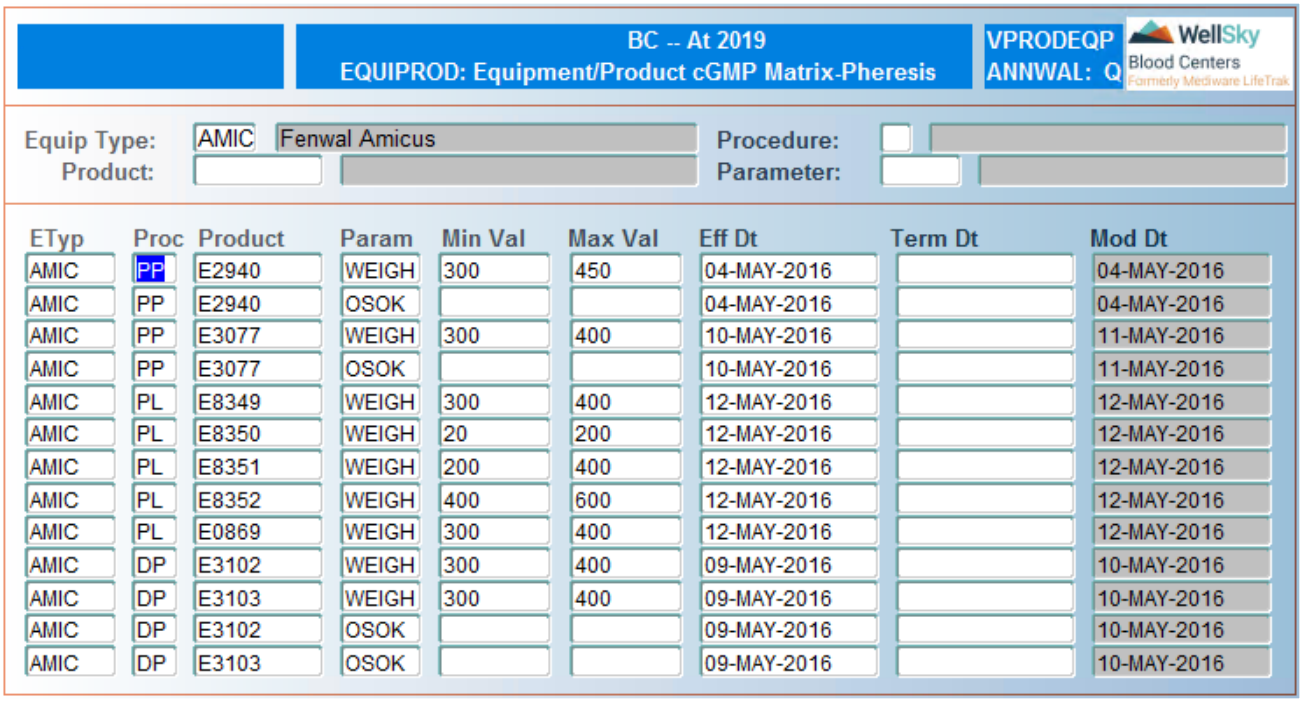

Query Existing Database

Equip Type

Enter equipment type or select from LOV. Leave blank to query by other fields.

Procedure

Enter the procedure code or select from LOV. Leave blank to query by other fields.

Product

Enter the product code or select from LOV. Leave blank to query by other fields.

Parameter

Enter the cGMP parameter or select from LOV. Leave blank to query by other fields. The parameters are static; additional parameters cannot be added in Master Codes (MASTER), code CGMP.

Enter New Data

Etyp

Enter the equipment type or select from LOV.

Proc

Enter the procedure code or select from LOV.

WellSky Corporation
Proprietary and confidential

Product
Enter the product code or select from LOV.

Param
Enter the parameter or select from LOV.

Min Val
Enter the minimum acceptable value for weight. Leave blank for all parameters other than WEIGHT.

Max Val
Enter the maximum acceptable value for weight. Leave blank for all parameters other than WEIGHT.

NOTE – CMW interdictions are automatically placed for components with weights not in the acceptable range.

Eff Date
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date in DD-MON-YYYY format.

Mod Dt
Field automatically populates with the date modifications were last made. Field is not navigable.

Press F12 (Commit) to save entries.

At Commit
Entries are saved to the database.

What to Do Next
There is no next step for this screen.

10.1.15 Product Conversions (ISBT 'SP'/Codabar) (PRODCONV)

Intended Use
This screen is used to define valid product conversions. Products can only be converted into product codes defined in this screen.

Limitations
- The table populated by this screen is used only by the Convert Components in Spiked Bags (ISBT) (CONVI) screen. The Convert/Modify Components (ISBT) (CMCI) screen does not use the table populated by


PRODCONV.

- In Convert Component into Spiked Bag (FRICON2)/(CONVI), attributes in SPPROC must only be configured with Converted-type attributes (C not M - modify type) in the ATTRIB table.

Prerequisites

Product Codes must be defined in Product Codes (PRODUCT).

Entering/Viewing Data

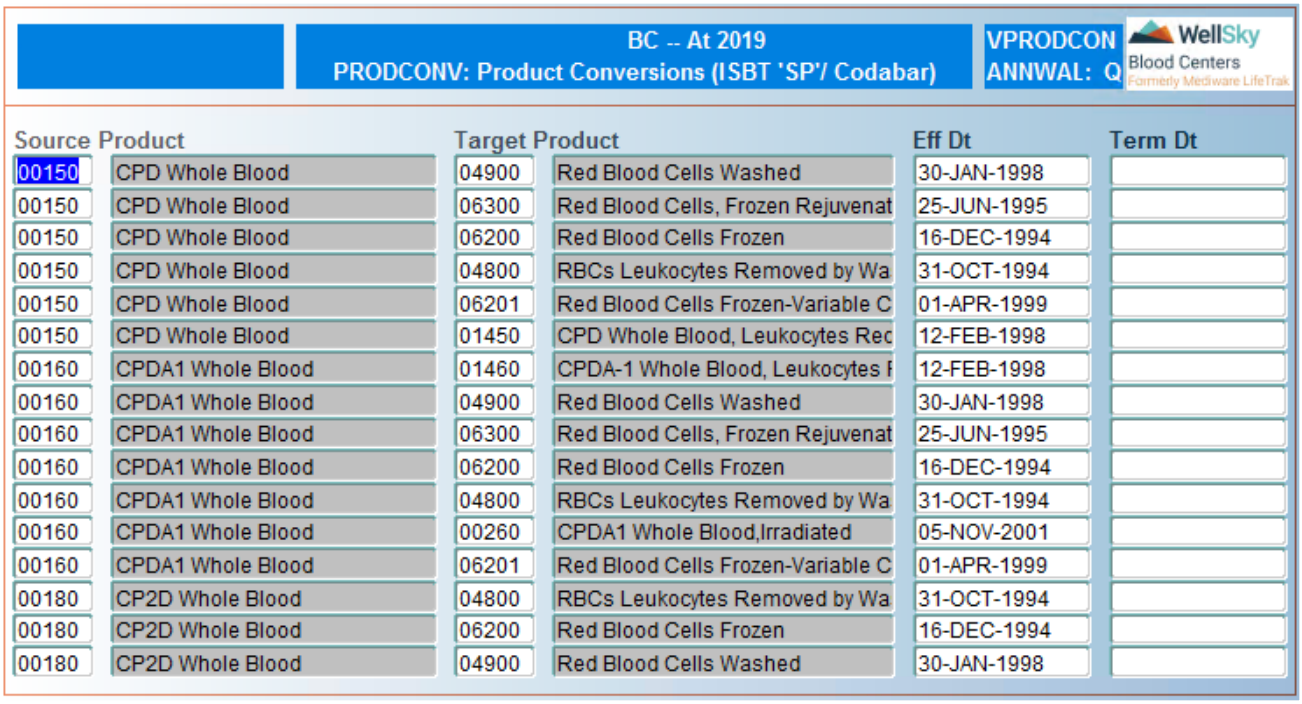

Source Product		Target Product		Eff Dt	Term Dt
00150	CPD Whole Blood	04900	Red Blood Cells Washed	30-JAN-1998	
00150	CPD Whole Blood	06300	Red Blood Cells, Frozen Rejuvenat	25-JUN-1995	
00150	CPD Whole Blood	06200	Red Blood Cells Frozen	16-DEC-1994	
00150	CPD Whole Blood	04800	RBCs Leukocytes Removed by Wa	31-OCT-1994	
00150	CPD Whole Blood	06201	Red Blood Cells Frozen-Variable C	01-APR-1999	
00150	CPD Whole Blood	01450	CPD Whole Blood, Leukocytes Rec	12-FEB-1998	
00160	CPDA1 Whole Blood	01460	CPDA-1 Whole Blood, Leukocytes F	12-FEB-1998	
00160	CPDA1 Whole Blood	04900	Red Blood Cells Washed	30-JAN-1998	
00160	CPDA1 Whole Blood	06300	Red Blood Cells, Frozen Rejuvenat	25-JUN-1995	
00160	CPDA1 Whole Blood	06200	Red Blood Cells Frozen	16-DEC-1994	
00160	CPDA1 Whole Blood	04800	RBCs Leukocytes Removed by Wa	31-OCT-1994	
00160	CPDA1 Whole Blood	00260	CPDA1 Whole Blood,Irradiated	05-NOV-2001	
00160	CPDA1 Whole Blood	06201	Red Blood Cells Frozen-Variable C	01-APR-1999	
00180	CP2D Whole Blood	04800	RBCs Leukocytes Removed by Wa	31-OCT-1994	
00180	CP2D Whole Blood	06200	Red Blood Cells Frozen	16-DEC-1994	
00180	CP2D Whole Blood	04900	Red Blood Cells Washed	30-JAN-1998	

Source Product

Enter the product code for the product to be converted or select from LOV. The product code description automatically populates after the product code is entered.

Target Product

Enter the 'convert to' product code or select from LOV. The product code description automatically populates after the 'convert to' product code is entered.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Press **F12** (Commit) to save entries.

WellSky Corporation
Proprietary and confidential

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.16 'SP' Special Processing Master Codes (FRMASTER)

Intended Use

Special Processing Master Codes are a set of code types used by the Special Processing module to provide flexibility to the application. A table of underlying codes is associated to each code type. The code types are specifically coded within in the application. Some Special Processing Master Codes define data for other tables. WellSky may be required to add new or modify existing Special Processing Master Codes.

Limitations

Each Code type is coded for specific use within the application and should not be changed. New Code types should not be added. Some underlying Code fields should remain static while others can be changed dynamically. Refer to Appendix L – Lab Special Processing.

Prerequisites

Each code is described in Appendix L – Lab Special Processing.

Entering/Viewing Data

BC -- At 2019
FRMASTER: 'SP' (Special Processing) Master Codes

VFRMSTCD
ANNWAL: Q

WellSky Blood Centers
Formerly Mediware LifeTrak

Enter the Code Type: PROC

Code	Description	Eff Dt	Term Dt	Mod Dt
D4	Plt leukoreduction <5.0log6	16-OCT-2000		02-FEB-2009
D6	Plt leukoreduction <8.5LOG5	16-OCT-2000		02-FEB-2009
DEGLY	Delycerolization	04-OCT-2017		04-OCT-2017
DGL	Deglycerolization	12-OCT-2000	11-JUL-2017	12-JUL-2017
FROZ	Freezing	29-JUL-1994		02-FEB-2009
GRAN	Granulocytes	29-SEP-1994		02-FEB-2009
IR	Irradiation	15-APR-2008		02-FEB-2009
IRR	Pool Irradiation	23-AUG-2001		02-FEB-2009
LYMP	Lymphocytes	29-SEP-1994		02-FEB-2009
PLT	Platelet Leuko Filtration	03-NOV-1994		02-FEB-2009
REG	Regular Component Production	03-NOV-2000		02-FEB-2009
REJU	Rejuvenation	29-JUL-1994		02-FEB-2009
STEM	Stem Cells	29-JUL-1994		02-FEB-2009
THAW	Deglycerolization	29-JUL-1994		02-FEB-2009

Enter the Code Type

Enter code type or select from LOV. A maximum of 5 characters is allowed.

> **NOTE –** All code types are to remain static. At times new code types and underlying codes will be added for new or modified functionality. Existing codes associated to the individual code types can be either static or dynamic. Refer to LabSpecial Processing, Appendix L to determine if a code can be modified.

To add a new record, press CTRL + F2 (Create Record).

Code

Enter a code that is to be under the code type. A maximum of 5 characters is allowed.

Description

Enter a description for the code. A maximum of 50 characters is allowed.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Mod Dt

Field automatically populates with the date modifications were last made. Field is not navigable.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.17 'SP' Processes and Stages (PROCSTAG)

Intended Use

Use this screen to define process and applicable stages used in component special processing. Defining various stages allows reagents and differential information to be tracked for different stages of special product processing.

Limitations

- Routine component production is not handled in this screen.
- A maximum of four stages can be defined for each special process.


WellSky Corporation
Proprietary and confidential

Prerequisites

Refer to Special Processing Master Codes (FRMASTER), codes:

- PROC – Define special processes.
- STAG – Define stages.

Entering/Viewing Data

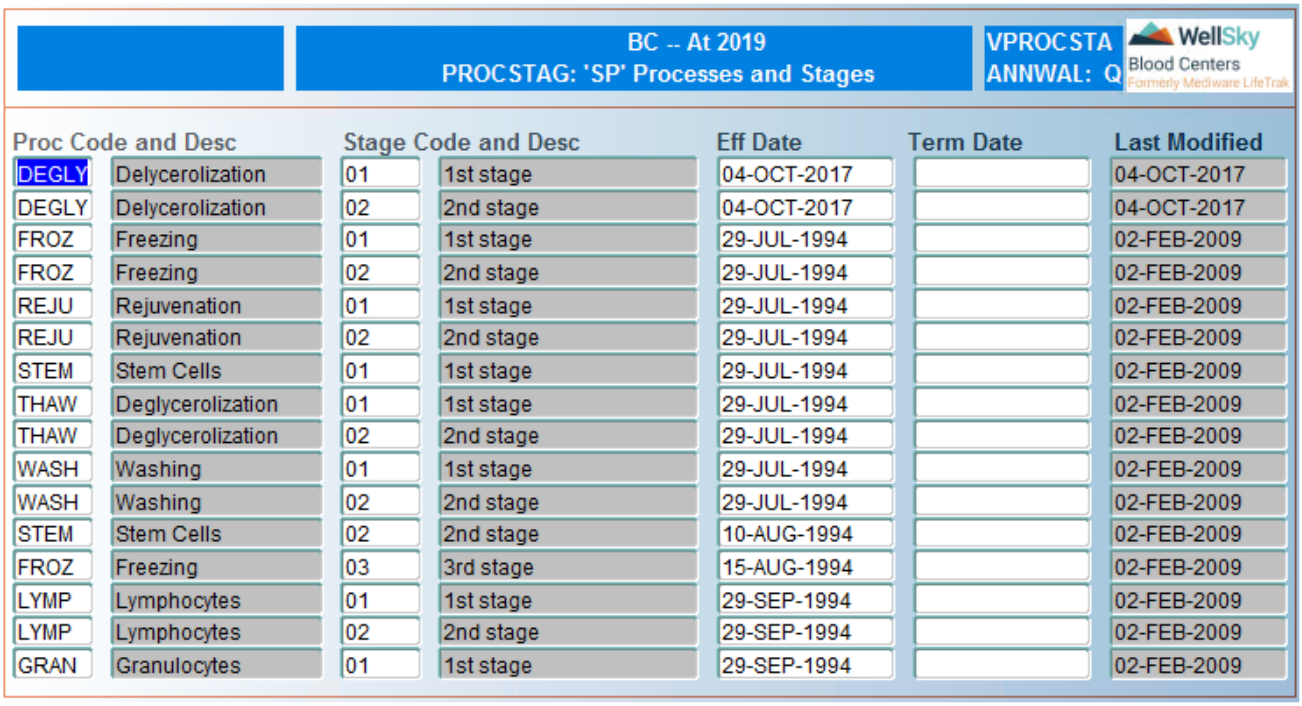

Proc Code and Desc		Stage Code and Desc		Eff Date	Term Date	Last Modified
DEGLY	Delycerolization	01	1st stage	04-OCT-2017		04-OCT-2017
DEGLY	Delycerolization	02	2nd stage	04-OCT-2017		04-OCT-2017
FROZ	Freezing	01	1st stage	29-JUL-1994		02-FEB-2009
FROZ	Freezing	02	2nd stage	29-JUL-1994		02-FEB-2009
REJU	Rejuvenation	01	1st stage	29-JUL-1994		02-FEB-2009
REJU	Rejuvenation	02	2nd stage	29-JUL-1994		02-FEB-2009
STEM	Stem Cells	01	1st stage	29-JUL-1994		02-FEB-2009
THAW	Deglycerolization	01	1st stage	29-JUL-1994		02-FEB-2009
THAW	Deglycerolization	02	2nd stage	29-JUL-1994		02-FEB-2009
WASH	Washing	01	1st stage	29-JUL-1994		02-FEB-2009
WASH	Washing	02	2nd stage	29-JUL-1994		02-FEB-2009
STEM	Stem Cells	02	2nd stage	10-AUG-1994		02-FEB-2009
FROZ	Freezing	03	3rd stage	15-AUG-1994		02-FEB-2009
LYMP	Lymphocytes	01	1st stage	29-SEP-1994		02-FEB-2009
LYMP	Lymphocytes	02	2nd stage	29-SEP-1994		02-FEB-2009
GRAN	Granulocytes	01	1st stage	29-SEP-1994		02-FEB-2009

To add a new record, press CTRL + F2 (Create Record).

Proc Code and Desc

Enter the code for the special process or select from LOV. The description field automatically populates after the process code is entered.

Stage Code and Desc

Enter valid stage code associated to the process code or select from LOV. The description automatically populates after the stage code is entered.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Date

Enter termination date in DD-MON-YYYY format.

Last Modified

Field automatically populates with the date modifications were last made. Field is not navigable.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.18 'SP' Products and Special Processes (SPPROC)

Intended Use

Use this screen to define special processes that can be performed on different product types. Verify Component Suitability (SUIT), Verify Component Suitability – Offline (SUITO), and Modify Pooled Components (MODPOOL) refer to this program for verification of product suitability.

Limitations


Routine component modification is not handled in this screen.

Prerequisites

- Special Processing Master Codes (FRMASTER), code PROC –define special processes.
- Product Code (PRODUCT) – Define product codes.
- Attribute Codes (ATTRIB) – Define attributes.
- In Convert Component into Spiked Bag (FRICON2)/(CONVI), attributes in SPPROC must only be configured with Converted-type attributes (C not M - modify type) in the ATTRIB table. M-type attributes should not be configured in SPPROC.

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

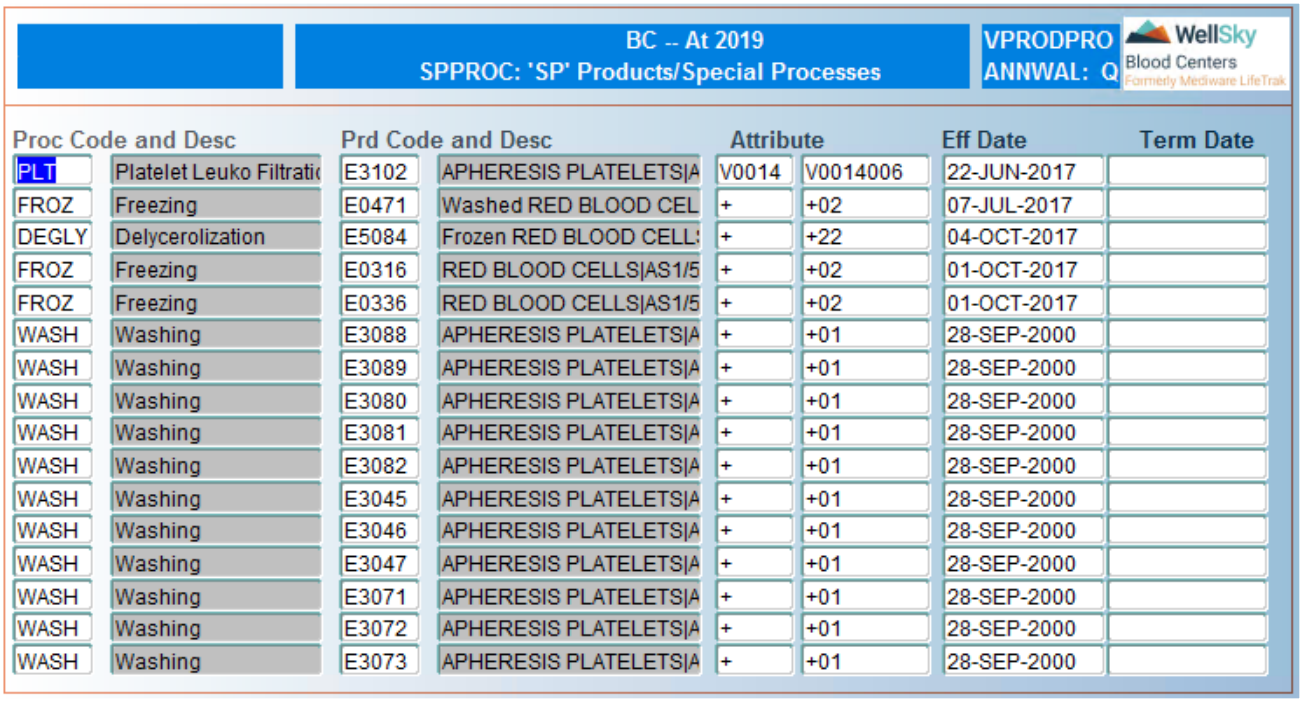

Proc Code and Desc		Prd Code and Desc		Attribute		Eff Date	Term Date
PLT	Platelet Leuko Filtrati	E3102	APHERESIS PLATELETS|A	V0014	V0014006	22-JUN-2017	
FROZ	Freezing	E0471	Washed RED BLOOD CEL	+	+02	07-JUL-2017	
DEGLY	Delycerolization	E5084	Frozen RED BLOOD CELL:	+	+22	04-OCT-2017	
FROZ	Freezing	E0316	RED BLOOD CELLS|AS1/5	+	+02	01-OCT-2017	
FROZ	Freezing	E0336	RED BLOOD CELLS|AS1/5	+	+02	01-OCT-2017	
WASH	Washing	E3088	APHERESIS PLATELETS|A	+	+01	28-SEP-2000	
WASH	Washing	E3089	APHERESIS PLATELETS|A	+	+01	28-SEP-2000	
WASH	Washing	E3080	APHERESIS PLATELETS|A	+	+01	28-SEP-2000	
WASH	Washing	E3081	APHERESIS PLATELETS|A	+	+01	28-SEP-2000	
WASH	Washing	E3082	APHERESIS PLATELETS|A	+	+01	28-SEP-2000	
WASH	Washing	E3045	APHERESIS PLATELETS|A	+	+01	28-SEP-2000	
WASH	Washing	E3046	APHERESIS PLATELETS|A	+	+01	28-SEP-2000	
WASH	Washing	E3047	APHERESIS PLATELETS|A	+	+01	28-SEP-2000	
WASH	Washing	E3071	APHERESIS PLATELETS|A	+	+01	28-SEP-2000	
WASH	Washing	E3072	APHERESIS PLATELETS|A	+	+01	28-SEP-2000	
WASH	Washing	E3073	APHERESIS PLATELETS|A	+	+01	28-SEP-2000	

To add a new record, press CTRL + F2 (Create Record).

Proc Code and Desc

Enter the process code to be added or select from LOV. The description automatically populates after the code is entered.

Prod Code and Desc

Enter the product code on which the process can be performed or select from LOV. The description automatically populates after the product code is entered.

Attribute

If the special process to be performed should add an attribute to the component, enter the appropriate attribute group or select from LOV. Then enter the appropriate attribute code. If no attributes are to be added to the component when the special process is performed, leave both fields blank.

NOTE – M-type attributes should not be entered.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

Define valid conversions for Codabar products in Product Conversions (PRODCONV).

10.1.19 'SP' Antigen Group Definitions (ANTGGRP)

Intended Use

Use this screen to define antigen combinations associated with antigen groups. Groups defined in this program can be used to search for antigen-typed units in Products with Antigens (PAGQ) in Distribution.


Limitations

This program is not used for defining HLA or ABO blood group system antigen groups.

Prerequisites

- Special Processing Master Codes (FRMASTER), code ANTG – Define antigen groups.
- Available Tests (TEST) – Define valid antigens and results.

Entering/Viewing Data

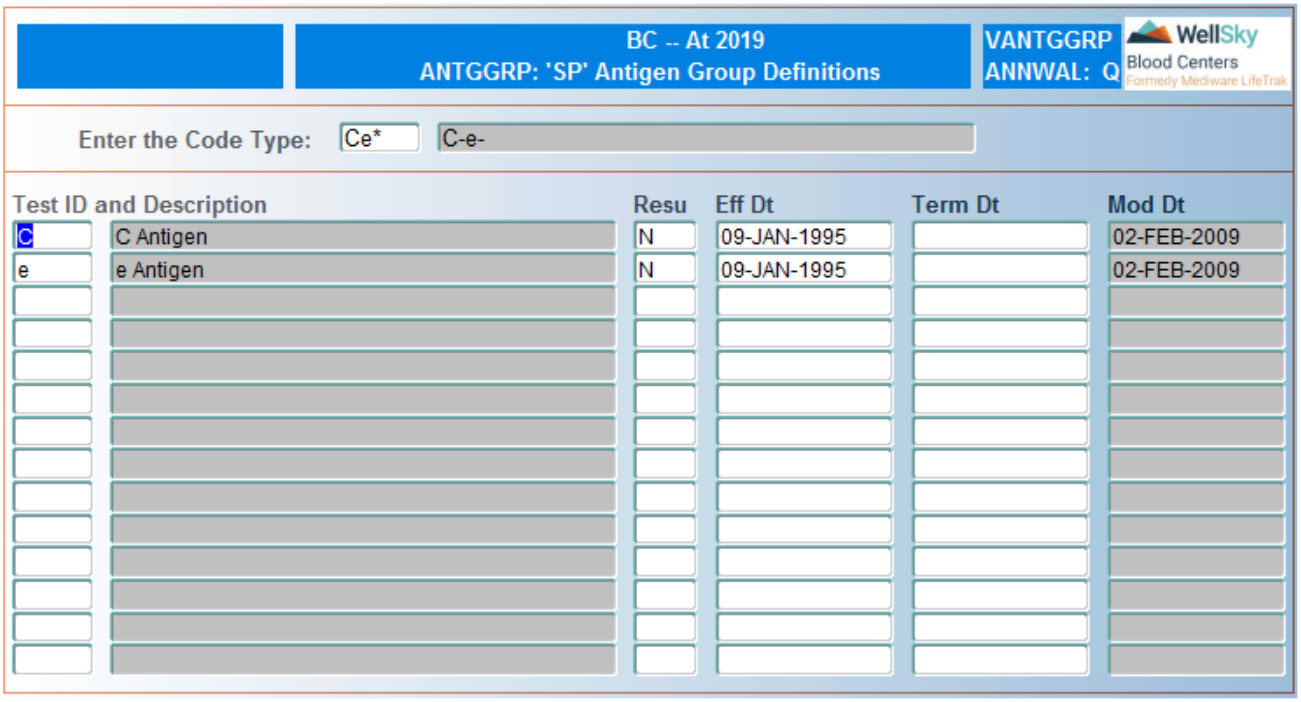

WellSky Corporation
Proprietary and confidential

Enter the Code Type

Enter antigen group code or select from LOV.

NOTE – Any red cell product having antigen typings matching a code type with an asterisk (*) will automatically check into special SP inventory when checking the product into Distribution.

Test ID and Description

Enter the test ID or select from LOV. The description automatically populates when the test ID is entered.

NOTE – Only tests defined as antigens in Available Tests (TEST) will be accepted or appear in the LOV.

Resu

Enter the result that corresponds to the desired antigen typing of the antigen groups being defined, or select from LOV.

NOTE – Only valid results defined in Available Tests (TEST) for the antigen entered will be accepted or appear in the LOV.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Mod Dt

Field automatically populates with the date modifications were last made. Field is not navigable.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.20 'SP' Antigen Rarity Combinations (RARITY)

Intended Use

Use this screen to define and view rare antigen combinations. Groups defined in this program can be used to search for antigen typed units in Products with Antigens (PAGQ) in Distribution. Units with antigen typings matching those entered in this program will automatically be assigned to "Special Class" when checked in to inventory in Distribution if the rarity percentage is less than or equal to the value defined in Chapter Details (CHAPTER).


Limitations

ABO blood group system combinations are not defined in this screen.

Prerequisites

Antigens and results must be defined in Available Tests (TEST). Only tests in the antigen group can be entered in this screen.

Entering/Viewing Data

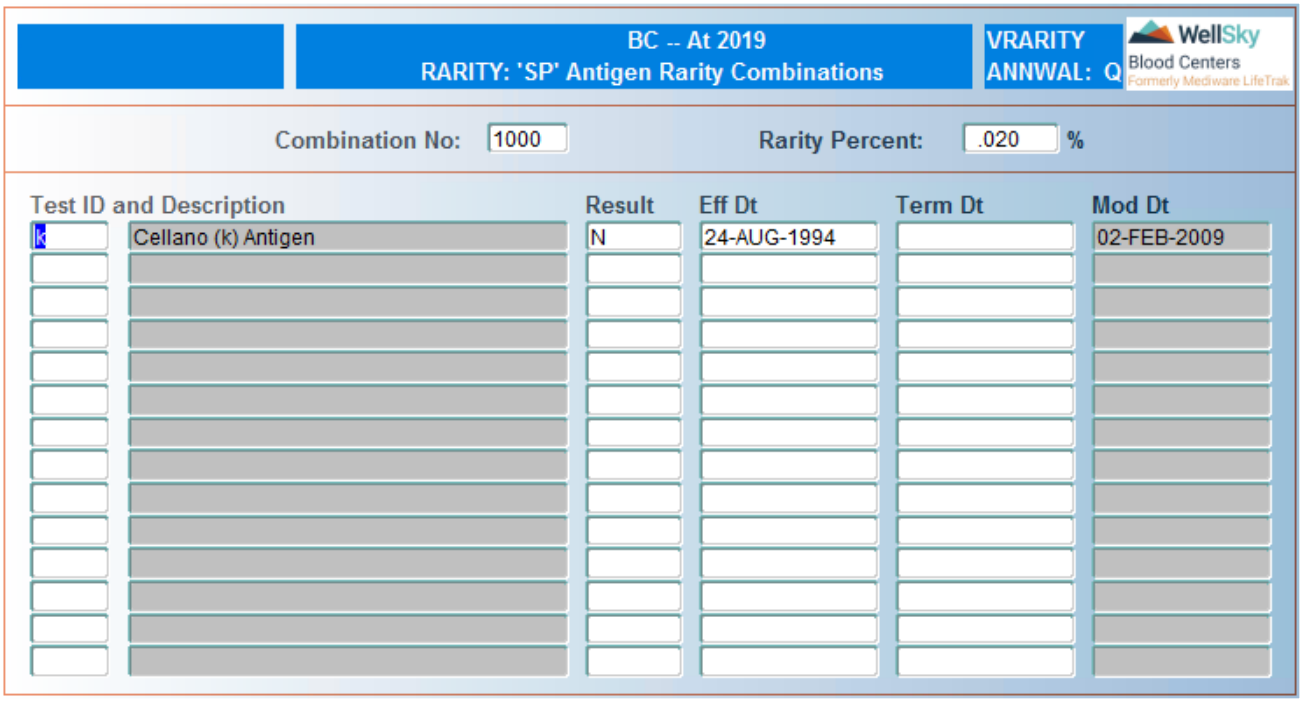

Combination No

To view existing combinations, enter the combination number or select from LOV. All information for the entered combination appears on the screen.

To enter a new combination, leave field blank.

WellSky Corporation
Proprietary and confidential

Rarity Percent
Enter the frequency (%) of the new combination to be entered. Screen will not navigate to this field if viewing an existing combination.

Test ID and Description
Enter the test ID or select from LOV. The test description automatically populates after the test ID is entered.

Result
Enter the antigen result that should be considered in the rare combination or select from LOV.

Eff Dt
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date in DD-MON-YYYY format.

Mod Dt
Field automatically populates with the date modifications were last made. Field is not navigable.

Press F12 (Commit) to save entries.

At Commit
Combination number is automatically assigned to the entry.

What to Do Next
There is no next step for this screen.


10.1.21 Valid Pool ABO Values (POOLSLD)

Intended Use
Use this screen to define the system label decision that should be assigned to pooled products based on the ABO of each product being added to the pool.

Limitations
None

Prerequisites
- Valid ABO Values (ABOVAL) – Define valid ABO values.

Entering/Viewing Data

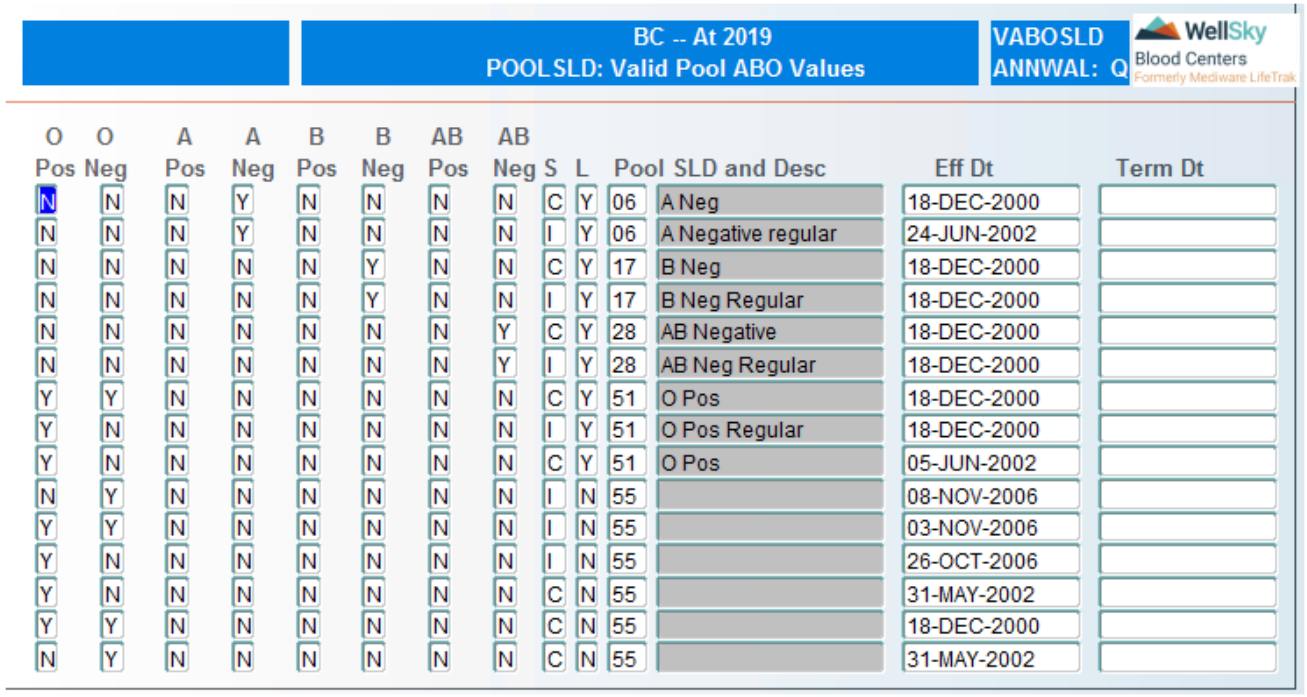

O Pos	O Neg	A Pos	A Neg	B Pos	B Neg	AB Pos	AB Neg	S	L	Pool	SLD and Desc	Eff Dt	Term Dt
N	N	N	Y	N	N	N	N	C	Y	06	A Neg	18-DEC-2000	
N	N	N	Y	N	N	N	N	I	Y	06	A Negative regular	24-JUN-2002	
N	N	N	N	N	Y	N	N	C	Y	17	B Neg	18-DEC-2000	
N	N	N	N	N	Y	N	N	I	Y	17	B Neg Regular	18-DEC-2000	
N	N	N	N	N	N	N	Y	C	Y	28	AB Negative	18-DEC-2000	
N	N	N	N	N	N	N	Y	I	Y	28	AB Neg Regular	18-DEC-2000	
Y	Y	N	N	N	N	N	N	C	Y	51	O Pos	18-DEC-2000	
Y	N	N	N	N	N	N	N	I	Y	51	O Pos Regular	18-DEC-2000	
Y	N	N	N	N	N	N	N	C	Y	51	O Pos	05-JUN-2002	
N	Y	N	N	N	N	N	N	I	N	55		08-NOV-2006	
Y	Y	N	N	N	N	N	N	I	N	55		03-NOV-2006	
Y	N	N	N	N	N	N	N	I	N	55		26-OCT-2006	
Y	N	N	N	N	N	N	N	C	N	55		31-MAY-2002	
Y	Y	N	N	N	N	N	N	C	N	55		18-DEC-2000	
N	Y	N	N	N	N	N	N	C	N	55		31-MAY-2002	

To add a new record, press **CTRL** + **F2** (Create Record).

O Pos

Enter `Y` if any of the products added to the pool has a tested ABO of O Pos (51); otherwise, enter `N`.

O Neg

Enter `Y` if any of the products added to the pool has a tested ABO of O Neg (95); otherwise, enter `N`.

A Pos

Enter `Y` if any of the products added to the pool has a tested ABO of A Pos (62); otherwise, enter `N`.

A Neg

Enter `Y` if any of the products added to the pool has a tested ABO of A Neg (06); otherwise, enter `N`.

B Pos

Enter `Y` if any of the products added to the pool has a tested ABO of B Pos (73); otherwise, enter `N`.

B Neg

Enter `Y` if any of the products added to the pool has a tested ABO of B Neg (17); otherwise, enter `N`.

AB Pos

Enter `Y` if any of the products added to the pool has a tested ABO of AB Pos (84); otherwise, enter `N`.

WellSky Corporation
Proprietary and confidential

AB Neg

Enter `Y` if any of the products added to the pool has a tested ABO of AB Neg (28); otherwise, enter `N`.

S

Enter one of the following:

- `C` – Unit scheme of the pool unit ID is Codabar.
- `I` – Unit scheme of the pool unit ID is ISBT.

L

Enter one of the following:

- `Y` – The combination entered should include the Rh when assigning the SLD.
- `N` – The combination entered should not include the Rh when assigning the SLD.

Pool SLD and Desc

Enter SLD that should be assigned to the pool based on the previous data entered or select from LOV. The corresponding description automatically displays after the code is entered.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format. Entry not required in this required.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.22 Attribute Expiration Override - ISBT (OVR)

Intended Use

Use this screen to define attributes with associated lifespans that when present should override the lifespan of another attribute. Entries in this screen are used by programs that calculate a product's expiration date/time.


Limitations

None

Prerequisites

Define Attribute code (ATTRIB) – Define attribute codes.

Entering/Viewing Data

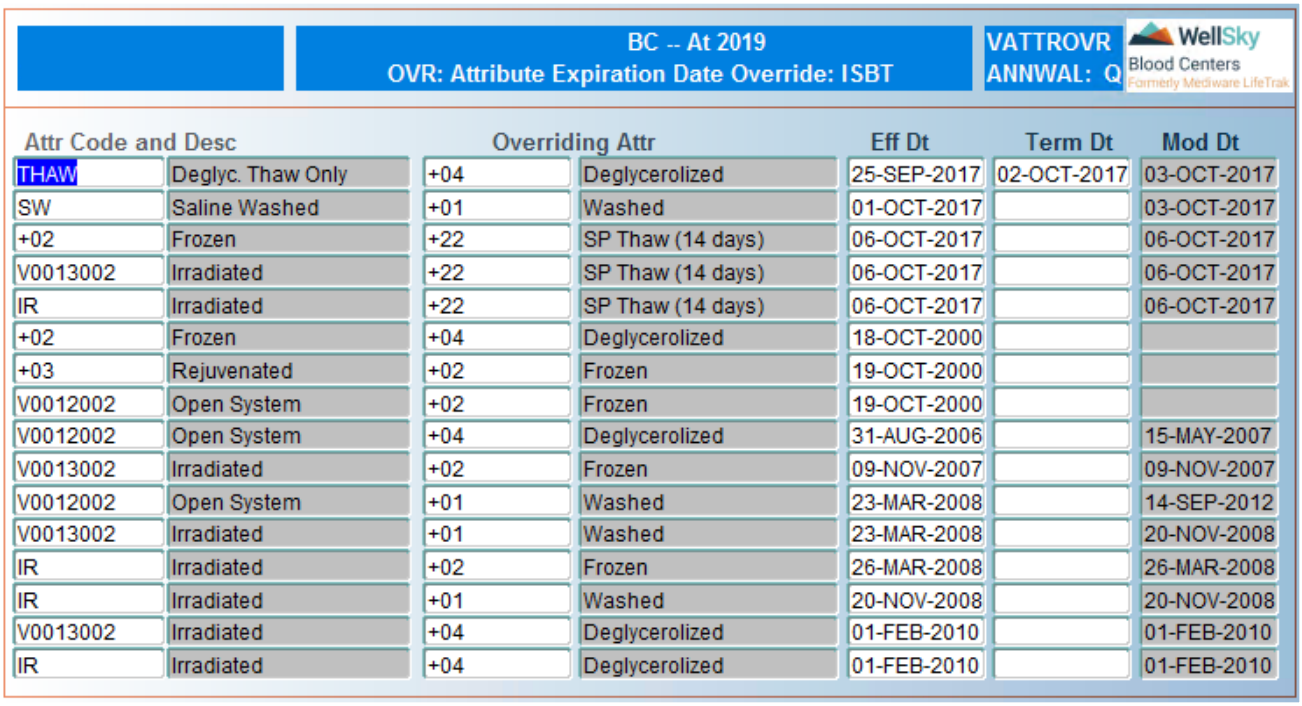

BC -- At 2019
OVR: Attribute Expiration Date Override: ISBT

VATTROVR
ANNWAL: Q

WellSky Blood Centers
Formerly Mediware LifeTrak

Attr Code and Desc		Overriding Attr		Eff Dt	Term Dt	Mod Dt
THAW	Deglyc. Thaw Only	+04	Deglycerolized	25-SEP-2017	02-OCT-2017	03-OCT-2017
SW	Saline Washed	+01	Washed	01-OCT-2017		03-OCT-2017
+02	Frozen	+22	SP Thaw (14 days)	06-OCT-2017		06-OCT-2017
V0013002	Irradiated	+22	SP Thaw (14 days)	06-OCT-2017		06-OCT-2017
IR	Irradiated	+22	SP Thaw (14 days)	06-OCT-2017		06-OCT-2017
+02	Frozen	+04	Deglycerolized	18-OCT-2000		
+03	Rejuvenated	+02	Frozen	19-OCT-2000		
V0012002	Open System	+02	Frozen	19-OCT-2000		
V0012002	Open System	+04	Deglycerolized	31-AUG-2006		15-MAY-2007
V0013002	Irradiated	+02	Frozen	09-NOV-2007		09-NOV-2007
V0012002	Open System	+01	Washed	23-MAR-2008		14-SEP-2012
V0013002	Irradiated	+01	Washed	23-MAR-2008		20-NOV-2008
IR	Irradiated	+02	Frozen	26-MAR-2008		26-MAR-2008
IR	Irradiated	+01	Washed	20-NOV-2008		20-NOV-2008
V0013002	Irradiated	+04	Deglycerolized	01-FEB-2010		01-FEB-2010
IR	Irradiated	+04	Deglycerolized	01-FEB-2010		01-FEB-2010

To add a new record, press CTRL + F2 (Create Record).

Attr Code and Desc

Enter attribute code or select from LOV. This is the attribute whose associated lifespan is to be overridden.

Override Attr

Enter overriding attribute code or select from LOV. This attribute code lifespan will override the attribute lifespan from the first field.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Mod Dt

Field is not navigable. Modification date will automatically populate with the date when the modification was made.

Press F12 (Commit) to save entries.

WellSky Corporation
Proprietary and confidential

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.23 CRYO Methods (CRYOMET)

Intended Use

Use this screen to define the valid parameters for CRYO preparation, including thaw method, thaw temperature range, thaw time range, and freeze time range. Only the methods and range identified in this table are acceptable for CRYO production. Interdictions are placed on units not meeting the criteria in this screen.


Limitations

Production parameters for other products are not entered in this screen.

Prerequisites

None

Entering/Viewing Data

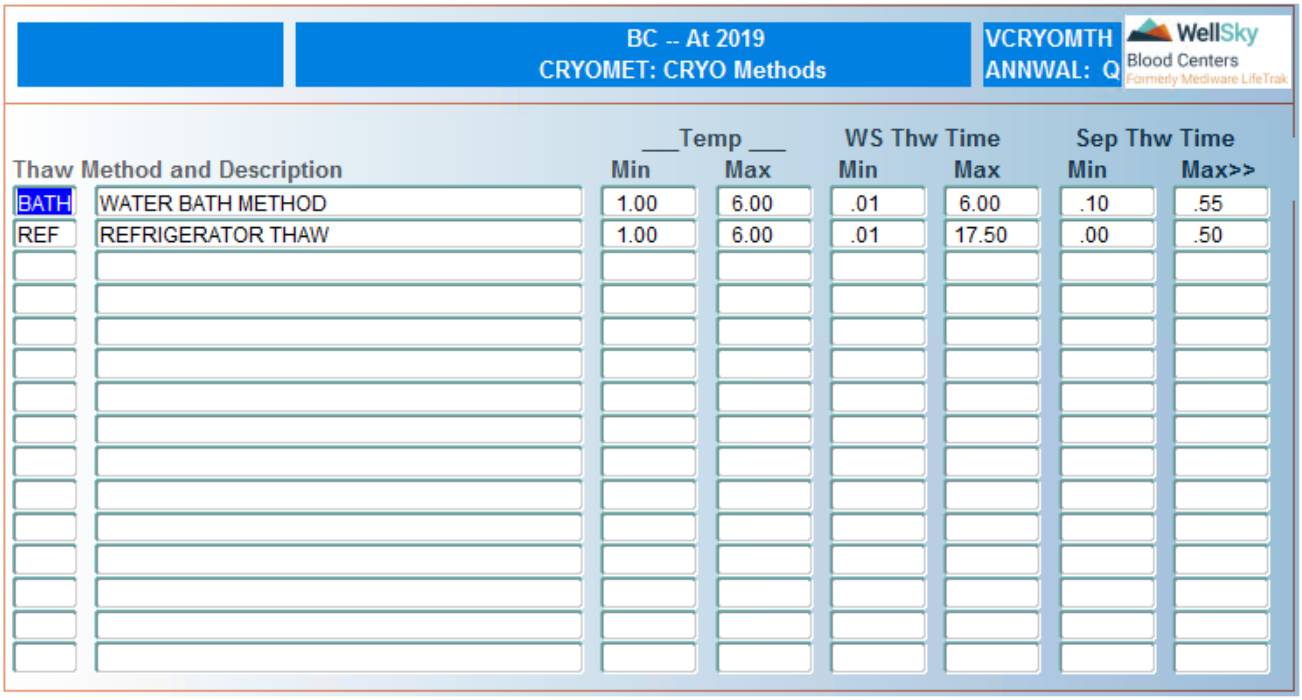

Thaw Method and Description		Temp Min	Temp Max	WS Thw Time Min	WS Thw Time Max	Sep Thw Time Min	Sep Thw Time Max>>
BATH	WATER BATH METHOD	1.00	6.00	.01	6.00	.10	.55
REF	REFRIGERATOR THAW	1.00	6.00	.01	17.50	.00	.50

Thaw Method

Enter code for a CRYO thaw method. A maximum of 4 characters is allowed.

Description

Enter description for the CRYO thaw code. A maximum of 50 characters is allowed.

Min Temp

Enter minimum acceptable CRYO thaw temperature (°C).

Max Temp

Enter maximum acceptable CRYO thaw temperature (°C).

NOTE – A CRTE interdiction is automatically placed on products not thawed within the acceptable thaw temperature range.

WS Thw Time Min

Enter the minimum acceptable thaw time. Use <hours>.<minutes> format.

EXAMPLE – An entry of .10 means 10 minutes. An entry of .55 means 55 minutes. An entry of 17.50 means 17 hours and 50 minutes.

NOTE – This will be the minimum time allowed from the time the unit is placed on a CRYO worksheet until the time the CRYO is frozen.

WS Thw Time Max

Enter the maximum acceptable thaw time. Use <hours>.<minutes> format.

EXAMPLE – An entry of .10 means 10 minutes. An entry of .55 means 55 minutes. An entry of 17.50 means 17 hours and 50 minutes.

NOTE – This will be the maximum time allowed from the time the unit is placed on a CRYO worksheet until the time the CRYO is frozen.

A CRWS interdiction is automatically placed on units not thawed within the acceptable thaw time range for the thaw method selected.

Sep Thw Time Min

Enter the minimum acceptable time from CRYO separation time to freeze time. Use <hours>.<minutes> format.

EXAMPLE – An entry of .10 means 10 minutes. An entry of .55 means 55 minutes. An entry of 17.50 means 17 hours and 50 minutes.

WellSky Corporation
Proprietary and confidential

NOTE – This will be the minimum time allowed from the time the CRYO is separated to the time it is frozen.

Sep Thw Time Max

Enter the maximum acceptable time from CRYO separation time to freeze time. Use <hours><minutes> format.

EXAMPLE – An entry of .10 means 10 minutes. An entry of .55 means 55 minutes. An entry of 17.50 means 17 hours and 50 minutes.

NOTE – This will be the maximum time allowed from the time the CRYO is separated to the time it is frozen.

A CRSE interdiction is automatically placed on CRYO that is not frozen within the acceptable time range for the thaw method selected.

NOTE – Press ENTER to open the Eff Dt and Term Dt columns.

Eff Dt

Enter effective date in DD-MON-YYYY in .

Term Dt

Enter termination date in DD-MON-YYYY format.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.24 Pre-Printed Product Labels – ISBT (PREPRINT)

Intended Use

Use this screen to define the product code labels that will not print when defining ISBT products.

Limitations

This screen is used for ISBT label printing only.


Prerequisites

Lab Master Codes (LMASTER), code types:

- PRDTY – Define valid product types.
- BAG – Defined bag codes.

Define Valid Catalog Numbers (CATALOG).

Entering/Viewing Data

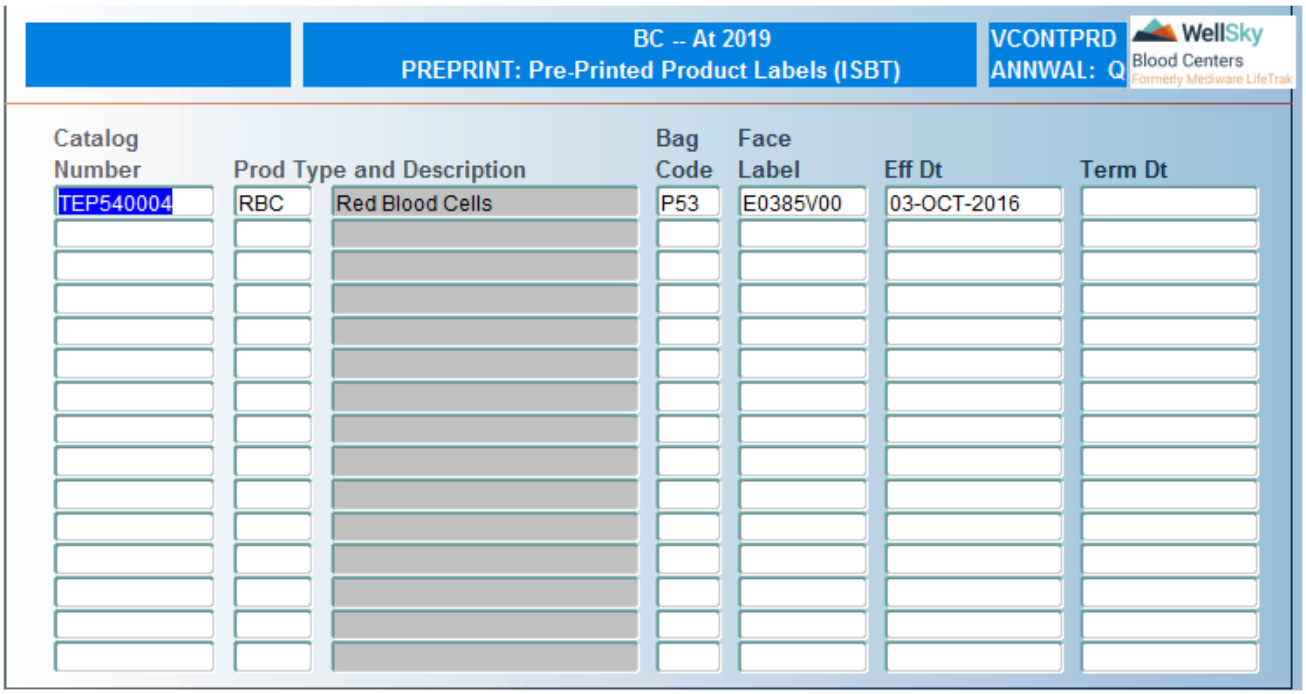

Catalog Number

Enter catalog number or select from LOV.

Prod Type and Desc

Enter product type or select from LOV.

Product type description automatically displays after the product type is entered. This field is not navigable.

Bag Code

Enter bag code or select from LOV.

Face Label

Enter 8-character ISBT product code that, when matching the previous entries, should not automatically be printed when defining the product.

WellSky Corporation
Proprietary and confidential

NOTE – If a product is configured not to print labels, the label can still be reprinted in the definition screen or by using Reprint Labels (REPLBL).

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.25 Configure Interdiction Placement (CIP)

Intended Use

This screen is used to configure interdictions that will interdict a single product, multiple products or a specific product type. The system will place the interdiction when the defined components are produced.

This screen can also be used to view the data that has already been configured.

Limitations


None

Prerequisites

The following master codes must be defined:

- AIPRG – list of programs that will call the auto interdiction package. This list cannot be modified by the user; it is static.
- REJECT – list of reject reasons.

Entering/Viewing Data

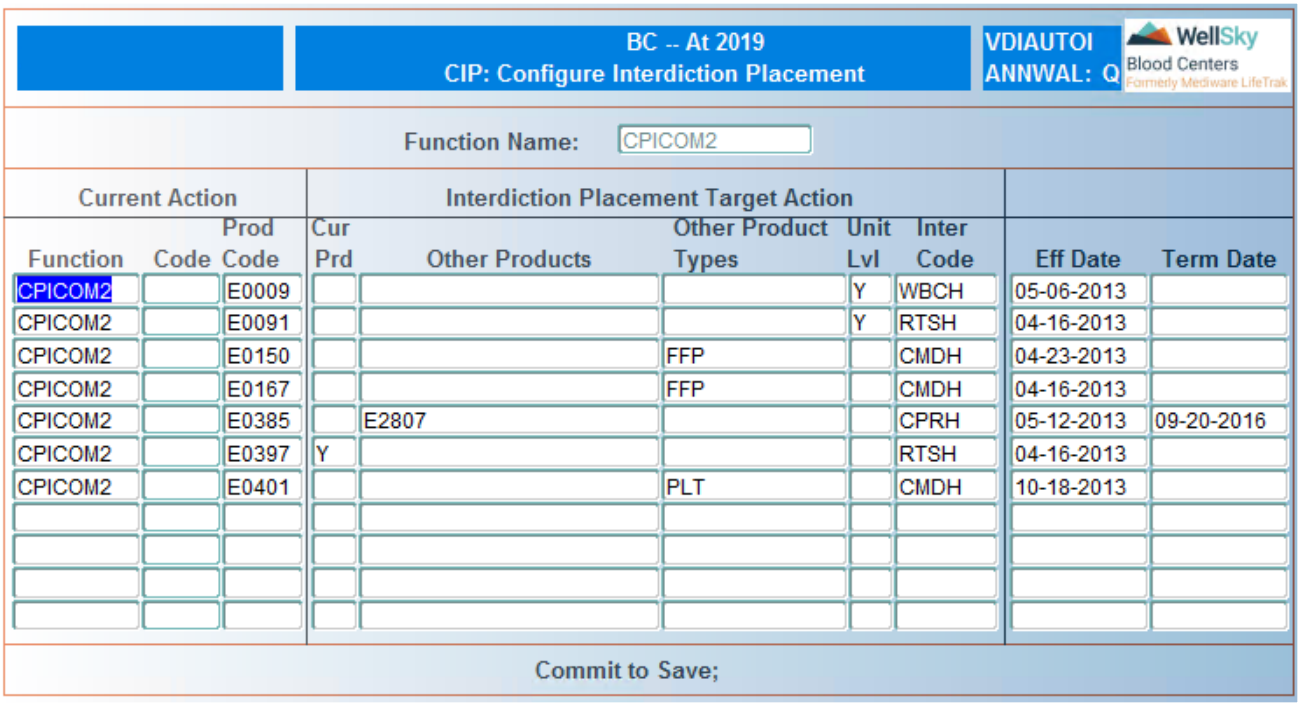

Control Block Fields and Definitions

Function Name

Enter function name or select from LOV. The LOV populates with the values from Master Code AIPRG.

To view all function names, leave field blank and press ENTER. You will not be able to update any of these entries or add new entries when querying data is already entered.

Detail Block Fields and Definitions

Current Action:

Function

Field automatically populates with the function name specified in the Detail Block.

Code

Select the reject code that will cause the interdiction to be placed on the product code. This is only used with the program CPIREJ.

Prod Code

Enter action product code or select from LOV. The LOV populates with the values from the VALID_PRODUCTS table.

WellSky Corporation
Proprietary and confidential

Interdiction Placement Target Action:

Cur Prd

Defines whether an interdiction is to be applied to the current product code or to other product codes, as follows:

- Y – apply interdiction to current product only
- blank – apply interdiction to other product

Other Products

Enter valid product codes, separated by commas.

Other Product Types

Enter other product types, separated by commas.

Unit Lvl

Defines whether to place an interdiction at a unit level and not at a component level, as follows:

- Y – place interdiction at the unit level and not at the component level
- blank – do not place interdiction at the unit level

Inter Code

Enter interdiction code that will be placed when the component or product type is defined in the specified function.

Eff Date

Enter effective date in MMDDYYYY format.

Term Dt

Enter termination date in MMDDYYYY format.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.26 Valid Aliquots (VALALI)

Intended Use

Use this screen to define or update product codes that will be defined when dividing a product. This screen allows definition of a product code for each aliquot that is different from the original product code.


Limitations

Only Codabar aliquot information should be defined in this screen.

Prerequisites

Product Codes (PRODUCT) – Define valid product codes.

Entering/Viewing Data

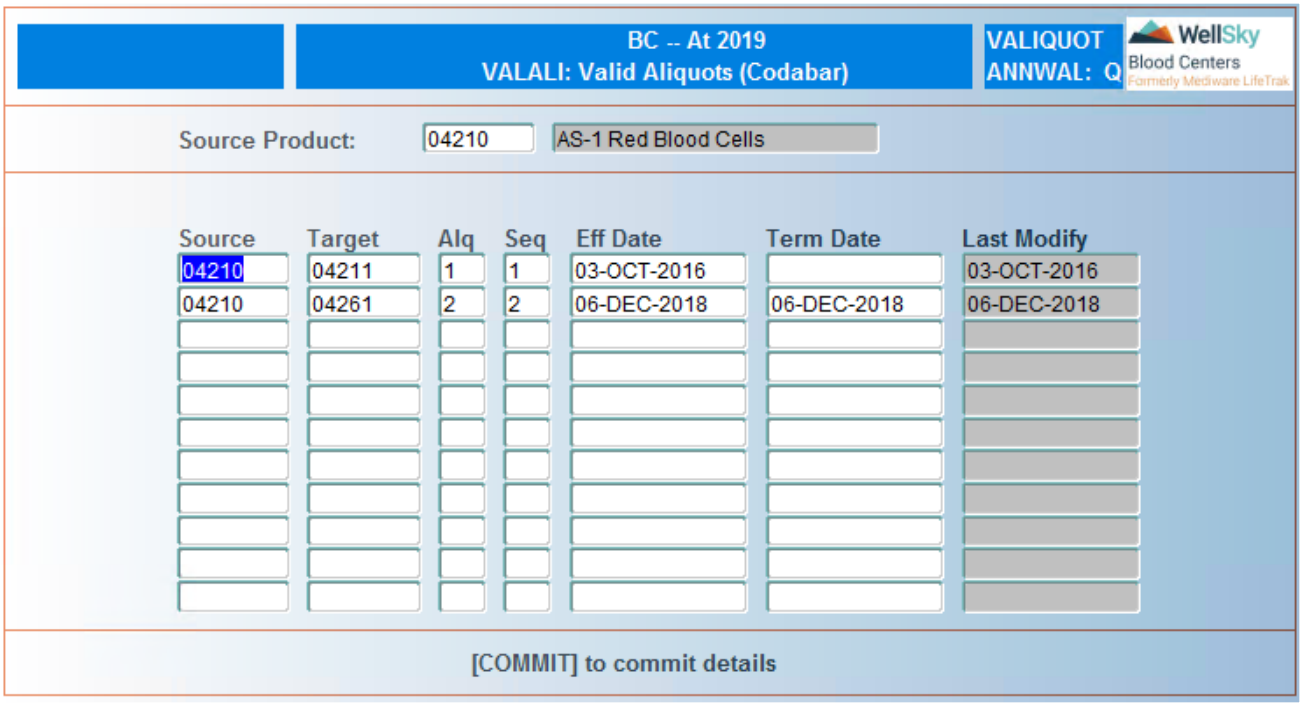

To add a new record, press ENTER until a blank line displays.

In the Control Block

Source Product

Enter source product code or select from LOV. This field is used to query data within the table.

In the Detail Block

Source

Enter the source product code manually or select from LOV. The source product code is the original product code that will be divided.

Target

Enter target product code or select from LOV. The target product is the product code value after division of the original product code.

WellSky Corporation
Proprietary and confidential

Alq

Enter a numeric value from 1 to 9.

- If the target product code changes for each aliquot made from the original, the aliquot value should be set to 1.
- If the target product code does not change with each aliquot, the aliquot number should increment n+1 for each entry.
- If the product code is not defined in the table, the system automatically will set the product code to the original and increment n+1 for each division.

Seq

Enter a numeric value between 1-9. The sequence number represents the product code that will be generated after each division.

Eff Date

When the table is entered, the *Effective Date* field populates with current date. Press **F5** (Clear Field) to enter a different effective date in DD-MON-YYYY format.

Term Date

Enter termination date in DD-MON-YYYY format.

Last Modify

Field automatically populates with the date modifications were last made. Field is not navigable.

Press **F12** (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.27 Valid Product Code Attributes (ATTRPRD)

Intended Use

Use this screen to define attributes that are associated to a particular Codabar product code. The defined attributes are automatically inserted on the product code in the following programs:

- Components Made from Unit (COMPENT)
- Enter Pheresis Components (PHER)
- Change Component in the Same Bag (CHANGE)
- Change Component into a Different Bag (CONVERT)

- Convert Component into Spiked Bag (CONV)
- Sterile Docking Definition (SDD)

If the attributes are deleted from the component, the component will be labeled as HOLD in ABO Labeling (LABEL) and will not be able to be labeled in Emergency Medical Release (EMGREL).


Limitations

This screen is used for Codabar products only.

Prerequisites

- Product Codes (PRODUCT) – Define valid product codes.
- Attribute Codes (ATTRIB) – Define valid attribute codes.
- Product Type Attributes (PRDATTR) – Define valid product type attributes.

Entering/Viewing Data

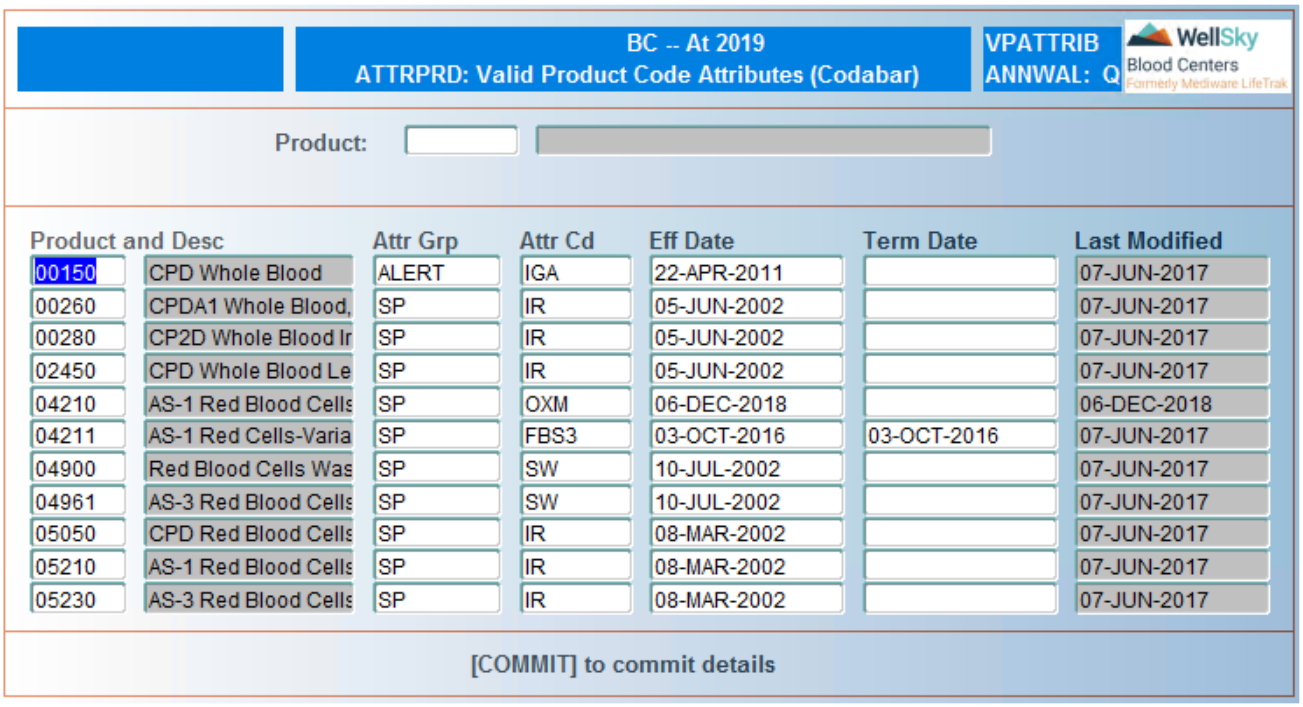

Product

Enter product code to be modified or entered or leave blank to view all entries.

Product and Desc

Enter product code or select from LOV. Product code description automatically displays after the product code is entered.

Attr Grp
Enter attribute group or select from LOV.

Attr Cd
Enter attribute code or select from LOV.

Eff Date
Enter effective date in DD-MON-YYYY format.

Term Date
Enter termination date in DD-MON-YYYY format.

Last Modified
Populates automatically by the system when the code is updated. Field is not navigable.

What to Do Next
There is no next step for this screen.


10.1.28 Product Combinations (PRODCOM)

Intended Use
This screen is used to enter product combinations for set bag configurations.

Limitations
- Existing combinations can be viewed and/or deleted in Delete Product Combination (DPRODCOM).
- This program is not used for defining valid combinations of products collected by apheresis technology.

Prerequisites
Product types must be defined in Lab Master Codes (LMASTER), code PRDTY.

Entering/Viewing Data

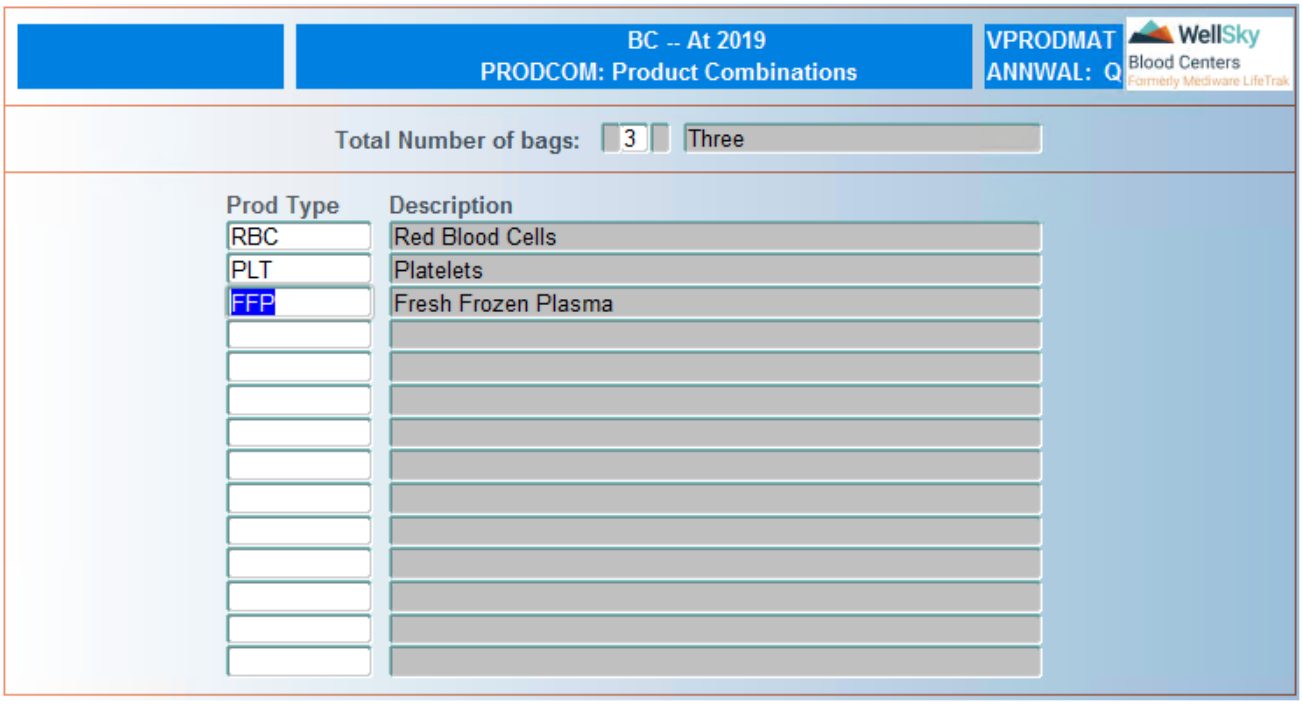

Total Number of Bags

Enter the number of bags in the set. A maximum number of 15 can be entered.

Prod Type

Enter the product type that can be included in the set or select from LOV.

Description

The description field automatically populates after the product type is entered.

Press F12 (Commit) to save entries.

At Commit

A set number is generated for the new combination entered. The set number can only be viewed in Delete Product Combinations (DPRODCOM).

What to Do Next

There is no next step for this screen.

WellSky Corporation
Proprietary and confidential

10.1.29 Delete Product Combination (DPRODCOM)

Intended Use

This screen is used to view or delete product combinations for set bag configurations. The information can be queried by number of bags and/or by product type.


Limitations

None

Prerequisites

The combination must be entered in Product Combinations (PRODCOM).

Entering/Viewing Data

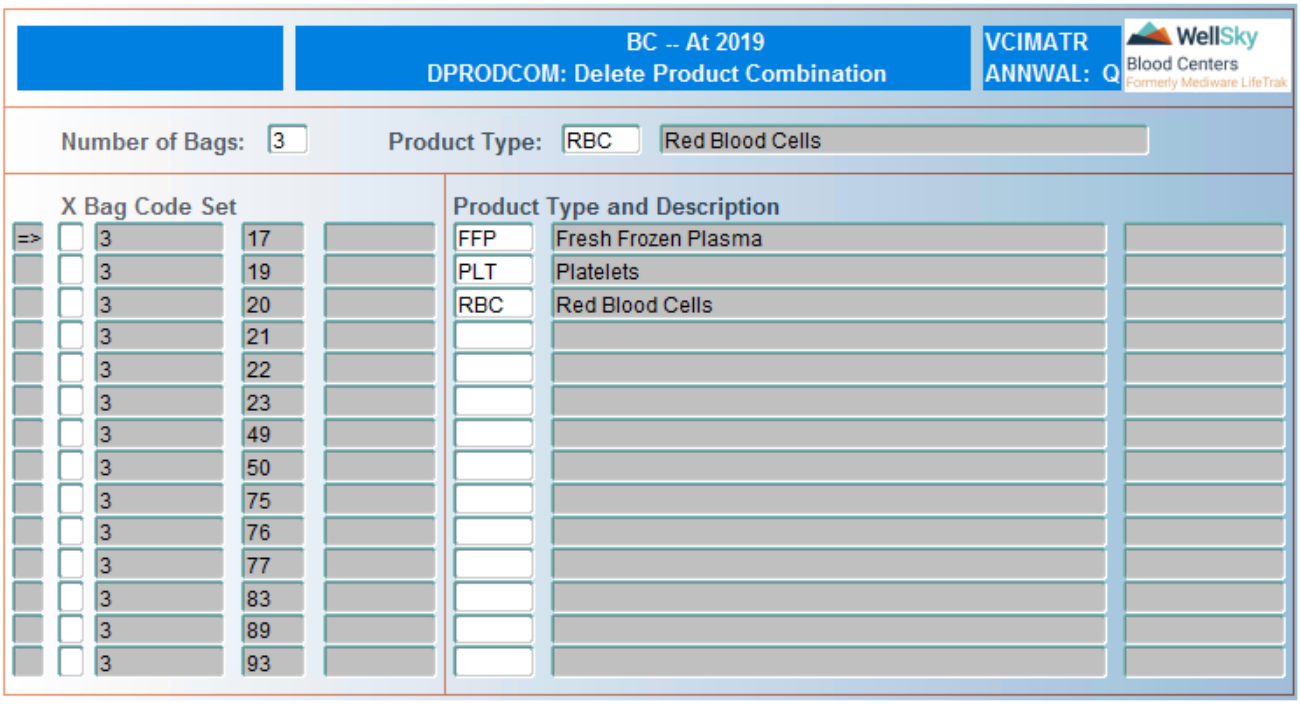

Number of Bags

Enter the number of bags or leave blank to query by product type only.

Product Type

Enter the product type or select from LOV. Leave blank to query by number of bags only.

NOTE – The corresponding combinations populate the screen. Use the [Up]/ [Down] arrow keys to navigate through the listing.

X

Enter an x next to the combinations to be deleted.

Press **F12** (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

10.1.30 Product Bags (PRODBAG)

Intended Use

This screen is used to define valid product to bag combinations. Products can only be defined in bags listed in this screen.

Limitations

The following bag IDs are static and cannot be terminated in the system:


- P99
- 99

Prerequisites

- Product Codes (PRODUCT) – Define product codes.
- Lab Master Codes (LMASTER), code BAGID – Define bag IDs.

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

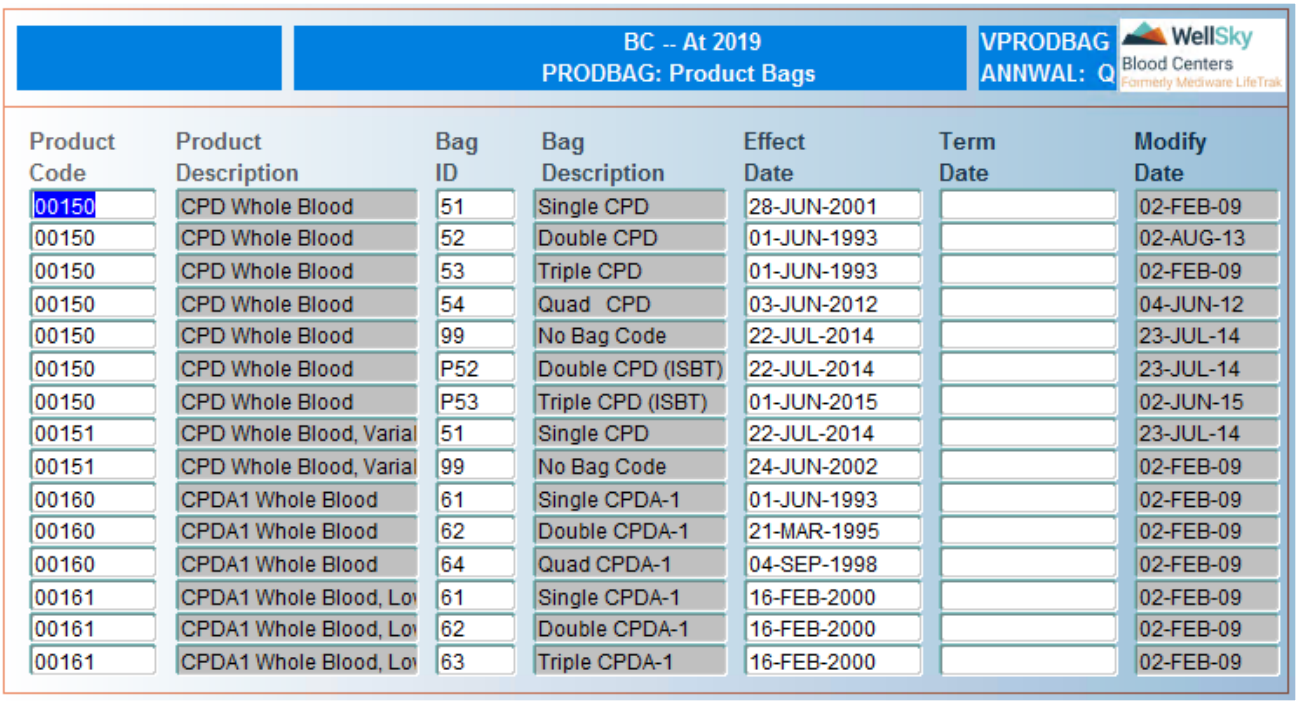
BC -- At 2019
PRODBAG: Product Bags
VPRODBAG
ANNWAL: Q
WellSky Blood Centers
Formerly Mediware LifeTrak

Product Code	Product Description	Bag ID	Bag Description	Effect Date	Term Date	Modify Date
00150	CPD Whole Blood	51	Single CPD	28-JUN-2001		02-FEB-09
00150	CPD Whole Blood	52	Double CPD	01-JUN-1993		02-AUG-13
00150	CPD Whole Blood	53	Triple CPD	01-JUN-1993		02-FEB-09
00150	CPD Whole Blood	54	Quad CPD	03-JUN-2012		04-JUN-12
00150	CPD Whole Blood	99	No Bag Code	22-JUL-2014		23-JUL-14
00150	CPD Whole Blood	P52	Double CPD (ISBT)	22-JUL-2014		23-JUL-14
00150	CPD Whole Blood	P53	Triple CPD (ISBT)	01-JUN-2015		02-JUN-15
00151	CPD Whole Blood, Varial	51	Single CPD	22-JUL-2014		23-JUL-14
00151	CPD Whole Blood, Varial	99	No Bag Code	24-JUN-2002		02-FEB-09
00160	CPDA1 Whole Blood	61	Single CPDA-1	01-JUN-1993		02-FEB-09
00160	CPDA1 Whole Blood	62	Double CPDA-1	21-MAR-1995		02-FEB-09
00160	CPDA1 Whole Blood	64	Quad CPDA-1	04-SEP-1998		02-FEB-09
00161	CPDA1 Whole Blood, Lo	61	Single CPDA-1	16-FEB-2000		02-FEB-09
00161	CPDA1 Whole Blood, Lo	62	Double CPDA-1	16-FEB-2000		02-FEB-09
00161	CPDA1 Whole Blood, Lo	63	Triple CPDA-1	16-FEB-2000		02-FEB-09

To add a new record, press CTRL + F2 (Create Record).

Product Code

Enter product code or select from LOV.

Product Description

Field automatically populates after the product code is entered. Field is not navigable.

Bag ID

Enter the bag ID that is acceptable for storing the product code entered or select from LOV.

NOTE – ISBT 128 imports go into a P99 bag; Codabar Imports go into a 99 bag.

Bag Description

Field automatically populates after the bag ID is entered. Field is not navigable.

Eff Dt

Enter effective date in DD-MON-YYYY format. Field defaults to the system date.

Term Dt

Enter termination date in DD-MON-YYYY format.

Modify Date

Field automatically populates with the date modifications were last made. Field is not navigable.

Press F12 (Commit) to save entries.

At Commit

Entries are saved to the database.

What to Do Next

There is no next step for this screen.

WellSky Corporation
Proprietary and confidential


11

Chapter 11 - Lab Functions - Pathogen Reduction

11.1 Screens and Descriptions 418
11.1.1 Pathogen Reduction Process Configurator (PRCONFG) 418

11.1 Screens and Descriptions

These functions are accessed from the following menu:

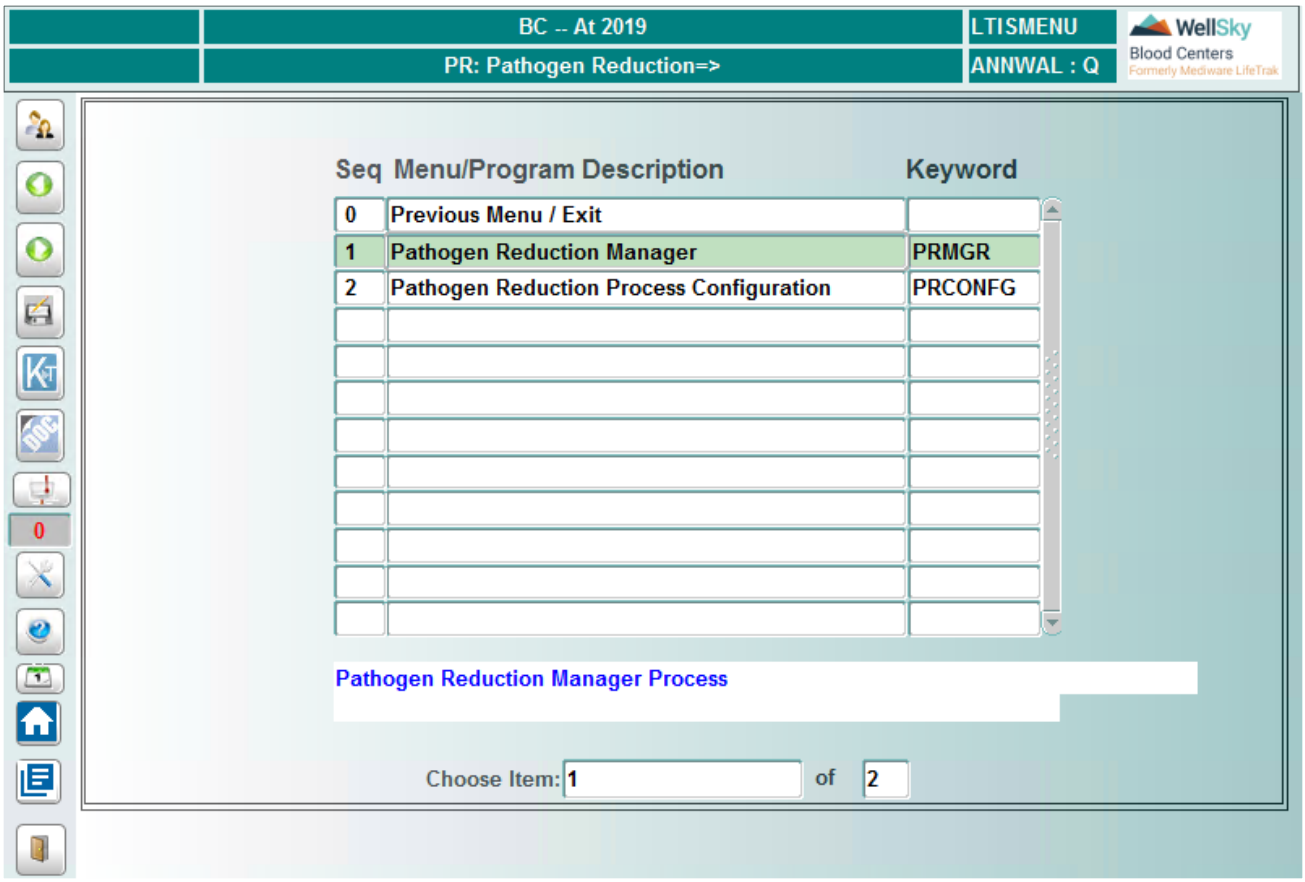

11.1.1 Pathogen Reduction Process Configurator (PRCONFG)

Intended Use

Use this screen to define validation values to be used during the process of pathogen reduction.

Limitations

Only one configuration for volume type set 'PL' is allowed. If you define more than one, you will receive an error in pathogen reduction suitability that more than one set type has been defined.

Prerequisites

The following master codes need to be defined prior to setting validation data:

WellSky Corporation
Proprietary and confidential

- PEQUP: equipment that can be used to collect the platelets to be pathogen reduced

> **NOTE –** When defining the PEQUP, set up a generic plasma equipment, since equipment is not used for plasma products.


- SUSTY: suspension types for platelet suspension

> **NOTE –** Plasma products will have a suspension type of 100% plasma; PAS-3 will not be used.

- VTYST: volume set types that are used during the pathogen reduction process

The user must know the final volumes and platelet counts based on yields and a 10-15% loss when performing the pathogen reduction process.

Entering/Viewing Data

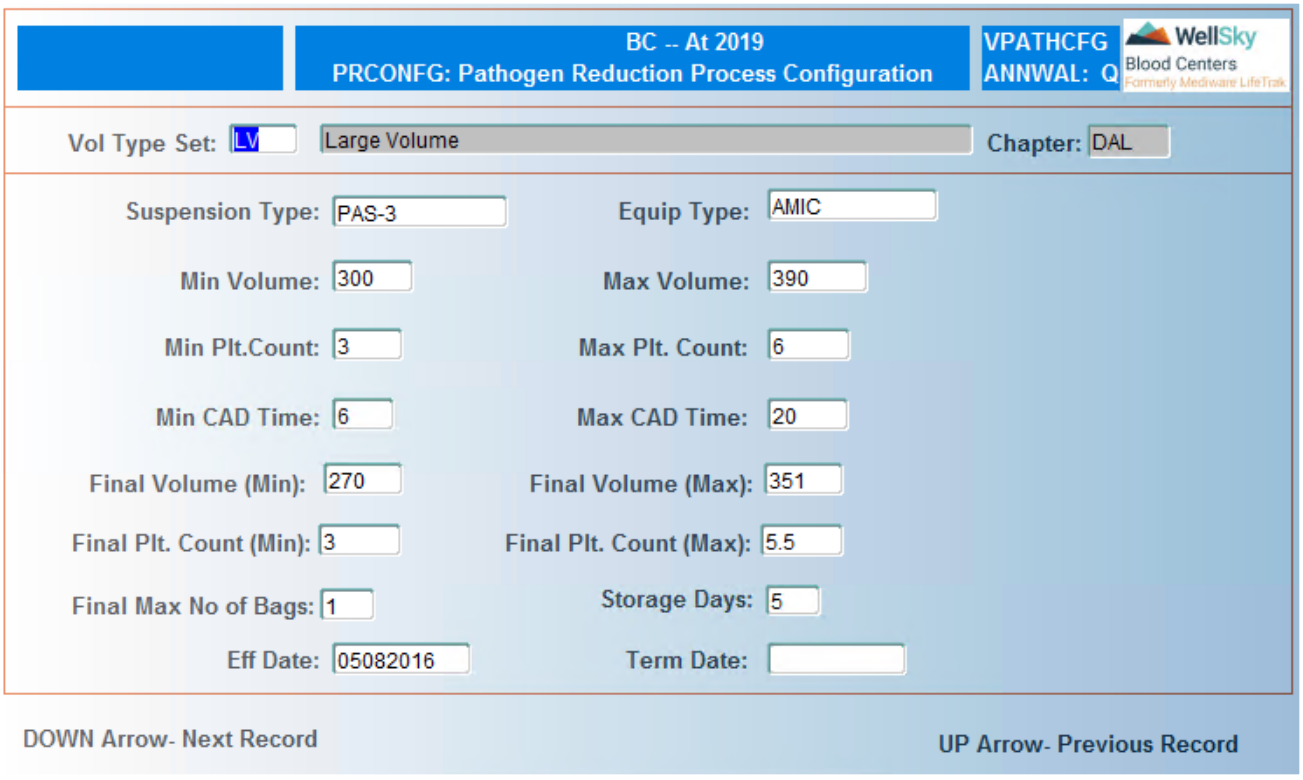

Vol Type Set

Enter the volume type set or select it from the LOV. The LOV is populated from master code VTYST.

Vol Type Set Description

The description of the specified volume type set is automatically populated once you move out of the Vol Type Set box. The description cannot be modified.

Chapter

The chapter code is automatically populated and cannot be changed. The chapter ID is populated based on the user's chapter in which they are currently logged in to the system.

Suspension Type

Enter the suspension type or select from the LOV. The LOV is populated from the master code SUSTY.

Equip Type

Enter the equipment type or select from the LOV. The LOV is populated from the master code PEQUP.

Min Volume

Specify the minimum volume as a whole integer in mL. These values should be defined based on the manufacturer's package insert for the set type being defined.

Max Volume

Specify the maximum volume as a whole integer in mL. These values should be defined based on the manufacturer's package insert for the set type being defined.

Min Plt. Count

Specify the minimum platelet count with a value N x 10^{11}. These values should be defined based on the manufacturer's package insert for the set type being defined.

Max Plt. Count

Specify the maximum platelet count with a value N x 10^{11}. These values should be defined based on the manufacturer's package insert for the set type being defined.

Min CAD Time

Specify the minimum CAD time (in hours). These values should be defined based on the manufacturer's package insert for the set type being defined.

Max CAD Time

Specify the maximum CAD time (in hours). These values should be defined based on the manufacturer's package insert for the set type being defined.

Final Volume (Min)

Specify the final minimum volume of the product (as an integer) in mL. These values should be calculated by the user's facility based on yields and the package insert from the manufacturer on basic loss value.

WellSky Corporation
Proprietary and confidential

Final Volume (Max)

Specify the final maximum volume of the product (as an integer) in mL. These values should be calculated by the user's facility based on yields and the package insert from the manufacturer on basic loss value.

Final Plt. Count (Min)

Specify the minimum final platelet count with a value of N x 10^{11}. These values should be calculated by the user's facility based on yields and the package insert from the manufacturer on basic loss value.

Final Plt. Count (Max)

Specify the maximum final platelet count with a value of N x 10^{11}. These values should be calculated by the user's facility based on yields and the package insert from the manufacturer on basic loss value.

Final Max No of Bags

Specify the maximum number of final bags. These values should be defined based on the manufacturer's package insert for the set type being defined.

Storage Days

Specify the number of days the product will be stored (lifespan).

Eff Date

Enter the effective date in MMDDYYYY format.

Term Date

Enter the termination date in MMDDYYYY format.

At Commit

Entries are saved to the database. Once the set types are defined and committed, the user is allowed to view the set type data by using the ↓↑ keys. The data can be updated, if needed.

What to Do Next

There is no next step for this screen.

This Page Intentionally Left Blank

12

Chapter 12 - Lab Functions - Testing Administration


12.1 Introduction 424
12.2 Screens and Descriptions 424
12.2.1 Available Tests (TEST) 424
12.2.2 Internal Contract (CONTR) 430
12.2.3 Instrument Tests (INTST) 435
12.2.4 Instrument Test Results (INTSTRS) 436
12.2.5 Valid Remote Testing Labs (VTILABS) 438
12.2.6 Valid Additional Tests: Remote Testing (VADDTST) 440
12.2.7 Horizontal Test File Test Mapping (HTFM) 442
12.3 Multiple Observation Testing Administration (MOTADM) 444
12.3.1 Valid Multiple Observation Results (VMOR) 444
12.3.2 Multiple Observation Test Types by MFG (MOTTMFG) 445
12.3.3 Multiple Observation Fields (MOF) 447
12.3.4 Multiple Observation Result Matrix (MORM) 449

12.1 Introduction

The Testing Administration (TESTADM) menu is located under the Testing Modules (TESTING) menu under Laboratory Functions (LAB).

12.2 Screens and Descriptions

These functions are accessed from the following menu:

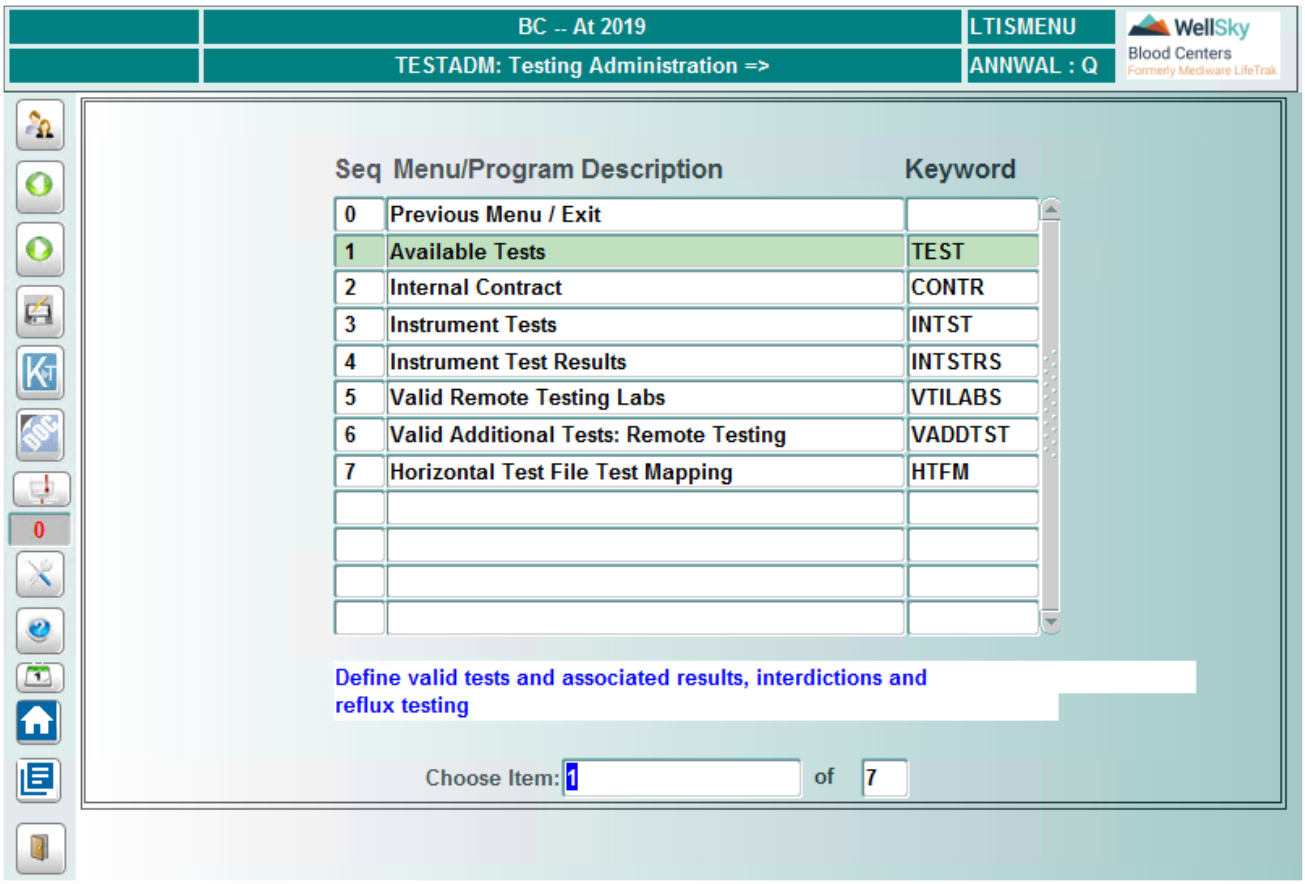

12.2.1 Available Tests (TEST)

Intended Use

This screen is used to define valid tests, including interdictions and attributes that are automatically placed based on test results.

Limitations

The following test IDs are static within the system:

WellSky Corporation
Proprietary and confidential

ABORH	HBC	HTLV-I	Panel
ALT	HBSAG	HTLV-I/II	STS
CHOL	HCV	IAT	
CMV	HIV-1/2	NAT	
DAT	HIV1AG	P1	


Tests that are in the group MAN will not go across to Donor unless they are part of your Internal Contract testing.

The result code of R must be used for positive CMV tests to allow the discrepancy check to occur with the donor historical CMV results.

Prerequisites

- Lab Master Codes (LMASTER), codes:
  - TEGRP – Define test groups. These test groups are listed in Appendix K – Lab Master Codes and are static and cannot be changed.
  - RESUL – Define valid results.
- Interdiction Codes (INTER) – Define interdictions.
- Valid Attributes (ATTRIB) – Define attributes.

Entering/Viewing Data

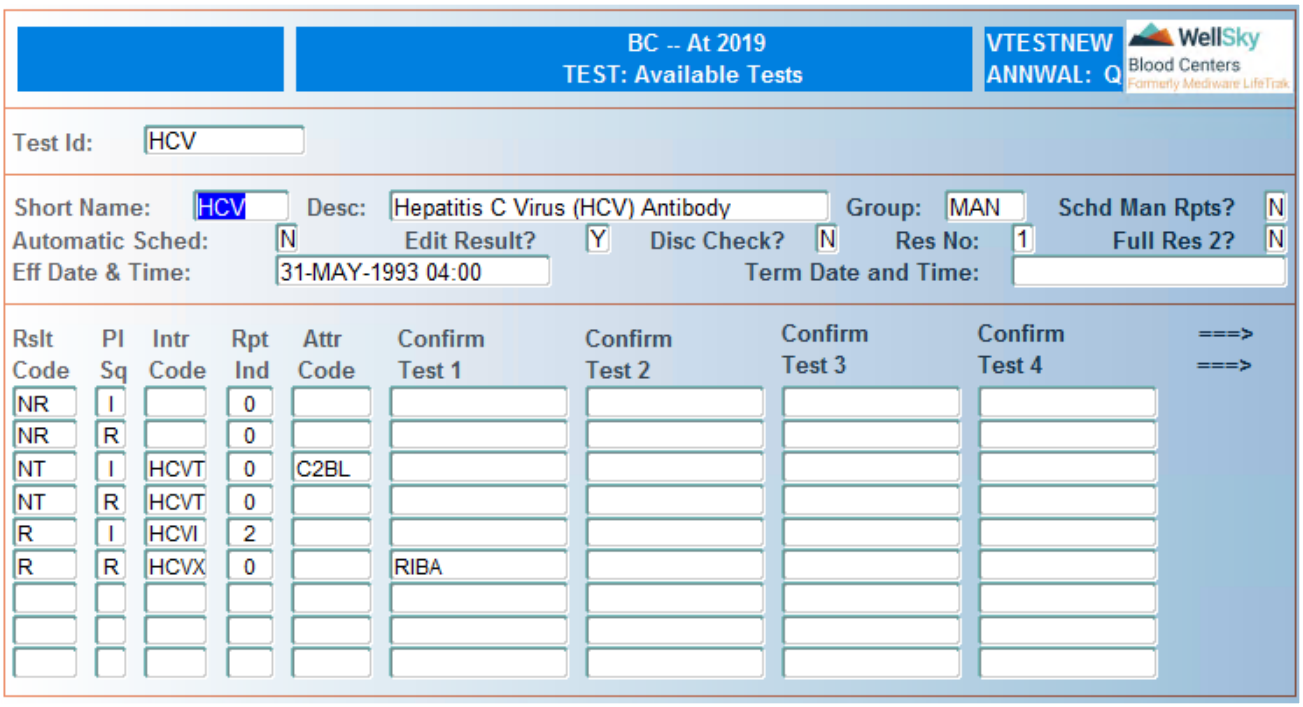

To add a new record, press the DOWN arrow key.

NOTE – If confirmatory tests are used, they should be defined first.

NOTE – When the screen first displays, the only fields that appear on the screen are *Rslt Code* through *Confirm Test 4*. The arrows pointing to the right indicate that the screen contains additional fields. Press TAB or ENTER to scroll to the right.

Test ID

Enter the test ID or use LOV. A maximum of 10 characters is allowed.

Short Name

Enter a short name for the test. A maximum of 6 characters is allowed.

Desc

Enter the test description. A maximum of 50 characters is allowed.

Group

Enter a group for the test or use LOV. The list of values is populated from the Master Code type TEGRP.

Schd Man Rpts

Enter Y if repeats are to be scheduled manually only. Enter N or leave blank if repeats can be automatically scheduled based on initial test results.

NOTE – If only I (initial) test results are defined, this field must be set to Y. If I and R (repeat) test results are defined, this field can be set to N. There will be no results in LOV for Result column in RES1 if this field is not defined correctly.

Automatic Sched

Enter one of the following:

- Y – Test is to be automatically scheduled.
- N (or leave blank) – Test is not scheduled automatically.

NOTE – If the flag is set to Y and testing is performed prior to the unit and/or tube being checked in, the test result will not appear on the unit because there is no collection date associated to the tested unit.

NOTE – This field pertains to results from the following:

- Manual testing.
- Olympus PK7 (ATIRDOLY) – ONLY 1ST RESULT UPLOAD.
- IBG (ATIRDIBG) – ONLY 1ST RESULT UPLOAD.

WellSky Corporation
Proprietary and confidential

- Abbott Commander (ATUPCMDR) – ONLY 1ST RESULT UPLOAD.
- Galileo (ATUPGALI) – ONLY 1ST RESULT UPLOAD.

Edit Result

Enter one of the following:

- `Y` – Test result can be edited.
- `N` (or leave blank) – Editing is not permitted for the test.

Disc Check

Enter one of the following:

- `Y` – Discrepancy check is to be performed for the test.
- `N` (or leave blank) – Discrepancy check is not to be performed.

NOTE – Discrepancy check includes check of the donor system and a check of the current results for the unit. If a discrepancy is detected, the current discrepant results are voided, and a new test is scheduled.

NOTE – Discrepancy check includes a check against the historical donor result information interfaced from the Donor application, such as ABO/Rh, CMV and RBC antigens. It will also check discrepancies between current test results for the unit. If a discrepancy is detected, the current discrepant results are voided and an additional test is scheduled. Donor historical results are not voided during the discrepancy check process.

Res No

Entry in this field is not required for automated testing. Enter one of the following:

- `1` – Entry for the test is required only in First Tech Test Result (RES1).
- `2` – Entry is required in both First Tech Test Result (RES1) and Second Tech Test Result Verification (RES2).

NOTE – Tests defined as AG or ROUAG allow only one result entry in Antigen Result Entry (AG), regardless of the value entered in this field.

Full Res 2

Enter one of the following:

- `Y` – Entry is required for each result in Second Tech Test Result Verification (RES2).
- `N` – Entry is required for only certain results.

NOTE – Navigation to this field is allowed only if 2 was entered in the *Res No* field.

Eff Date & Time

Enter effective date and time in DD-MON-YYYY HH24:MI format.

Term Date and Time

Enter termination date and time in DD-MON-YYYY HH24:MI format.

Rslt Code

Enter valid result codes for the test or use LOV.

NOTE – Take extra precaution when defining NT result codes for initial 'I' or repeat 'R' result interpretations.

NOTE – Result codes for tests that can be uploaded from the IBG instrument (ATIRDIBG) must be limited to 3 characters.

Pl Sq

Enter one of the following:

- `I` – The result code is to be used for initial results.
- `R` – The result code is to be used for repeat results.

NOTE – If a result can be resulted as both initial and repeat, it must be defined on separate lines.

Intr Code

Enter an interdiction that should affect the system label decision (SLD) of components produced from the unit. If a result should cause an interdiction to be placed on a unit, enter the interdiction code or use LOV. If no interdiction is associated with the result, leave field blank.

NOTE – Special precautions must be taken when using not tested (NT) result codes for initial or repeat interpretations of test results to ensure proper SLD assignment.

Rpt Ind

Enter the number of repeats that should be automatically scheduled if the result is obtained. If repeats should not be performed, enter `0`.

WellSky Corporation
Proprietary and confidential

Attr Code

If a result should cause an attribute to be placed on a unit, enter the attribute code or use LOV. If no attribute is associated with the result, leave field blank.

Confirm Test 1

If a result requires confirmatory testing, enter the confirmation test ID or use LOV. Leave field blank if confirmation is not required.

Confirm Test 2

If a result requires more than one confirmatory test, enter the second confirmation test ID or use LOV. Leave field blank if a second confirmation is not required.

Confirm Test 3

If a result requires more than two confirmatory tests, enter the third confirmation test ID or use LOV. Leave field blank if a third confirmation is not required.

Confirm Test 4

If a result requires more than three confirmatory tests, enter the fourth confirmation test ID or use LOV. Leave field blank if a fourth confirmation is not required.

NOTE – To see the additional fields in the window, scroll to the right by pressing TAB or ENTER.

Confirm Test 5

If a result requires more than four confirmatory tests, enter the fifth confirmation test ID or use LOV. Leave field blank if a fifth confirmation is not required.

Confirm Test 6

If a result requires more than five confirmatory tests, enter the sixth confirmation test ID or use LOV. Leave field blank if a sixth confirmation is not required.

MR

Enter Y if the result is a machine read result only. Leave blank if the result can be machine read or manually entered.

NOTE – IF Y is entered, the result will not appear in the LOV for manual result entry.

Res Two

Enter Y if entry is required in Second Tech Test Result Verification (RES2) for the test result entered. Leave blank if entry is not required for the result.

NOTE – You cannot navigate to this field if Y was entered in Full Res 2.

Eff Date
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date in DD-MON-YYYY format.

What to Do Next
- Internal Contract (CONTR) – Define internal contract.
- Instrument Tests (INTST) – Map internal test ID to instrument test ID.
- Instrument Test Results (INTSTRS) – Map instrument test results to test results defined for the test.
- Valid Multiple Observation Results (VMOR) – Define valid test result observations.
- Multiple Observation Test Types by MFG (MOTTMFG) – Define multiple observation results by manufacturer.
- Multiple Observation Fields (MOF) – Define each observation field for a test by manufacturer.
- Multiple Observation Result Matrix (MORM) – Define valid combinations and the interpretation associated with the combinations.

12.2.2 Internal Contract (CONTR)


Intended Use
This screen is used to define internal contract information.

Limitations
If a new test is added to the internal contract prior to all the units having the confirmatory (CONFIRM) lab to donor interface performed, then the new test must be added to those units pending the CONFIRM interface for the confirmatory/supplemental results to interface back to donor. If this is not performed, the confirmatory/supplemental results will not interface.

Prerequisites
- Available Tests (TEST) – Define tests.
- Lab Master Codes (LMASTER), code BARCD – Define barcode symbology.
- Valid Collection Facilities (COLLID) – Define valid collection facilities. This must be entered for ISBT only.

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

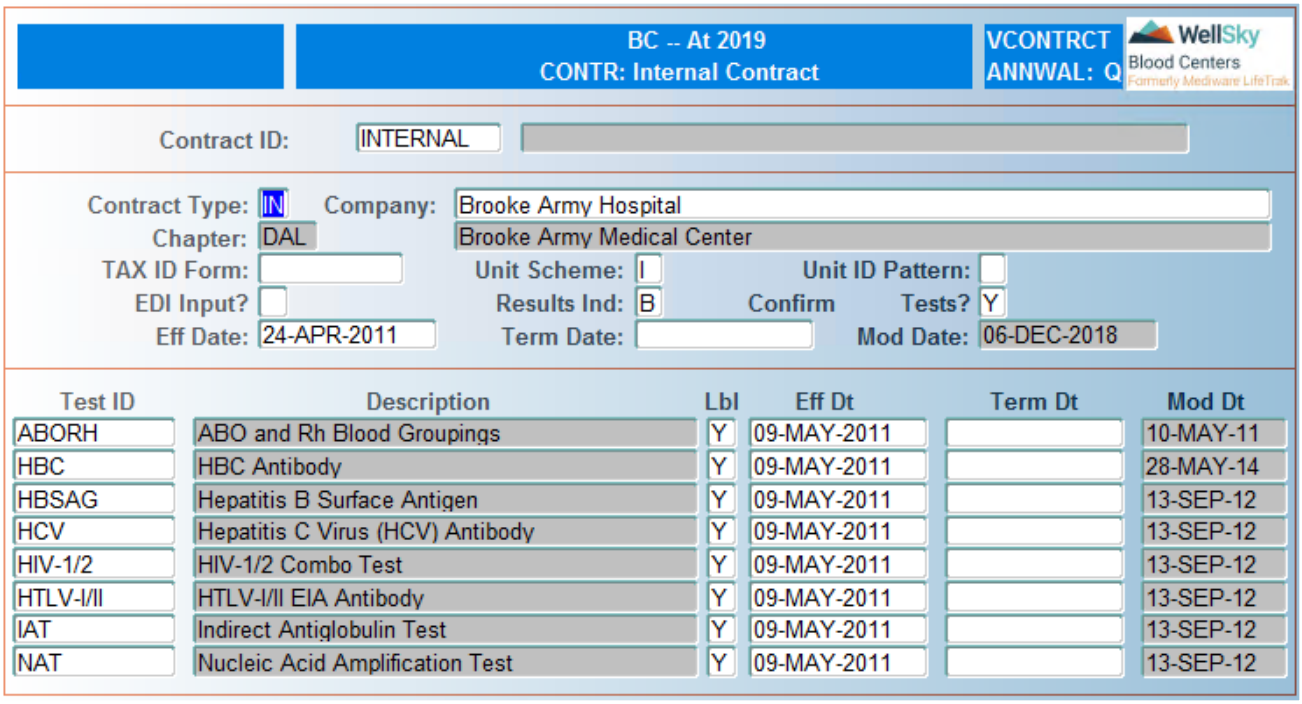

Contract ID


Enter the contract ID to be modified or select from LOV. Leave blank to create a new contract.

Contract Type

Enter `IN` in this field.

Company

Enter the company name. A maximum of 50 characters is allowed. After the company name is entered, the following window opens:.

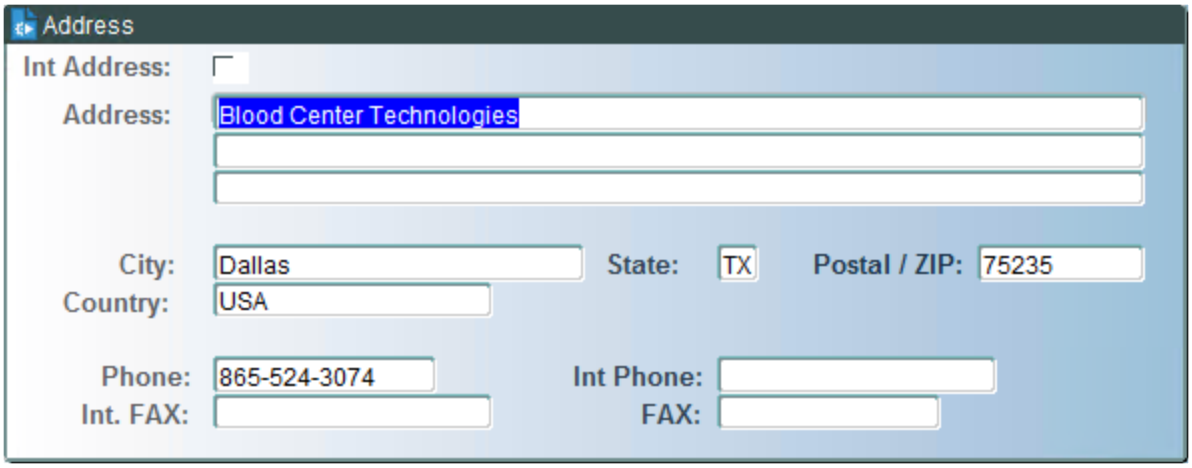

Int Address (check box)

For an international address, click mouse in box. A check mark ()appears. For a domestic address, leave this box blank (un-checked).

Address

Entry in the first line is required. Enter the facility address. Three lines are available to record the necessary information. A maximum of 50 characters is allowed on each of the three address lines.

For international addresses, use the third line for country-specific designations such as province or state.

City

Entry is required. Enter the city. A maximum of 20 characters is allowed.

State

Entry is required for a domestic address (Int Address box not checked). Enter the state abbreviation or select from LOV. A maximum of 2 characters is allowed.

Postal/Zip

Entry is required. Enter the postal or zip code. A maximum of 15 characters is allowed.

Country

Entry is required. Enter the country. A maximum of 15 characters is allowed.

Phone

Entry is optional. Enter the phone number. A maximum of 10 characters is allowed.

Int Phone

Entry is optional. Enter the internal phone number, beginning with the country code. A maximum of 15 characters is allowed.

Int Fax

Entry is optional. Enter the international Fax number, beginning with the country code. A maximum of 15 characters is allowed.

FAX

Entry is optional. Enter the Fax number. A maximum of 10 characters is allowed.

Chapter

The chapter ID automatically defaults based on the information entered in Chapter Details (CHAPTER).

Tax ID Form

Enter the tax ID or leave blank.

WellSky Corporation
Proprietary and confidential

Unit Scheme

Enter the contract's unit scheme or use LOV.

Unit ID Pattern

Enter the unit ID pattern for unit ID barcode reading: = or &.

NOTE – Entry in this field is allowed only if Code 128 was entered in Unit Scheme.

EDI Input

Enter Y if files are received electronically. Leave blank if files are not received electronically.

Results Ind

Define the type of reports required. Enter one of the following:

- R – Reports
- E – Electronic mail
- B – Both reports and electronic mail

Confirm Tests

Enter Y if confirmatory results are required, where indicated. Leave blank if confirmatory results are not required.

Eff Date


Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Mod Dt

Field automatically populates with the date when modifications were last made.

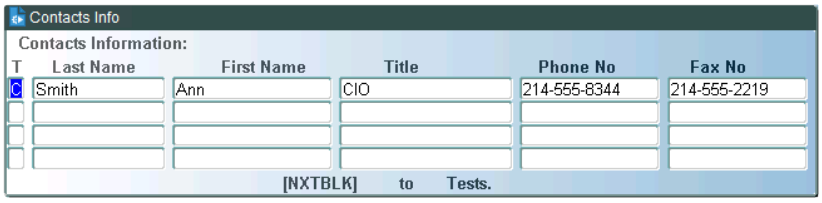

Contacts Information

NOTE – Entry of contact information is optional. Press CTRL + F3 (Next Block) to go to the next block to enter test results.

T

Enter contact type:

- I – Institution
- C – Contract

Last Name

Enter contact's last name. A maximum of 50 characters is allowed.

First Name

Enter contact's first name. A maximum of 50 characters is allowed.

Title

Enter the contact's title or leave blank. A maximum of 30 characters is allowed.

Phone No

Enter the contact's phone number or leave blank.

Fax No

Enter the contact's Fax number or leave blank.

NOTE – Press CTRL + F3 (Next Block) after required information has been entered.

To add a new record, press the DOWN  arrow key.

Test ID

Enter the ID of required tests for the contract or use LOV.

Description

The *Description* field automatically populates after the test ID is entered.

Lbl

Enter one of the following:

- Y – Results for the test are required in order to perform ABO labeling.
- N – Results are not required for ABO labeling.

Eff Date

Enter effective date in iDD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

WellSky Corporation
Proprietary and confidential

Mod Dt

Field automatically populates with the date modifications were last made. Field is not navigable.

What to Do Next

There is no next step for this screen.

12.2.3 Instrument Tests (INTST)

Intended Use

This screen is used to identify tests performed on various instruments.


Limitations

For Olympus the test IDs must be defined in the table and ABORH test should be received as TYPE.

Prerequisites

- Available Tests (TEST) – Define valid tests.
- Lab Master Codes (LMASTER), code INSTR – Define valid testing instruments.

Entering/Viewing Data

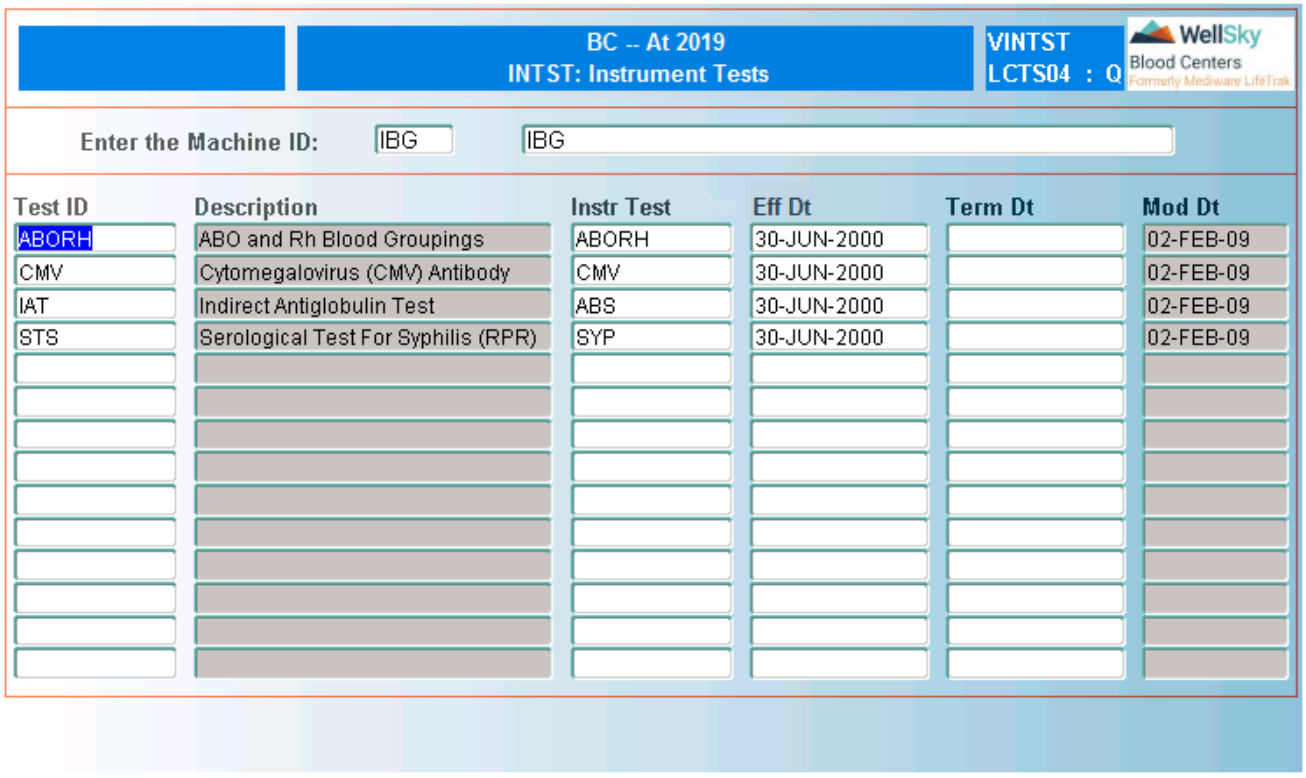

Enter the Machine ID

Enter the machine ID or use LOV.

To add a new record, press **CTRL** + **F2** (Create Record).

Test ID

Enter the test ID or use LOV.

Description

Description automatically populates after the test ID is entered.

Instr Test

Enter the test ID from the instrument. A maximum of 10 characters is allowed.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Mod Dt

Field automatically populates with the date modifications were last made.

What to Do Next

There is no next step for this screen.

12.2.4 Instrument Test Results (INTSTRS)

Intended Use

This screen is used to map instrument results to the test results accepted within the application. It is also used to map external testing lab results that are to be uploaded using the WellSky Blood Centers surround upload process.

Limitations


None

Prerequisites

- The machine and test ID must be defined in the Instrument Test (INTST) table.
- Test must be defined in Available Test (TEST).

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

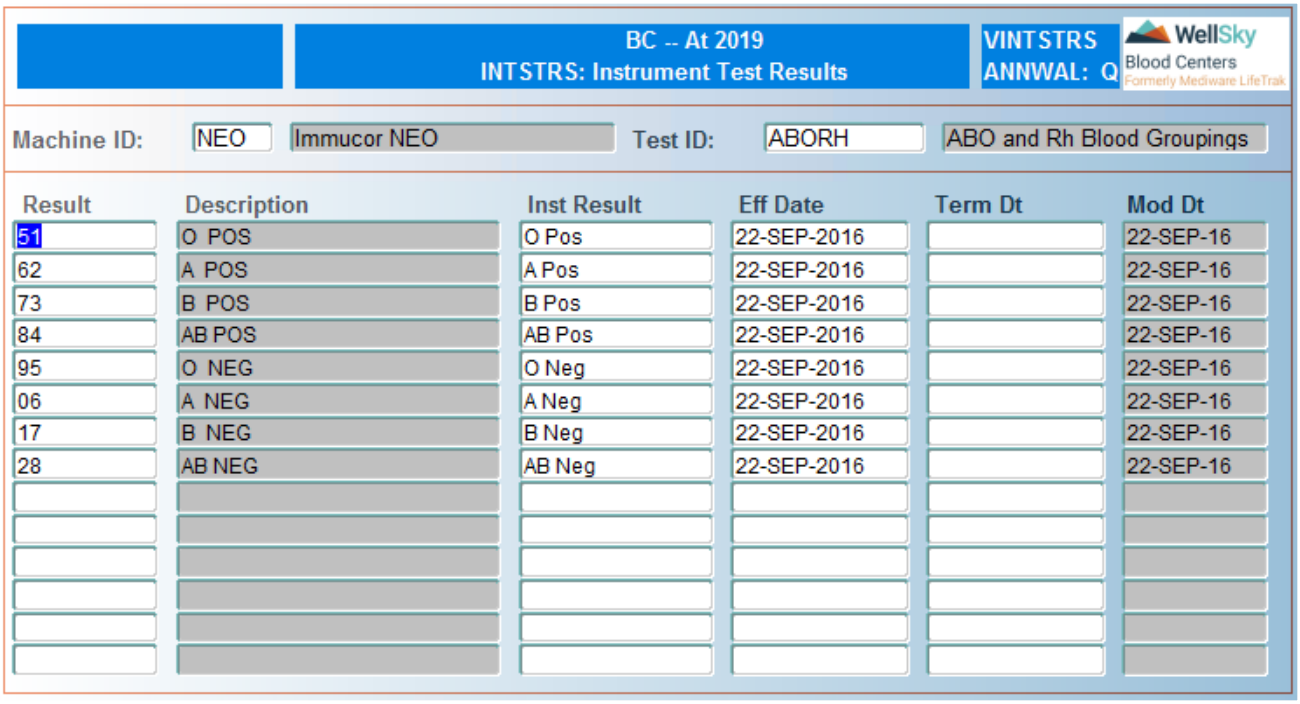

Machine ID

Enter the machine code or select from LOV.

Test ID

Enter the Test ID or select from LOV.

NOTE – Only tests that have been defined for that machine in Instrument Tests will display.

Result

Enter the test result that will be used in the application or select from LOV.

Description

Result description automatically displays after the result code is entered. Field is not navigable.

Inst Result

Enter the instrument result that corresponds to the application result. A maximum of 12 characters is allowed.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Mod Dt

Displays the date in which it was last modified in DD-MON-YY format. Field is not navigable.

What to Do Next

There is no next step for this screen.

12.2.5 Valid Remote Testing Labs (VTILABS)

Intended Use

This screen is used to identify testing facilities to which samples may be sent.


Limitations

None

Prerequisites

Chapter information must be entered in Chapter Details (CHAPTER).

Entering/Viewing Data

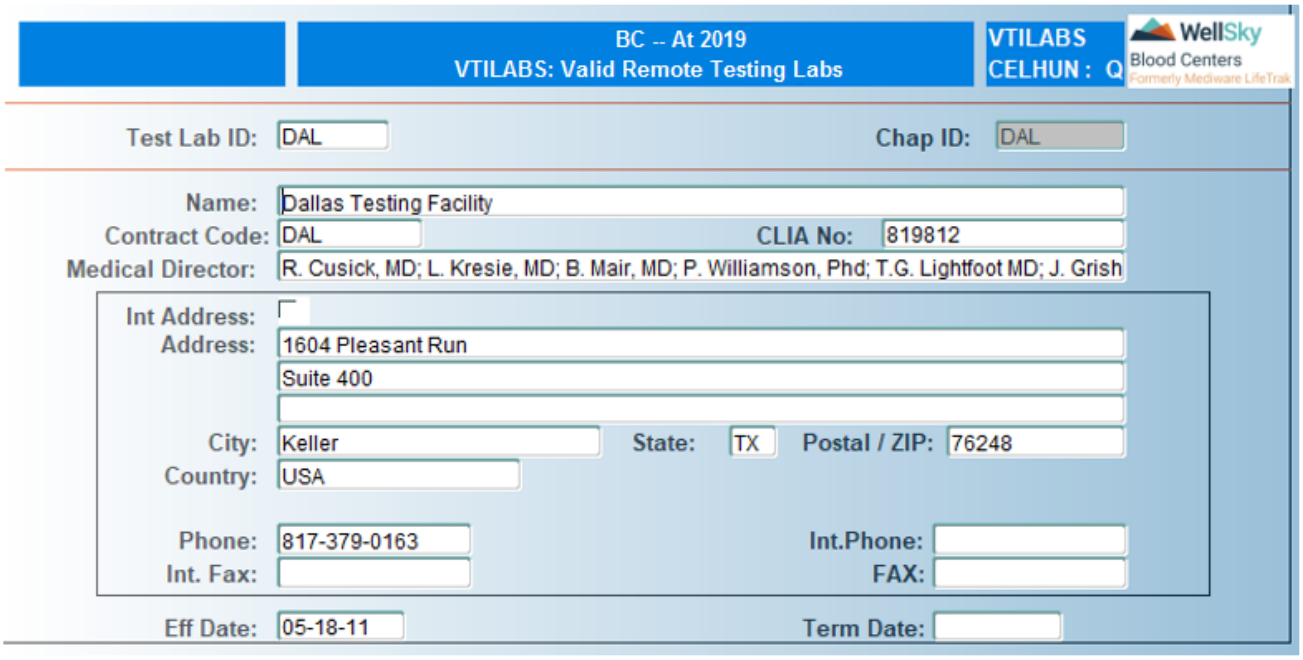

Test Lab ID

Enter a code for the test lab ID. A maximum of 5 characters is allowed.

WellSky Corporation
Proprietary and confidential

Chap ID

Screen does not navigate to this field. Information automatically populates based on the information entered in Chapter Details (CHAPTER).

Name

Enter the testing lab name. A maximum of 50 characters is allowed.

Contract Code

Enter the contract code. A maximum of 9 characters is allowed.

CLIA No

Enter the test lab's CLIA number. A maximum of 15 characters is allowed.

Medical Director

This is not a required field. Enter the name of the medical director. This field will accept a maximum of 500 characters.

Int Address (check box)

For an international address, select the check box. A check mark ()appears. For a domestic address, leave this check box blank (un-checked).

Address

Entry in the first line is required. Enter the facility address. Three lines are available to record the necessary information. Entry is limited to a maximum of 50 characters in each of the address lines.

City

Enter facility city. Entry is limited to a maximum of 20 characters.

State

Enter facility state abbreviation or select from LOV. Entry is limited to a maximum of 2 characters.

Postal/Zip

Enter facility postal or Zip code. Entry is limited to a maximum of 15 characters.

Cntry

Enter country where the requesting facility is located. Entry is limited to a maximum of 15 characters.

Phone

Enter the main number for the facility. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

Int Phone

Enter the international phone number for the facility. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

Int Fax

Enter the international fax number for the facility. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

Fax

Enter the Fax number for the facility. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

E-mail

Enter the valid e-mail address for the facility. Entry in this field is not required. Entry is limited to a maximum of 50 characters.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

What to Do Next

There is no next step for this screen.

12.2.6 Valid Additional Tests: Remote Testing (VADDTST)

Intended Use

This screen is used to identify tests in addition to profile tests that can be included in a remote sample file (for example, CMV).

Limitations


None

Prerequisites

Define tests in Available Tests (TEST).

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

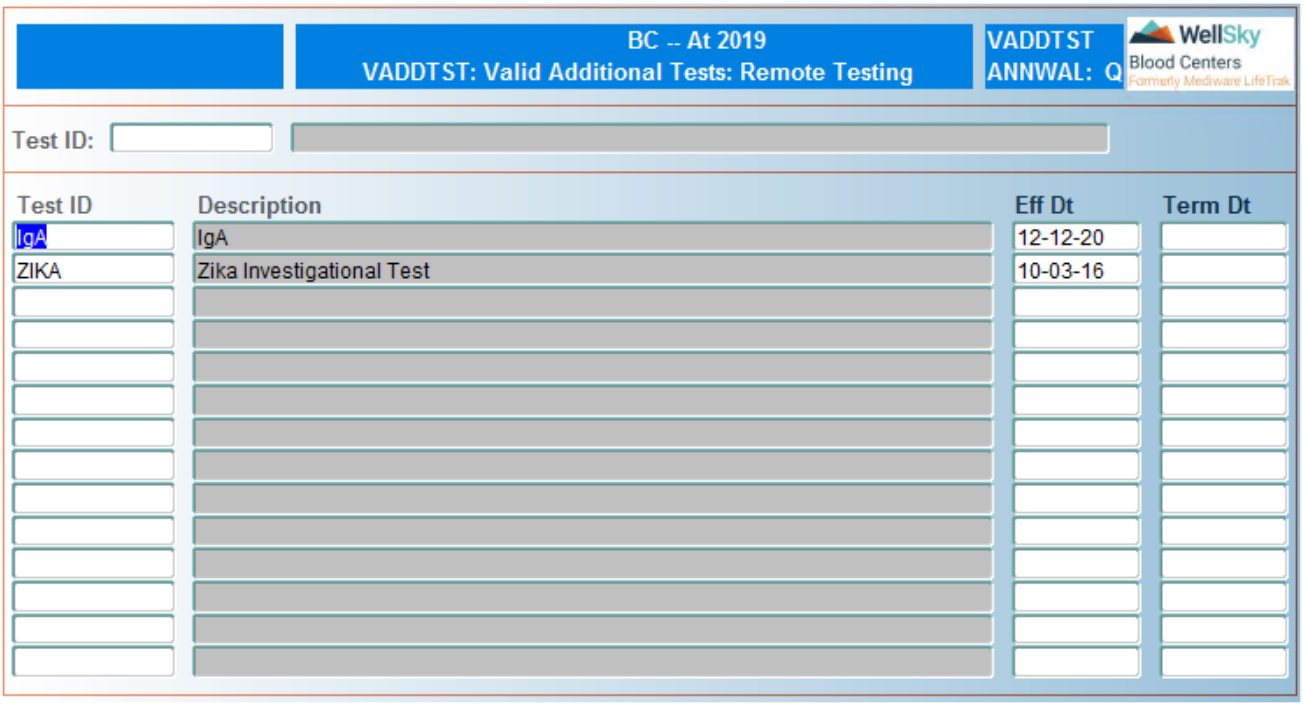

To add a new record, press CTRL + F2 (Create Record).

Test ID (Control Block)

Enter test ID, use LOV, or leave blank to query existing or add new tests.

Test ID

Enter the test ID or use LOV.

Description

Test description automatically populates after the test ID is entered.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

What to Do Next

There is no next step for this screen.

12.2.7 Horizontal Test File Test Mapping (HTFM)

Intended Use

This screen is used to map the results location of specific tests in the horizontal test result format (for example, Surround, ARC) test file.


Limitations

None

Prerequisites

Knowledge of the horizontal tests and test result positions received from third party testing facilities is required in order to map the start and stop positions for test results.

Entering/Viewing Data

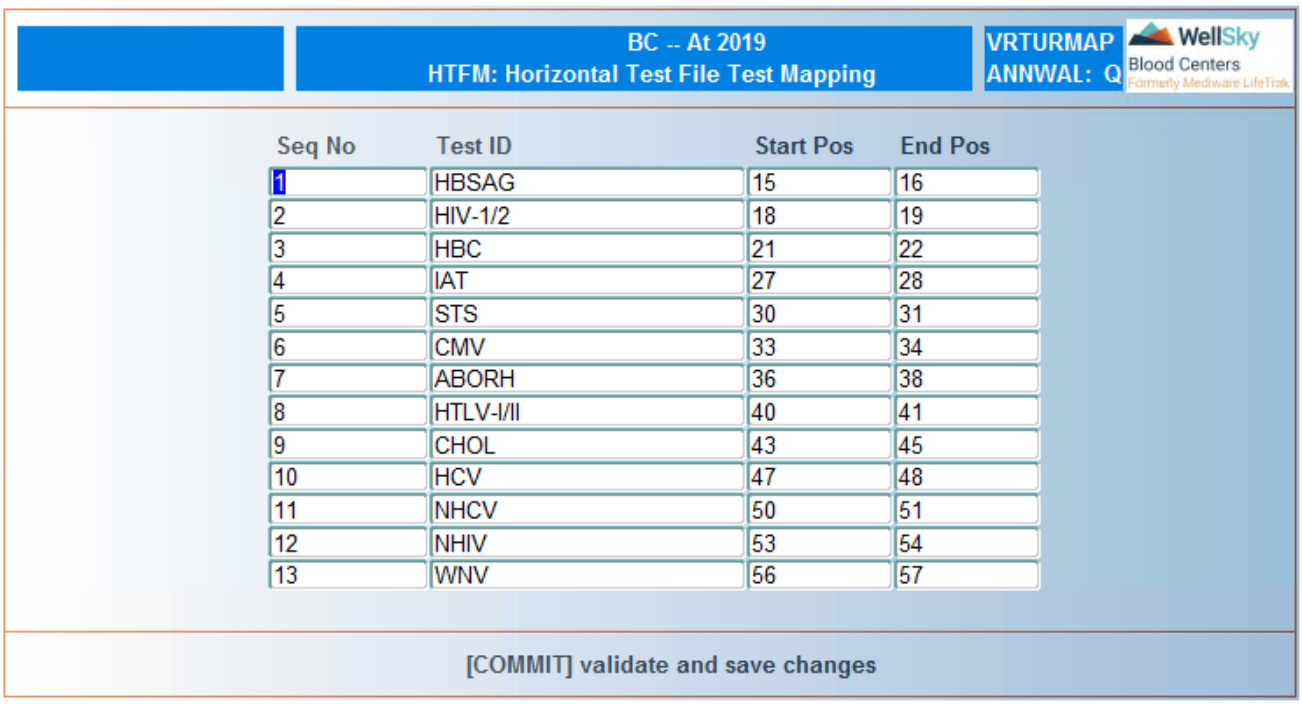

Seq No	Test ID	Start Pos	End Pos
1	HBSAG	15	16
2	HIV-1/2	18	19
3	HBC	21	22
4	IAT	27	28
5	STS	30	31
6	CMV	33	34
7	ABORH	36	38
8	HTLV-I/II	40	41
9	CHOL	43	45
10	HCV	47	48
11	NHCV	50	51
12	NHIV	53	54
13	WNV	56	57

The screen displays the current mappings. To create a new mapping, use the DOWN arrow to open a new line, and enter the following fields.

Seq No

Enter a sequence number, which cannot be a duplicate of a previous sequence number, and must be the next number in order.

WellSky Corporation
Proprietary and confidential

Test ID

Enter a test ID or select from LOV. The LOV is populated from the Tests table. The Test ID should not be duplicated within the table. If you enter a duplicate value, the system will display an error message at time of commit.

Start Pos

Enter the position number where the result will start for that specific test ID. If duplicate values are entered, the system will display an error message at time of commit.

End Pos

Enter the position number where the result will stop for that specific test ID. If duplicate values are entered, the system will display an error message at rime of commit.

At Commit

Press F12 (Commit) to validate and save changes. The system checks for duplicate entries and displays appropriate error messages.

The system updates the RTURLOAD_TESTS table.

What to Do Next

There is no next step for this screen.

12.3 Multiple Observation Testing Administration (MOTADM)

The Multiple Observation Testing Admin (MOTADM) menu is located under the Multiple Observation Testing (OBSERV) menu under Testing Modules (TESTING) menu under Laboratory Functions (LAB).

12.3.1 Valid Multiple Observation Results (VMOR)

Intended Use

This screen is used to identify the result codes that can be used in resulting multiple observation tests.


Limitations

If a result value has been defined it should not be updated if results have been partially entered. This could cause a discrepancy in band entry if both Tech 1 and Tech 2 entry is required.

Prerequisites

Available Tests (TEST) – Define valid tests.

Entering/Viewing Data

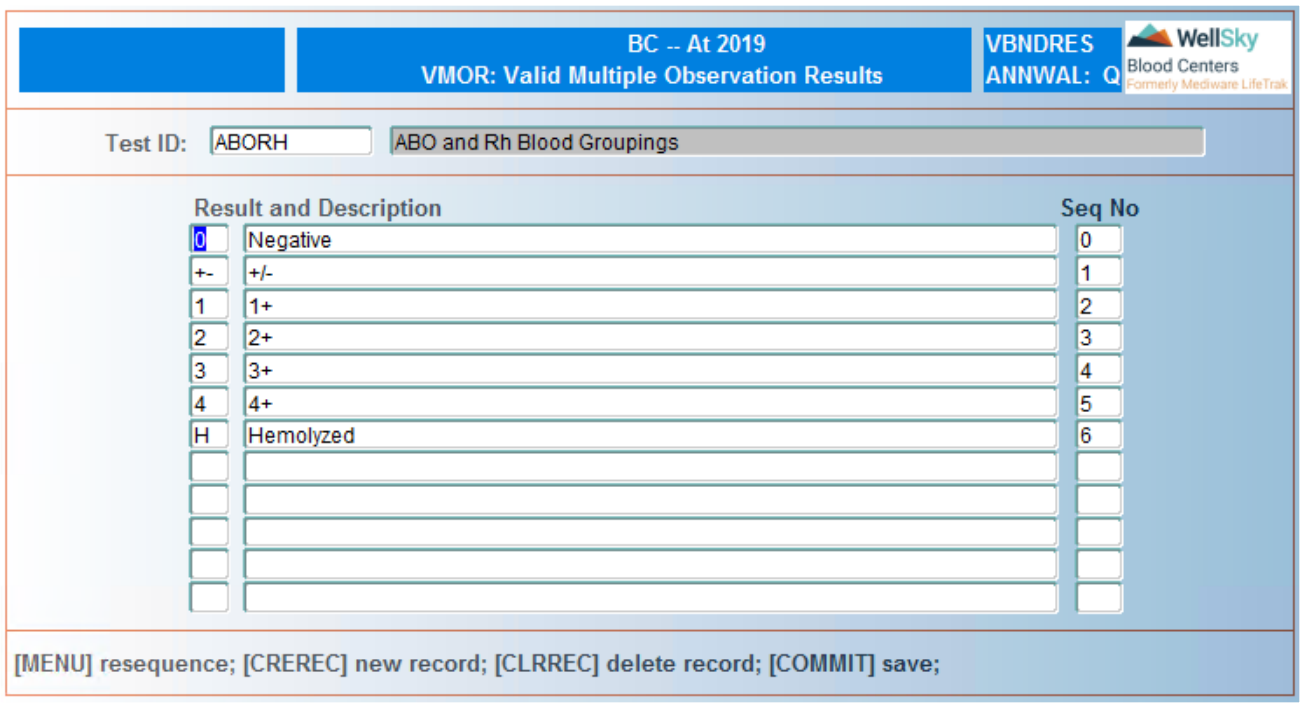

Test ID

Enter the test ID or use LOV.

WellSky Corporation
Proprietary and confidential

Result
Enter the result code. A maximum of 2 characters is allowed.

Description
Enter a description for the result code.

Seq No.
Enter the sequence number of how result codes should display in the LOV.

What to Do Next
The next step is to define test types by test ID, refer to Multiple Observation Test Types by MFG (MOTTMFG).


12.3.2 Multiple Observation Test Types by MFG (MOTTMFG)

Intended Use
This screen is used to identify different manufacturers and the requirements in resulting tests performed using that manufacturer's method.

Limitations
None

Prerequisites
- Available Tests (TEST) – Define valid tests.
- Valid Multiple Observation Results (VMOR) – Define valid multiple observation results.

Entering/Viewing Data

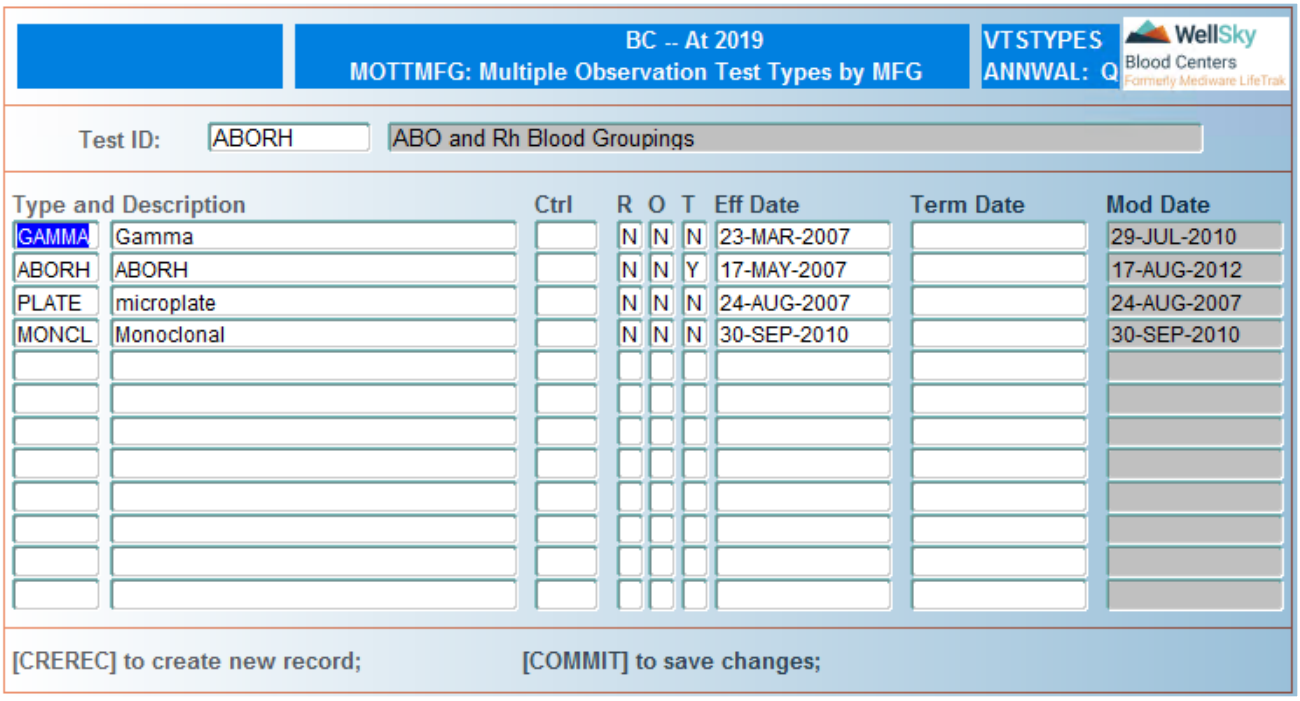

Test ID

Enter the test ID or use LOV. The list will contain only the test IDs that were defined in Valid Multiple Observation Results (VMOR).

Type

Enter the test type code. This code has maximum value of 5 characters. This code should represent a manufacturer.

Description

Enter a description for the test type code.

Ctrl

Enter the control value for which the results will be considered positive if equal to or greater than the entered value. If a control value is not needed, then leave blank.

R

Update of the system results. Enter one of the following:

- `Y` – User is able to update the system results.
- `N` – User is not able to update the system results.

NOTE – If the system result can be overridden, the test will automatically be sent for reconciliation.

WellSky Corporation
Proprietary and confidential

O

Other band values. Enter one of the following:

- `Y` – Test ID will require the entry of other band values.
- `N` – Test ID will not require the entry of other band values.

T

Entry of full band values. Enter one of the following:

- `Y` – Results for the band values will have to be entered by a second tech.
- `N` – Only the final interpretation will have to be entered by a second tech.

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Date

Enter termination date in DD-MON-YYYY format.

Mod Date

Field automatically populates with the date modifications were last made.

What to Do Next

The next step is to define observation fields by test ID, refer to Multiple Observation Fields (MOF).

12.3.3 Multiple Observation Fields (MOF)

Intended Use

This screen is used to identify fields and headers that will be resulted for each test ID.


Limitations

Entry screens can only display up to eleven fields.

Prerequisites

- Available Tests (TEST) – Define valid tests.
- Valid Multiple Observation Results (VMOR) – Define valid multiple observation results.
- Multiple Observation Test Types by MFG (MOTTMFG) – Define a multiple observation test parameters by the manufacturer.

Entering/Viewing Data

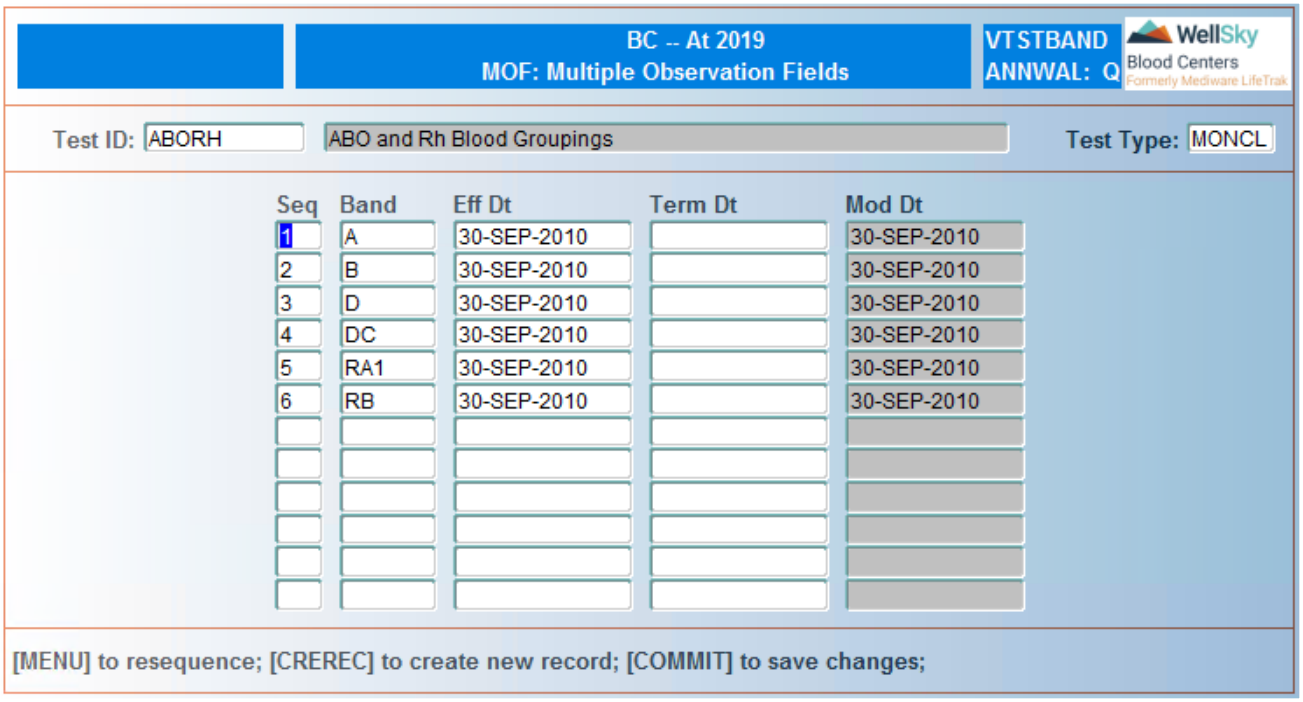

Test ID

Enter the test ID or use LOV. The list will contain only the test IDs that were defined in Valid Multiple Observation Results (VMOR).

Type

Enter the test type code or use LOV.

Seq

Enter the number for each band value. This determines how the bands will display in the entry screens.

NOTE – Enter 99 for values that are terminated.

Band

Enter the Band code. This will be the header for each column in the result screen.

NOTE – Bands should not be greater than 4 characters. If greater than 4 characters are entered, the first character will be truncated on the Multiple Observation Worksheet (LTRCNFWS).

Eff Date

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Mod Dt

Field automatically populates with the date modifications were last made.

What to Do Next

The next step is to identify valid combinations of bands and the acceptable band value for a final system result interpretation; refer to Multiple Observation Result Matrix (MORM).

12.3.4 Multiple Observation Result Matrix (MORM)

Intended Use

This screen is used to identify valid combinations of bands and the acceptable band value for a final system result interpretation.


Limitations

None

Prerequisites

- Available Tests (TEST) – Define valid tests.
- Valid Multiple Observation Results (VMOR) – Define valid results for multiple observation tests.
- Multiple Observation Test Types by MFG (MOTTMFG) – Define valid multiple observation test types by manufacturer.
- Multiple Observation Fields (MOF) – Define fields for multiple observation tests by type.

Entering/Viewing Data

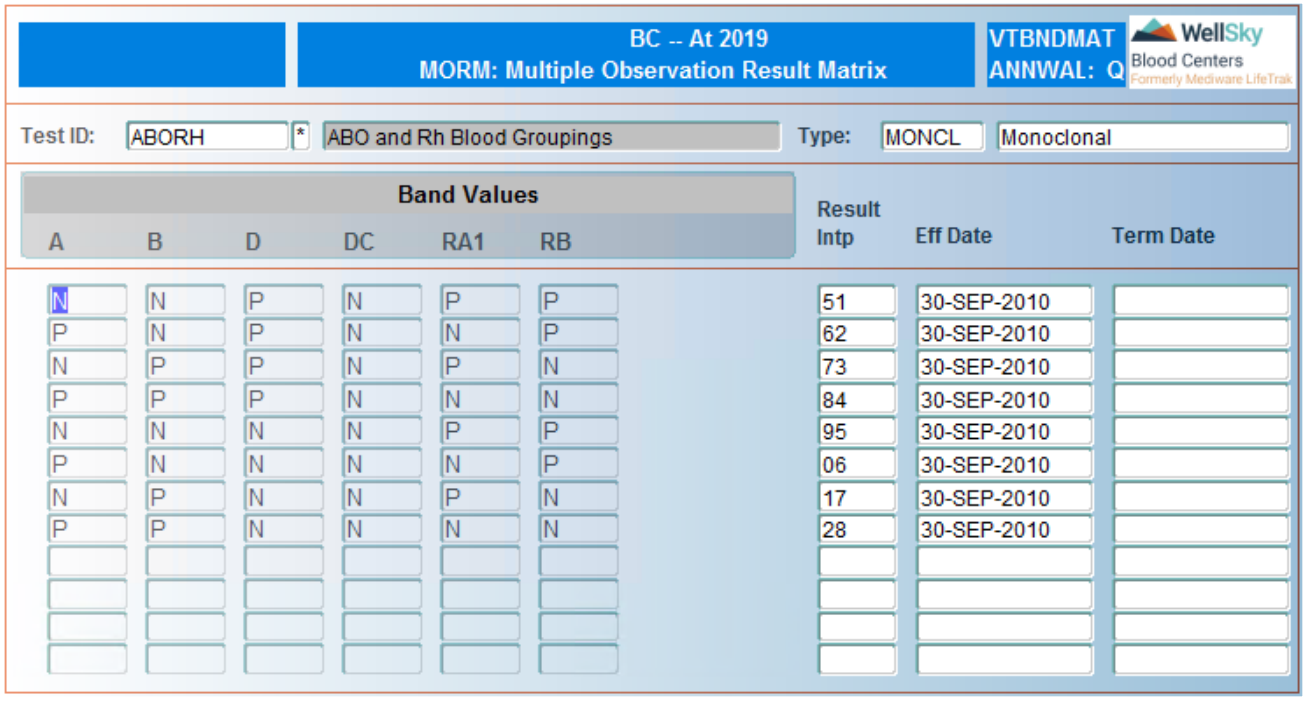

Test ID

Enter the test ID or use LOV. The list will contain only the test IDs that were defined in Valid Multiple Observation Results (VMOR).

Type

Enter the test type or select from LOV.

Band Values

The band values that display are defined in the Valid Multiple Observation Results (VMOR). For each band value, enter one of the following:

- `P` – Positive
- `N` – Negative
- `I` – Indeterminate
- `?` – Value entered for that band does not affect the final interpretation. This result is used more for blot tests.

Result Intp

Enter the final interpretation for the combination of band values or select from LOV. This will be the result interpretation that will display to the user when the band result entry is complete.

Eff Date

Enter effective date in DD-MON-YYYY format.

WellSky Corporation
Proprietary and confidential

Term Dt

Enter termination date in DD-MON-YYYY format.

What to Do Next

There is no next step for this screen.

This Page Intentionally Left Blank


13

Chapter 13 - Lab Functions - Confirmatory Administration

13.1 Screens and Descriptions 454
13.1.1 Sample Test Linkage (STMAP) 454
13.1.2 Test/Test Series Configuration (TSERIES) 456
13.1.3 Notation Code Configuration (NOTCFG) 461

13.1 Screens and Descriptions

These functions are accessed from the following menu:

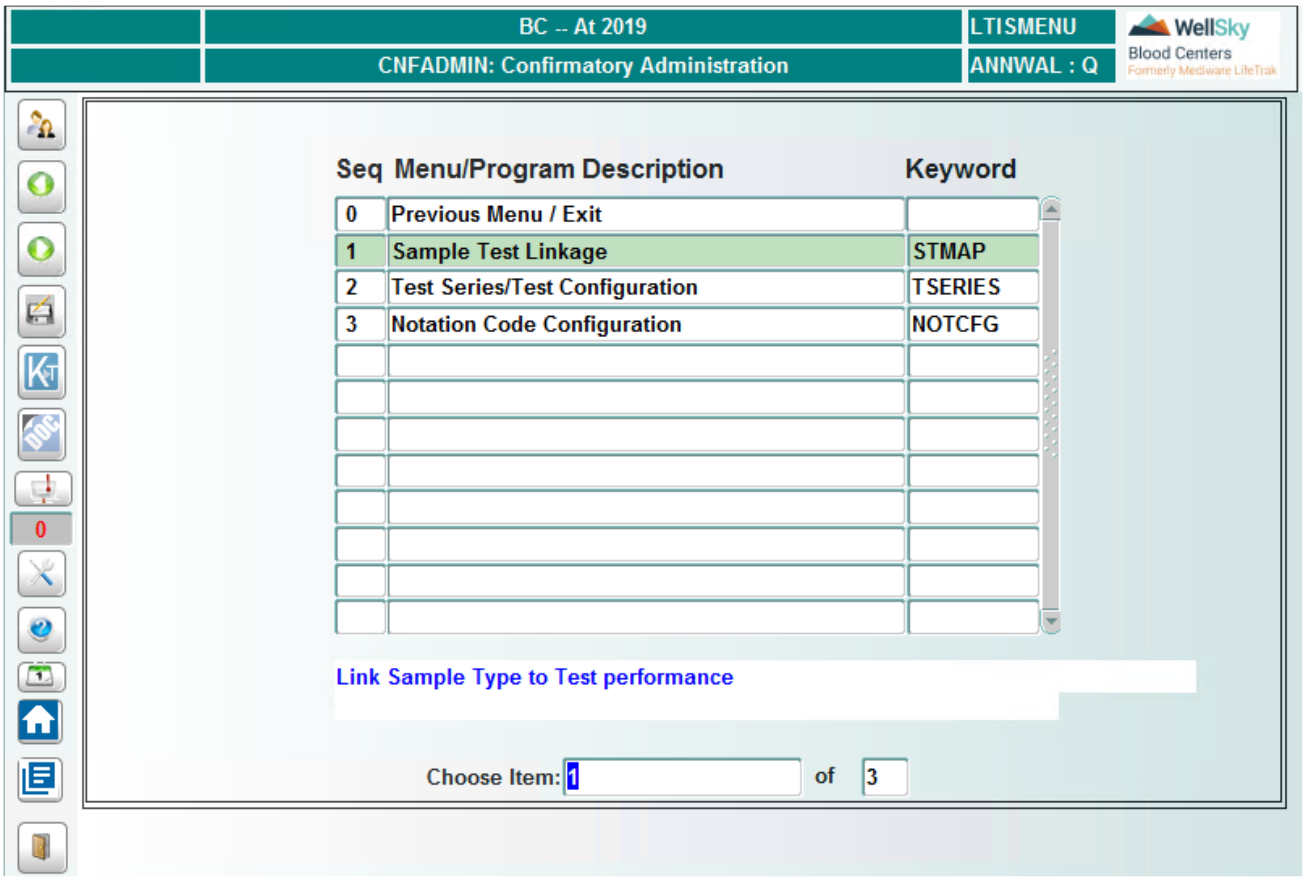

13.1.1 Sample Test Linkage (STMAP)

Intended Use

Use this form to map sample types to confirmatory/supplemental test IDs. This linkage will be used during the Transfer In process to receive samples and schedule confirmatory tests.

Limitations

N/A.


Prerequisites

- Master code Sample Transfer Sample Types (STTYP)
- Available Tests (TEST)

WellSky Corporation
Proprietary and confidential

Accessing the Screen

Access this screen from the Confirmatory Administration menu, or by entering the keyword STMAP.

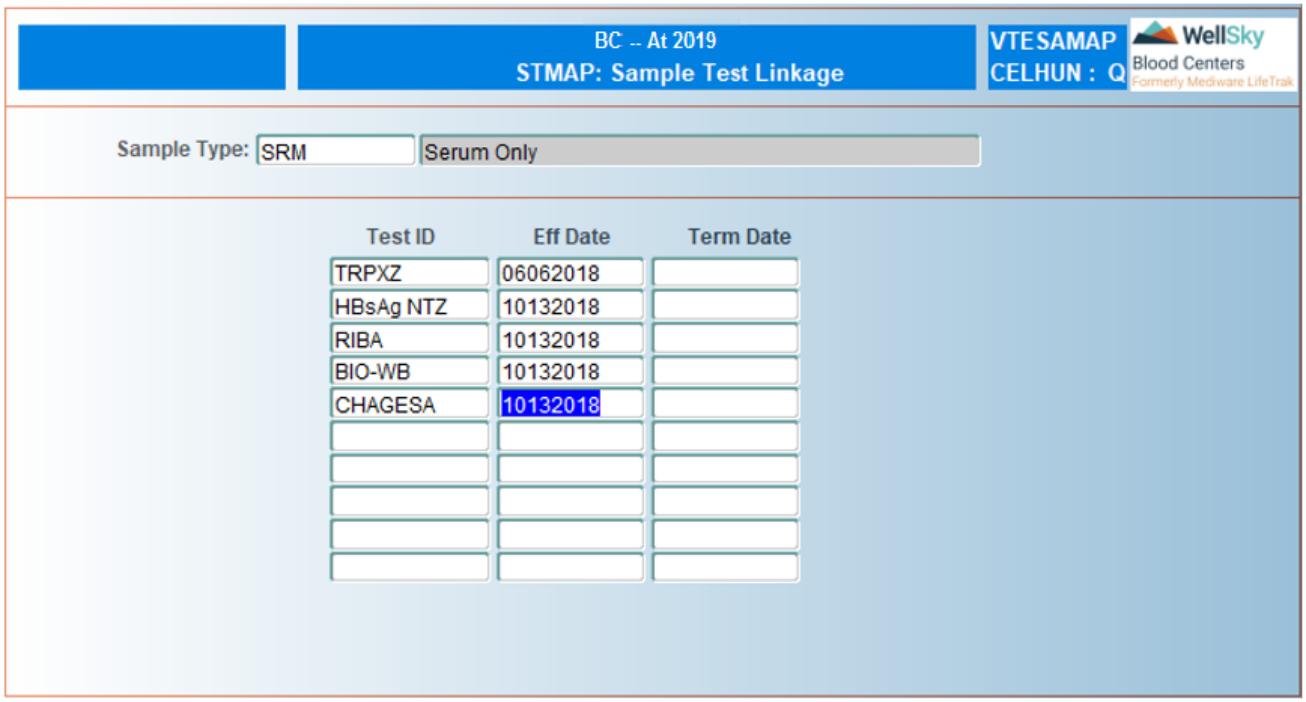

Control Block Fields and Definitions

Sample Type

This is a required field. Manually enter a sample type, or select it from the LOV. The LOV is populated from master code STTYP.

Test ID

This is a required field. Manually enter the test ID, or select it from the LOV. The LOV is populated from the Available Test (TEST) table.

NOTE – This displays all of the tests in the Available Tests (TEST) table. This screen is only used with confirmatory and supplemental tests.

Eff Date

This is a required field. The field will populate with the current chapter date, but it can be modified to a future date. Enter the date in MMDDYYYY format, and the system will reformat it to MM-DD-YYYY.

Term Date

This is an optional field. Enter the date in MMDDYYYY format, and the system will reformat it to MM-DD-YYYY.

At Commit

Data is saved to the database.

What to Do Next

There is no next step for this screen.

13.1.2 Test/Test Series Configuration (TSERIES)

Intended Use

Use this screen to configure the ordering, canceling, and placing of notations based on test series or test ID.

Limitations

- Test ID configuration can only be done at the first level. If multiple levels are required, set the value up as a series.
- Single notation code per line.


Prerequisites

- Master Codes: TRGID test series IDs
- Available Tests (TEST) must be defined
- Notation Code Configuration (NOTCFG) must be defined for each test ID and test result, if needed.

Accessing the Screen

Access this screen from the Confirmatory Administration menu, or by entering the keyword `TSERIES`.

WellSky Corporation
Proprietary and confidential

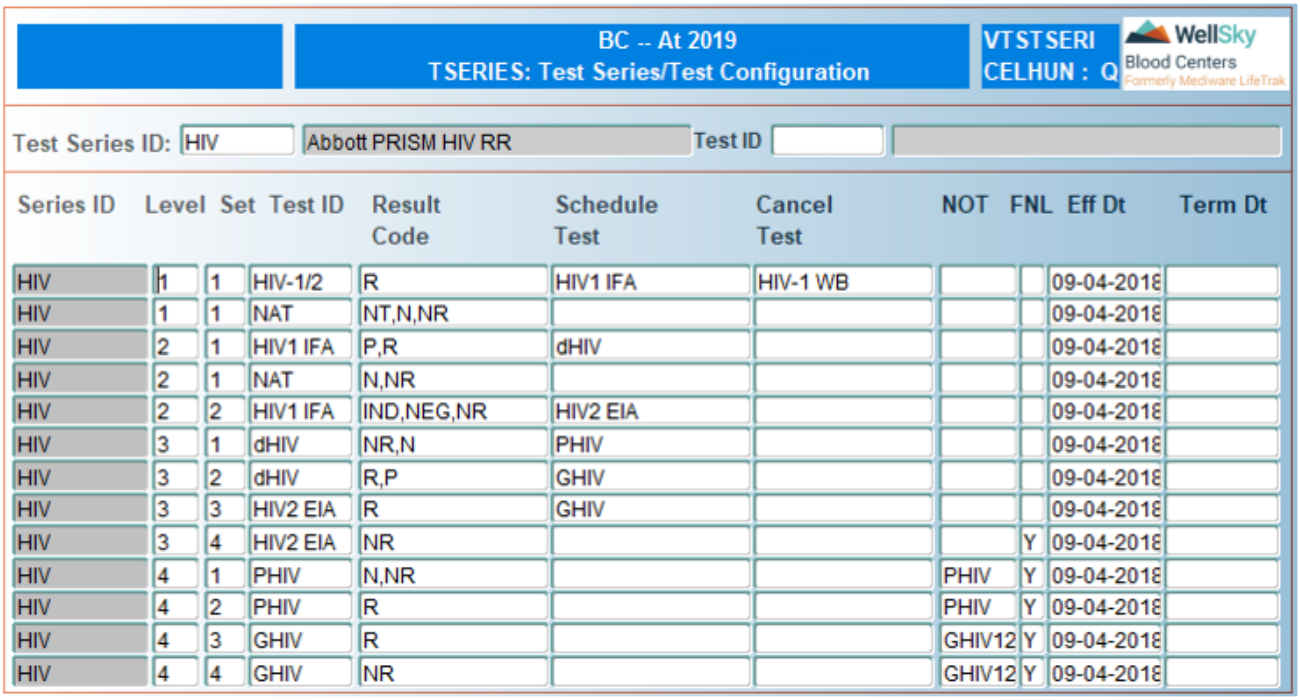

BC -- At 2019
TSERIES: Test Series/Test Configuration
VTSTSERI
CELHUN : Q
WellSky Blood Centers Formerly Medware LifeTrak

Test Series ID: HIV Abbott PRISM HIV RR Test ID

Series ID	Level	Set	Test ID	Result Code	Schedule Test	Cancel Test	NOT	FNL	Eff Dt	Term Dt
HIV	1	1	HIV-1/2	R	HIV1 IFA	HIV-1 WB			09-04-2018	
HIV	1	1	NAT	NT,N,NR					09-04-2018	
HIV	2	1	HIV1 IFA	P,R	dHIV				09-04-2018	
HIV	2	1	NAT	N,NR					09-04-2018	
HIV	2	2	HIV1 IFA	IND,NEG,NR	HIV2 EIA				09-04-2018	
HIV	3	1	dHIV	NR,N	PHIV				09-04-2018	
HIV	3	2	dHIV	R,P	GHIV				09-04-2018	
HIV	3	3	HIV2 EIA	R	GHIV				09-04-2018	
HIV	3	4	HIV2 EIA	NR				Y	09-04-2018	
HIV	4	1	PHIV	N,NR			PHIV	Y	09-04-2018	
HIV	4	2	PHIV	R			PHIV	Y	09-04-2018	
HIV	4	3	GHIV	R			GHIV12	Y	09-04-2018	
HIV	4	4	GHIV	NR			GHIV12	Y	09-04-2018	

Control Block Fields and Definitions

Entry of the test series ID will require entry of the Level and Set fields. If the test ID is entered, the Level and Set fields will not be needed.

Entry of Test Series

Level

Enter a number that represents the level at which the test scheduling or test canceling will occur. If this is the first level in determining the series, then enter `1`, second level - enter `2`, third level - enter `3`, etc. This is a required field for the definition of a test series.

NOTE – There can be multiple levels for a test series.

Set

Enter a number for the set of tests and results that complete that level. If it is the first set for the level, then enter `1`, second set - enter `2`, third set - enter `3`, etc. Only numbers are allowed, and a maximum of 999 can be entered. This is a required field for the definition of a test series.

NOTE – There can be multiple sets within a level for a test series.

Test ID

Enter a test ID or select it from the LOV. This is a required field.

Result Code

Enter a test result code or select it from the LOV. This is a required field. Multiple entries are allowed, and they must be separated by a comma. Result codes should be associated to the test in the Available Test (TEST) table.

NOTE – When selecting multiple result codes, the system automatically inserts the comma prior to the next entry.

Schedule Test

Enter a test ID or select it from the LOV. This is not a required field. Multiple entries are allowed, and they must be separated by a comma.

Cancel Test

Enter a test ID or select it from the LOV. This is not a required field. Multiple entries are allowed, and they must be separated by a comma.

NOTE – The same test ID should not be entered in the Schedule Test and Cancel Test ID fields.

NOT

This is not a required field. Enter a notation code or select it from the LOV. These notations will be applied at the test result level.

NOTE – Limited to a single notation per line.

FNL

This is not a required field. Enter Y to state this is the end of the test series scheduling based on result combinations.

Eff Dt

This is a required field. The field will populate with the current chapter date, but it can be modified to a future date. Enter the date in MMDDYYYY format, and the system will reformat to MM-DD-YYYY.

Term Dt

This is an optional field. Enter the date in MMDDYYYY format, and the system will reformat to MM-DD-YYYY.

Entry of Test ID

Entry of a test ID configuration does not require entry of the level or set ID. Definition is only defined at a level 1.

Test ID

Enter a test ID or select it from the LOV. This is a required field.

Result Code

Enter a test result code or select it from the LOV. This is a required field. Multiple entries are allowed, and they must be separated by a comma. Result codes should be associated to the test in the Available Test (TEST) table.

WellSky Corporation
Proprietary and confidential

Schedule Test

Enter a test ID or select it from the LOV. This is not a required field. Multiple entries are allowed, and they must be separated by a comma.

Cancel Test

Enter a test ID or select it from the LOV. This is not a required field. Multiple entries are allowed, and they must be separated by a comma.

NOT

This is not a required field. Enter a notation code or select it from the LOV. These notations will be applied at the test result level.

FNL

This is not a required field. Enter `Y` to state this is the end of the test series scheduling based on result combinations.

To Select a Single Test for Schedule or Cancel Test


To select a single test, do the following:

1. Enter the desired test in the *Test/Group ID* field, or select it from the LOV.
2. Press **Enter**. The selected test appears in the *Scheduled Test ID* field.


To Select Multiple Tests Within a Single Group ID

To select one or more tests from the same Group ID, do the following:


1. Leave the *Group* field blank, and press **Enter**. The following window opens:

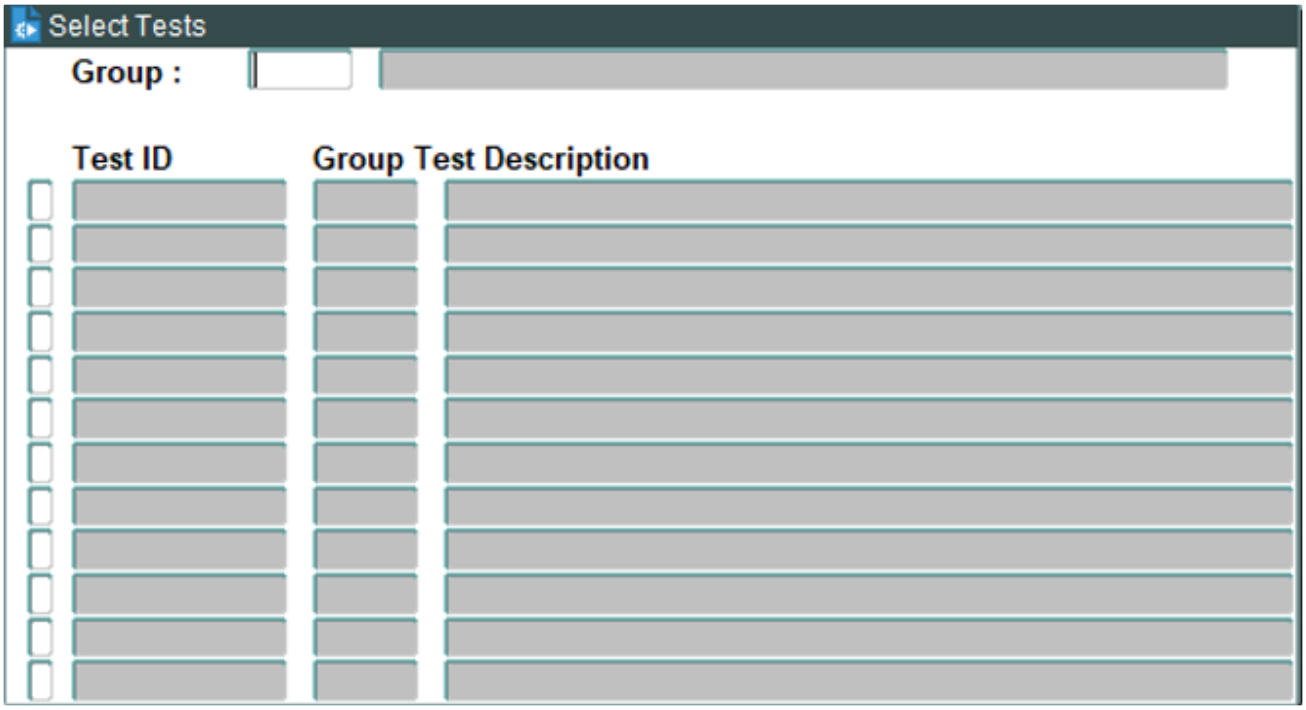

2. Enter the test group in the *Group* field, or select it from the LOV.
3. Press **Enter**. All available test IDs from the selected test group are displayed, as shown:

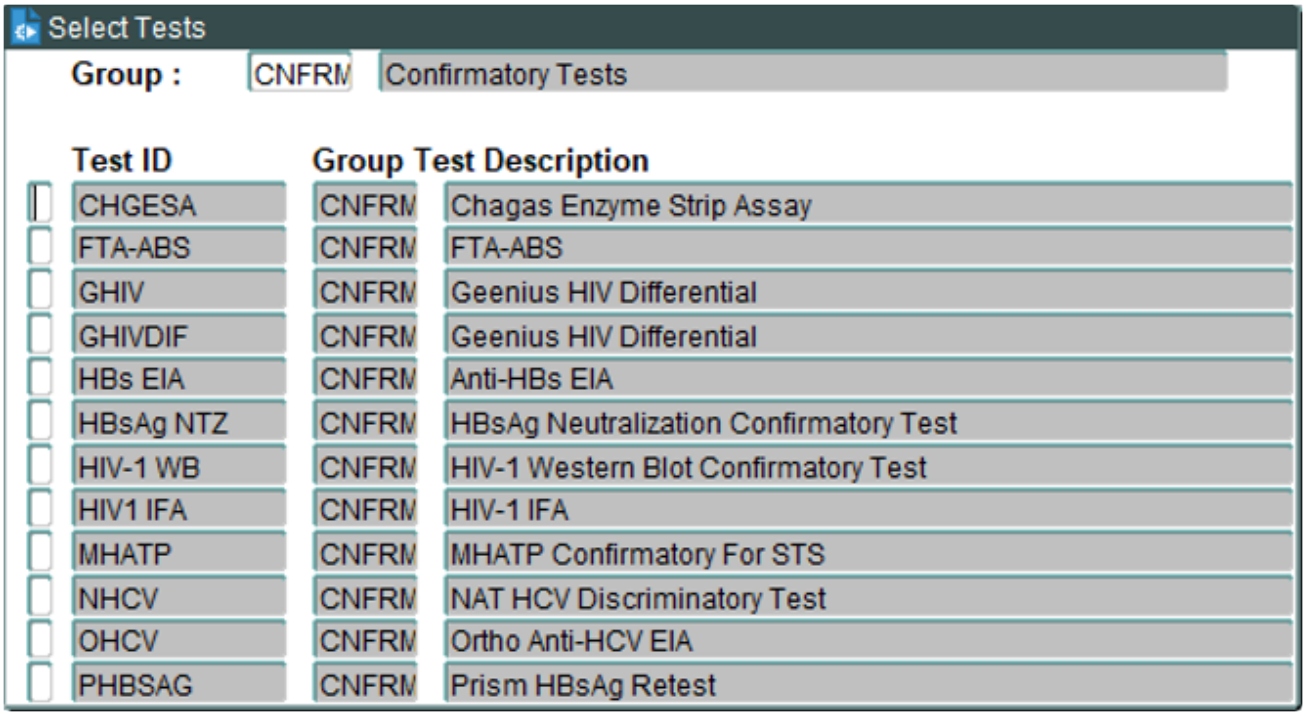

4. Select tests by placing an X in the Select box, or by pressing **Enter**. Use the **UP** and **DOWN** arrow keys to navigate through the list.

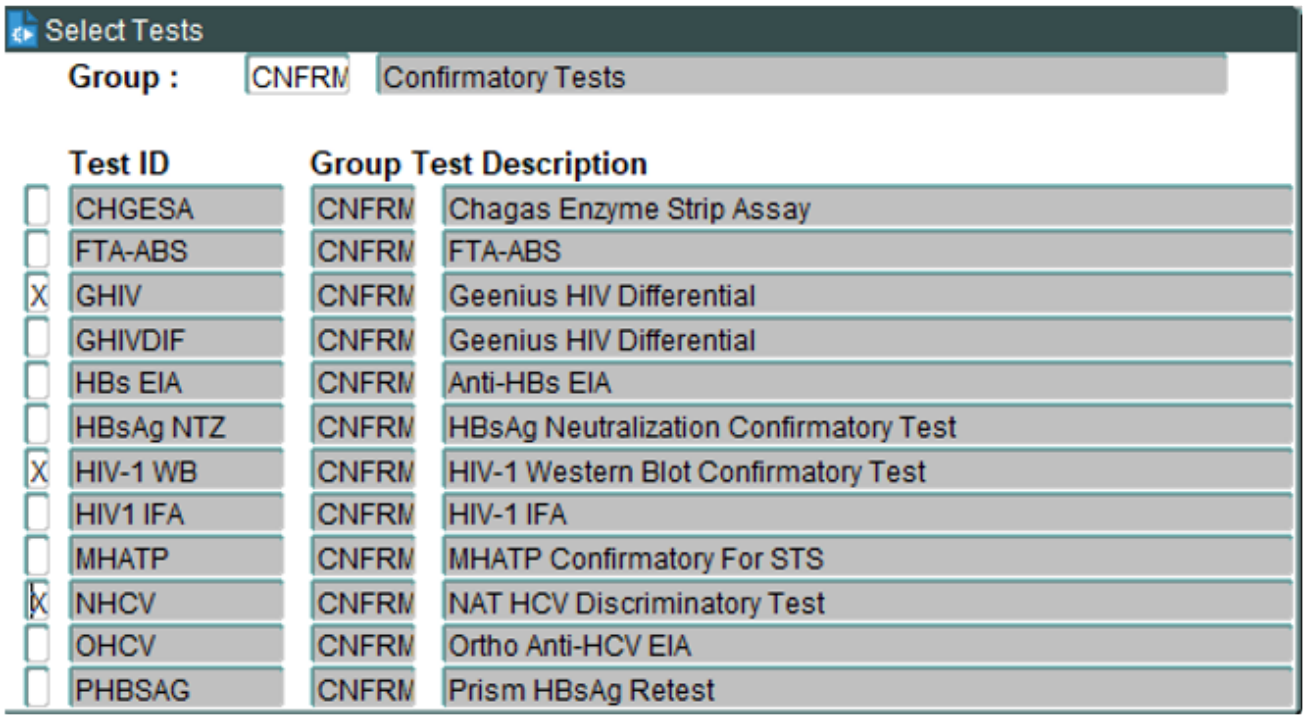

WellSky Corporation
Proprietary and confidential

5. Press **F8** (Exit Screen) to abort without saving. Press **F12** (Commit) to save the selected tests. The selected tests appear in the *Scheduled Test ID* field, as shown.

At Commit

Data is saved to the database.

What to Do Next

There is no next step for this screen.

13.1.3 Notation Code Configuration (NOTCFG)

Intended Use

Use this screen to define notation codes that will be used in confirmatory testing.

Limitations


- SRSRPT_1 = hard-coded in series report for the user to define footers.
- SRSRPT_2 = hard-coded in series report for the user to define footers.

Prerequisites

Test ID should be defined in the Available Test (TEST) table.

Accessing the Screen

Notation Configuration is accessed through the following screen.

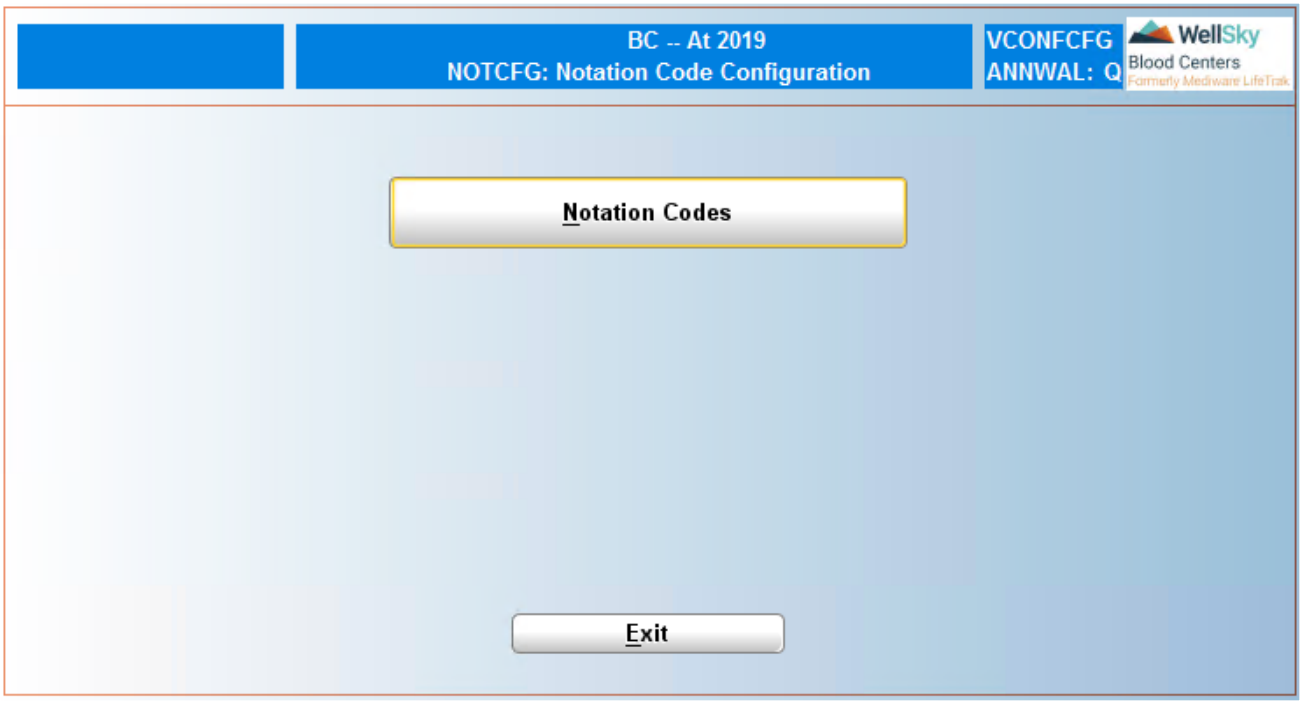


Buttons

Exit

Press the button to close the form and return to the menu.

Notation Codes

Press the button to open the window to define the notation code.

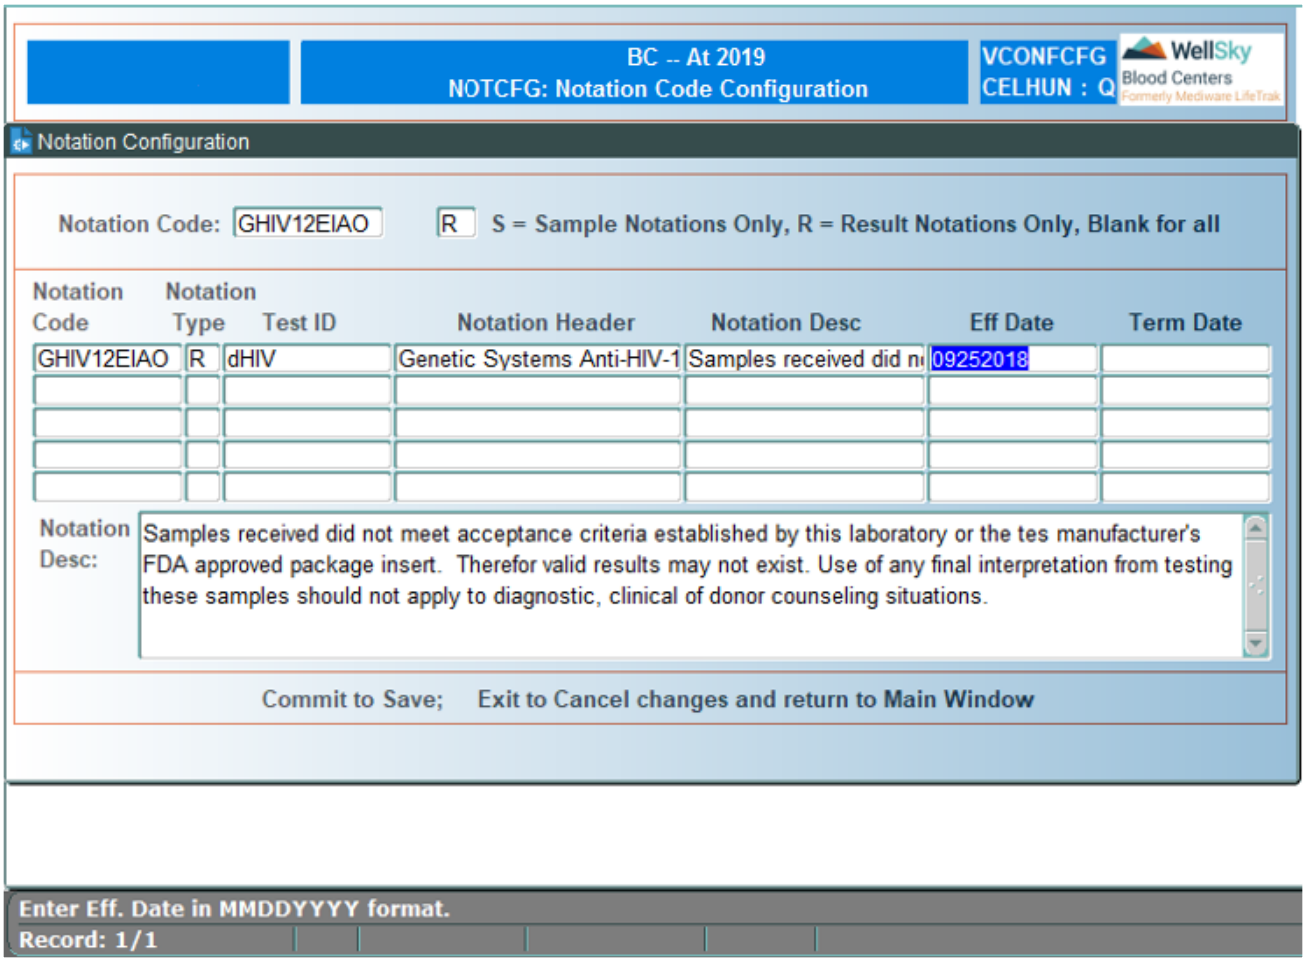

Control Block Fields and Definitions

Notation Code

Enter a notation code or select from the LOV. This is a required field. The LOV is populated from the form entry. The code allows 10 characters that are numbers or letters. Special characters are not allowed.

Type of Code

This is a required field. Only value of 'R' or 'S' is allowed.

R = Result Notation Only, which is linked to a test ID.

S = Sample Notation Only.

WellSky Corporation
Proprietary and confidential

Detail Block Fields and Definitions

Notation Code

Notation code displays based on the entry defined in the control block.

Notation Type

Notation type displays based on the entry in the control block.

Test ID

Enter a test ID or select from the LOV.

Notation Header

Enter a short description for the notation. The Notation Header is only used for result type notations. A maximum of 240 characters is allowed in this field.

Notation Description

Enter a description for the notation. A maximum of 1000 characters is allowed in this field. To open the editor to see the entire description, press **CTRL+E** to open the following window:



You can view the entire entry in this window. Once the entry is complete, and the cursor moves out of the description field, the entire content of the description displays in the lower notation description window.

Effective Date

This is a required field. The field will populate with the current chapter date, but it can be modified to a future date. Enter the date in MMDDYYYY format, and the system will reformat it to MM-DD-YYYY.

Term Date

This is an optional field. Enter the date in MMDDYYYY format, and the system will reformat it to MM-DD-YYYY.

Query of Information

- To view a single notation code, enter the code in the control block. Once the code is entered, the description will display.
- To query a code type, leave the notation code field blank and enter the notation type. All codes linked to the entered type will display.
- To query all codes, leave the notation code and notation type fields blank, and press Enter. All codes that have been defined will display.

At Commit

Data is saved to the database.

What to Do Next

There is no next step for this screen.

WellSky Corporation
Proprietary and confidential


14

Chapter 14 - Lab Functions - Equipment Administration

14.1 Screens and Descriptions 466
14.1.1 Equipment Master Codes (EQMAST) 466

14.1 Screens and Descriptions

These functions are accessed from the following menu:

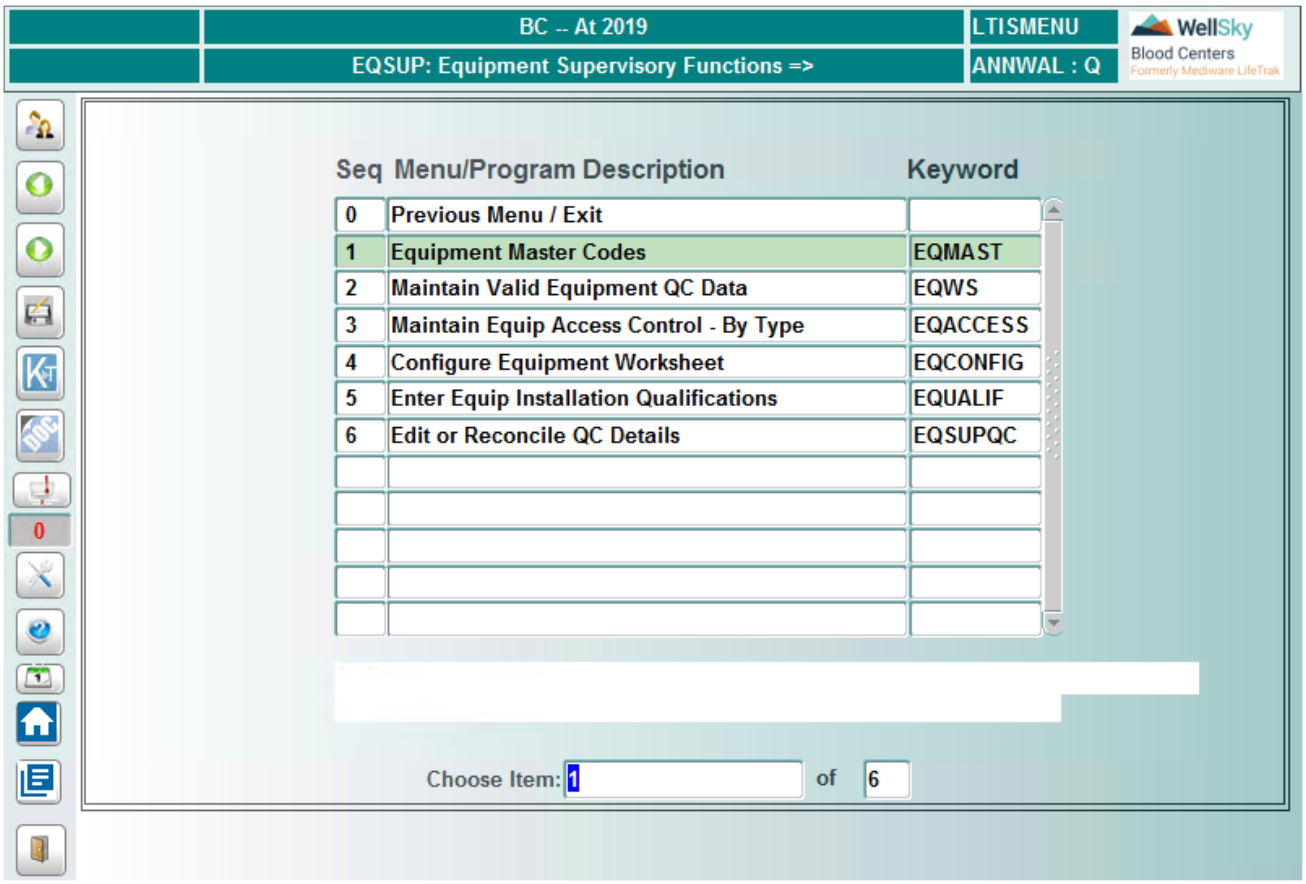

14.1.1 Equipment Master Codes (EQMAST)

Intended Use

Master Codes are a set of code types used by individual modules to provide flexibility to the application. A table of underlying codes is associated to each code type. The code types are specifically coded within the application. WellSky may be required to add new or modify existing Equipment Master Codes.

Limitations


Each Code type is coded for specific use within the application and should not be changed. New 'Code' types should not be added. Some underlying Code fields should remain static while others can be changed dynamically. Refer to Appendix M – Equipment.

Prerequisites

None

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

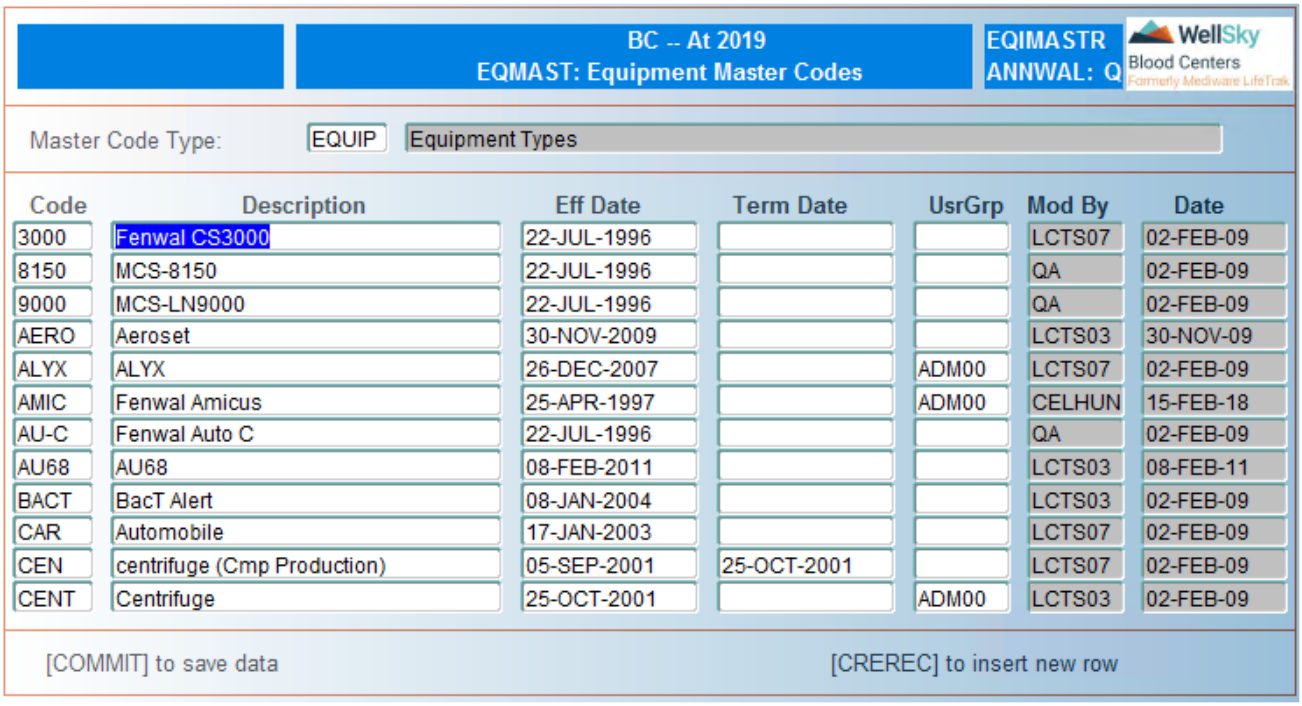

Master Code Type

Enter code type or use LOV. A maximum of 5 characters is allowed.

NOTE – All code types are to remain static. At times new code types and underlying codes will be added for new or modified functionality. Existing codes associated to the individual code types can be either static or dynamic. Refer to the Equipment Master Codes in Appendix M to determine if a code can be modified.

Code

Enter a code that is to be under the code type. A maximum of 5 characters is allowed.

Description

Enter a description for the code. A maximum of 50 characters is allowed.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Usr Grp

Enter user group ID or use LOV to limit the group that can edit the master code. Leave blank to allow all groups to access and edit code.

Mod By

Field automatically populates with the ID of the user that last made modifications.

Mod Dt

Field automatically populates with the date modifications were last made.

What to Do Next

There is no next step for this screen.

WellSky Corporation
Proprietary and confidential

15

Chapter 15 - Distribution Functions - Customer Administration

15.1 Customer Consignee Product Details (VCUSTPRD) 470

15.1 Customer Consignee Product Details (VCUSTPRD)

Intended Use

Use this screen to specify the inventory product types or product codes that will be unavailable to specified customers and consignees. The specified values will then be removed from the Product Code or Product Type LOV in the following screens:

- Enter Regular Order (ORDER)
- Enter Special Order (SPECIAL)
- Enter Export Order (EXPORT)
- Enter Standing Order (STANDO)
- Cancel or Change Order (CANCEL)
- Pack Products (PACK)
- Pack Inv Rejects to Salvage (PACKOS)
- Pack Lab Discards to Salvage (PACKLS)
- Offline Packing (PACKO)

Limitations


None

Prerequisites

None

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

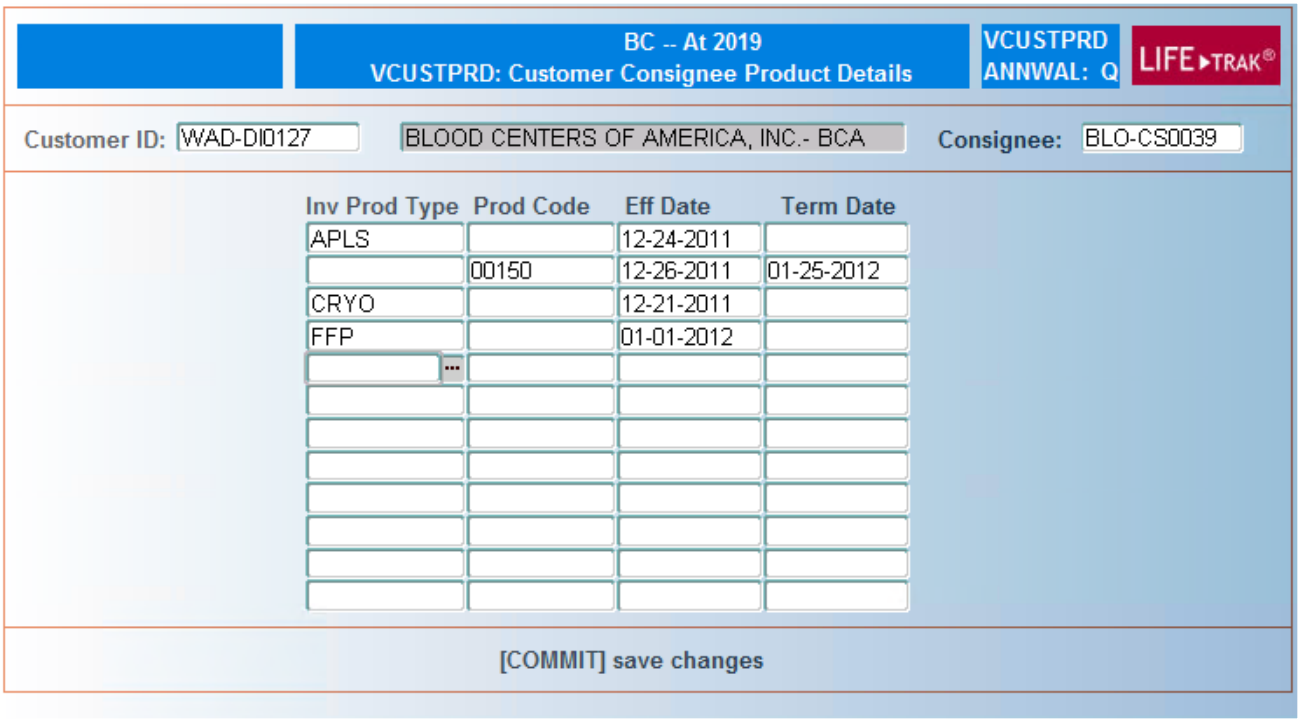

In the Control Block

Customer ID

Enter the Customer ID or select from LOV. Entry is required.

Consignee

Enter the Consignee or select from LOV. Entry is optional. Leave field blank to restrict inventory product codes or product types for all consignees associated to the selected customer.

In the Detail Block

NOTE – For each entry, you can select either an inventory product code or a product type, but not both.

Inv Prod Type

Enter inventory product type or select from LOV. To specify a product code, press TAB or ENTER to move the cursor to the Prod Code field.

NOTE – To stop the process at order, you need to set the restriction at the inventory product level, and it will not allow users to order that product type.

Prod Code

Enter product code or select from LOV.

> **NOTE –** To allow the ordering of the product, but prevent the user from packing a specific product, set the restriction at the product code level.

Eff Date

Enter effective date in MMDDYYYY format.

Term Dt

Enter termination date in MMDDYYYY format.

Press the DOWN  arrow to add additional entries.

Press **F12** (Commit) to save changes.

What to Do Next

There is no next step for this screen.

WellSky Corporation
Proprietary and confidential


16

Chapter 16 - Distribution Functions - Product Location Definition

16.1 Screens and Descriptions 474
16.1.1 Storage Device Details (DSTORE) 474
16.1.2 Product Storage Definition (PSTORE) 477
16.1.3 Rack Definition (RSTORE) 479

16.1 Screens and Descriptions

These functions are accessed from the following menu:

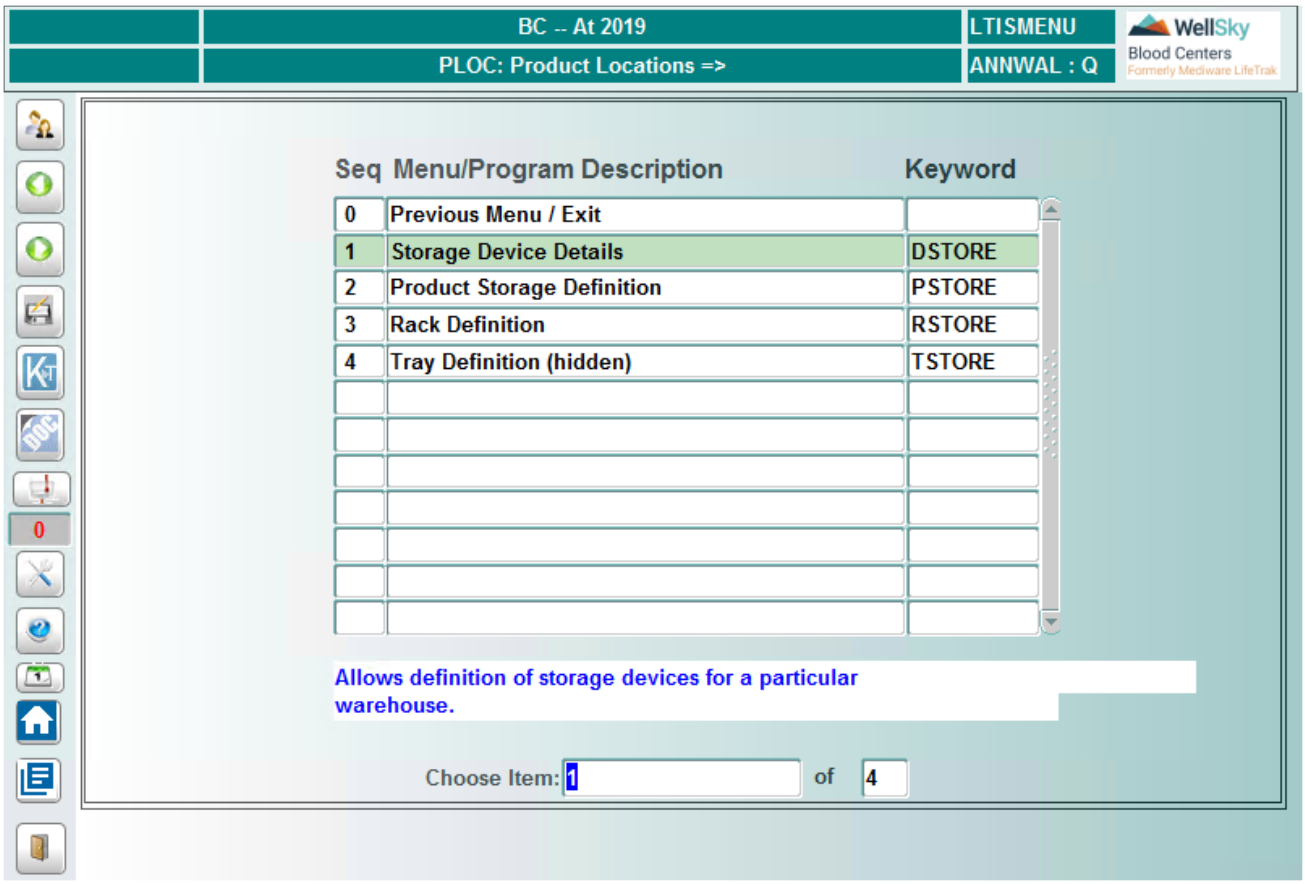

16.1.1 Storage Device Details (DSTORE)

Intended Use

Use this screen to define valid storage devices and locations for specified warehouse locations.

Limitations

Devices should all be created in advance of the day that you plan to use them.


Prerequisites

Master Codes (MASTER), code types:

- LTYPE – Define warehouses.
- DVTYP – Define device types.
- DESTS – Define device statuses.

WellSky Corporation
Proprietary and confidential

Entering/Viewing Data

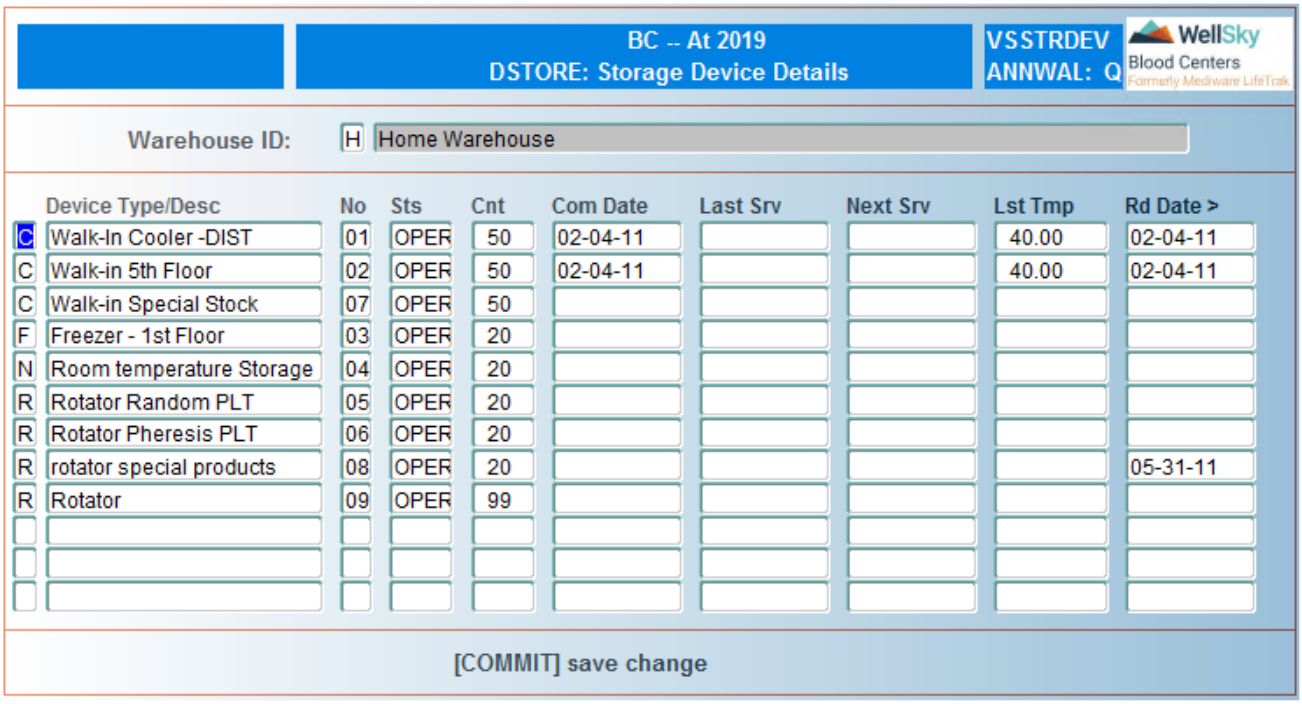

In the Control Block

Warehouse ID

Enter valid warehouse ID or select from LOV.

In the Detail Block

Press **CTRL** + **F2** (Create Record) to create a new record or scroll up and down to modify an existing entry.

Device Type/Desc

Enter valid device type or select from LOV.

Enter description for the device type. A maximum of 50 characters is allowed.

No

Enter a unique 2-digit number for the device.

> **NOTE –** Entry must be numeric.

STS

Enter a valid device status code or select status from LOV.

Cnt

Enter the number of racks for the device. A maximum of 4 characters is allowed.

NOTE – Entry must be numeric.

Com Date

Enter the date the device was first placed into use in MM-DD-YY format. Entry in this field is not required.

Last Srv

Enter date device last serviced in MM-DD-YY format. Entry in this field is not required.

Next Srv

Enter next scheduled device service date in MM-DD-YY format. Entry in this field is not required.


Lst Tmp

Enter last device temperature reading (C°). Two decimal places are allowed (for example, 21.29).

Rd Date

Enter the date the last temperature was taken in MM-DD-YY format. Entry in this field is not required.

NOTE – There are more columns in this screen than can be displayed at one time. After the *Rd Date* field is entered, the screen will scroll to reveal hidden fields for entry.

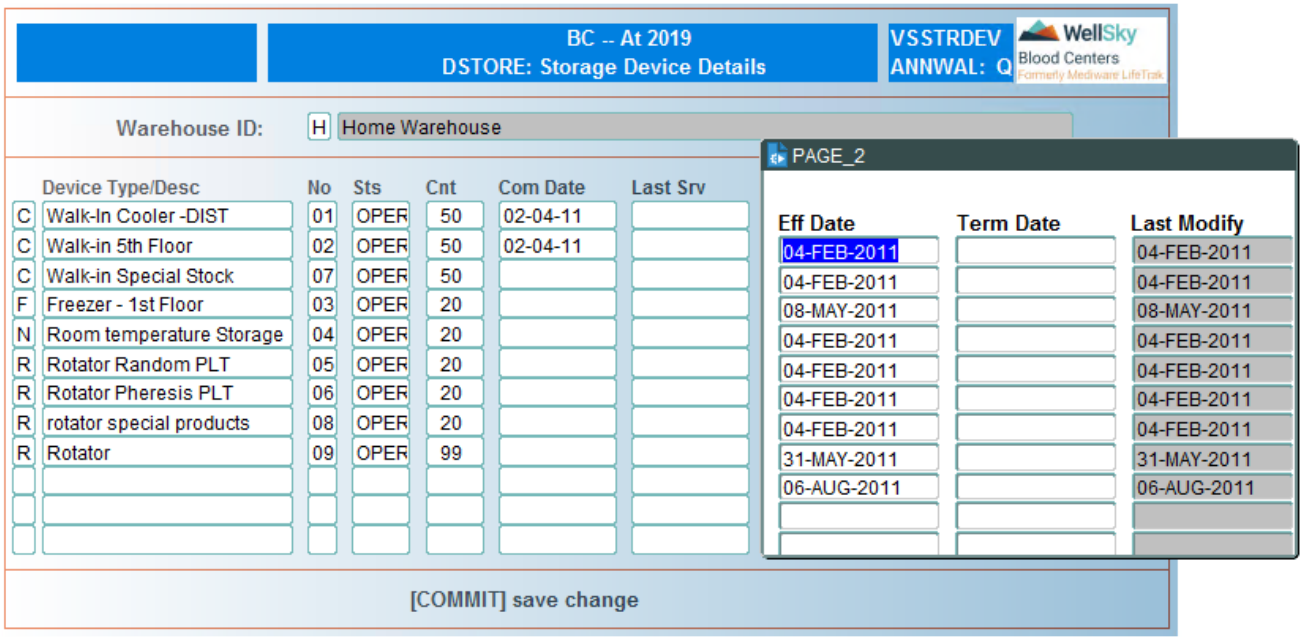

WellSky Corporation
Proprietary and confidential

Eff Dt
Enter effective date in DD-MON-YYYY format.

Term Dt
Enter termination date in DD-MON-YYYY format.

Last Modify
Field automatically populates with the date modifications were last made.

What to Do Next
Define product storage in Product Storage Definition (PSTORE).


16.1.2 Product Storage Definition (PSTORE)

Intended Use
Use this screen to define valid product storage information by inventory product type.

Limitations
- Existing records cannot be modified; they can only be terminated. To modify existing information, a new record must be created.
- Devices should all be created in advance of the day that you plan to use them.

Prerequisites
- Product Codes (PRODUCT) – Define valid products.
- Master Codes (MASTER), code types:
  - LTYPE – Define warehouses.
  - DVTYP – Define device types.

Entering/Viewing Data

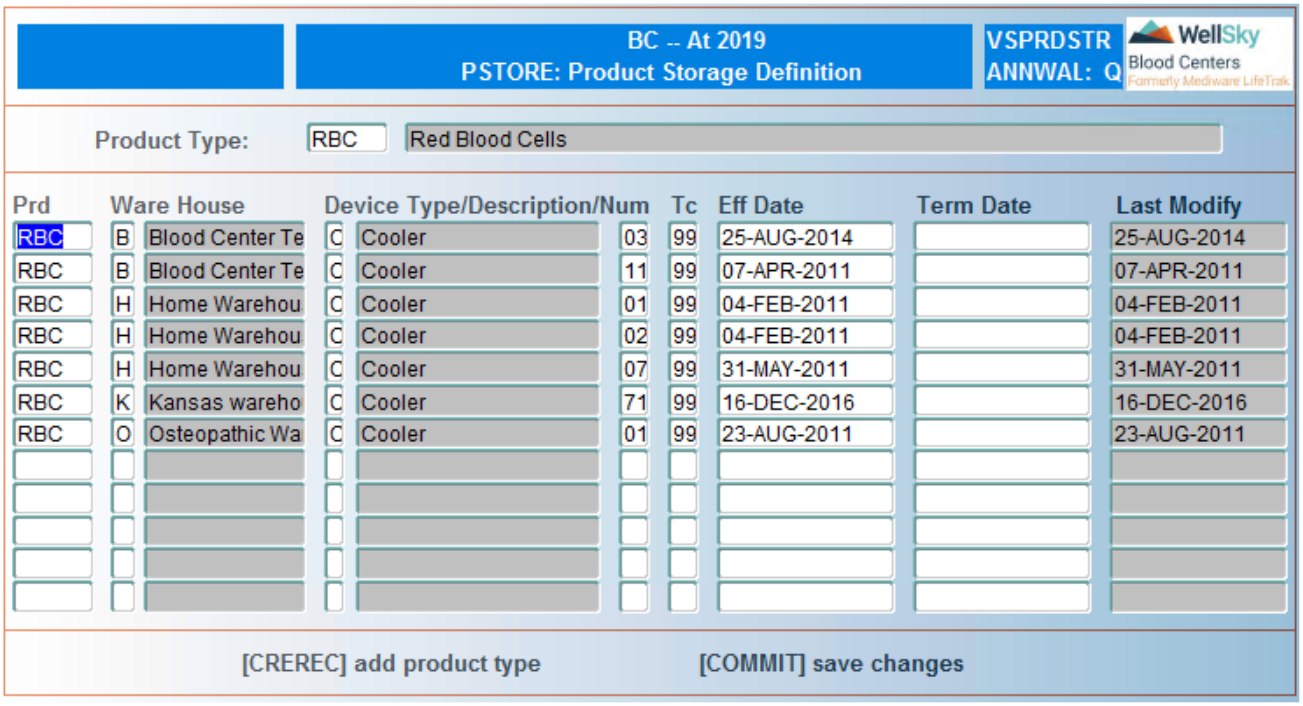

Product Type

Enter valid product type or select from LOV to limit the display to a single inventory product type. Leave field blank to display storage definitions for all product types. If a valid type has been entered, the product type description will automatically display.

NOTE – Press CTRL + F2 (Create Record) to create a new record or scroll up and down to select and terminate an existing record.

Prd

Enter valid inventory product type or select from LOV.

Warehouse

Enter valid warehouse code for product storage or select from LOV. The warehouse name automatically displays after the code is entered.

Device Type/Desc

Enter valid device type for product storage or select from LOV. The device type description automatically displays after the code is entered.

Num

Enter a valid 2-digit device number for the warehouse location specified or select from LOV.

WellSky Corporation
Proprietary and confidential

NOTE – Entry must be numeric.

Tc

Enter a 2-digit number that specifies the maximum number of products that can be stored in a single tray in the device.

NOTE – Entry must be numeric. Enter `99` to allow unlimited storage in the tray.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

Last Modify

Field automatically populates with the date modifications were last made.

What to Do Next

Define racks in Rack Definition (RSTORE).

16.1.3 Rack Definition (RSTORE)

Intended Use

Use this screen to define specific product types to be stored on a specific rack of a storage device at specified warehouse location.


Limitations

Devices should all be created in advance of the day that you plan to use them.

Prerequisites

- Product Codes (PRODUCT) – Define valid products.
- Master Codes (MASTER), code types:
  - LTYPE – Define warehouses.
  - DVTYP – Define device types.
  - STORE – Define storage types.
- Valid ABO (ABO) – Define valid ABO types.
- Storage Device Details (DSTORE) – Define storage types.

Entering/Viewing Data

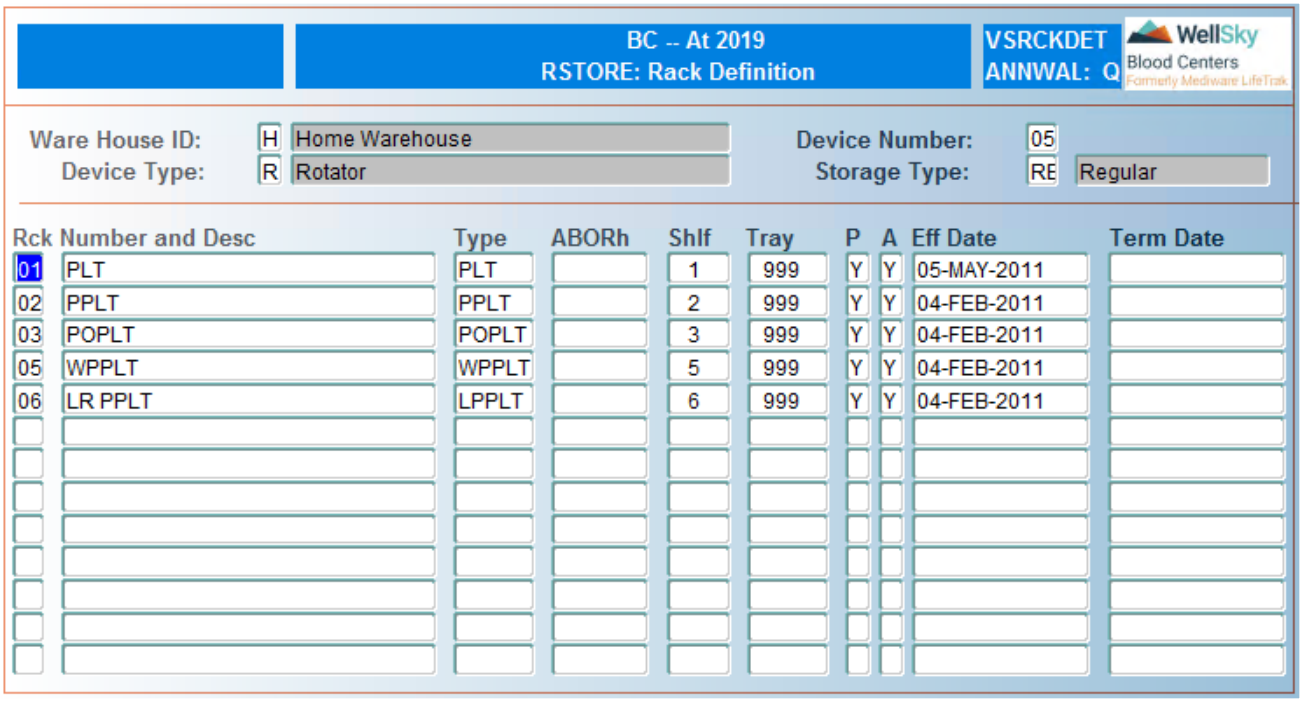

In the Control Block

Warehouse ID

Enter valid warehouse ID or select from LOV.

Device Type

Enter valid device type or select from LOV.

Device Number

Enter valid 2-digit device number or select from LOV.

Storage Type

Enter valid storage type or select from LOV.

NOTE – AB must be defined in order to check in Autologous Biohazard ISBT products. AU must be defined for Autologous Use Only.

In the Detail Block

NOTE – Existing rack definitions meeting the criteria entered automatically display. Press CTRL + F2 (Create Record) to create a new record or scroll up and down to modify an existing entry.

Rck Number and Desc

Enter a rack number. A maximum of 2 digits is allowed.

Enter a description for the rack. A maximum of 50 characters is allowed.

Type

Enter valid product type or select from LOV.

ABORh

Enter valid ABO type to be stored in this rack or select ABO from LOV. Leave blank if multiple ABO types can be stored on this rack.

NOTE – For ease of use, it is recommended to leave this field blank, unless you specifically want to limit the ABO that can be stored in this location. Entering ABO in this field may be beneficial for devices dedicated to rare products.

Shlf

Enter the number of shelves for the rack. Entry in this field is not required.

Tray

Enter the total number of trays for the rack or enter `1`.

NOTE – Enter a value of `99` to provide unlimited trays.

P

Enter one of the following:

- `Y` – More than one product type can be stored on the rack.
- `N` – Only the product type entered can be stored on this rack.

A

Enter one of the following:

- `Y` – More than one ABO type can be stored in this rack.
- `N` – Only the ABO type entered can be stored on this rack.

Eff Dt

Enter effective date in DD-MON-YYYY format.

Term Dt

Enter termination date in DD-MON-YYYY format.

What to Do Next

There is no next step for this screen.

WellSky Corporation
Proprietary and confidential

17


Chapter 17 - Miscellaneous Information

17.1 Special Donations Tag Printing 484
17.1.1 Configuration Setup 484
17.1.2 Print Auto/Directed Tie Tags 489
17.1.3 Maintain Special Instructions 498
17.1.4 Print Special Instruction Tie Tags 502
17.1.5 Printer Setup 506


17.1 Special Donations Tag Printing

17.1.1 Configuration Setup

Lab Master Codes

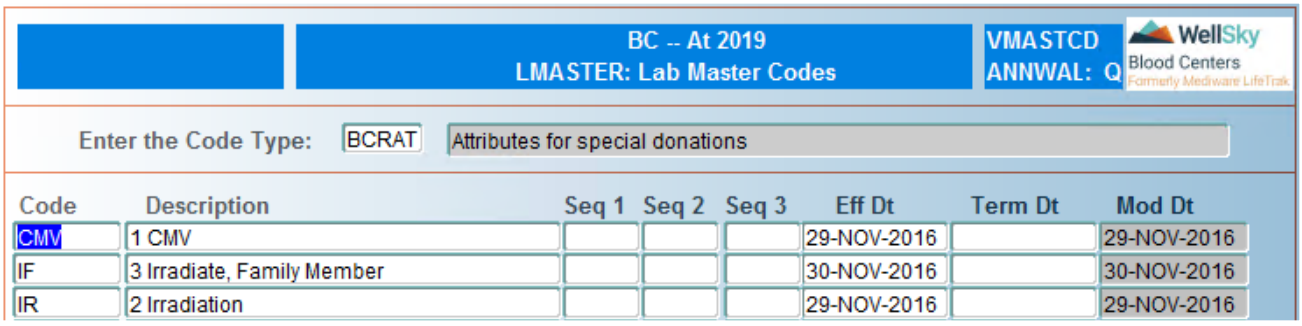

BCRAT are the attributes that the user can select to print on the label in the program SDIADTAG. In the description field, enter the number in front of the description to determine the order in how it displays.

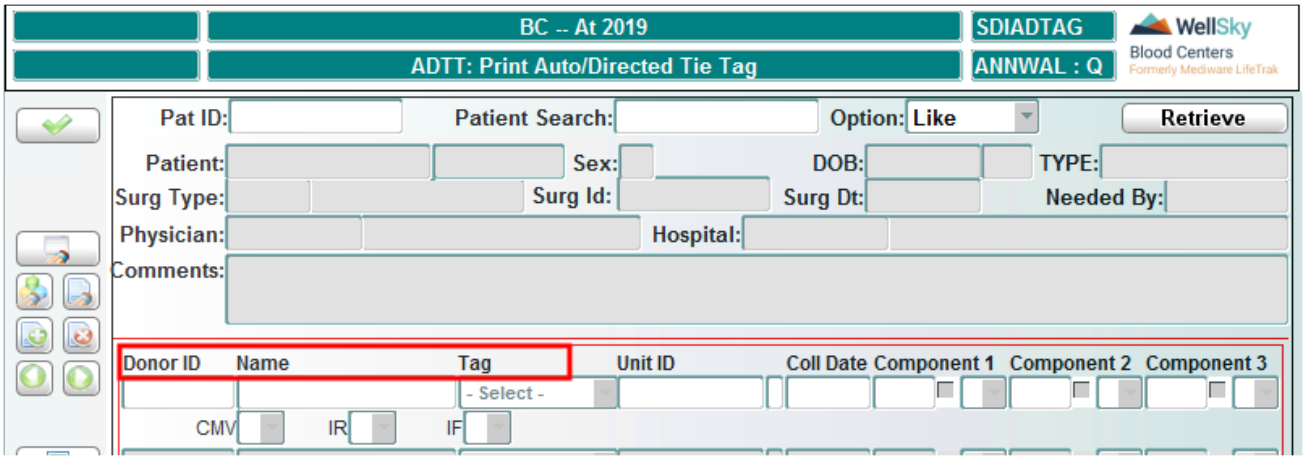

- For Irradiation – A special rule is in place where if the current customer – CUSTOMERS@LAB or the current customer group (alpha key in CUSTOMERS) – matches an active record in VALID_MASTER_CODES (Code Type BSPFI), and the selected donation type and product type are also a part of the master code description, then automatically change the value for Irradiation to 'Y'.
- 'Irradiation' is a special attribute – tag if the value is 'Y'. Therefore, the print Irradiation Instruction field is linked to the Special attribute field through MASTER_CODES – code type MISC – code description matches the code for the MASTER_CODE code type BCRAT code – and the corresponding value on the field (Y / N) is assigned to the print Irradiation Instruction field.
  - MISC master code is defined and under it BCIRR – which will list the attribute codes that will be printed on the label.

WellSky Corporation
Proprietary and confidential

- BCRAT will define the codes, which are the same codes as those listed under BCIRR. The description will have a number which will put them in that order, and beside the number, the description that will print on the label.

- Forced Irradiation for as follows: <Hospital/Hospital Group>|<Donation Types delimited with ';'>|<Product Types delimited with ;>| Examples AURA|MT;DI;|LSDP;RBC;| WAD-RG0052|MT;|LSDP;RBC;CRYO;|

EXAMPLE –
1) AURA|MT;DI;|LSDP;RBC;|
2) WAD-RG0052|MT;|LSDP;RBC;CRYO;|

Let's call the values separated by '|' as tokens.

	Example 1	Example 2	Usage
	AURA|MT;DI;|LSDP;RBC;|	WAD-RG0052|MT;|LSDP;RBC;CRYO;|	
Token 1	AURA	WAD-RG0052	Customer's - ALPHA_KEY or CUSTOMER_ID (customers table)
Token 2	MT;DI;	MT;	Donation Type(s) separated by ';'
Token 3	LSDP;RBC;	LSDP;RBC;CRYO;	Product Type(s) separated by ';'

Mandatory irradiation enforced if the customer ID (alpha key or customer_id), selected product type, and selected donation type are found in the master code.


Incorrect:

GUAM|MT;DI|RBC;PLT;FFP;PPLT;WB;LRBC

Correct:

GUAM|MT;DI;|RBC;PLT;FFP;PPLT;WB;LRBC;|

Lab Master Code MISC

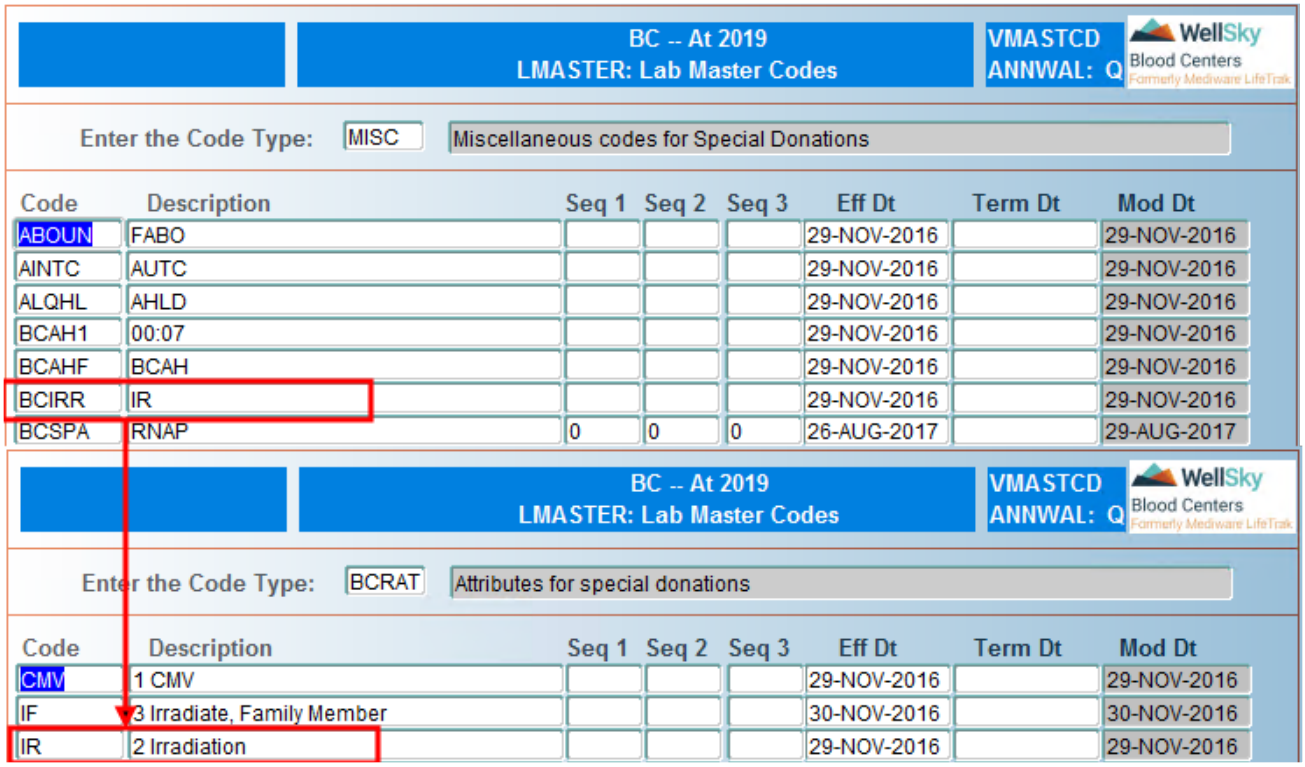

- MISC master code is defined, and under it BCIRR – which will list the attribute codes that will be printed on the label.
- BCRAT will define the codes which are the same codes that are listed under BCIRR. The description will have a number which will put them in that order, and beside the number, the description that will print on the label.


BCIRR

** IRRADIATE ** is hard coded on the label based on the designated Irradiation attribute. The other attributes are not printed on the label – just used for controlling whether they are on the product or not.

Lab master code BCIRR – IR indicates which of the attributes is the Irradiation one on the screen. It must match one of the codes under BCRAT.

WellSky Corporation
Proprietary and confidential


Donor Master Codes

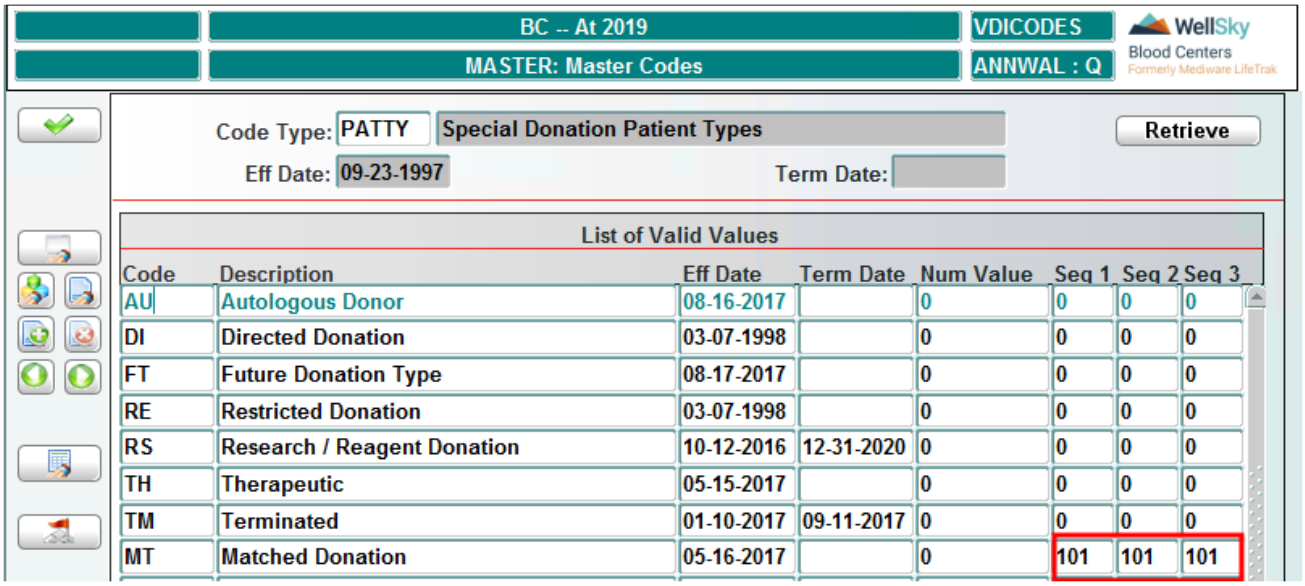

Selection of the tag type is determined by the master code PATTY. Entering a sequence number greater than 100 will print the HLA types on the tie tag. It can be placed on any code.

101 – IF THE USER CHOOSES THIS TAG TYPE, THEN PRINT OFF THE HLA TYPE THAT WAS PRINTED AND ONLY PRINT As AND Bs.

Donor Master Code BSPFI

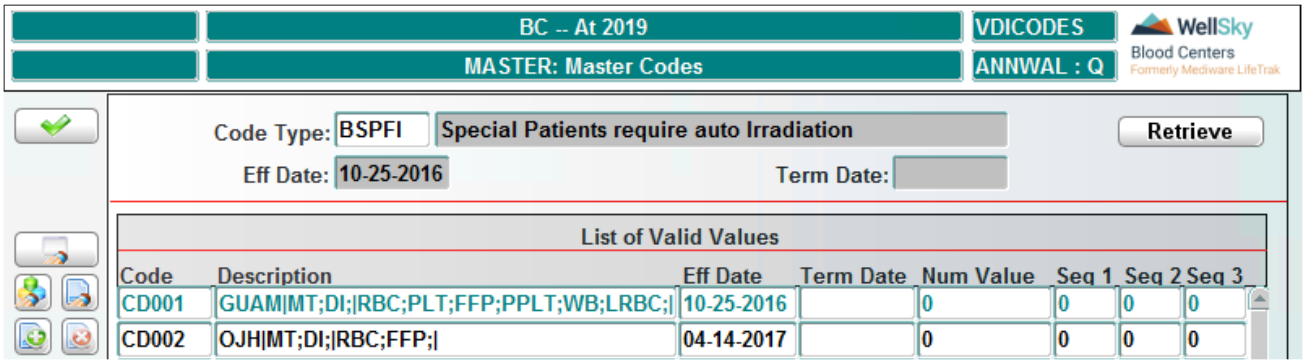

EXAMPLE –
1) AURA|MT;DI;|LSDP;RBC;|
2) WAD-RG0052|MT;|LSDP;RBC;CRYO;|

Let's call the values separated by '|' as tokens.

	Example 1	Example 2	Usage
	AURA|MT;DI;|LSDP;RBC;|	WAD-RG0052|MT;|LSDP;RBC;CRYO;|	

	Example 1	Example 2	Usage
Token 1	AURA	WAD-RG0052	Customer's - ALPHA_KEY or CUSTOMER_ID (customers table)
Token 2	MT;DI;	MT;	Donation Type(s) separated by ';'
Token 3	LSDP;RBC;	LSDP;RBC;CRYO;	Product Type(s) separated by ';'

Mandatory irradiation enforced if the customer ID (alpha key or customer_id), selected product type, and selected donation type are found in the master code.


Incorrect:

GUAM|MT;DI||RBC;PLT;FFP;PPLT;WB;LRBC

Correct:

GUAM|MT;DI;|RBC;PLT;FFP;PPLT;WB;LRBC;|

Donor Interdiction Table

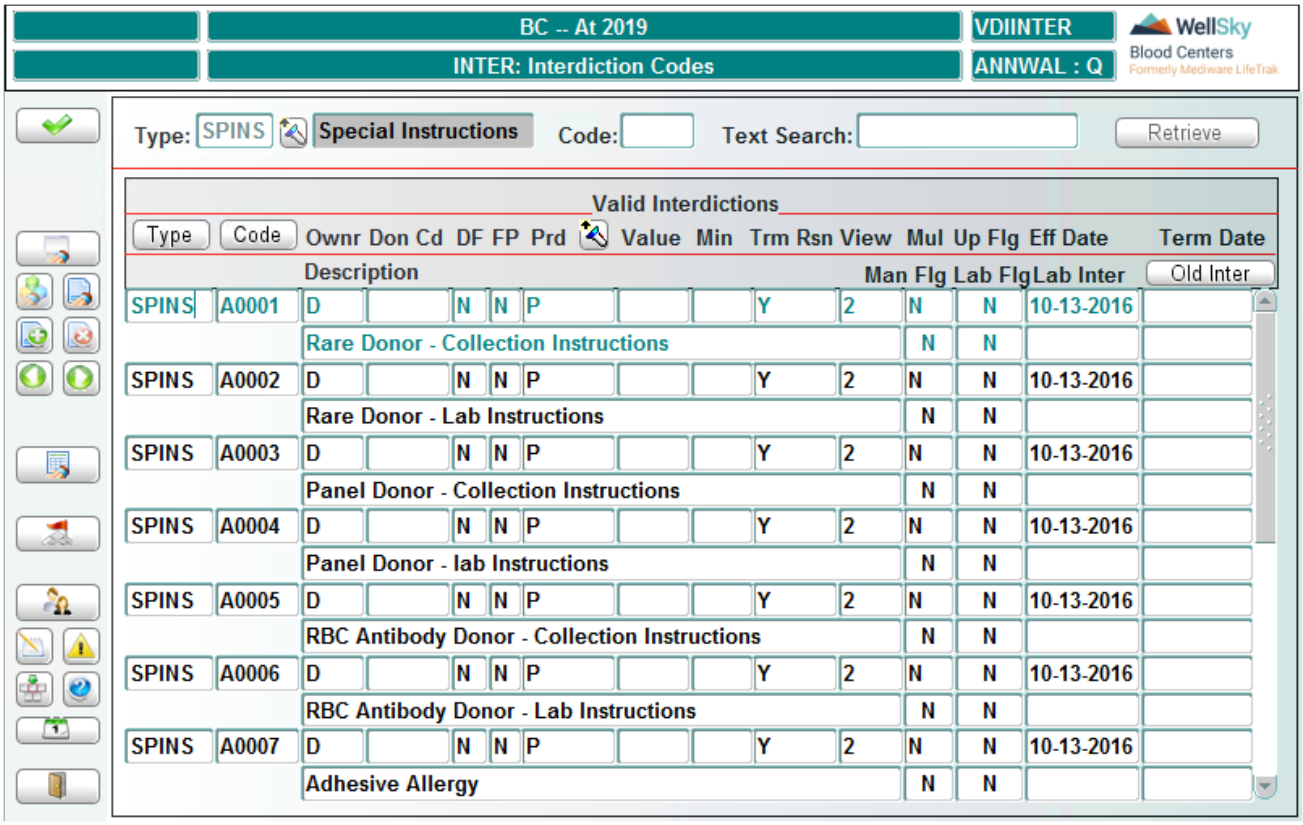

Code of A so it would show at the very top –so you can view it in the attribute window.


These attributes will be placed on the donor so special instructions can be printed for the collection.


WellSky Corporation
Proprietary and confidential

17.1.2 Print Auto/Directed Tie Tags

Prerequisites

In order to print the Unit and Donor information on the donor, the unit must be linked to the patient and registered in the system.

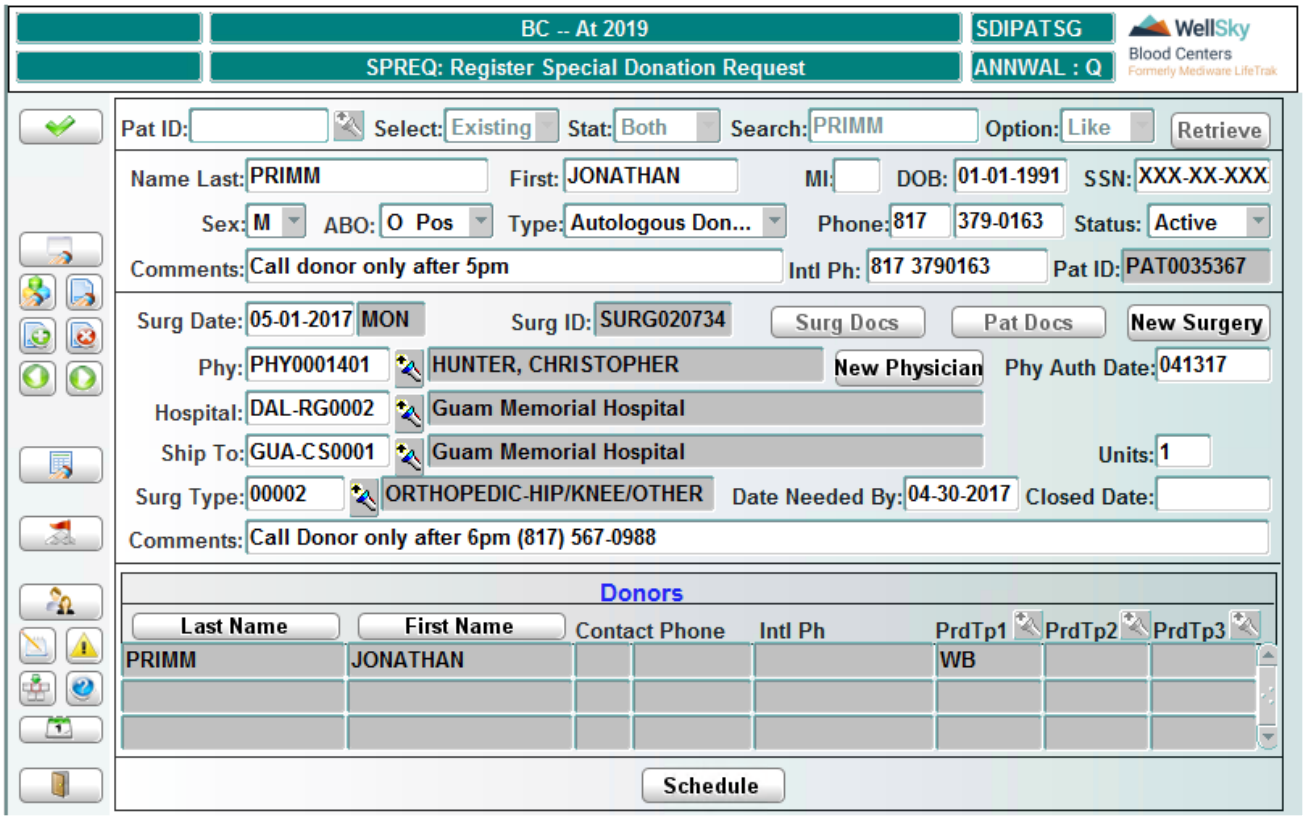

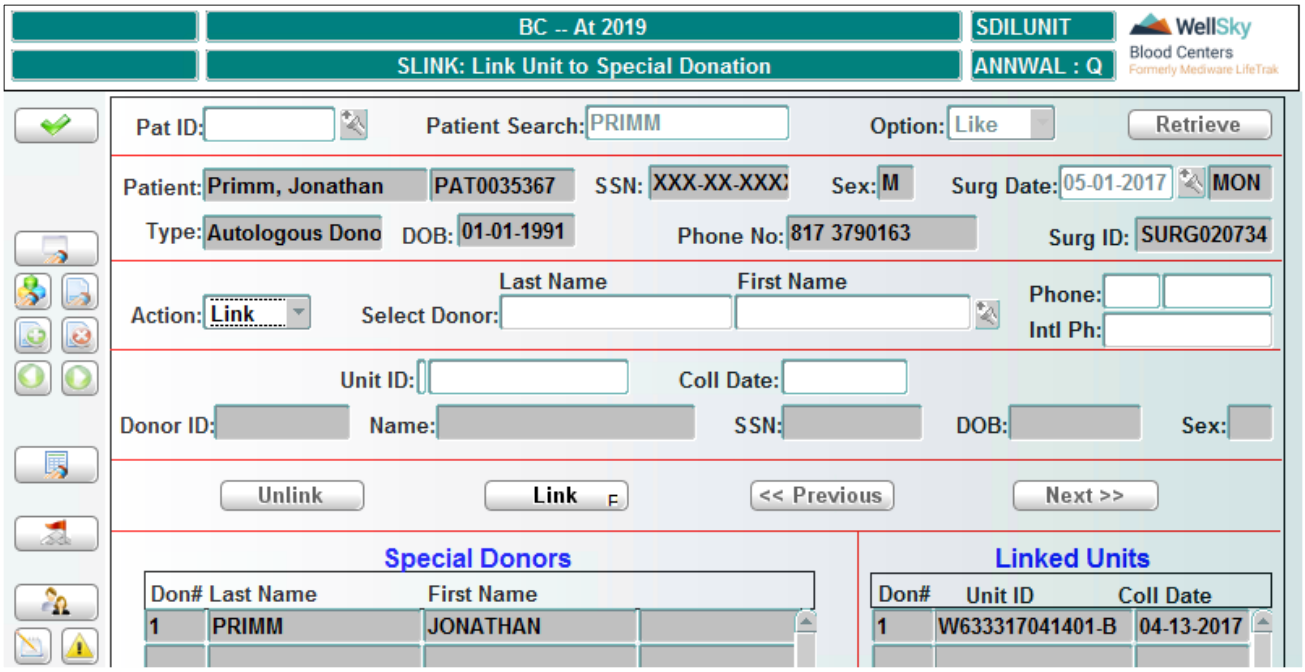


Once the request is present, then link the donation just like prior.

Here is the screen that prints the tie tags.

- See that all the header information listed here has been entered into standard Blood Centers screen (SDIPATSG).
- See that all the detail information listed here has been entered into standard Blood Centers screen (SDILUNIT).

WellSky Corporation
Proprietary and confidential

Autologous/Directed Tie Tag Printing

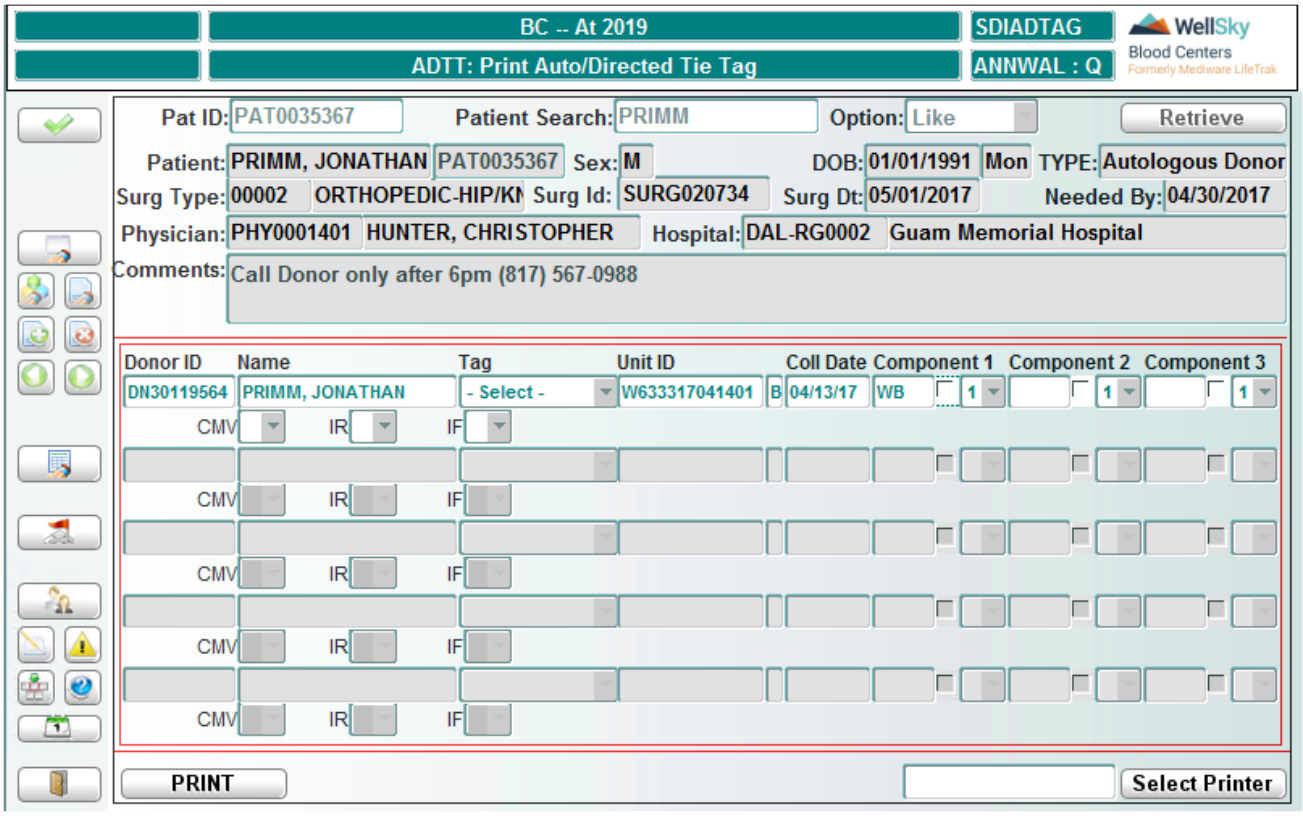

1. Comments that display are from SPREQ (comment section in surgery detail section).
   a. COMMENT – section does print on the label, and it is limited based on the size of the label.
2. All details in the top section of the form comes from SPREQ.
3. If the donor and units are not linked to the request, user will receive:
   a. Enter a patient ID that does not have any donors attached to the ID.- Err: 99007: No donors linked to patient by SPS. Tie tag will not print.
   b. Enter a patient ID that does not have any products defined for the donors attached. - Err: 99005: No products ordered by SPS for patient. Tie Tag will not print.
4. When the donor and units are linked to the request, then the information will display as shown in above screen shot.
5. The components listed all come from the SPREQ screen linking the donor to a product type.
6. Have ability to select the printer. Where are the printers defined – master code for list of printers. Specific type of printers that are used, there is a programming manual and it creates a file that is sent to the printer. The printers listed come from RMASTER where the code type is LPTT, or LLPTT.

- The table RPT_MASTER_CODES (for code_type 'LLPTT') needs to be replicated on the Laptop in order to run this program on the laptop.

BC -- At 2019
RMASTER: Maintain Report Master Table
RMMASTER
ANNWAL: Q

Type	Code	Description	Command/ IP Address	Port#	Seq	L
LBLPGM	FRICON2	FRICON2				
LBLPGM	LAILABE2	ISBT Labeling printing				
LBLPGM	LAIPPPRD	Reprint labels				
LBLPGM	LAIPRLBL	Label Pre-frozen				
LBLPGM	LAIRESCH	Research labeling				
LBLPGM	LAIRPINT	Reprint labels				
LBLPGM	LAISUPER	Emergency release				
LBLPTR	KAS -codabar	Lenexa	10.155.194.60	5500	7	H
LBLPTR	KAS 4x2	Lenexa - 4x2	10.155.194.60	5500	5	H
LBLPTR	KAS-4X4	Lenexa - 4X4	10.155.194.60	5500	4	H
LBLPTR	SATO 4x4	ISBT 4x4 Label	10.155.194.60	5500	6	B
LBPRT	DAL-4X4	ISBT 4X4	172.16.13.20	5500	5	B
LP	HP	automatic printer				
LPTT	SGX420D	Tie Tag Printer				
LPTTT	Laptop TIETAG	Tie tag printer Laptop				


Selection of Printer


BC -- At 2019
ADTT: Print Auto/Directed Tie Tag
SDIADTAG
ANNWAL : Q

Pat ID: PAT0035367 Patient Search: PRIMM Option: Like Retrieve
Patient: PRIMM, JONATHAN PAT0035367 Sex: M DOB: 01/01/1991 Mon TYPE: Autologous Donor
Surg Type: 00002 ORTHOPEDIC-HIP/KN Surg Id: SURG020734 Surg Dt: 05/01/2017 Needed By: 04/30/2017
Physician: PHY0001401 HUNTER, CHRISTOPHER Hospital: DAL-RG0002 Guam Memorial Hospital
Comments: Call Donor only after 6pm (817) 567-0988


Donor ID	Name	Tag	Unit ID		Coll Date	Component 1	Component 2	Component 3
DN30119564	PRIMM, JONATHAN	- Select -	W633317041401	B	04/13/17	WB	1	1	1
CMV	IR	IF						
CMV	IR	IF						
CMV	IR	IF						
CMV	IR	IF						
CMV	IR	IF						

PRINT
Select Printer
Record: 1/1

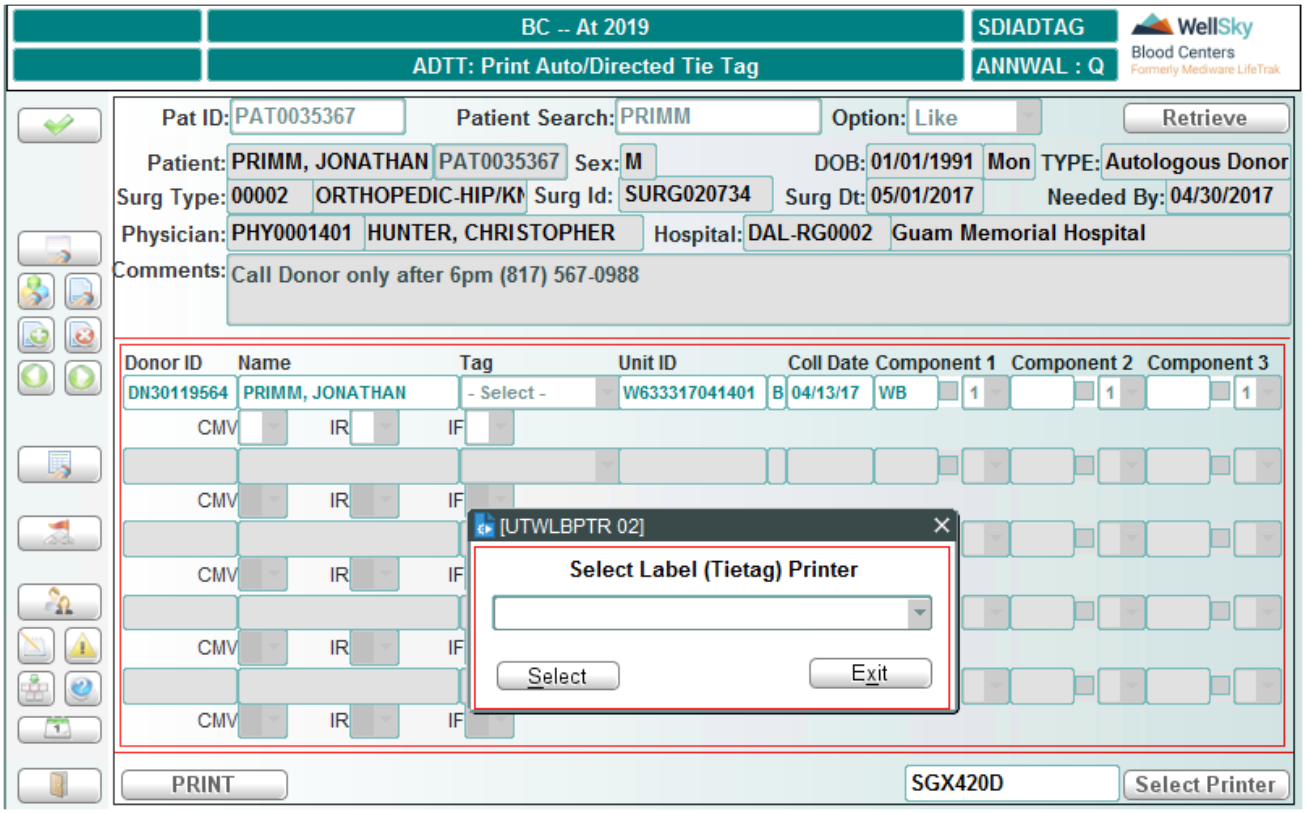
BC -- At 2019
SDIADTAG
ADTT: Print Auto/Directed Tie Tag
ANNWAL : Q
WellSky Blood Centers
Pat ID: PAT0035367
Patient Search: PRIMM
Option: Like
Retrieve
Patient: PRIMM, JONATHAN PAT0035367 Sex: M DOB: 01/01/1991 Mon TYPE: Autologous Donor
Surg Type: 00002 ORTHOPEDIC-HIP/KN Surg Id: SURG020734 Surg Dt: 05/01/2017 Needed By: 04/30/2017
Physician: PHY0001401 HUNTER, CHRISTOPHER Hospital: DAL-RG0002 Guam Memorial Hospital
Comments: Call Donor only after 6pm (817) 567-0988
Donor ID Name Tag Unit ID Coll Date Component 1 Component 2 Component 3
DN30119564 PRIMM, JONATHAN - Select - W633317041401 B 04/13/17 WB 1 1 1
CMV IR IF
[UTWLBPTR 02]
Select Label (Tietag) Printer
Select
Exit
PRINT
SGX420D
Select Printer

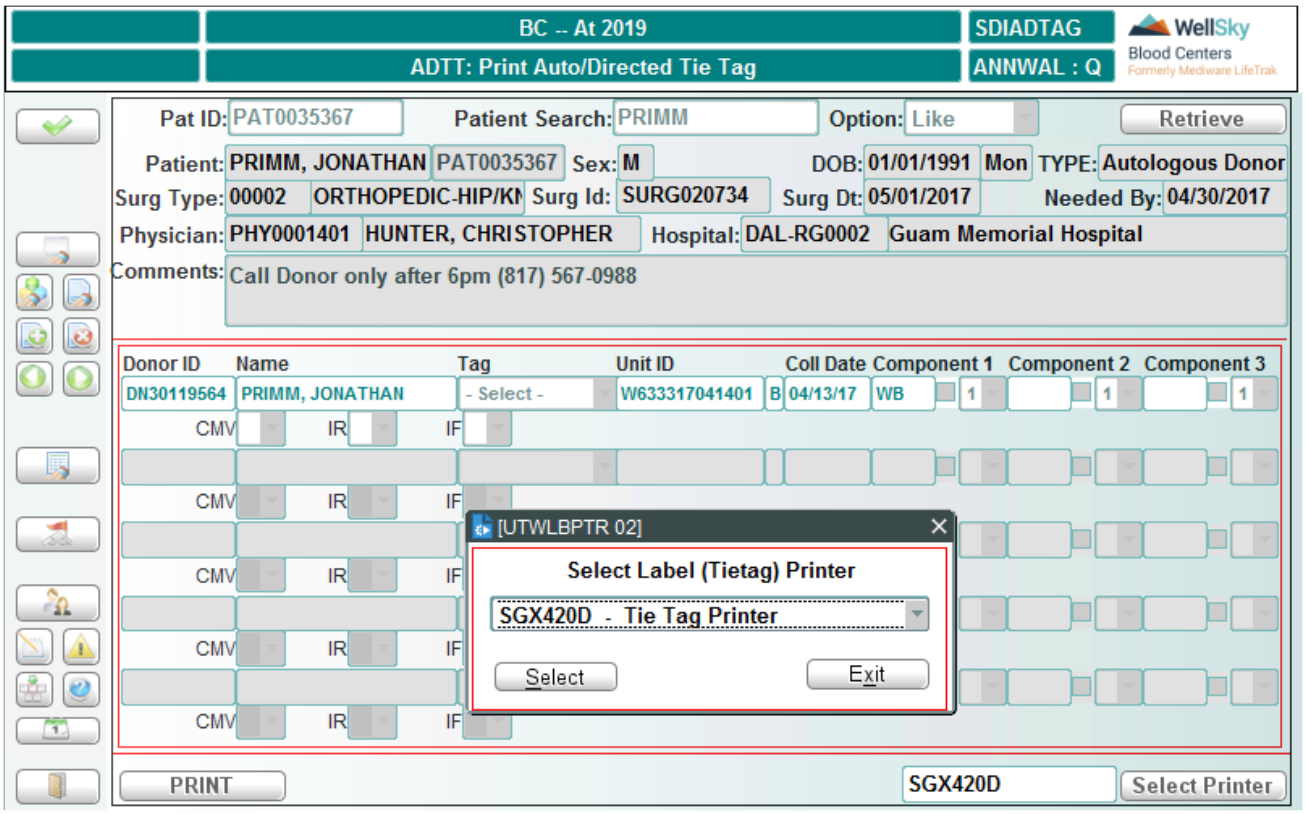

BC -- At 2019
SDIADTAG
ADTT: Print Auto/Directed Tie Tag
ANNWAL : Q
WellSky Blood Centers
Pat ID: PAT0035367
Patient Search: PRIMM
Option: Like
Retrieve
Patient: PRIMM, JONATHAN PAT0035367 Sex: M DOB: 01/01/1991 Mon TYPE: Autologous Donor
Surg Type: 00002 ORTHOPEDIC-HIP/KN Surg Id: SURG020734 Surg Dt: 05/01/2017 Needed By: 04/30/2017
Physician: PHY0001401 HUNTER, CHRISTOPHER Hospital: DAL-RG0002 Guam Memorial Hospital
Comments: Call Donor only after 6pm (817) 567-0988
Donor ID Name Tag Unit ID Coll Date Component 1 Component 2 Component 3
DN30119564 PRIMM, JONATHAN - Select - W633317041401 B 04/13/17 WB 1 1 1
CMV IR IF
[UTWLBPTR 02]
Select Label (Tietag) Printer
SGX420D - Tie Tag Printer
Select
Exit
PRINT
SGX420D
Select Printer


The printer then populates in the screen.

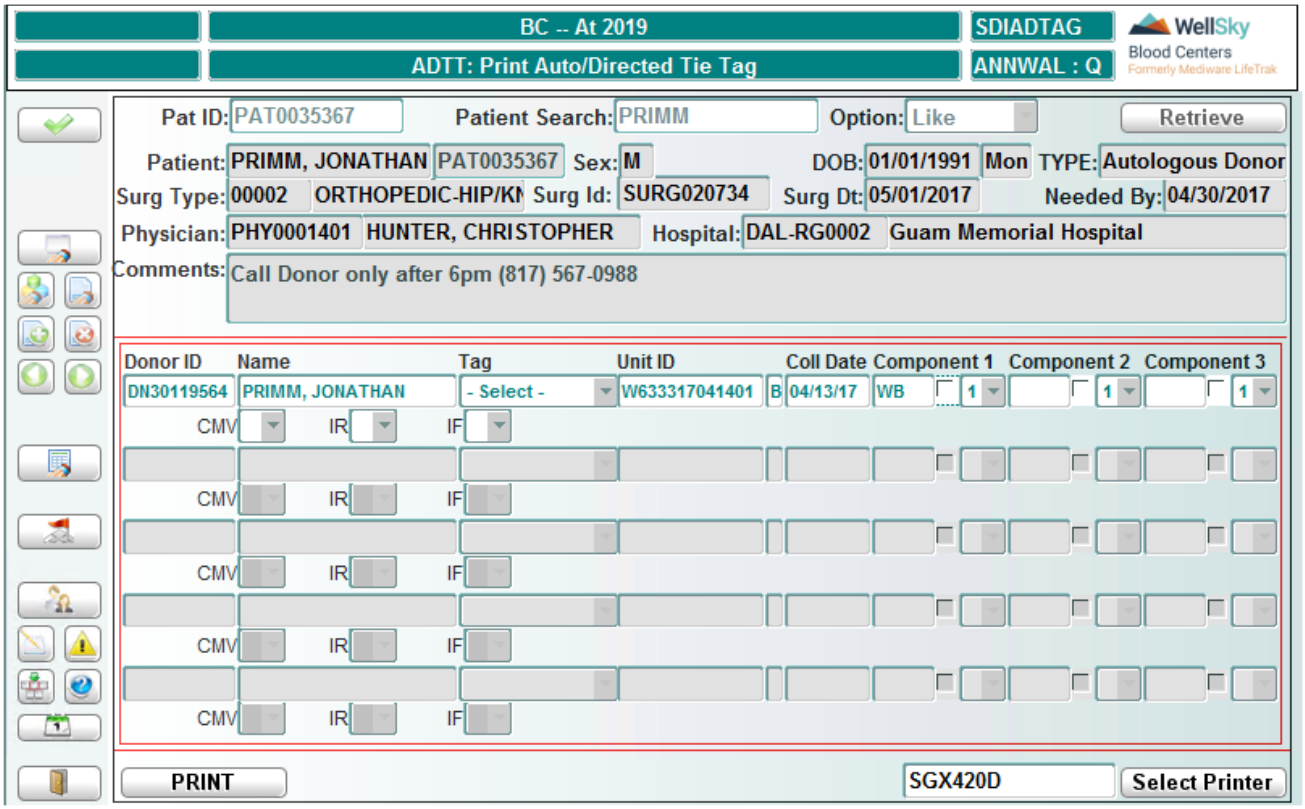

Press PRINT. It generates the file to send to the printer, and then it clears the screen.

WellSky Corporation
Proprietary and confidential

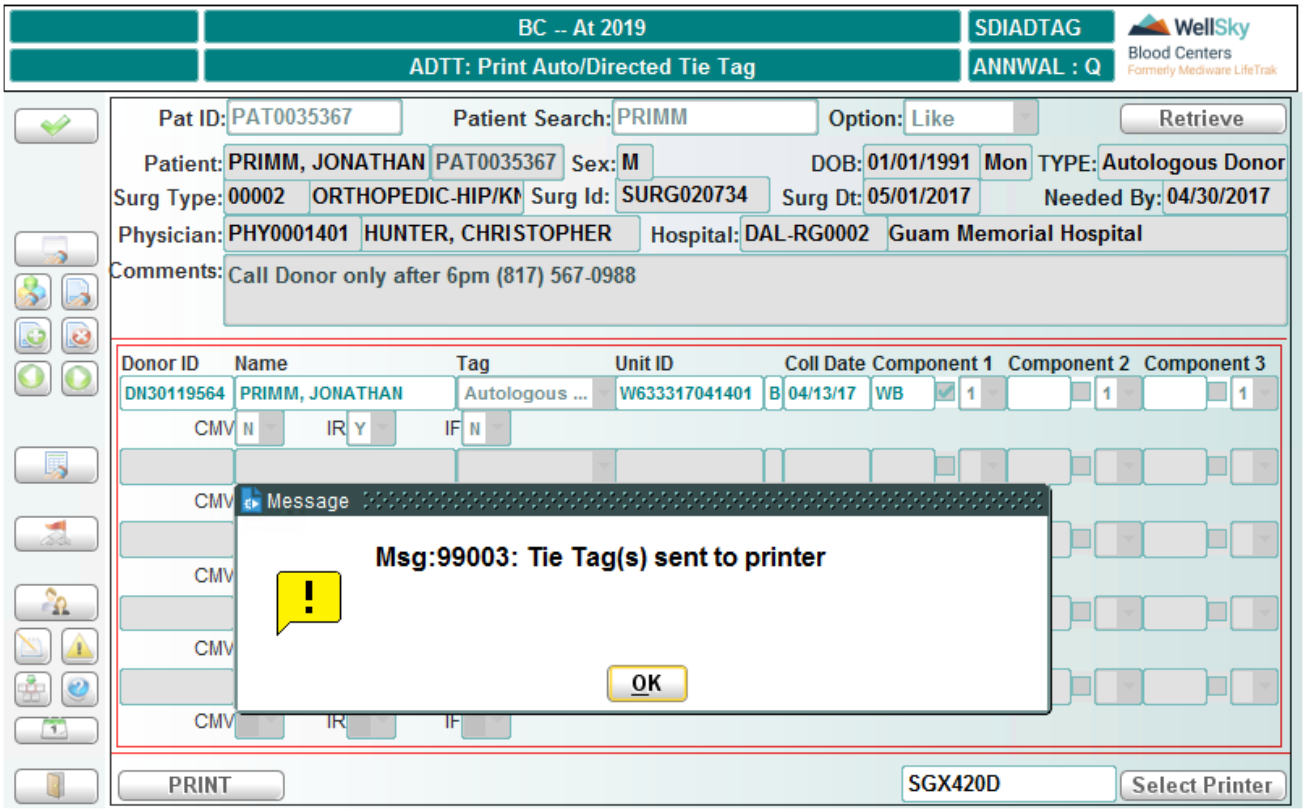

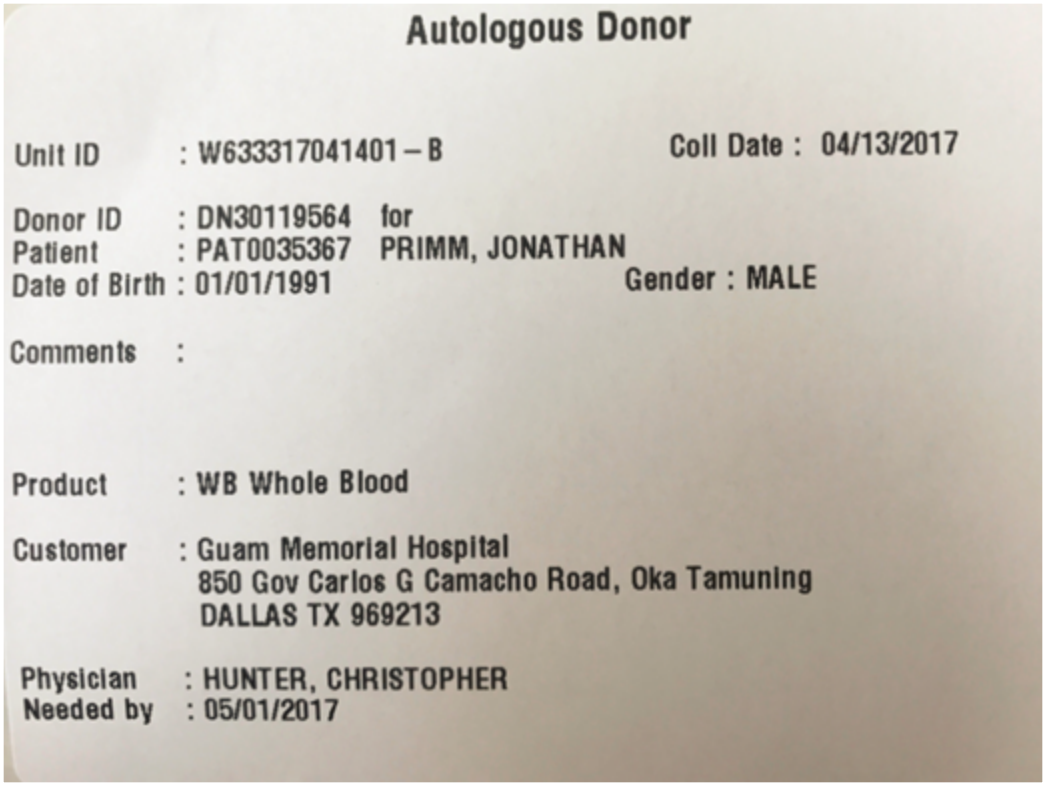

Autologous Donor

Unit ID : W633317041401 – B Coll Date : 04/13/2017

Donor ID : DN30119564 for
Patient : PAT0035367 PRIMM, JONATHAN
Date of Birth : 01/01/1991 Gender : MALE


Comments :

Product : WB Whole Blood


Customer : Guam Memorial Hospital
850 Gov Carlos G Camacho Road, Oka Tamuning
DALLAS TX 969213

Physician : HUNTER, CHRISTOPHER
Needed by : 05/01/2017


Comment did not print, so go back to SPREQ and entered comment, and reprint.

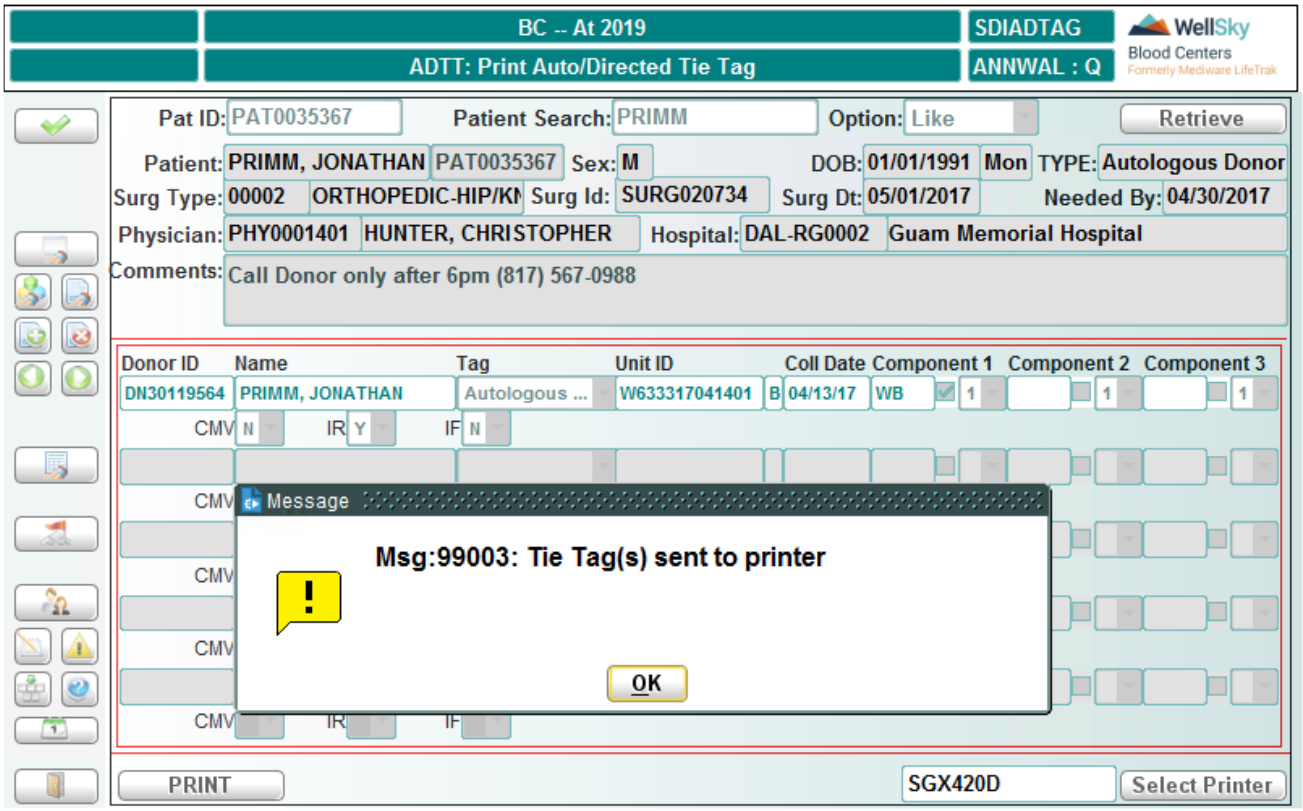

New label

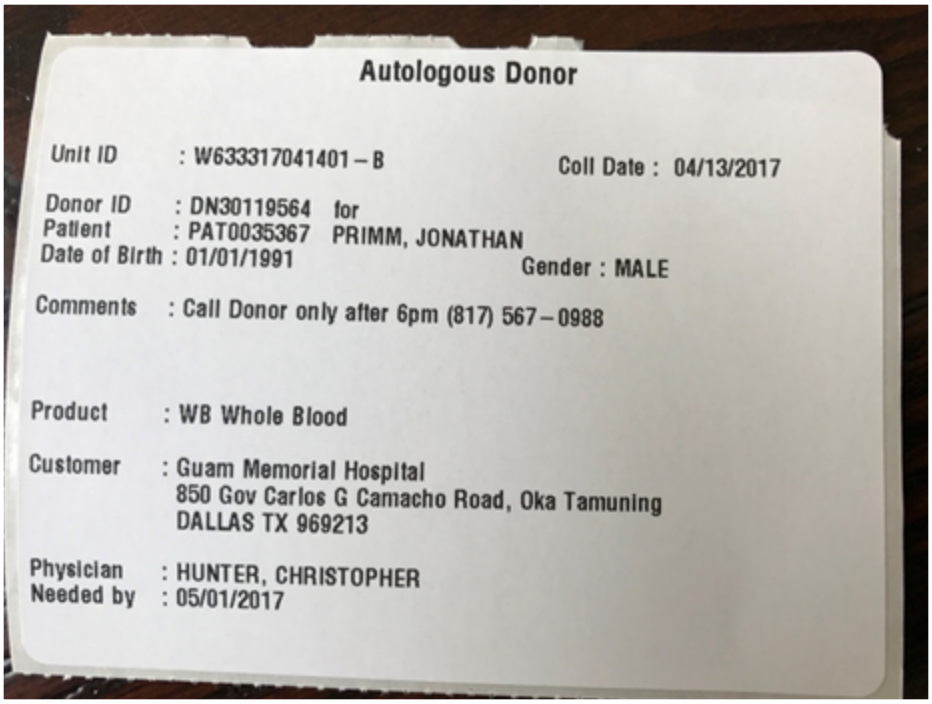

IRRADIATE is not placed on the label because the BCIRR was not set up with just IR.

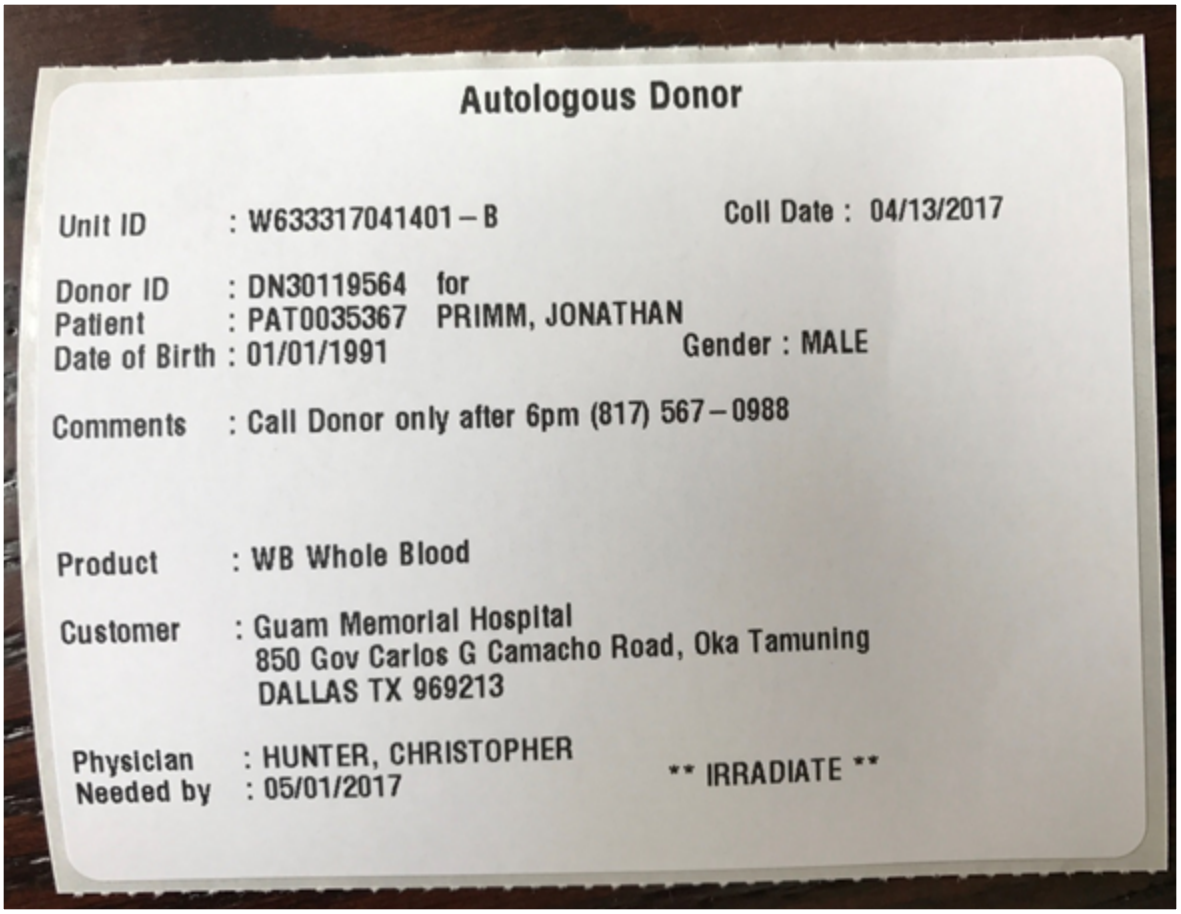

Autologous Donor

Unit ID : W633317041401 – B Coll Date : 04/13/2017

Donor ID : DN30119564 for
Patient : PAT0035367 PRIMM, JONATHAN
Date of Birth : 01/01/1991 Gender : MALE

Comments : Call Donor only after 6pm (817) 567 – 0988

Product : WB Whole Blood

Customer : Guam Memorial Hospital
850 Gov Carlos G Camacho Road, Oka Tamuning
DALLAS TX 969213

Physician : HUNTER, CHRISTOPHER
Needed by : 05/01/2017 ** IRRADIATE **

Placed information into a table with IR=Y, CMV=N,(whatever attributes selected), and the unit goes to Distribution, and there is a package that checks to see if the product has those attributes. If not present, it places the product on hold. RNAP gets placed based on master code.

When you go back and send it to the lab, irradiate it and check.

If you checked a requirement that was not needed, go back and unclick Print Label. You will have to remove the HOLD.

A trigger fires when the status of the product changes from L or S. Two places:

1) component checked into distribution, or

2) if inventory changes from regular inventory to AD inventory.

For BCSPA (in LAB master codes):

Code type: MISC

Code: BCSPA


Desc: Inter code value

For BCRAH (in LAB master codes), unsure if BCRAH itself needs to be under MISC, as this is not referenced anywhere in the code.


Code_type : BCRAH

Code: Don't know

Code_Desc: has the information we need (ship to and attrib code)

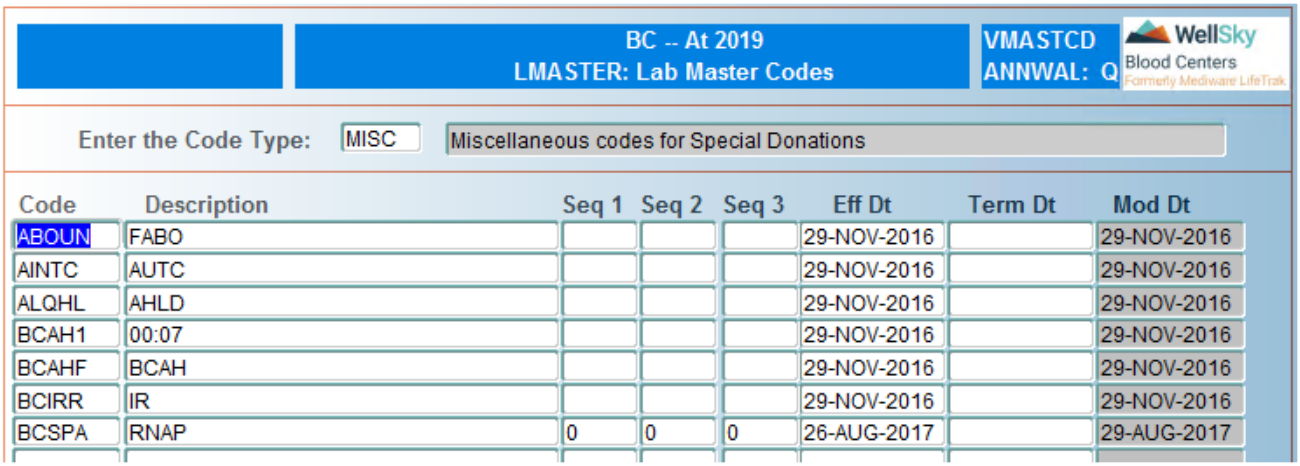


17.1.3 Maintain Special Instructions

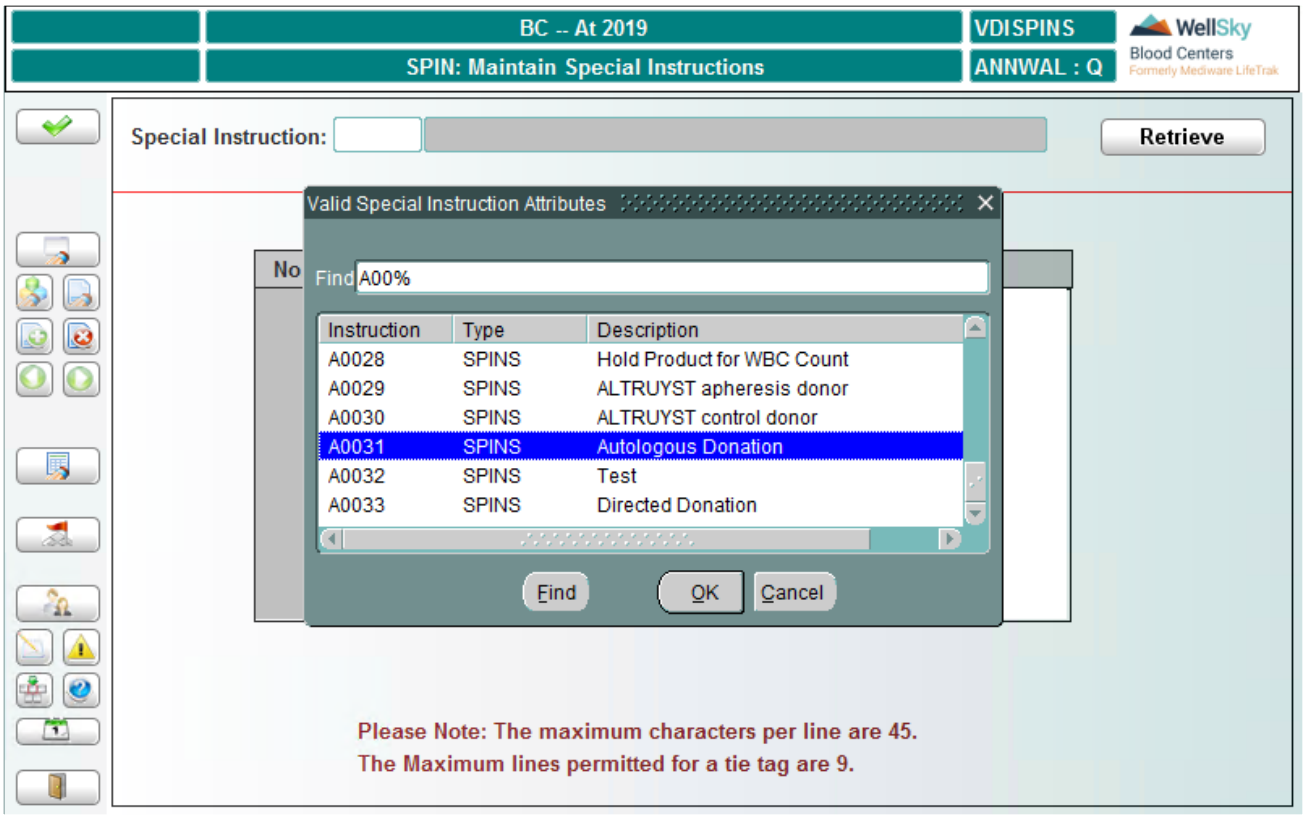


The LOV pulls from the Interdiction table with interdiction types of SPINS.

Enter special instructions for each SPINS attribute.

WellSky Corporation
Proprietary and confidential

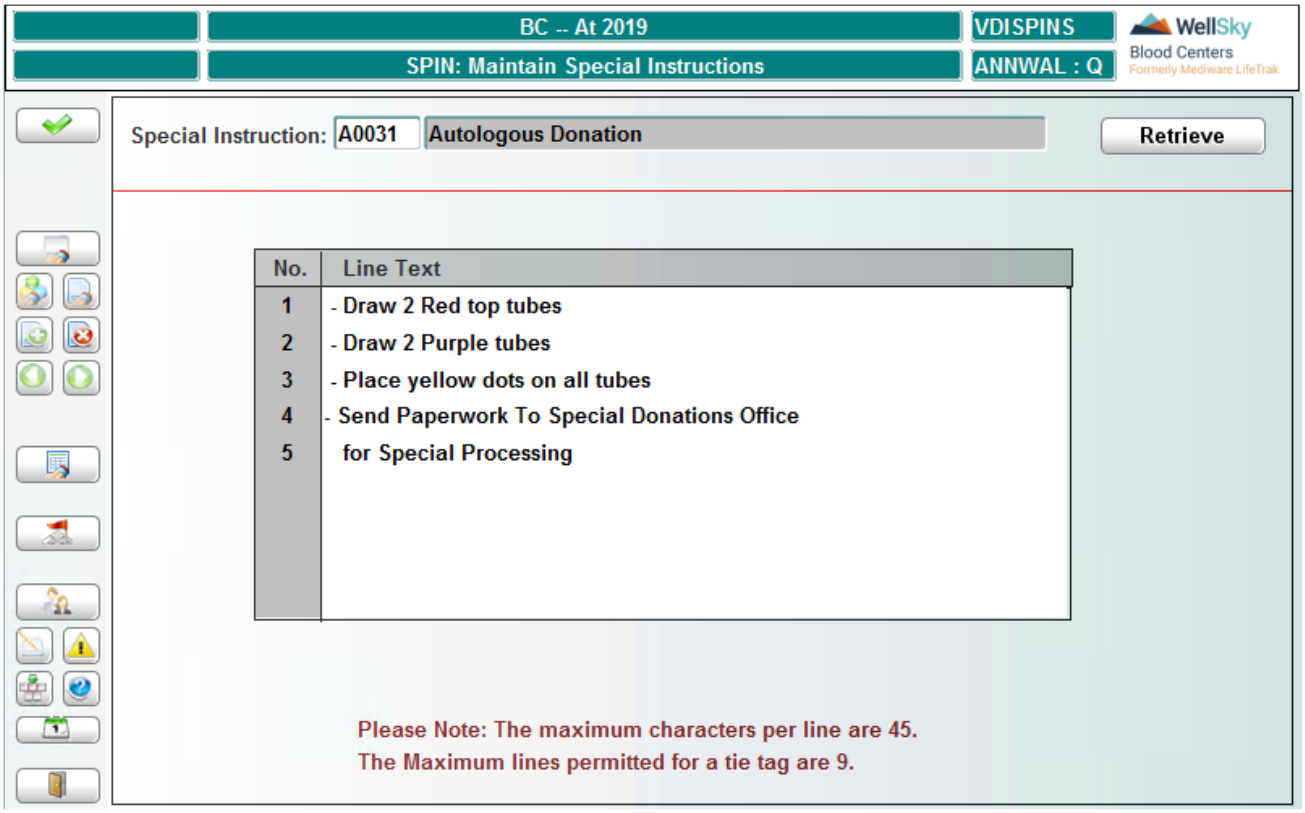


- The maximum characters per line are 45. Lines over 45 characters will wrap around and count as multiple lines. If a line is going to be more than 45 it will move the text to the next row. If you want to have the text line up under each other you will need to place spaces in front of the second line for them to line up.

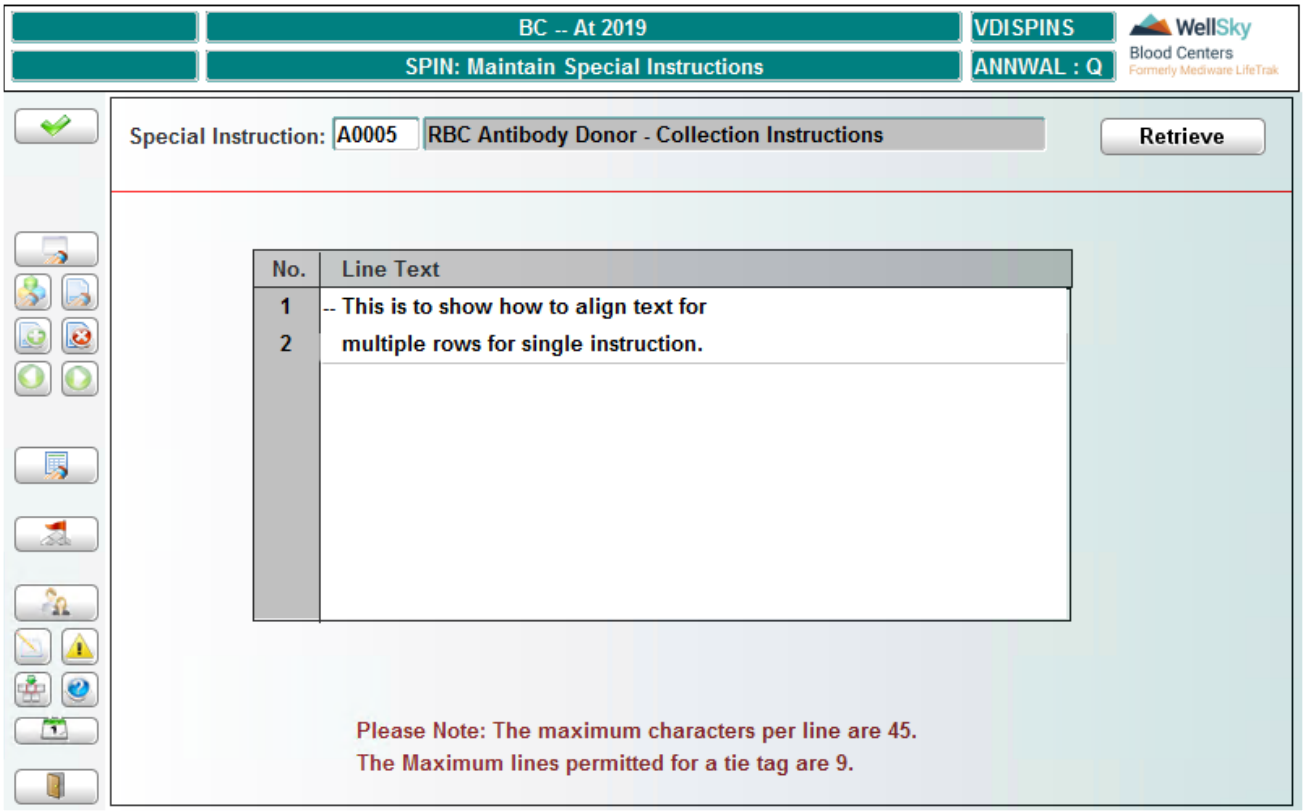


- The maximum lines permitted for a tie tag is 9.
- It does allow mixed case.
- The database table name BC_SP_INS.

The attribute must be placed on the donor.

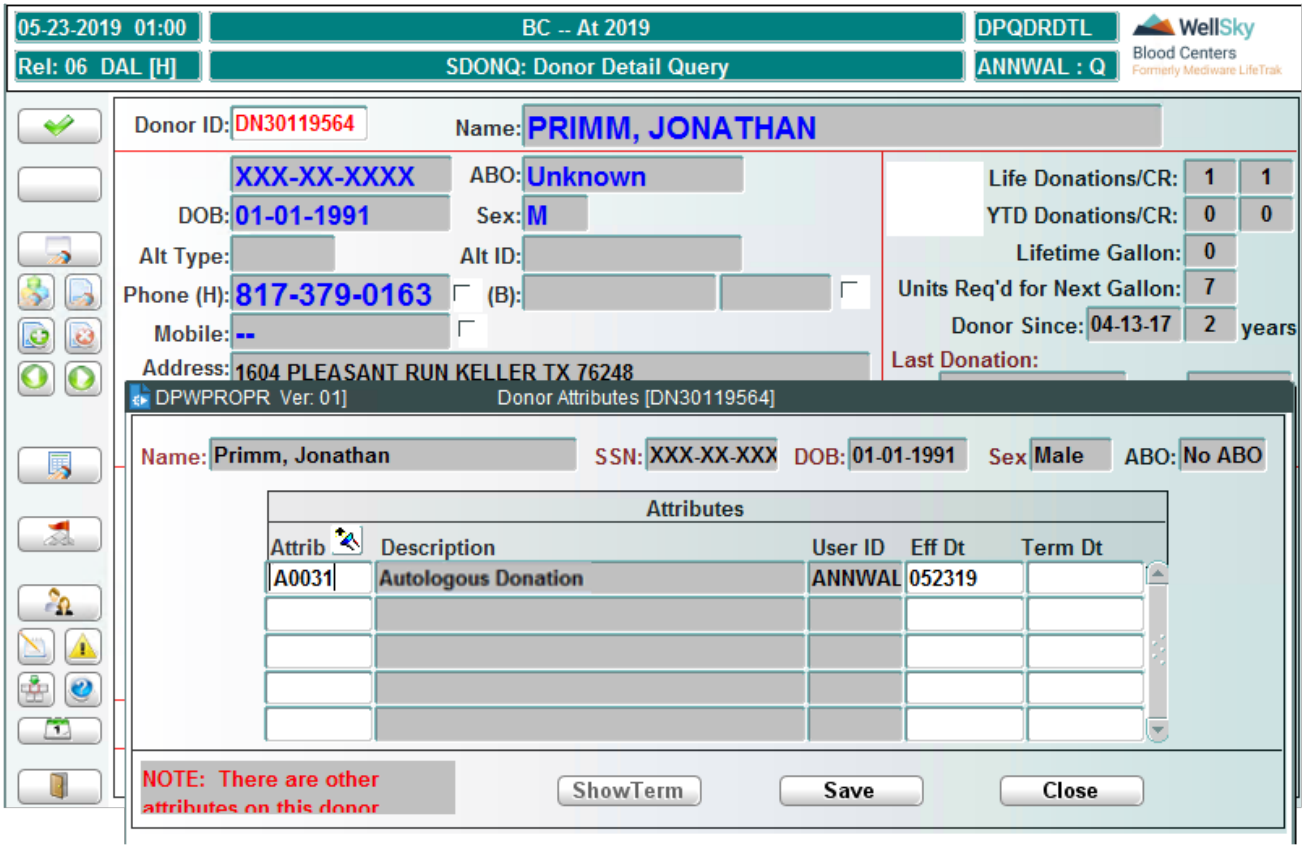


Spin interdictions assigned to donors using standard Blood Centers functionality.


For the SPIN interdictions to be placed as attributes, they need to be defined under master code (Donor) PROPR.

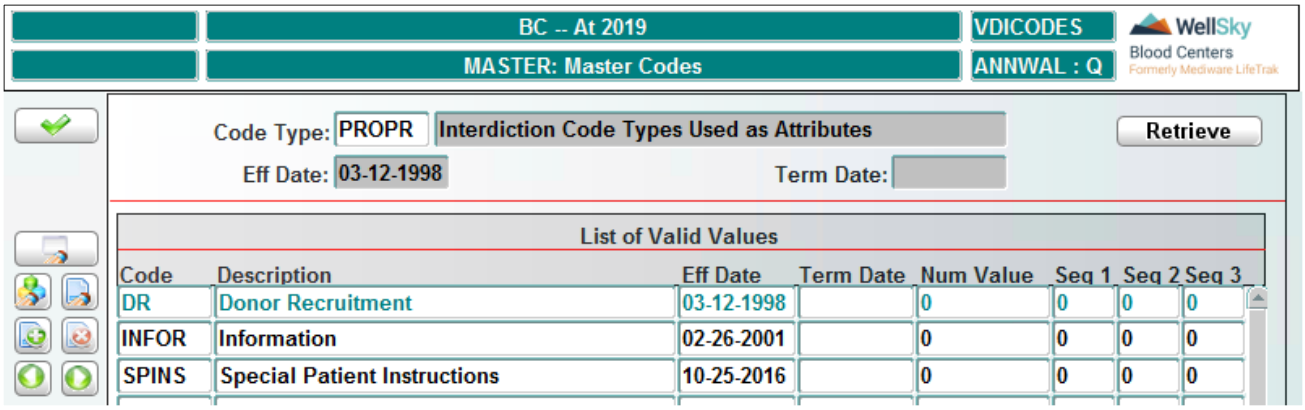

The user access for the SPINS attribute codes will also have to be set up in order to be able to place the attributes.


17.1.4 Print Special Instruction Tie Tags

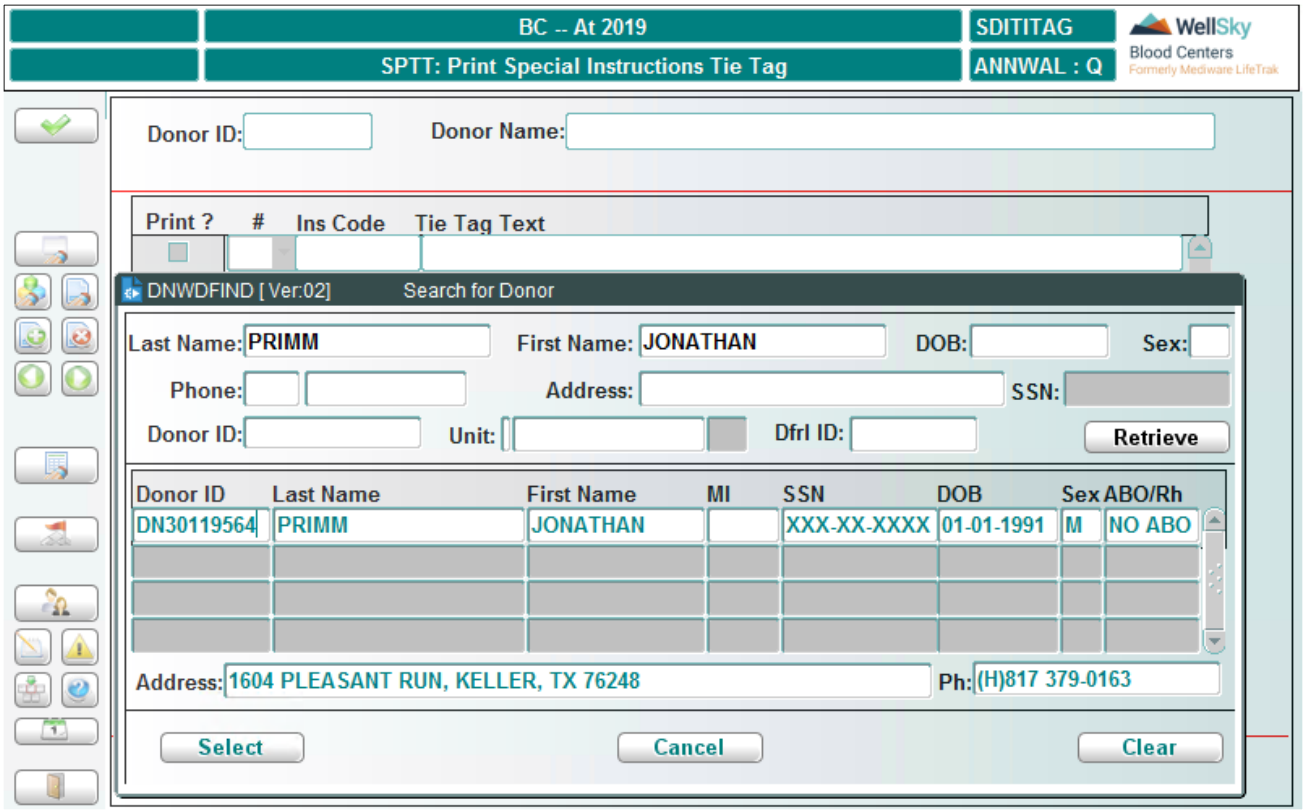

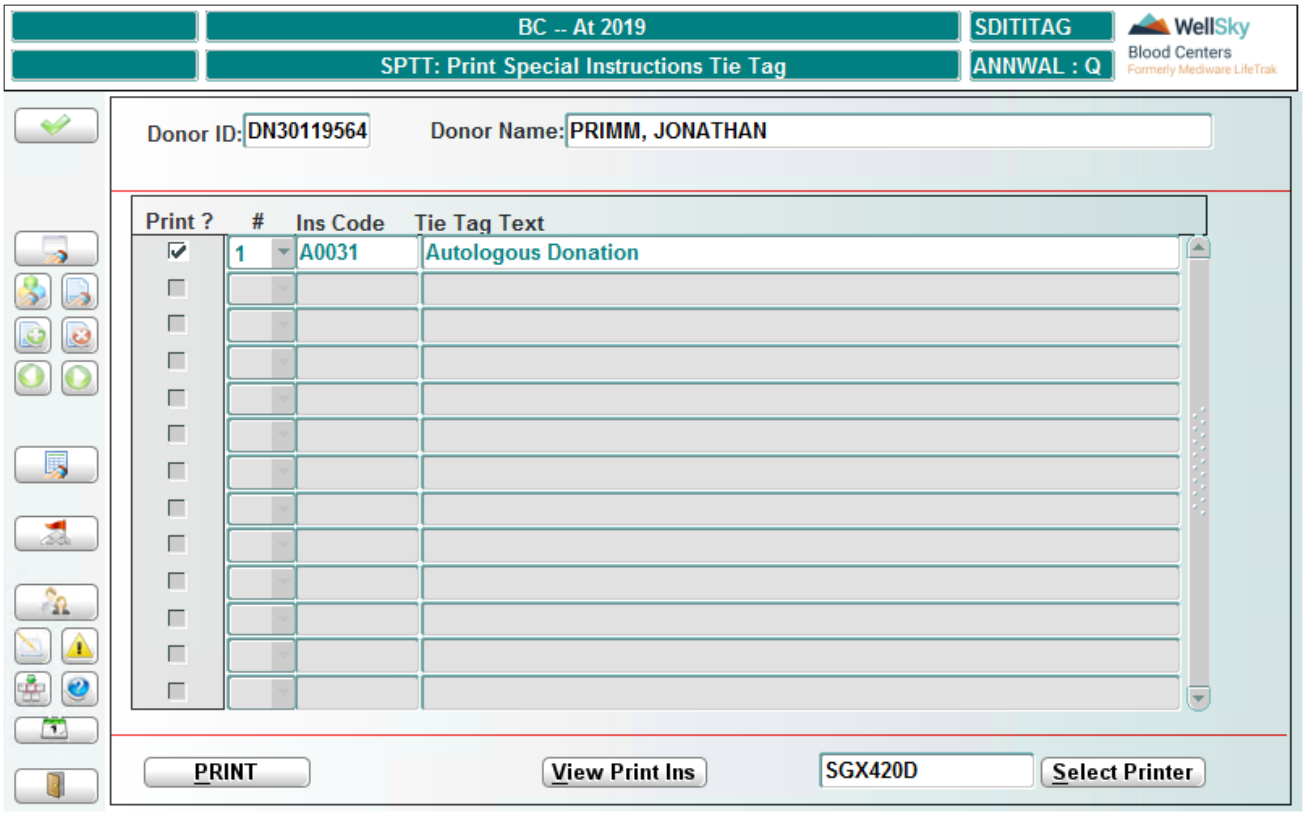


Based on the number of attributes, a tag will print for each special instruction.


VIEW PRINT INS – will be used to see what the tag would look like if printed.

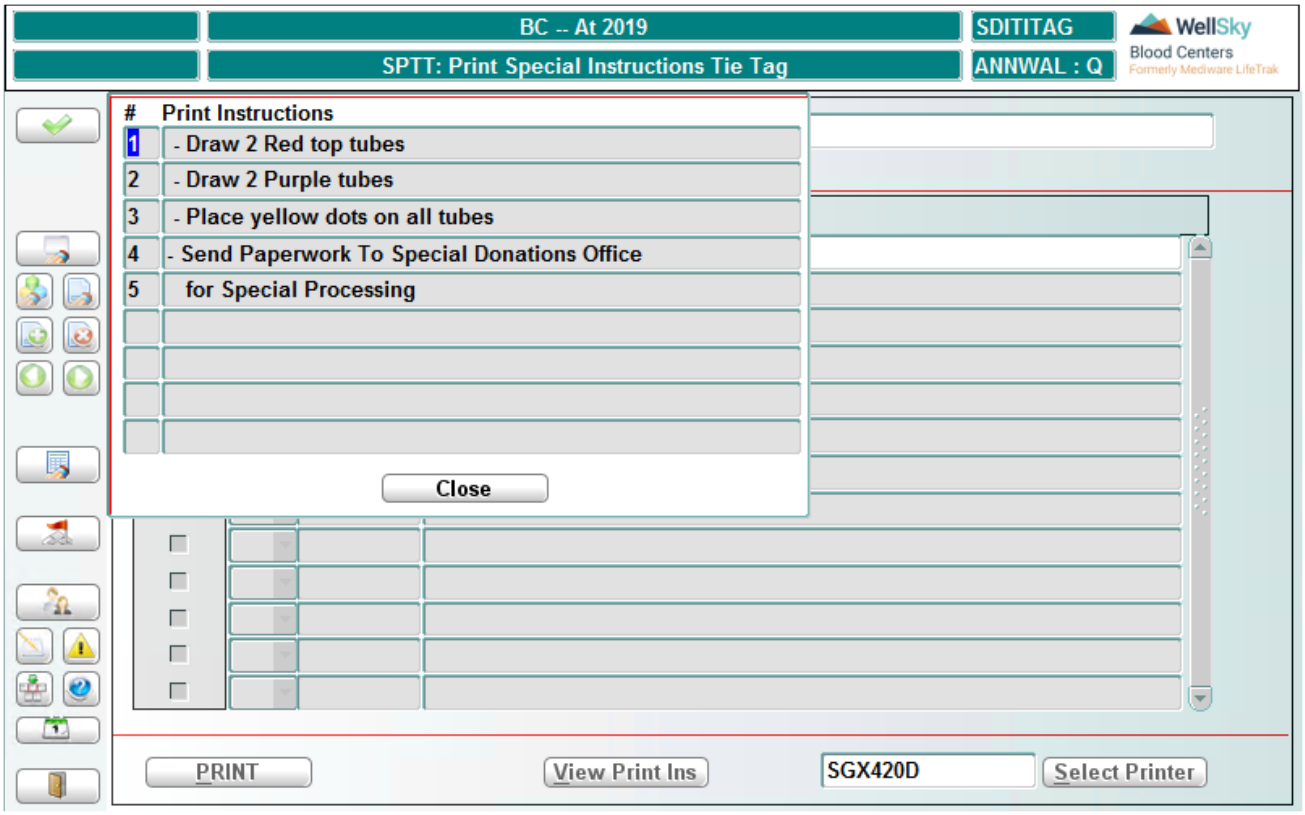


Shows what will actually print on the label

Press **PRINT**.

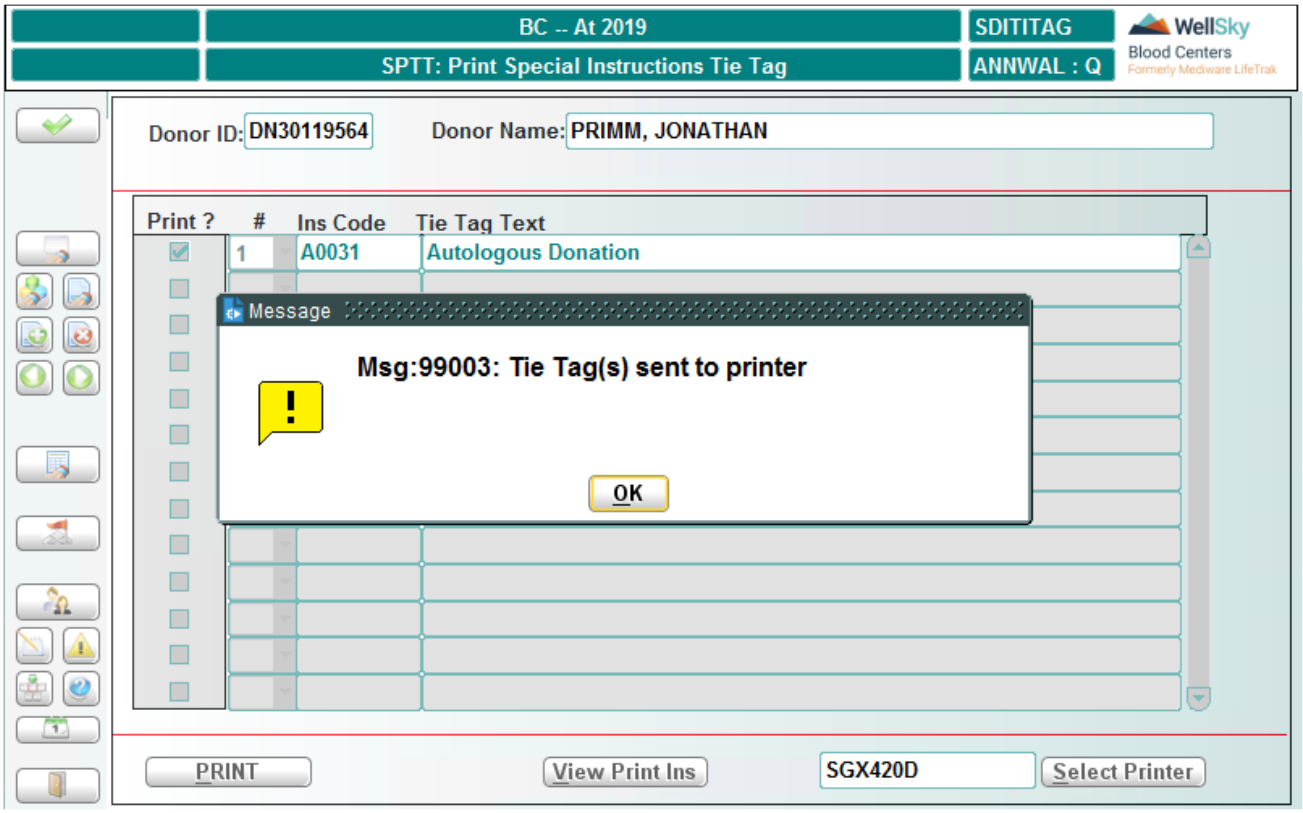
BC -- At 2019
SDITITAG
SPTT: Print Special Instructions Tie Tag
ANNWAL : Q
WellSky
Blood Centers
Donor ID: DN30119564
Donor Name: PRIMM, JONATHAN
Print ?
#
Ins Code
Tie Tag Text
1
A0031
Autologous Donation
Message
Msg:99003: Tie Tag(s) sent to printer
OK
PRINT
View Print Ins
SGX420D
Select Printer

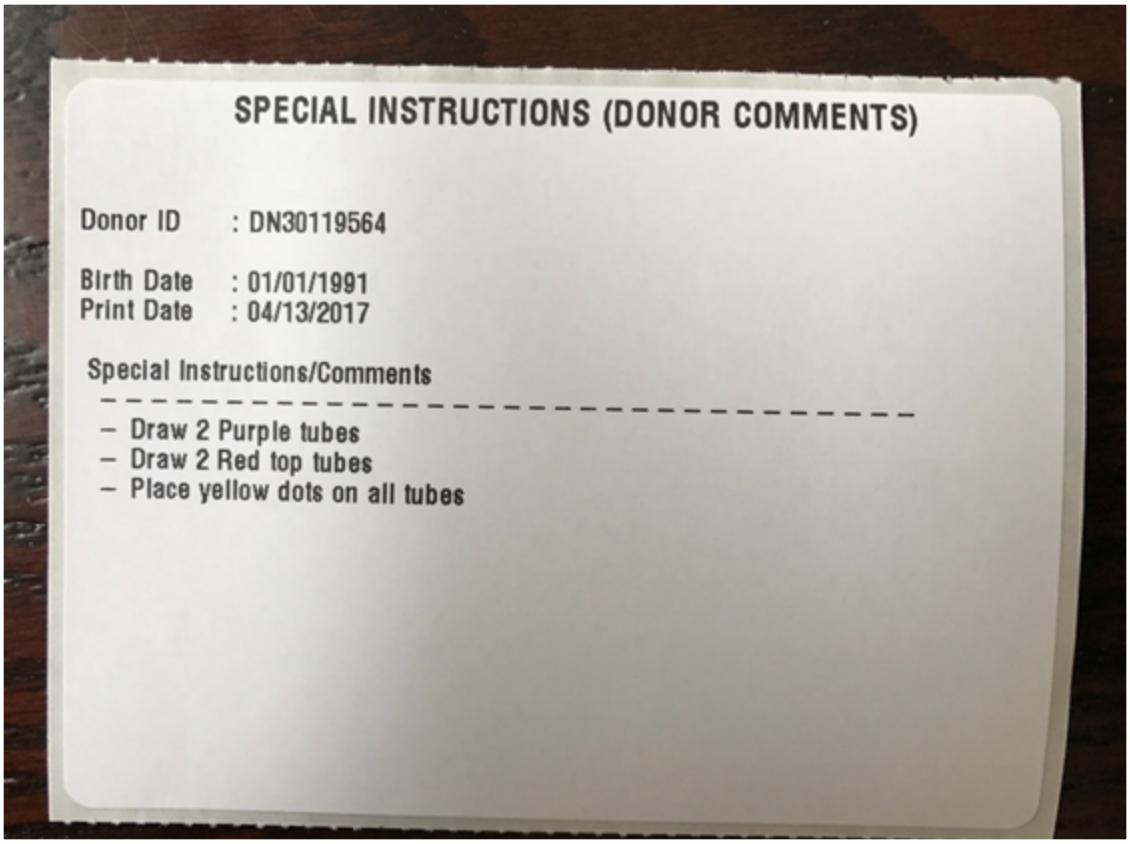
SPECIAL INSTRUCTIONS (DONOR COMMENTS)
Donor ID : DN30119564
Birth Date : 01/01/1991
Print Date : 04/13/2017
Special Instructions/Comments
- Draw 2 Purple tubes
- Draw 2 Red top tubes
- Place yellow dots on all tubes

17.1.5 Printer Setup

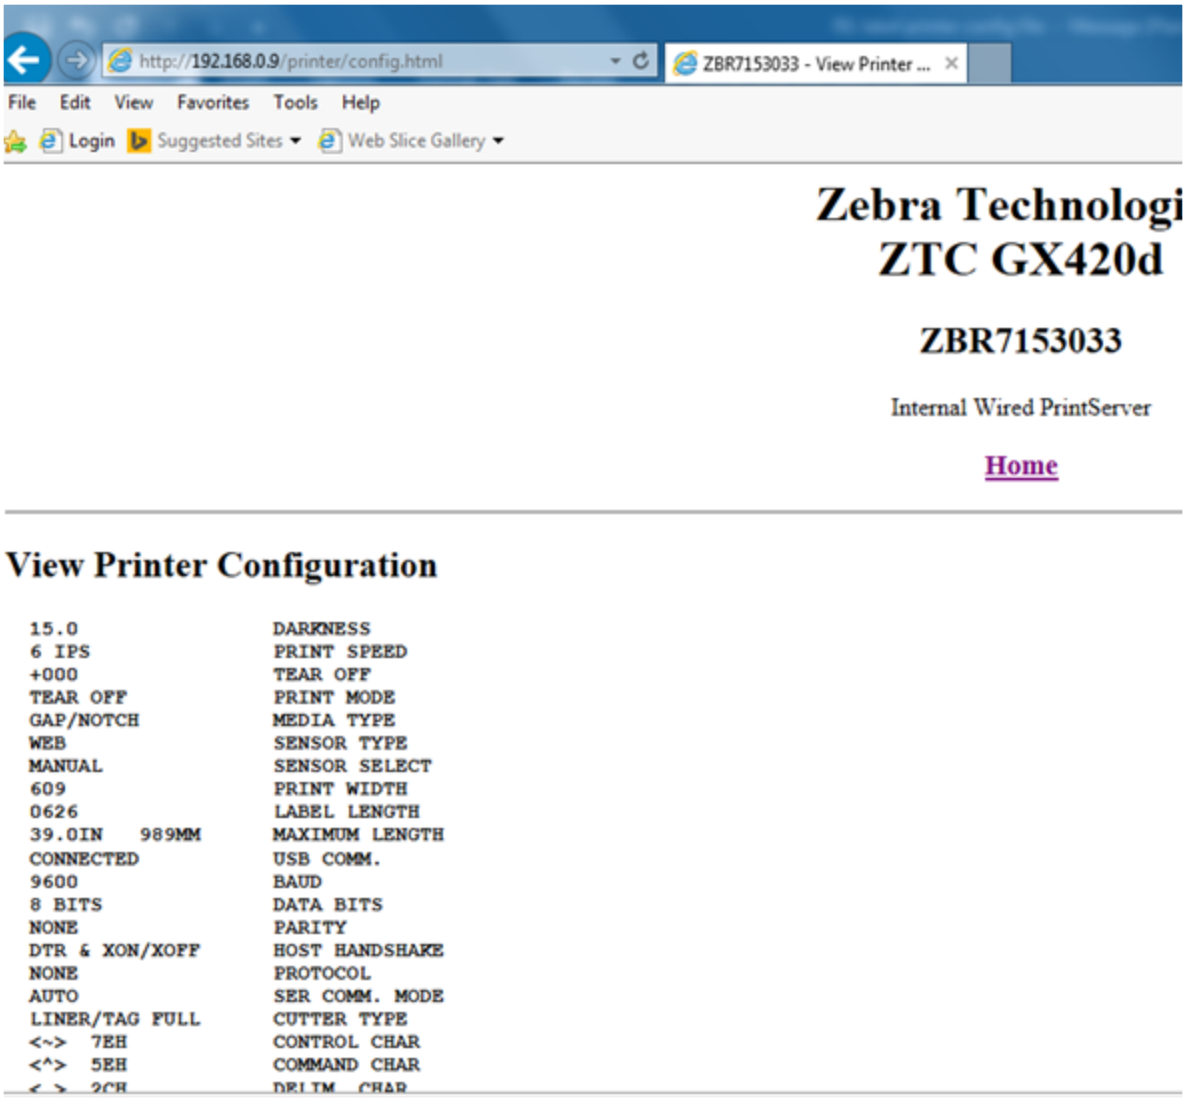

View Printer Configuration

15.0	DARKNESS
6 IPS	PRINT SPEED
+000	TEAR OFF
TEAR OFF	PRINT MODE
GAP/NOTCH	MEDIA TYPE
WEB	SENSOR TYPE
MANUAL	SENSOR SELECT
609	PRINT WIDTH
0626	LABEL LENGTH

39.0IN 989MM	MAXIMUM LENGTH
CONNECTED	USB COMM.
9600	BAUD
8 BITS	DATA BITS
NONE	PARITY
DTR & XON/XOFF	HOST HANDSHAKE
NONE	PROTOCOL
AUTO	SER COMM. MODE
LINER/TAG FULL	CUTTER TYPE
<~> 7EH	CONTROL CHAR
<^> 5EH	COMMAND CHAR
<,> 2CH	DELIM. CHAR
ZPL II	ZPL MODE
NO MOTION	MEDIA POWER UP
FEED	HEAD CLOSE
DEFAULT	BACKFEED
+000	LABEL TOP
+0000	LEFT POSITION
NO	HEXDUMP
045	WEB S.
096	MEDIA S.
012	WEB GAIN
050	MARK S.
017	MARK GAIN
095	MARK MED S.
033	MARK MEDIA GAIN
095	CONT MEDIA S.
007	CONT MEDIA GAIN
020	TAKE LABEL
CWF	MODES ENABLED
...	MODES DISABLED
832 8/MM FULL	RESOLUTION
V56.17.17Z <-	FIRMWARE
1.3	XML SCHEMA
V30.00.014F	HARDWARE ID
CUSTOMIZED	CONFIGURATION
2104k	R: RAM
1536k	E: ONBOARD FLASH
NONE	FORMAT CONVERT
DISABLED	ZBI

2.1	ZBI VERSION
785 IN	LAST CLEANED
785 IN	HEAD USAGE
785 IN	TOTAL USAGE
785 IN	RESET CNTR1
785 IN	RESET CNTR2
30J163200305	SERIAL NUMBER
MAINT. OFF	EARLY WARNING

WellSky Corporation
Proprietary and confidential

Appendix A - Validation/Administration Tables

The tables listed below are grouped by the menu where they reside. Most validation or administration tables reside in Application Administration, module specific administration, such as Recruitment Administration or System Administration. These tables include data that should remain static and require little change once modified to meet your business needs.

In some cases, there are validation tables that may require modification more often. These tables are found in the maintenance functions for the specific module and are listed below under their respective menu, identified by '**'. Although these maintenance functions are listed in the table below, their functional use is described in the WellSky Blood Centers User Guide. Some functions reside in more than one menu. Each menu item for the function is listed.

All validation tables begin with 'V' (e.g., VDIINSTS, Institution Details). Some require modification more frequently than others (e.g., VDIEMPLY, employees table). Some functions listed do not begin with 'V', but may not change often due their functionality. This appendix consists of both types of programs.

Program Name	Title	Keyword	Description
Restricted Validation Tables (VALID)			
VDIINSTS	Institution Details	INST	Defines details associated with an institution. Defined details will appear in reports.
VDICHAPT	Chapter Details	CHAPTER	Permits definition of chapters associated to the institution.

Program Name	Title	Keyword	Description
VDIPARAM	System Parameters	SYSPARM	Defines limits for various types of data to customize the application to the institution's preferences (e.g., projected deferral rate '18').
VDICHDST	Set the Day Light Savings	SETDST	Sets dates and times to enable daylight savings/summer time.
VDIMPROC	Enhance Manufacturing Process Codes	MPROC	
VDIEMCFG	Enhance Manufacturing Mapping Configuration	EMFCFG	
VEMFPROC	Enhance Manufacturing Process Definition	EMFPROC	
DONOR Restricted Validation Tables (DVALID)			
VDICODES	Master Codes	MASTER	Codes that allow flexibility to the modules within the application.
VDIFACNU	Valid Facility Identifiers	FINCD	Associates FIN codes to Chapter ID.
VDIINTER	Interdiction Codes	INTER	Defines interdiction codes that can be applied to donors and donations manually and by the system. Such definition includes description, map to previously-used interdiction codes, deferral flag, fixed period and period type, view level, and whether placement of multiple codes is allowed.

WellSky Corporation
Proprietary and confidential

Program Name	Title	Keyword	Description
VDIREGIN	Registration Holds Mapping	RHOLDS	Used for associating hold codes with each critical data field of the registration process. Also used to group hold codes by department for query purposes.
VDIINTUP	Interdiction Upgrade Matrix	INTUP	Table that controls the placement and removal of interdictions based upon the interdictions already present on the donor and the new interdiction being assigned.
VDITESTS	Define Tests	TESTS	Defines test IDs and the group that the test belongs to (e.g., HBSAG - Hepatitis B Surface Antigen).
VDITERES	Define Test Results	RESULT	Defines which results are valid for which test.
VDIRESOV	Test Result Override Rules	RESOV	Defines which test results can automatically be overwritten.
VDIDOTYP	Define Donation Types	DONS	Defines donation type codes and descriptions.
VDIPRCOD	Define Procedure Codes	PROCS	Defines procedure codes and the red cell and plasma loss for the specified procedure to be considered valid by the system.
VDIDPCOD	Define Donation Procedures	DONPROC	Defines what procedure codes are valid for any donation type.

Program Name	Title	Keyword	Description
VDIEGPCS	Define Duration Between Procedures	DBETP	Determines a donor's donation eligibility based upon the donor's last donation by procedure type, and by minimum allowable duration between procedures.
VDIPROGP	Define Procedure Groups	PROCGRP	Used to equate different procedure codes in eligibility.
VDIEGPRD	Define Max Donations for Proc Groups	MAXDON	For a procedure group, defines the maximum number of donations for a defined interval.
VDIATRIB	Venipuncture Attributes	VENATRR	Defines attributes associated to sponsor requirements and defines venipuncture codes.
UTIFDCFG	Configure Find Donor Block for Program	DONBLOCK	Defines how the Find Donor block is configured at a program level (e.g., enter the last name twice in a program, once in another).
VDINAMEM	Associate Nickname to Name	NICK	Defines name combinations that are to be interpreted as a similar name (e.g., Cindy/Cynthia; Gerald/Jerry; Robert/Bob).
VDICLLOS	Define Eligible Cell Loss	LOSS	Defines the maximum volume a donor can lose over a specified number of days. The maximum volumes are placed into two cell types RBC and PLASMA. These are static values in this table.

Program Name	Title	Keyword	Description
VDIPRCEX	Define Procedure Exclusions	XCLU	Associates an interdiction to a specific donation type/procedure code. That interdiction sets the donor as ineligible for that donation type/procedure code.
Lab Restricted Validation Tables (LVALID)			
VMASTCD	Lab Master Codes	LMASTER	Codes that allow flexibility to the modules within the application.
VDONPP	Valid Donation Type/Procedure Codes	DONPP	Defines attributes that are associated to donation types and/or procedure codes entered in Donor.
VDRIVE	Drives	DRIVES	Displays drive information.
VGRPSITE	Group/Sites	SITES	Defines and views Sponsor Groups and Sites.
VSABO	Valid ABO	ABO	Defines valid ABO types and assign multiple mnemonics that will be recognized as valid by the system.
VDILBLCF	Labeling Configuration	LBLCF	Configures bar codes, product types, and recovered plasma tests. Can also be used to map test messages.
VINTER	Lab Interdiction Codes	LINTER	Defines interdictions which affect the system label decision (SLD) of components.
VINTERCL	Assign Interdiction Class	ICLASS	Associates interdictions to the appropriate interdiction class(es).

Program Name	Title	Keyword	Description
VINTOVER	Labeling Interdiction Override: Tech 1	INTOVER	Defines interdictions that are to be overridden so that certain products can be labeled.
VINTOVR2	Labeling Interdiction Override: Tech 2	INTOVER2	Verifies interdictions that are to be overridden from the Labeling Interdiction Override: Tech 1.
VINTOVRQ	Labeling Interdiction Override Query	INTOVERQ	Queries labeling interdiction overrides.
VDIOVER1	Donor Interdiction Override: Tech 1	OVERDON1	Defines donor interdictions that are to be overridden in the donor deferral registry check.
VDIOVER2	Donor Interdiction Override: Tech 2	OVERDON2	Verifies donor interdictions that are to be overridden from the Donor Interdiction Override: Tech 1 (OVERDON1).
VDIOVERQ	Donor Interdiction Override Query	OVERDONQ	Queries donor interdiction overrides.
VDDCODES	Donor Decision Codes	DDCODES	Defines and updates donor decision codes.
VFFVALUE	Valid ff Flag Values - ISBT	FFVAL	Define the ff value that is assigned to the end of the ISBT number for the facility.
Distribution Restricted Validation Tables (SVALID)			
VSCODE	Define Distribution Master Code Types	CODE	A table of underlying codes associated to each master code.
VSMASTER	Distribution Master Codes	DMASTER	Codes that allow flexibility to the modules within the application.

WellSky Corporation
Proprietary and confidential

Program Name	Title	Keyword	Description
VSABO	Valid ABO	ABO	Defines valid ABO types and assign multiple mnemonics that will be recognized as valid by the system.
VSANTGN	Antigen Tests	ANTGN	Defines and displays valid antigen tests.
VSPRDTYP	Inventory Product Types	PRODTYP	Defines and modifies manufactured products, standard pricing, and inventory product groupings.
VSUBSTIT	Valid Product Substitutions	SUB	Defines inventory products that may be substituted for an ordered product if the customer specifies that a substitution is acceptable.
VABOCOMP	ABO and Product Compatibility	ABPCOMP	Defines ordered product and ABO combinations that are compatible with other inventory product/ABO combinations.
VORDCLA	Order Class Codes	ORDCL	Defines classifications for orders in terms of priority and response time.
VSBOXCAP	Shipping Box Capacity	BOXCAP	Defines the number of products that can be packed in a single container.
VSREASON	Return Reason Codes	REASON	Defines valid reasons for return of products from customers.
VSPMATRX	Pool Compatibility Matrix	PSCOMP	Defines product types that are associated to pooled product types.

Program Name	Title	Keyword	Description
VCUSTPRD	Customer Consignee Product Details	VCUSTPRD	Specifies the inventory product types or product codes that will be unavailable to specified customers and consignees.
WellSky Restricted Validation Tables (WSKYRVT) - Updates done by WellSky.			
VTIDONID	Define All Donor ID Sequences	ALLIDS	Defines control of different sequence numbers used in the application.
VDIERROR	Error Codes	ERRORS	Defines all user messages displayed throughout the system.
VDIDGMAT	Donor Grading Matrix	GRADMAT	Defines critical donor data elements and assigns a grade based on a comparison with other donor data elements using the Find Donor block and other processes.
DEIVALOP	Define Operators	OPER	Defines the operators used in the list creation for Donor Enlistment.
LPIMASTR	Maintain Laptop Tables	LAPMASTR	Identifies all tables replicated for the Laptop Lookup programs.
UTQDONOR	Find Donor Routine Logic	UTDONQ	Validates donor IDs.
VABOVAL	Valid ABO Values	ABOVAL	Identifies and is used to determine appropriate values for display, calculation, and printing.
VSCANTYP	Valid Scan/Scale Interfaces	SCANTYP	Contains the scale configurations for automatic interface of weight.
VBARCODE	Bar Code Translations	BARCODE	Defines numeric to alpha conversions.

Program Name	Title	Keyword	Description
VERRORS	Lab Error Codes	LERRORS	Defines all Lab error codes and their descriptions.
VSERRORS	Dist Error Codes	DERRORS	Defines all Distribution error codes and their descriptions.
Blood Center Report Maintenance (BCRM)			
RMIMASTR	Maintain Reports Master Table	RMASTER	Identifies printer types and assignments
Blood Center Menu Administration (BCMA)			
LTIMITEM	Maintain Menu Items	MENUITM	Identifies access levels for functions/working groups and application password enforcement for some validation tables.
LTIGROUP	Define Groups	GROUPS	Identify working/functional groups. (ADM00 is reserved for WellSky Support.)
User Access Administration (USER)			
UTIOPSWD	Reset User Password	RESET	Used to update a different user password for one time entry into the application.
LTIAUSER	Add System User	ADDUSER	Create system users or modify their working/functional group access and/or level.
VDIPWCFG	Password Configuration	PWDCFG	Configures the parameters users must adhere to in order to create valid user passwords.
Lab/Distribution User Administration			
VUSERCLA	Assign User Interdiction Class	UCLASS	Associates users to interdiction classes.

Program Name	Title	Keyword	Description
VWAREUSR	Assign User to a Warehouse	WUSER	Associates users to warehouses and printers.
VLIUACLS	Define Lab User Access	LUACCESS	Defines access classes to a user.
Donor User Administration			
VDIACLSS	Define Access Class	ACCESS	Used to assign interdictions to access classes.
VDIUACLS	Define User Access	UACCESS	Associates users to access classes for interdictions/attributes, special view or extended capabilities.
LTIFNGRP	Modify User Access within a Group	MUAG	Modify a users access level within a working/functional group.
DPQINTER	Access Class by Inter Code Query	ACCQ	Displays the access classes to which a particular interdiction or attribute is associated, and the users and their access level in that class. All interdictions associated to the class can be displayed as well.
UTQCKACC	User Access to Menus and Interdictions	MENUQ	Queries a user's association to a working/functional group, their level within the group, the programs in the group, and the access class and level for the user.
Recruitment Administration (RECADM)			
VDIRESRC	Define Resource Master List	ALLRES	Define valid critical resources pertinent to drive scheduling (e.g., STAFF).

WellSky Corporation
Proprietary and confidential

Program Name	Title	Keyword	Description
VDIAVLRS	Define Resource Availability Rules	RESRULE	Defines the day a resource is available, and the number of resources available for that day (e.g., 25 staff are available on any Monday).
VDIDYSTS	Define Day Status Codes	DAYSTAT	Defines limits by resource for a display of drive feasibility.
VDITERTR	Create and Maintain Territories	TERINFO	Used in the Recruitment module to define recruitment territories and the sponsors associated to them.
MRIBCGOL	Define Collection Goals by Month	GOALMON	Defines collection goals by month for different goal types (e.g., Recruiter, Institution, Territory).
MRIDTGOL	Define Collection Goals by Date Range	GOALDT	Defines collection goals by a date range and weekdays for different goal types (e.g., Recruiter, Institution, Territory).
MRIDEFCL	Define Default Drive Checklist	DEFCLIST	Defines 'tickler' actions to be taken for drive management.
VDIDRULE	Define Drive Category Rules	DRULE	Drive scheduling rules that limit the number of drives in a day by drive type, or by combination of drive types.
** Recruitment Maintenance (MRMAINT)			
MCICNHLD	Confirm On-Hold Drives	CONFIRM	
MCIMOBDR	Modify Drive Details - Super	SDRIVE	
MCIFIXDR	Create or Modify Special Drive	SPDRIVE	
MCICANSF	Cancel Special Drive	CANSPDRV	

Program Name	Title	Keyword	Description
MCIEXRES	Define Resource Exceptions	RESXP	
MCIHILIT	Enter Calendar Highlights	HILITE	
VDIEVENT	Create Events	EVENT	Allows entry of community events that may affect blood collection (e.g., holidays).
MRICAMPG	Create and Modify Campaigns	CAMPAIGN	
VDIITEMS	Enter Promotional Items	ITEMS	Define promotional items (e.g., T-shirts).
MRIPROMO	Assign Promotional Items to Campaigns	PROMOS	
VDIEMPLY (1st listing)	Maintain Staff Details	STAFF	Define details associated with recruitment staff. Other menu entries for staff include mobile staff (STAFF4), fixed site staff (STAFF2) and production control drivers (STAFF3).
MRITERRT	Assign Territory to Recruiter	TTOR	
VDIUPRIV	Determine Care-Taker Recruiter	CTREC	In the Recruitment module, allows temporary assignment of recruitment territory to a recruiter while the primary owner is not available.
MRITERMS	Merge or Split Territories	RTER	
MRUSPMRG	Merge Duplicate Sponsors	SPMRG	
MCISLOTS	Define Mobile Drive Slot Parameters	MSLOTS	
** Collection Staff Maintenance (SSMAINT)			

WellSky Corporation
Proprietary and confidential

Program Name	Title	Keyword	Description
VDISKLDF	Skill Definitions by Job Code	JOBSKILL	Used in Staff Scheduling, defines skill level for a job description using a numerical value.
VDIEMPLY (2nd listing)	Maintain Staff Details	STAFF4	Define details associated with collections staff (e.g., Team Leader).
SSIEMPSK	Enter Job and Skills to Collection Staff	STFSKILL	
SSIDTEAM	Maintain Collection Staff Teams	TEAMS	
VSIUNAVL	Reason Codes for Staff Unavailability	REASCD	Defines reason codes for staff unavailability (e.g., Jury Duty).
SSISWARN	Mobile Staff Alerts	SWARN	
VDIDIFFS	Enter Differential Codes	DIFFS	Permits entry of pay differentials to be used in staff Cost Per Unit calculation.
Donor Center Administration (DCENADM)			
MCIDRLOC	Define Donor Center	FSITE	Defines a donor fixed site for planned opening by type of site or allows modification of an existing site (e.g., Weekly Fixed Site).
VDIFIXST	Enter Time Slots and Capacity	TIMESLOT	Establishes time slots for appointments at donor centers for special or allogeneic donors by procedures.
DSIFIXST	Define Flexible Time Slots and Capacity	UCAP	Establishes time slots for appointments at donor centers for special or allogeneic donors by procedures.
DSIOPNSL	Open Appointment Calendar	OPENSITE	Verifies time slots for fixed site appointments and allows scheduling donors for those times.

Program Name	Title	Keyword	Description
DSUSLOTS	Modify Calendar and Capacity	MODLOAD	Allows modification to existing time slots for fixed sites.
**Donor Center Maintenance (DSMAINT)			
MCIFIXDR	Create or Modify Special Drives	SPDRIVE2	
MCICANSF	Cancel Fixed and Special Drives	CANSF	
MCICRTFX	Create Fixed Drives Automatically	FIXDR2	
VDIEMPLY (3rd listing)	Maintain Staff Details	STAFF2	Define details associated with a fixed site staff member.
DSIFXSTS	Assign Staff to Donor Center	FIXSTAFF	
VDIFIXAT	Define Apheresis Machines	MCODE	
** Prod Control & Transport Maintenance (PRMAINT)			
VDIEMPLY (4th listing)	Maintain Staff Details	STAFF3	Define details associated with a driver (e.g., Van or Coach).
VDIVECHL	Maintain Vehicle Details	VEHICLE	In the Production Control and Transportation module, stores details such as license and registration dates, and assigns system identification numbers, for vans, coaches, and other company vehicles.
Registration Administration (REGADM)			
VDIPHYRL	Define Physical Findings Values	PHYRULE	Defines minimum and maximum limits for each physical finding. Defines the appropriate deferral period for an out-of-limit response.

WellSky Corporation
Proprietary and confidential

Program Name	Title	Keyword	Description
VDIPFTP	Create Physical Findings Template	PHYTEMP	Defines required physical findings by donation type/procedure code to be used in donation/deferral audit.
VDIHHQUS	Health History Questions Bank	HHQBANK	Defines valid health history questions that are used in developing templates that represent questions as presented on the donor record.
VDIHHANS	Define Health History Responses	HHR	Defines unexpected responses for valid health history questions. Defines the appropriate deferral period for an unexpected response when applicable.
VDIHHTP	Create Health History Template	HHQTEMP	Defines questions as presented on the donor record.
VDIABBRQ	Abbreviated Questionnaire Setup	ADHQ	Sets the parameters for the abbreviated questionnaire.
VDIWEBCF	FastTrak Web Configuration (Onsite)	WEBCFG	Configures the OnSite FastTrak Donor Response system online response and multi-language flags.
VDIALTID	Alternate ID Configuration	ALTID	Inserts, updates, and deletes the Key grade for a donor in the Find Donor window.
** HLA Maintenance Functions (HLAMAIN)			
VDIHLALC	Define HLA Antigens	HLANTI	Defines valid HLA antigens (e.g., A3, B7).
VDIEPITO	Define HLA Cross-Reactive Groups	HLAEPI	Allows definition of industry recognized cross reactive HLA antigen groups (e.g., A1-CREG).

Program Name	Title	Keyword	Description
VDIHLAGR	Define HLA Matching Grades	HLAGRAD	Defines industry standard acronyms for HLA matching (e.g., B1U1X).
VDIXXREC	Associate Strong Reactivity	HLAXX	Defines cross-reactivity of HLA antigen pairs.
VDIHLITM	Define HLA Interim Output	HLAINT	Defines the match interpretation for recipient to donor comparison per loci (e.g., II, ID).
Notification Administration (DNADM)			
VDILETTR (1st listing)	Define Notification Letters	DEFLET	Define notification letter details (e.g., Test Result Notification, Donor Apology). Program also used for Define Communication Letters (COMLET).
VDIDNINT	Associate Letter to Interdiction	INTERLET	Used in Donor Notification module, defines what letter is suggested for an interdiction.
VDRVWLTR	View Letter Templates	VDRVWLT2	Used in Reports.
VDRNTLTR	Valid Notification Letters	VDRNTLTR	Used in Reports.
Donor Communication Admin. (DCOMADM)			
VDICOMTP	Define Communication Types	COMTYPE	Identifies the type of communication the institution may have with a donor.
VDILETTR (2nd listing)	Define Communication Letters	COMLET	Define communication letter details (e.g., Donation History). Program also used for Define Notification Letters (DEFLET).
Component Administration Tables (COMPADMN)			

WellSky Corporation
Proprietary and confidential

Program Name	Title	Keyword	Description
VATTRIB	Attribute Codes	ATTRIB	Identifies valid attribute codes and billing, interdictions, etc. associated with the interdiction.
VATTRCFG	Smart Manufacture Attribute Configurator	ATRCFG	Configures the attributes that can be placed in that function.
VCATALOG	Valid Catalog Numbers	CATALOG	Defines and displays the manufacturer catalog numbers of bags, sterile connection wafers, needles, segments, and filters used in component production and modification.
VLOTS	Lot Details for Bags	LOTS	Defines lot numbers of bags, filters, needles, segments, and sterile connection wafers used in component production and modification.
VFILTER	Valid Filters	FILTERS	Defines and updates filter information. Allows definition of valid product types to be used with different filters.
VPRODUCT	Product Codes	PRODUCT	Defines Codabar and ISBT product code information.
VLICPROD	Licensed Products	LICPROD	Selects and modifies the list of licensed products available to a given chapter.
VPRDTYAT	Default Product Code Attribute - ISBT	PRDTYAT	Defines default core conditions to be used when determining possible ISBT product codes.

Program Name	Title	Keyword	Description
VPRDATTR	Product Type Attributes (ISBT/Codabar)	PRDATTR	Defines attributes that can be added to specific product types.
VATTRMAT	Valid Attribute Matrix - ISBT	ATTRMAT	Defines attributes that, when added, should either cause another attribute to be placed or cause the core condition of a product to be changed.
VPRDTYPE	Product Type Data - (Codabar/ISBT)	PRDTYPE	Defines attributes that can be added to specific product types.
VPROCPRD	Product/Procedure Matrix - Pheresis	PRODPROC	Queries and defines product types that can be collected from specific apheresis procedures.
VATTREQU	Procedure Attribute/Equipment Matrix	ATTREQUP	Defines valid attributes for equipment used in the collection of apheresis products.
VPRODEQP	Equipment/Product cGMP Matrix	EQUIPROD	Defines and queries cGMP parameters for products collected by apheresis.
VPRODCON	Product Conversions (ISBT 'SP'/Codabar)	PRODCONV	Defines valid product conversions.
VFRMSTCD	'SP' Special Processing Master Codes	FRMASTER	Codes that allow flexibility to the modules within the application.
VPROCSTA	'SP' Processes and Stages	PROCSTAG	Defines process and applicable stages used in component special processing.
VPRODPRO	'SP' Products and Special Processes	SPPROC	Defines special processes that can be performed on different product types.

WellSky Corporation
Proprietary and confidential

Program Name	Title	Keyword	Description
VANTGGRP	'SP' Antigen Group Definitions	ANTGGRP	Defines antigen combinations associated with antigen groups.
VRARITY	'SP' Antigen Rarity Combinations	RARITY	Defines and displays rare antigen combinations.
VABOSLD	Valid Pool ABO Values	POOLSLD	Defines the system label decision that should be assigned to pooled products based on the ABO of each product being added to the pool.
VATTROVR	Attribute Expiration Override - ISBT	OVR	Defines attributes with associated lifespans that, when present, should override the lifespan of another attribute.
VCRYOMTH	CRYO Methods	CRYOMET	Defines the valid parameters for CRYO preparation, including thaw method, thaw temperature range, thaw time range, and freeze time range.
VCONTPRD	Pre-Printed Product Labels - ISBT	PREPRINT	Defines the product code labels that will not print when defining ISBT products.
VDIAUTOI	Configure Interdiction Placement	CIP	Configures interdictions that will interdict a single product, multiple products, or a specific product type.
VALIQUOT	Valid Aliquots	VALALI	Defines and updates product codes that will be defined when dividing a product.

Program Name	Title	Keyword	Description
VPATTRIB	Valid Product Code Attributes	ATTRPRD	Defines attributes that are associated to a particular Codabar product code.
VPRODMAT	Product Combinations	PRODCOM	Enters product combinations for set bag configurations.
VCIMATR	Delete Product Combination	DPRODCOM	Displays or removes product combinations for set bag configurations.
VPRODBAG	Product Bags	PRODBAG	Defines valid product to bag combinations.
VPATHCFG	Pathogen Reduction Process Configurator	PRCONFG	Defines validation values to be used during the process of pathogen reduction.
Testing Administration Tables (TESTADM)			
VTESTNEW	Available Tests	TEST	Defines valid tests, including interdictions and attributes that are automatically placed based on test results.
VCONTRCT	Internal Contract	CONTR	Defines internal contract information.
VINTST	Instrument Tests	INTST	Identifies tests performed on various instruments.
VINTSTRS	Instrument Test Results	INTSTRS	Maps instrument results to test results accepted within the application. It also maps external testing lab results that are to be uploaded using the WellSky Blood Centers Surround upload process.
VTILABS	Valid Remote Testing Labs	VTILABS	Identifies testing facilities to which samples may be sent.

WellSky Corporation
Proprietary and confidential

Program Name	Title	Keyword	Description
VADDTST	Valid Additional Tests: Remote Testing	VADDTST	Identifies tests in addition to profile tests that can be included in a remote sample file (e.g. CMV).
VRTURMAP	Horizontal Test File Mapping	HTFM	Maps the results location of specific tests in the horizontal test result format (e.g. Surround, ARC) test file.
Multiple Observation Testing Administration Tables (MOTADM)			
VBNDRES	Valid Multiple Observation Results	VMOR	Identifies the result codes that can be used in resulting multiple observation tests.
VTSTYPES	Multiple Observation Test Types by MFG	MOTTMFG	Identifies different manufacturers and the requirements in resulting tests performed using that manufacturer's method.
VTSTBAND	Multiple Observation Fields	MOF	Identifies fields and headers that will be resulted for each test ID.
VTBNDMAT	Multiple Observation Result Matrix	MORM	Identifies valid combinations of bands and the acceptable band value for a final system result interpretation.
Equipment Administration Tables (EQSUP)			
EQIMASTR	Equipment Master Codes	EQMAST	Codes that allow flexibility to the modules within the application.
Product Location Definition Tables (PLOC)			
VSSTRDEV	Storage Device Details	DSTORE	Defines valid storage devices and locations for specified warehouse locations.
VSPRDSTR	Product Storage Definition	PSTORE	Defines valid product storage information by inventory product type.

Program Name	Title	Keyword	Description
VSRCKDET	Rack Definition	RSTORE	Defines specific product types to be stored on a specific rack of a storage device at a specified warehouse location.

WellSky Corporation
Proprietary and confidential

Appendix B - Chapter Tables

The following tables are looked at by the system as Institution level even though they may have a specific chapter displayed in the table.

Donor

Table	Keyword
VALID_PARAMETERS	SYSPARM
VALID_ACL_CODES	ACCESS
VALID_COMMUNICATION_CODES	COMTYPE
VALID_DAY_STATUS	DAYSTAT
VALID_DIFFS	DIFFS
VALID_DONATION_TYPES	DONS
VALID_DONPROC_CODES	DONPROC
VALID_ELIG_CELL_LOSS	LOSS
VALID_ELIG_PERIODS	MAXDON
VALID_ELIG_PROCS	DBETP
VALID_HH_ANSWERS	HHR
VALID_HH_QUESTIONS	HHQBANK
VALID_HLA_EPITOPES	HLAEPI
VALID_HLA_GRADING	HLAGRAD
VALID_HLA_LOCUS	HLANTI
VALID_ITEM_MASTER	PROMOS
VALID_NOTIFIC_LETTERS	INTERLET
VALID_PHYSICAL_RULES	PHYRULE
VALID_PROC_CODES	PROCS
VALID_PROC_GROUPS	PROCGRP

Table	Keyword
VALID_PROFILE_TESTS	TEST
VALID_RESOURCES	ALLRES
VALID_RESULT_OVERRIDES	RESOV
VALID_SKILLS	JOBSKILL
VALID_STRONG_REACTIVITY	HLAXX
VALID_TERRITORIES	TERINFO
VALID_TEST_RESULTS	RESULT
VALID_VEHICLES	VEHICLE

Lab/Distribution

Table	Keyword
VALID_COLLECTION_AGENCIES	COLLID
VALID_CRYO_METHODS	CRYMET
VALID_FF_VALUES	FFVAL
VALID_FILTERS	FILTER
VALID_INSTRUMENT_TESTS	INTST
VALID_INSTRUMENT_TEST_RESULTS	INTSTRS
VALID_LOTS--LOTS	LOTS
VSERV_CHARGE_CODES	VCHARGE
VSERV_CODE_NAMES	VSCODE
VSERV_PS_MATRIX	PSCOMP
VSERV_RETURN_REASONS	REASON
VSERV_CODE_NAMES	VSCODE

The following tables should have these settings in the Blood Centers Configuration table:

- Chapter ID= `ALL`
- Multi Chapter = `Y`
- TimeZone = `N`

Donor
DONOR_ADDRESSES
DONOR_HLA_ANTIGENS
DONOR_INTERDICTIONS
DONOR_RBC_ANTIGENS

Donor
DONORS
INTER_TRANSACTIONS
VALID_COMMUNICATION_CODES
VALID_DIFFS
VALID_DONATION_TYPES
VALID_DONPROC_CODES
VALID_ELIG_CELL_LOSS
VALID_ELIG_PERIODS
VALID_ELIG_PROCS
VALID_HH_ANSWERS
VALID_HH_QUESTIONS
VALID_HLA_EPITOPES
VALID_HLA_GRADING
VALID_PHYSICAL_RULES
VALID_PROC_CODES
VALID_PROC_GROUPS
VALID_PROFILE_TESTS
VALID_RESOURCES
VALID_RESULT_OVERRIDES
VALID_TEST_RESULTS
VALID_PARAMETERS
VALID_TEST_RESULTS

Lab
VALID_TESTING_LABS
VALID_ADDITIONAL_TESTS
VALID_FF_VALUES
VALID_TESTING_LAB_CONTRACTS

Dist
VSERV_CODE_NAMES
VSERV_PS_MATRIX

This Page Intentionally Left Blank

Appendix C - Barcodes

C.1.1 Equipment (Machine) Barcodes

For the equipment scan ,the field accepts the Equipment reference number as the scanned value. The third column in EQSTATQ is the reference number. The number looks like EQ-000044. The barcode should only contain the start and stop codes and then the complete numerical value. The start and stop codes are + and +

EXAMPLE – Equipment reference number is EQ-000044: the barcode should be +000044+

That equipment reference number is assigned by Blood Centers when the equipment is created ; this is how Blood Centers links the machine code with the serial number.

C.1.2 Centrifuge Barcodes

To create a centrifuge barcode the start and stop codes are c and c. The barcode should contain the equipment code number and not the reference number.

EXAMPLE – Centrifuge is 001: the barcode should be created to read in notepad c001c

C.1.3 Deferral ID Barcodes

The format for deferral ID barcodes is code 128 using the start and stop codes of ‘c’ and ‘c’ with 8 digits, as shown in the following example:



The eye-readable portion of the barcode may or may not include the 'c' start and stop codes.

This Page Intentionally Left Blank

Appendix D - System Parameters

Parameter	Value*	Description
* These are examples of the types of values to enter, although some are hard-coded and should not be changed. If you have questions about the value of a parameter, call the WellSky Helpdesk.		
ABOPP	ALL	All ABO Types.
ADATE	01-jan-1990	Effective date for simplified audit. **Important:** The value of this system parameter must be a date that precedes the system date for the appropriate interdiction to be placed in NHOLD form.
AGE_LOW	17	Youngest a donor can donate without screener receiving a warning in the ONILKREG- Lookup and Registration screen.
AGE_UPPER	65	Oldest a donor can donate without screener receiving a warning in the ONILKREG- Lookup and Registration screen.
ALTID_MODE	A	In the Find Donor block, defines required usage of the ALT ID fields, as follows: A – Alternate ID field must be entered
AUTO_PRINT	N	Print the donor card automatically in the On-Site Module Registration programs (ONILKREG, ONPLKREG).

Parameter	Value*	Description
AVGHR	5	This parameter contains the average number of hours for any drive. It is used to control which staff get assigned to which drive in the following manner. If the AVGHR parameter is set to four, any drive that is less than four hours, will be assigned staff from the list of eligible staff, sorted by who has the MOST hours already scheduled. Drives more than four hours will be assigned staff from the list of eligible staff, sorted by who has the LEAST hours already scheduled. This parameter is used so that staff with lesser hours get precedence for longer drives. NOTE: Setting this parameter to 0 will always sort the list in least order, which will assign staff regardless of the number of hours to the drive. The effect of doing this is that your staff with the least number of hours are assigned to drives, based upon the order of the drives, not on the number of hours scheduled for the drive. This is one reason that the under time and overtime is not controlled better.
AVGSK	5	This parameter is used to assign the average skill rating for a drive. As the staff scheduling program assigns each staff, it will recalculate the average skill of the people already assigned to the drive. If the average for the drive is below this number, it will sort the available staff by descending skill rating, so that a more experienced person can be selected next. The skill rating assigned to a specific drive will override this value because staff without the minimum skill rating will not be considered.
BAGPR	100	Bag type % default setting.
BAGTY	53	Bag type default setting.
BATCH_REG	Y	REGIS: By Batch verifies entries between First Unit ID/Last Unit ID, or (N) no verification.
BC_SCAN_RE	Y	Scan ID required during On-Site Registration (Y or N).
BC_WIDTH	30	Sets the size of the QR barcode in FastTrak so it can be viewed on a phone and printed in an email.
BDRLOC	User-defined	The location where the BDR report will be stored.
CB_ID	CHECKIN BATCH ID	Used to place notes on check-in batches. The BATCH_INPUTS table is used to pull the batch ID into the Notes. window. This parameter is static and cannot be changed.
CDIFF	60	Days back to check mismatched coll date lab & donor
COCOST	35	Coach Fixed Cost for projected cost.

WellSky Corporation
Proprietary and confidential

Parameter	Value*	Description
CNFM_FLD	L or D	The field that is required to be re-entered when the Find Donor block is configured as 'Y' in the protected entry column for Donor ID. This field will also be used when the system parameter BC_SCAN_RE is set to be required for assignment of the scan ID for donors. Entries are: L=last name, D=DOB
COPY_DAYS	30	Number of days in which the On-Site health history program will display previously answered questions.
CPUDAY	14	Maximum no. of days for CPU recalculation.
CUE_LOC	L-for Link, B- for Bleed	The program in which the CUE field is located when using the VISTA interface.
CUEYN	Y	Scan donor CUE in donor registration or not .
DAYS_RAPND	7	RAPND hold interdiction **NOTE –** This is optional functionality. If you decide to use this functionality, contact WellSky for assistance in configuration.
DAYS_TRPH	7	TRPH hold interdiction **NOTE –** This is optional functionality. If you decide to use this functionality, contact WellSky for assistance in configuration.
DDATE	140	Number of days in which drive is selected for REGIS.
DEFRT	18	Default value of projected deferral rate for mobile.
DELAY	1	Enter 0-9 seconds to delay the cursor movement in the Health History View/Signoff. Zero value will cause no delay.
DNLB_ABO	7	Days back to perform Historical ABO Interface.
DNLB_AUDIT	45	Days back to perform Registration Audit Interface.
DNLB_DRIVE	14	Days forward to perform Drive Information Interface.
DNR_HINT	Hint	Ask the screener for a assistance if you do not understand the process. This is the hint line sentence that displays under the response to the question on understanding English in the ONIDNRES.
DNR_RES	YES	Response the donor will enter to acknowledge he/she can read and understand English.
DNSUP	Name	Name of person that appears on the notification letters.
DONLIST	Y or N	Donor List Running Locking flag.

Parameter	Value*	Description
DRCHG	3	Drive details can be changed for sysdate_DRCHG days.
DRDAT		Rollover Drives at least after so many days. Required but not currently used .
DRVDISPREP	3	Go back 3 months to display drives on SPALL report.
DSFINISH	Y or N	Y - Finish button enabled to be used during survey. N - Finish button disabled (does not display).
DYLMT	0	Number of days limit on Create/Revise Drive.
EFRNG	1.58	Efficiency range - used for estimating resources.
EMF_UTIL	Y	Turn on the Enhance Manufacturing Utility.
ENCRPT_REQ	Y or N	Used during mobile Donor Registration to determine whether to encrypt or not encrypt the file at time of extract . If set to 'Y', the file is encrypted; if set to 'N', the file is not encrypted.
EQUIPQC_RQ	Y or N	Enter Y for entry of equip/supply in PF and Bleed (On-Site). Enter N to not require equipment QC. The Supply tab will be hidden in Physical Findings (PF). The Equipment and Supply tab will be present in BLEED, where entry will be optional.
ERROR_DIR		Directory where the user errors will be written in the Donor subsystem. Specify the directory name mentioned in the oracle parameter UTIL_FILE_DIR .
ERROR_LOG		Specify the name of the file in which log entries should be recorded (for example, USER_ERR.log) .
ETHNIC	Y or N	Determines whether *Ethnicity* field in DEFREGIS, REGIS, and WELCOME screens are required or optional. Enter `Y` to make the *Ethnicity* filed a required field; enter `N` to make the *Ethnicity* field an optional field.
EXTDLT		Determines the delineator used in the extract file for mobile PC donor registration.
FCARD	DPRFSANT	Fixed site Donor Card print program.
FD_PRVFLD	Y	Key previous field allowed in FINDDONOR BLOCK.
FIXDEFRT	12	Default value of projected deferral rate for fixed drives.
FNAME	Y	Use First Name field in Find Donor block.
GALLON_IMG	GALLON.bmp	Gallon pin logo that shows up when donor has reached minimum gallon value.
GALLON_VAL	8	The number of donations that defines a gallon has been donated. (Used in the ONILKREG- Lookup and Registration screen).
GENBDR		Y = BDR report is generated and moved to designated directory; N = BDR report does not generate.

Parameter	Value*	Description
GENDER_LBL	SEX or GENDER	Enter the label that will display in OnSite Find Donor key data field for SEX. If the parameter is not defined it will automatically default to GENDER.
HBS	HbS	Enter the test ID that will be used for Hemoglobin S.
HH_SUMMARY	Y or N	Y = Health History Summary required in On-Site Module (.net); N = Health History Summary is not required to complete the Health History in On-Site Module (.net).
HOLD_ENLST	FALSE	If true, will put enlistment lists on hold.
IAUTO	Y	Used to configure interdiction placement.
ID_VERIFY	Number of days	Enter the message that will display to the user to verify the donor's address in OnSite Registration.
IDPNR	24	After the specified number of hours, the status will change to NR (Not Received) from Vista .
IDP_FCN	Y or N	Set to 'Y' if IDP messages will be generated at time of donor registration, otherwise set to 'N'. (Only in Onsite Registration Module).
IDP_PURGE	7	Number of days between file purge.
ILOG	/TMP	Directory to put log file in .
INC_DATE	Y	Copy the incident date for the Health History question in Onsite Registration module.
LBDN_ANTGN	42	Days back to perform Antigen Test Results Interface.
LBDN_CONTR	42	Days back to perform Contract/Profile Test Results Interface.
LBDN_SUPPL	60	Days back to perform Supplemental Test Results Interface.
LISTL	7	Donor Call LIST expiration warning (in days).
LOV_LIMIT	14	Number of past days that any LOV is allowed to returned.
LMPCDT	368	Number of days of data for transaction tables (for example, DONORS, CENTRAL_NOTES). **NOTE –** This must be set to a minimum value of 368 in order for the eligibility routine to calculate dates correctly.
LMPDONPIC	Y or N	Laptop Mobile PC dump for donor pictures. Y = ON; N = OFF
LMPDRV	365	Laptop Mobile PC DRIVES for Specific Set Of Time Interval.
MAXDONRET	200	Maximum donors to be returned by HLA/RBC match routine.
MAXDR	16	Maximum mobile drives per day.
MAXHR	17	Maximum hours allowed for a drive.

Parameter	Value*	Description
MCOST	0.37	Mileage cost for drive CPU calculation.
MDKEY	2	Number of entries in Modify Donor Data (MODKYDAT).
MINDR	13	Alert if drive is created # days before drive date.
MPCPU	14.00	Maximum projected CPU allowed.
MXROW	500	Maximum number of rows that will be retrieved on certain queries.
NOTIF_DIR	G:\QA_LETTERS	Generated letters are stored here.
NOTIF_REF	G:\NOTIFIC_REF_ LETTERS	Ref directory for notification letters.
NUHLD	AUHLD	Hold Code to be removed from DPINUHLD.
OL_CON_RE	Y or N	Consent check required: Y = required; N = not required
ONACCESS	N	Allow access to [HEALTH] from Lookup during On Site Registration.
PAUDIT	Y or N	Y - Paperless Audit is enabled; N - Not enabled
PBDUR	4	Piggyback criteria - drive duration in hours.
PF_HEIGHT	Physical finding code for height	Physical code for height - used in the PF screen for Height in the On-Site (.NET) application.
PF_WEIGHT	Physical finding code for weight	Physical code for weight - used in the PF screen for Weight
PI_END_CHK	24	Time for platelets to be exposed to UVA light for the pathogen reduction process
PI_ILL_ST	Numerical value (24)	Number of hours for initial PR product to be placed on illuminator from end bleed.
PI_SEAL_RQ	Y or N	Capture of the seal when bags are removed during the pathogen reduction process.
PIC_ENABLE	Y or N	Enables donor picture function in WELCOME screen: Y = donor picture function enabled; N = donor picture function disabled
PRINTTIMER	Number value 0-999	To set the refresh repeat interval in seconds for the RMUSER screen. Enter 0 to turn off the refresh OR terminate the parameter. Enter 1-999 to define the number of seconds to wait before refreshing the RMUSER screen. Enter 0-999 for data entry of the field.

WellSky Corporation
Proprietary and confidential

Parameter	Value*	Description
RCCHK	Number of days	Number of days to allow in REGTUBES (RGITUBES) for the collection date validation. Collection date will take the current chapter date as day zero, so based on parameter. **EXAMPLE –** 2 days Current system date 02-06-23 will receive error on 02-03-23.
READ_LTR	Y or N	Brings a letter that has been defined for the donor to read in Donor Response. (Only in Onsite Module.) (Y) yes or (N) no entry. If Y, content of letter should be defined in donor notifications, ONSITE.
READ_MORE	Y or N	Allows donor to read additional information about a question in Donor Response. (Only in Onsite Module). If set to Y, this parameter works in conjunction with RMF flag in the Heath history Question Bank.
REFRESH	300	Refresh screen data every this often seconds.
REGNXT	Y	The Find Donor block displays automatically in the ONILKREG (Lookup and Registration) screen. F-Goto Find Donor, H-Health History, N-None
RESP_DELAY	1	Response delay for questions that have already been viewed by the donor. Enter 0-9 seconds to delay the presentation of the next question to the donor in the Donor Response program (ONIDNRES). Zero value will cause no delay.
RES_DLY_NW	1	Response delay for questions that have not previously been viewed by the donor. Enter a value (in seconds) to delay the presentation of the next question to the donor in the Donor Response program (ONIDNRES). Recommended range is 0 – 9 seconds. Zero value will cause no delay.
REXDY	30	Limit for Resource Exception date in days.
RSM_CMO	Chief Medical Officer Name	Define the Chief Medical Officer Name to appear in lower right corner of the RSM report..
RSM_COPY	Directory location of where RSM Report will be placed	This is a user-defined directory to which the RSM Report will be moved after the results are extracted.
SCOST	8.45	General cost per proj/show for drive CPU.
SERIES_CPY	Directory location of where the Series Report will be placed	This is a user-defined directory to which the Series Report will be moved after the results are extracted.
SHIP_EXT	Y or N	Y = automatic extract at the time of shipment creation in On-Site. N = automatic extract is turned off.

Parameter	Value*	Description
SHOW_QUERY	FALSE	Show query text if TRUE.
SLOG	/tmp	Used to control where the staff scheduling program stores the log of activity for each staff scheduling session.
SMP_TIMER	Minutes to allow refresh	Enter the minutes in which the RGQCKPND program (SAMPTQ) will be refreshing the data in the screen.
SPDR_LIMIT	0	Days limit on create special drives; 0 must be used if you wish to create drives equal to the system date.
SPFIX	SPON031895	Default sponsor ID for fixed sites
SRATE	10.18	Labor cost/hour for projected cost.
SSN_MODE	4,9	Designates whether all nine digits of a Social Security Number must be entered or only the last 4.
STBKB	90	Setup/Breakdown - for Bloodlines - minutes
STBKD	60	Setup/Breakdown - default value - minutes
TB_ID	TEST BATCH ID	Used to place notes on testing batches. The TEST_BATCH_ HDR table is used to pull the batch ID into the Notes window. This parameter is static and cannot be changed.
TBVH	Y or N	Y will make the Height field required in the On-Site module (.NET). N will make the Height field optional.
TEST_ID	TEST ID	UTRS (Do not change the description. Used in placing individual test ID notes.)
TIETAG	TIETAG	See tie-tag for test result information.

WellSky Corporation
Proprietary and confidential

<table>
<tr><th>Parameter</th><th>Value*</th><th>Description</th></tr>
<tr><td>TOUT_IDLE</td><td>Number</td><td>Number of minutes when a warning displays the system has been idle and will be logged out.

  EXAMPLE – Timeout Configuration variable settings. Values are in minutes.

<table>
<tr><th>TOUT_IDLE</th><th>TOUT_WARN</th><th></th></tr>
<tr><td>4</td><td>O</td><td>System exits out of the application after 4 minutes of idle time without any warning alert.</td></tr>
<tr><td>3</td><td>2</td><td>System displays a warning alert after 3 minutes of idle time and the warning stays up for 2 minutes.</td></tr>
<tr><td>3</td><td>1</td><td>System displays a warning alert after 3 minutes of idle time and the warning stays up for 1 minute.</td></tr>
<tr><td>2</td><td>3</td><td>System displays a warning alert after 2 minutes of idle time and the warning stays up for 3 minutes.</td></tr>
<tr><td>0</td><td>N/A</td><td>Timeout feature is turned OFF</td></tr>
</table>
</td></tr>
<tr><td>TOUT_WARN</td><td>Number</td><td>Number of minutes the warning will stay up displayed to user.</td></tr>
<tr><td>UNIT</td><td>365</td><td>Number of days UNIT ID will be unique.</td></tr>
<tr><td>UNIT_ID</td><td>UNIT ID</td><td>Used to place notes on a unit/sample. The UNITS table is used to pull the test batch ID into the Notes window. This parameter is static and cannot be changed.</td></tr>
<tr><td>UPDTE_DRIV</td><td>365</td><td>Modify drive for no days.</td></tr>
<tr><td>UPDTE_UNIT</td><td>365</td><td>Number of days update allowed on donation .</td></tr>
<tr><td>VAN</td><td>6</td><td>Van capacity to hold max passengers.</td></tr>
<tr><td>VHEMAT</td><td>HCT</td><td>Hematocrit code that is used in the Vista file to populate the physical findings. (should match the code created in master code PHYCD for hematocrit).</td></tr>
<tr><td>VHEMOG</td><td>HGB</td><td>Hemoglobin code that is used in the Vista file to populate the physical findings. (should match the code created in master code PHYCD for hemoglobin)</td></tr>
</table>

Parameter	Value*	Description
VIEW_LIMIT	10	Maximum view limit for interdictions.
VPFRECHK	Y or N	Decide if the pre-calculated PF values should be checked again while loading the Vista file.
VPLATE	PLTCT	Platelet count code that is used in the Vista file to populate the physical findings. (should match the code created in master code PHYCD for Platelet Count).
VRBCRT	RBCRT	RBC Return code that is used in the Vista file to populate the physical findings for RBC return. (should match the master code PHYCD for RBC Returned).
WT_MINIMUM	110	Minimum weight required for plasma donation.

WellSky Corporation
Proprietary and confidential



Appendix E - Donor Master Codes

Code Type	Description	Usage	Static or Dynamic
ABO	ABO Types	A listing of all valid ABO and Rh combinations (for example, O Pos static codes include 00, 06, NONE).	(3) S
ABOPP	Bag Types Suggested for ABO	A listing of codes used in Production Control programs to suggest the ABO to be drawn for a bag configuration (for example, All O - Draw all known type O in this bag).	D
ACDTY	Access Code Types	A listing of codes used throughout Donor to classify secured data in order to control user access to them (for example, LETTR Donor Notification Letters).	S
ACLAS	Access Classes	A listing of codes used to identify groups of interdictions in order to control access to them. These groups then have interdiction codes associated to them (for example, 03RFU - Reference and Transfusion – User).	D (except those ending in *)
ACTCD	Action Codes for Drive Checklist	A listing of codes used in the Recruitment module to identify and query actions to take pertaining to a drive (for example, 3MONS - Three Month Contact).	D
ADTDN	Visual Audit Donations	A listing of donation types allowed in Visual Audit.	D
ADTPG	Allow Visual Audit	A listing of codes that allow Visual Audit for donations/deferrals: • Enter DON for Donations • Enter DEF for deferrals	D
AHOLD	Audit Holds	A listing of Audit Holds - Removable from NHOLD program. **NOTE –** The code OVRDF should *not* be defined in the AHOLD master code. If it is already defined, it should be terminated.	D

Code Type	Description	Usage	Static or Dynamic
ALTID	Alternate ID type	A listing of Alternate ID type used in On-Site Registration Module.	D
APHER	Apheresis Procedure Group	A listing of procedure codes associated with apheresis donations.	D
APIDR	API Directory	A listing of the codes that designates the API Directory.	D
APISC	API Source	A listing of the source code value populating the LOV in program APIQLOG.	S
APITY	API Type	A listing of the API code types. Values are DNRID (Donor ID), EMPID (Employer ID), and TRNID (Transaction ID).	D
AREAC	Telephone Area Codes	A listing of the of telephone area codes for cities.	D
ASHIP	Ship AU/Directed	A listing of codes for allowable Distribution Customer Contract Types for shipment of AUTO/Directed products. Static are: EX, RG.	(2) S
ATGRP	Attribute Group	A listing of attribute group for venipuncture code: VENI. Other attributes are defined in Interdiction Codes (INTER).	S
BAG	Bag Codes Used in Supplies in On-Site	A list of codes created for bags used in supply QC.	D
BAGTY	Bag Types	A listing of codes used in Production Control programs to identify bag configurations (for example., 53 - Triple CPD).	D
BSPFI	Special Patients Require Auto Irradiation	Forced Irradiation for as follows <Hospital/Hospital Group>|<Donation Types delimited with ';'>|<Product Types delimited with ;>| **EXAMPLE –** Example: GUAM|MT;DI;|RBC;PLT;FFP;PPLT;WB;LRBC;|	D
CNTRY	Countries	A listing of countries used to populate the *Country* field LOV.	D
CODTP	All Code Types	A listing of all codes used in the Master Codes table.	S
CONTY	Sponsor Contact Types	A listing of codes used in Recruitment programs to classify sponsor contacts, usually by job description (for example, PR - Public Relations). DC is a static value.	D, except DC
DCANC	Drive Cancellation Reasons	A listing of codes used in Recruitment programs to classify reasons for a drive cancellation (for example, WEATH - Bad weather).	D
DEPTS	List of Departments	A listing of codes used in programs to classify what department an employee belongs to (for example, 5000 - Mobile Collections Services/Audit).	D

WellSky Corporation
Proprietary and confidential

Code Type	Description	Usage	Static or Dynamic
DHRSN	Drive Hold Reason Codes	A listing of codes used in Recruitment programs to identify why a drive must be placed on hold before creation is allowed (for example, DMXHR - Drive over maximum hours).	S
DLCOM	Access level to delete Communication Description	A listing of codes used in DCWDCOMM. Users can delete communication descriptions only if they have access level defined for code type in DLCOM.	D
DNRRP	Donor Report Address	A listing of codes used in the MRRPARDR and MRRPARSP. Codes are static, but each code should reflect your blood center's address.	S
DOCER	Phlebotomist Documentation Errors	A list of all interdictions you may want to capture as documentation errors.	D
DRCAT	Drive Categories	A listing of codes used in Recruitment programs to classify drives (for example, HIGH - High Schools) which can then be used to determine drive feasibility. 2RBC and BLDLN are static.	(2) S
DREQP	Drive Equipment Types	These are the equipment types that will be used in performing QC for a drive. **NOTE –** Equipment codes should be defined the same as what is defined in Lab Equipment master code EQUIP. The description should have the following: • Each field should be separated using a pipe delimiter '|'. • 1st field = Description of the equipment/supply code • 2nd field = Equipment/supply code (Code defined) • 3rd field = Does this equipment/supply require QC? Y or N value will be used. • 4th field = Does this equipment/supply have to have QC performed before collection of the donation? Y or N value will be used. • 5th field = Equipment/supply that will be entered in the On-Site Bleed page. Y or N value will be used. **EXAMPLE –** Lancet|LAN|N|N|N Scale|SCALE|Y|Y|Y	D
DRPTY	Drive Profile Types	The drive profile types describe the collections being performed. These drive profiles will be defined with equipment and supplies that will need to be QC'd for the drive.	D


Code Type	Description	Usage	Static or Dynamic
DRSUP	Drive Supply Types	These are the supply types that will be used in performing QC for a drive. The description should have the following: • Each field should be separated using a pipe delimiter '|'. • 1st field = Description of the equipment/supply code • 2nd field = Equipment/supply code (Code defined) • 3rd field = Does this equipment/supply require QC? Y or N value will be used. • 4th field = Does this equipment/supply have to have QC performed before collection of the donation? Y or N value will be used. • 5th field = Equipment/supply that will be entered in the On-Site Bleed page. Y or N value will be used. **EXAMPLE –** Lancet|LAN|N|N|N Scale|SCALE|Y|Y|Y	D
DRVTY	Drive Types	A listing of codes used in the Recruitment module to indicate the type of drive (for example, C = Coach, I = Inside, F = Fixed).	S
DSTAT	Drive Statuses	A listing of codes used in Recruitment programs to identify the status of a drive (for example, CNFRM = Confirmed).	S
DTGRP	Donation Type Grouping	A listing of codes used in donor scheduling programs (for example, AL – Allogeneic). WellSky can update any donation type that you wish to be scheduled as AL or as SP.	S
DYSTS	Day Statuses	A listing of codes used in the Master Calendar program in the Recruitment module to identify whether or not a drive is feasible for a day based on the availability of critical resources, which in turn determines the color code used in the screen (for example, LIMIT - Limited Resources Available).	S
ELIGX	Venipuncture codes exclude for eligibility	A listing of all venipuncture codes that are to be excluded in the eligibility check routine. If you add any venipuncture codes other than the 01 - 08, they can be included.	D
EMACT	Enhanced Manufacturing Action Codes	List of action codes used for enhanced manufacturing table configuration.	S
EMPCL	Employee Classes	A listing of codes used in programs to classify what departmental group an employee belongs to. Static are DRVR, FSTAF, MSTAF, RECRT and TELRC.	(5) S
ENLST	Enlistment Types	A listing of codes used in the Enlistment module to classify a list (for example, PLT - Platelet Apheresis Donor Enlistment).	D

WellSky Corporation
Proprietary and confidential

<table>
<tr><th>Code Type</th><th>Description</th><th>Usage</th><th>Static or Dynamic</th></tr>
<tr><td>EQBRQ</td><td>Equipment/Bag Requirement</td><td>A listing of all the procedures that are collected through the On-Site (.net) module. The Sequence Number will determine if the bag and/or equipment are required for the procedure.

Sequence 1 (Seq 1) will be used to determine if equipment is required for the procedure. If set to "0", equipment is required, and the system will check master code EQUIP for one of those types of equipment. If set to "1", equipment is not required for the procedure.

Sequence 2 (Seq 2) will be used to determine if the procedure needs to have a bag checked in prior to completion of the BLEED page. If set to "0", a bag is required for the procedure. If set to "1", a bag is not needed for the procedure.

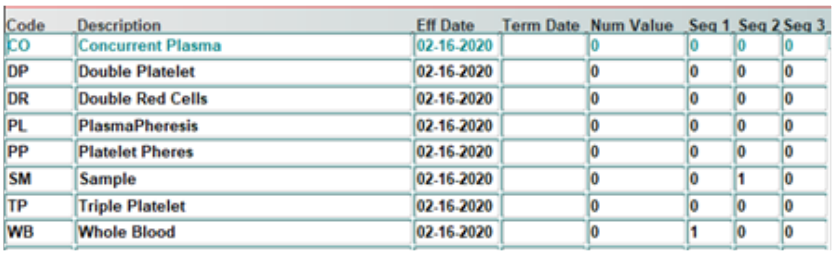 
<table>
<tr><th>Code</th><th>Description</th><th>Eff Date</th><th>Term Date</th><th>Num Value</th><th>Seq 1</th><th>Seq 2</th><th>Seq 3</th></tr>
<tr><td>CO</td><td>Concurrent Plasma</td><td>02-16-2020</td><td></td><td>0</td><td>0</td><td>0</td><td>0</td></tr>
<tr><td>DP</td><td>Double Platelet</td><td>02-16-2020</td><td></td><td>0</td><td>0</td><td>0</td><td>0</td></tr>
<tr><td>DR</td><td>Double Red Cells</td><td>02-16-2020</td><td></td><td>0</td><td>0</td><td>0</td><td>0</td></tr>
<tr><td>PL</td><td>PlasmaPheresis</td><td>02-16-2020</td><td></td><td>0</td><td>0</td><td>0</td><td>0</td></tr>
<tr><td>PP</td><td>Platelet Pheres</td><td>02-16-2020</td><td></td><td>0</td><td>0</td><td>0</td><td>0</td></tr>
<tr><td>SM</td><td>Sample</td><td>02-16-2020</td><td></td><td>0</td><td>0</td><td>1</td><td>0</td></tr>
<tr><td>TP</td><td>Triple Platelet</td><td>02-16-2020</td><td></td><td>0</td><td>0</td><td>0</td><td>0</td></tr>
<tr><td>WB</td><td>Whole Blood</td><td>02-16-2020</td><td></td><td>0</td><td>1</td><td>0</td><td>0</td></tr>
</table>

To set the number of tubes required by procedure, enter the numerical value in the NUM VALUE field. This value is used in material verification in the Bleed page in the .net application.</td><td></td></tr>
<tr><td>EQUIP</td><td>Equipment Types</td><td>A listing of codes used in On-Site Registration in the BLEED screen to list collection equipment. This code is limited to a maximum of 4 characters.

NOTE – The equipment type must match what is defined for equipment type in the Lab EQUIP master code.</td><td>D</td></tr>
<tr><td>ERRTY</td><td>Error Code Descriptions</td><td>A listing of codes used to remove hard coding for warning messages. Used in MCICANDR.</td><td>D</td></tr>
<tr><td>ETHGP</td><td>Ethnic Groups</td><td>A listing of codes used in the Registration module to identify a donor’s ethnicity (for example, AS – Asian). NA is static.</td><td>(1) S</td></tr>
</table>

Code Type	Description	Usage	Static or Dynamic
FACLT	Facility Codes	A listing of codes is used in conjunction with the code type TEAMS to control which teams get assigned to which drives. The code will be the different facilities (Headquarters, any off-site locations), and the sort sequence 1 field will contain a unique number. The number from the sort sequence 1 field of FACLT is associated with the sort sequence 1 field of the TEAMS field. If team 1 is a headquarter team, the TEAM1 code in the valid master codes will have the same sort sequence 1 value as the FACLT record for HQ. **NOTE –** The Description field is limited to a maximum of 20 characters.	D
FREQ	Frequency Codes	A listing of codes used in the Recruitment module to identify a sponsor's drive rollover preferences (for example, 4 - Fourth week).	S
GOALS	Goal Types	A listing of codes used in the Recruitment module to classify goals (for example, INGOL – Institution).	S
GPMOD	Group Interdiction Modes	Used in Donor Profile programs to classify the type of group being interdicted (for example, DRIVE - Drive ID).	S
HGHT	Donor Height	A listing of codes used in the On-Site Registration screen for entry of the donors height.	D
HHPFC	HHPF Card Configuration in On-Site (.net)	Configuration of the Health History/Physical Findings cards. Code | Description | Eff Date | Term Date | Num Value | Seq 1 | Seq 2 | Seq 3 CODE4 | PhysicalFindings | 04-01-2020 | | 0 | 1 | 0 | 0 CODE3 | HealthHistory | 04-01-2020 | | 0 | 2 | 0 | 0 CODE1 | DonorConsents | 04-01-2020 | | 0 | 3 | 0 | 0 CODE2 | DonorResponse | 04-01-2020 | | 0 | 4 | 0 | 0 **NOTE –** Cannot change the description, only update Sequence 1.	S
HLAC	HLA Comparison Codes	A listing of HLA Comparison Codes. Values should be C, D, G, I, S, U.	S
HLAGR	HLA Grades	A listing of HLA Grades (for example, C3X).	D
HLSTD	HLA - Standard	A listing of codes used in HLA/RBC module; it identifies industry standard references. Static are CREG and AABB.	(2) S
IDCON	ID Convert	A listing of codes used to determine if the codes listed will be converted to a new Blood Centers number or use the outside source number. The description field should contain 'Y' if a new number is to be generated, or 'N' to keep the outside source number.	S


WellSky Corporation
Proprietary and confidential

Code Type	Description	Usage	Static or Dynamic
IDPDR	Vista IDP Directory Name	A listing of the name of the Vista IDP directory.	S
IDPEP	Vista IDP Equipment Procedures	A listing of procedures that are collected through the VISTA interface that require equipment for the procedure.	S
IDPEQ	Equipment Codes Used with Vista Interface	Enter the equipment codes that will be used with the VISTA interface. The equipment code defined in Lab should be entered in the Code field.	D
IDPEX	IDP Exclude Procedures (Not Collected Codes)	A listing of codes that come through the VISTA interface that are not collected.	S
IDPPC	Vista Interface Procedure Codes	A listing of VISTA interface procedure codes.	S
IDPSR	IDP Source Type	A listing of the application ID that is used in program IDPVCONV .	S
IDPTP	External Interface Source Type	A listing of outside source application source values. This LOV is used in IDPVCONV to populate the conversion from the outside source to a value Blood Centers can use. • DRM – Telerecruitment Module • HMSPR – Hemasphere • TF – WellSky Transfusion • VISTA – Vista	S
IDPTR	Vista or IDP Target Type	A listing of the name of the application in which the data from outside source is coming to. The name will always be LFTRK.	S
IDPTV	Internal Application Target Type	A listing of codes used to translate to an internal code that Blood Centers can use.	S
INTER	Interdiction Types	A listing of codes used to group interdictions into categories to control user access (for example, SURVE – Surveillance).	S
INTRM	Reasons to Remove Interdictions	Used when removing a donor interdiction (for example, QAAPR - QA Approval). WRGEN is static.	(1) S
INTUD	Interdiction Code Types	A listing of codes used to identify interdiction code type used as true interdictions, not as attributes or informational. Also used in access grouping for interdictions.	S

Code Type	Description	Usage	Static or Dynamic
IRESU	Indeterminate Test Results	A listing of the test results values that are classified as Indeterminate. **NOTE –** Intermediate results are used in the Send Notification Letter (DNWSNDLT) called window. If the result code is defined in the IRESU Master Code, INDETERMINATE will print in the letter.	D
JOBT1	Backup Job Types		
JOBTY	Job Code Descriptions	A listing of codes used in Staff Scheduling functions to identify employee jobs. Static values are: • ATL • CDRVR • MEMBR • TMLDR • VDRVR In staff scheduling, this code type is used to define the staff job codes as well as control the amount of extra time that any given job code requires. For example, if a team leader has to show up 20 minutes prior to the drive, and leave 20 minutes after the drive returns, then a 40 must be in the 'Seq 2' field of the valid master codes for the TMLDR entry. Staff scheduling adds these values to the total time scheduled, in order to insure that there are no overlapping assignments.	(5) S

WellSky Corporation
Proprietary and confidential

Code Type	Description	Usage	Static or Dynamic
KTRAK	WellSky Quality & Compliance Interface	A listing of codes that identify the Quality & Compliance interface. Codes are as follows: • KTURL– URL to the site at customer location; can be secure http or regular http. • RCMD – remote command program call to access Quality & Compliance. This code is static. • DNAME – Quality & Compliance database name; set by the client installation (for example, Blood Centers). • ACODE – Quality & Compliance designation for application. Value must be set to 1. • KTREF –The refresh timer. It is not currently used, but will be used later. A value of 5 means the screen will refresh every 5 minutes. • SSL – Y means the QC application requires SSL connection for connectivity. • WLTLC – Wallet Location (Location in DB server where SSL certificates are stored.). WLTLC is only required if SSL is set to Y.	S
LANG	Language	A listing of codes that define the languages that can be entered in the Donor Demographics Window.	D
LBHLD	Lab Hold Flag	A listing of codes that describe what action to take on products associated with a donor, in the lab system (for example, A - Discard all products from donor).	S
LBPRJ	Procedure Codes that Skip Update to Donor's Blood Type	A listing of codes used by interface programs to control ABO update on donor record.	D
LOB	Line of Business	A listing of codes used in Recruitment programs to identify the general type of business a sponsor conducts (for example, CORPO – Corporate).	D
LOCTY	Location Types	A listing of codes used in Recruitment programs to classify a location (for example, MOBC - Mobile Coach). FIX is static.	(1) S
LOCUS	HLA Loci	A listing of codes used in the HLA/RBC module; it defines HLA antigens (for example, A - A Type Locus).	S
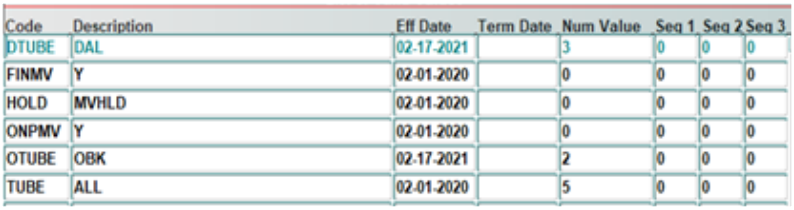
<table>
<tr><th>Code Type</th><th>Description</th><th>Usage</th><th>Static or Dynamic</th></tr>
<tr><td>MATVE</td><td>Material Verification Configuration</td><td>The following codes are defined and should not be changed; the only part that is defined by the user is data within the description.
ONPMV – set to Y if material verification is required in Bleed, and will show in the tabs. If set to N, the material verification tab will not show in the Bleed page in On-Site (.net application).
HOLD – enter the HOLD interdiction in the description that will be placed if the check fails for the number of tubes and number of bags.
FINMV – set to Y if the check of tubes check-in and tubes scanned in material verification matches. If set to N, this check will not occur.
TUBE – default number of tubes if the tubes required by procedure is not defined in master code EQBRQ. Description should have chapter ALL, and Num Value should contain the default tubes to be checked in.
Codes should be defined for other chapters if the facility is multi-chapter. The chapter ID should be put in the Description field, and Num Value should contain the number of tubes for that chapter. 
<table>
<tr><th>Code</th><th>Description</th><th>Eff Date</th><th>Term Date</th><th>Num Value</th><th>Seq 1</th><th>Seq 2</th><th>Seq 3</th></tr>
<tr><td>DTUBE</td><td>DAL</td><td>02-17-2021</td><td></td><td>3</td><td>0</td><td>0</td><td>0</td></tr>
<tr><td>FINMV</td><td>Y</td><td>02-01-2020</td><td></td><td>0</td><td>0</td><td>0</td><td>0</td></tr>
<tr><td>HOLD</td><td>MVHLD</td><td>02-01-2020</td><td></td><td>0</td><td>0</td><td>0</td><td>0</td></tr>
<tr><td>ONPMV</td><td>Y</td><td>02-01-2020</td><td></td><td>0</td><td>0</td><td>0</td><td>0</td></tr>
<tr><td>OTUBE</td><td>OBK</td><td>02-17-2021</td><td></td><td>2</td><td>0</td><td>0</td><td>0</td></tr>
<tr><td>TUBE</td><td>ALL</td><td>02-01-2020</td><td></td><td>5</td><td>0</td><td>0</td><td>0</td></tr>
</table></td><td>D</td></tr>
<tr><td>MEDIA</td><td>Campaign Media</td><td>A listing of codes used in the Recruitment module; it identifies the type of media used, usually for a campaign (for example, BILL – Billboard).</td><td>D</td></tr>
<tr><td>MLANG</td><td>User Language</td><td>A listing of available languages when using the multi-language option for donor responses.

You can select a default language that will be available in the Donor Responses (RESP) and Health History and Physical Findings (HHPF) screens. To do this, enter a <code>1</code> in the NumValue column for the language you select as the default. You can select only one default language.</td><td>D</td></tr>
<tr><td>MONTH</td><td>Months</td><td>A listing of the names of the 12 months.</td><td>S</td></tr>
<tr><td>NOINR</td><td>Reasons For Lab to Donor Interface Failure</td><td>A listing of codes used in the interface process; identifies reasons for interface failures (for example, TREQL - Requested test result is already in).</td><td>S</td></tr>
</table>

WellSky Corporation
Proprietary and confidential

<table>
<tr><th>Code Type</th><th>Description</th><th>Usage</th><th>Static or Dynamic</th></tr>
<tr><td>NUKEY</td><td>Nursing Audit Key Data Change Criteria</td><td>KEY1 = LAST_NAME
KEY2 = GENDER
KEY3 = DATE_OF_BIRTH
KEY4 = FIRST_NAME
KEY5 = DONOR_WEIGHT

These values cannot be changed except to terminate.</td><td>S</td></tr>
<tr><td>OASVR</td><td>Report Server</td><td>A listing of the report server names. The following codes are used:
<table><tr><th>Code</th><th>Description</th><th>Example</th></tr><tr><td>9002</td><td>First Report Server URL</td><td>http://172.16.12.170:9002</td></tr><tr><td>8888</td><td>Second Report Server URL</td><td>http://172.16.12.170:8888</td></tr><tr><td>R1</td><td>First Report Server Name</td><td>rep_wls_reports_chdevsrv10_lt_inst</td></tr><tr><td>R2</td><td>Second Report Server Name</td><td>RptSvr_chdevsrv10_LT_Inst</td></tr></table>
NOTE – The code itself is static, but the description will change for each customer.</td><td>S</td></tr>
<tr><td>OVRSN</td><td>Override Reasons</td><td>A listing of reason codes for overriding a deferral. Used in On-Site Registration.</td><td>D</td></tr>
<tr><td>PATTY</td><td>Special Donation Patient Types</td><td>A listing of codes used in the Special Donations module; it defines the type of donation for the patient. Static values are AU and TH.</td><td>(2) S</td></tr>
<tr><td>PBLEP</td><td>Public Epitopes</td><td>A listing of codes used in the HLA/RBC module; it defines cross-reactive groups.</td><td>D</td></tr>
</table>

Code Type	Description	Usage	Static or Dynamic
PHYCD	Physical Finding Codes	A listing of codes used in Registration Audit; these codes are use in defining a template, based on Donation Type and Procedure Code (for example, BPDI - Diastolic Blood Pressure). GDEF is a static code used in On-Site registration when deferring a donor through the Inquiry window. The value defined in Seq 3 (which cannot be 0) is the deferral reason code populated in the donations table. This value displays in the Deferral field in the SDONQ Don/Def Audit window. TEMPR must remain static if it is used in the Vista Interface. For all other codes (not including GDEF), the Seq 3 column has the reference number that the user will enter in the deferral code field in DRIREGIS and DRIREDEF that will identify the physical finding code that is out of range. NUM VALUE field will be used to check for equipment in the Physical Finding Template. If a value of 1 is used in the field, it will check for equipment to be included in the algorithm. Example: TBV, HCT, Weight	D/S
PHYSP	Physician Specialties	A listing of codes used in the Special Donations module; it defines the requesting physician's medical specialty.	D
PFCOM	Physical Findings Comments	Canned comments to be used in physical findings entries.	D
PLASM	Plasma	A listing of procedure codes yielding plasma products. Value entered in Num Value field indicates the number of plasma credits to be given to the recruiter for collections involving this product. Entry used in DERTRTKP. (Not applicable for routine use.)	D
PLATE	Platelets	A listing of procedure codes yielding platelet products. Value entered in Num Value field indicates the number of platelet credits to be given to the recruiter for collections involving this product. Entry used in DERTRTKP. (Not applicable for routine use.)	D
PRGRP	Donations Procedures Group	A listing of donation procedure groups for eligibility. The codes identified in Appendix E are used in reporting functions.	S
PRMTY	Parameter Types	A listing of codes used to define where a parameter is used (for example, ALL - Parameter Applies Globally).	S
PROPR	Allowable Inter Types Properties	A listing of codes used to determine what interdiction types are considered properties in access class assignment programs (for example, INFOR – Informational).	S
PRTYP	Period Type for Deferrals	A listing of codes used throughout the system to classify the period type for a deferral (for example, D - Days or M – Months).	S

WellSky Corporation
Proprietary and confidential

Code Type	Description	Usage	Static or Dynamic
QCPAR	Equipment QC Parameters	These are the QC tests to be performed in equipment management.	S
QCVTY	Equipment QC Value Types	These are the QC types that should be scanned in the equipment QC management.	S
QNS	QNS Codes	A listing of QNS codes used in DERTRTKP. (Not applicable for routine use.) This code is also the Total number of QNS attributes for a drive. Enter venipuncture code for the QNS draw.	D
REAC	Reactive Test Results	A listing of test results that will be considered reactive. (for example, P, R, POS, SE, etc.).	D
REACT	Reaction Codes	A listing of codes used in Registration to define the type of reaction a donor can have (for example, MI - Mild Reaction).	D
REDCL	Red Blood Cells	A listing of procedure codes yielding RBC products. Value entered in Num Value field indicates the number of RBC credits to be given to the recruiter for collections involving this product. Entry used in DERTRTKP. (Not applicable for routine use.)	S
RESON	Reasons for Resource Exceptions	A listing of codes used in Transportation and Staff Scheduling modules to identify the reason a critical resource will not be available (for example, MAINT - Vehicle Maintenance).	D
RESTY	Resource Types	A listing of codes used in Recruitment module to identify resources that can be used at a blood drive. Static values are: • BEDS • COACH • STAFF • VANS	(4) S
RESUL	Testing Results	A listing of all possible testing result codes (for example, NR – Non-reactive). Static values are 51, 62, 73, 84, 95, 06, 17, 28, IND and NT.	(10) S
SALUT	Salutation	A listing of salutations (for example Mr., Mrs, Dr., etc.).	D
SATTR	Staff Attributes	A listing of codes used in Staff Scheduling to identify special qualities for a Collections Staff member (for example, ESPAN - Spanish speaker).	D
SCHCN	Reasons for Donor Schedule Cancellation	A listing of codes used in the Donor Center Management module to define why a scheduled donation was cancelled (for example, CONFL - Schedule Conflict).	D
SCHST	Schedule Status	A listing of codes used in the Staff Scheduling module to define the status of a schedule (for example, FINAL – Finalized).	S
SCOST	Cost of Staff	A listing of codes used in STRAINQ. The codes are static, but the Num Value can be dynamic. The value in the Num Value field is a multiple for the STRAINQ violations.	D 'Num Value'

<table>
<tr><th>Code Type</th><th>Description</th><th>Usage</th><th>Static or Dynamic</th></tr>
<tr><td>SFPC</td><td>SalesForce Procedures</td><td>A list of procedures that will be sent over to SalesForce for eligibility.</td><td>D</td></tr>
<tr><td>SFPF</td><td>SalesForce Physical Findings</td><td>A list of physical codes that will be sent over to SalesForce.</td><td>D</td></tr>
<tr><td>SPCAT</td><td>Sponsor Categories - Type of Accounts</td><td>A listing of codes used in the Recruitment module to categorize the function of a sponsor (for example, CLLGE - College/University).</td><td>D</td></tr>
<tr><td>SPINS</td><td>Special Instruction Attributes</td><td>Special Instructions Attributes code is placed here (SPINS).</td><td>S</td></tr>
<tr><td>SPNPR</td><td>Sponsor Preferences</td><td>A listing of codes used in the Recruitment module to list sponsor requests for all drives that are held (for example, SPAN - Spanish speaking staff).</td><td>D</td></tr>
<tr><td>SPRAT</td><td>Sponsor Ratings</td><td>A listing of codes used in the Recruitment module to rate sponsors (for example, 1 – Excellent).</td><td>D</td></tr>
<tr><td>SRGTY</td><td>Surgery Procedures</td><td>A listing of codes used in the Special Donations module to identify what surgery a patient is scheduled to have (for example, THR - Total Hip Replacement).</td><td>D</td></tr>
<tr><td>SSTAT</td><td>Donor Schedule Statuses</td><td>A listing of codes used as a status applied to a donor schedule for a fixed site. Static values are CNFRM, NOSHW and REMND.</td><td>(3) S</td></tr>
<tr><td>STATE</td><td>All States</td><td>A listing of the names of the 50 states and US held territories (for example, VI - Virgin Islands).</td><td>N/A</td></tr>
<tr><td>STFTP</td><td>Staff Types</td><td>A listing of codes used in Staff Scheduling to identify the HR classification for an employee [for example, CLAS1 - Class 1 Full-time (40)].</td><td>D</td></tr>
<tr><td>SUCAT</td><td>Survey Category Types</td><td>These are the categories to link to donor surveys, and if the donor matches a category that is linked to a survey, then that survey presents to the donor.</td><td>S</td></tr>
<tr><td>SUTYP</td><td>Survey Types</td><td>A list of codes to describe the type of donor surveys used in the system.</td><td>D</td></tr>
<tr><td>TABB</td><td>Tab Configuration for Bleed Page in On-Site (.net application)</td><td>Bleed page – Configuration order of Tabs:
<table><tr><th>Code</th><th>Description</th><th>Eff Date</th><th>Term Date</th><th>Num Value</th><th>Seq 1</th><th>Seq 2</th><th>Seq 3</th></tr><tr><td>CODE1</td><td>SupplyEntryComponent</td><td>02-01-2020</td><td></td><td>0</td><td>1</td><td>0</td><td>0</td></tr><tr><td>CODE2</td><td>EquipmentEntryComponent</td><td>02-01-2020</td><td></td><td>0</td><td>2</td><td>0</td><td>0</td></tr><tr><td>CODE3</td><td>MaterialVerificationComponent</td><td>02-01-2020</td><td></td><td>0</td><td>3</td><td>0</td><td>0</td></tr><tr><td>CODE5</td><td>TubeCheckInComponent</td><td>02-01-2020</td><td></td><td>0</td><td>4</td><td>0</td><td>0</td></tr><tr><td>CODE4</td><td>BleedTimeComponent</td><td>02-01-2020</td><td></td><td>0</td><td>5</td><td>0</td><td>0</td></tr><tr><td>CODE6</td><td>DonorAttributesTableComponent</td><td>02-01-2020</td><td></td><td>0</td><td>6</td><td>0</td><td>0</td></tr></table>
NOTE – Cannot change the Description on the Seq 1 order.</td><td>S</td></tr>
</table>

WellSky Corporation
Proprietary and confidential

Code Type	Description	Usage	Static or Dynamic
TBV	Total Blood Volume Formula	**MALE:** 0.3669 **x** h^3 **+** 0.03219 **x** w **+** 0.6041 **FEMALE:** 0.3561 **x** h^3 **+** 0.03308 **x** w **+** 0.1833 h = height; w = weight	D
TEAMS	Team Definition	A listing of codes used in Staff Scheduling to identify teams of collection staff members (for example, TEAM 1 - Team One). This code type will be used to control the number of teams available. If the team is not defined in the valid master codes, then the staff scheduling routine will not be able to assign the team to any drives, even though the individuals may be assigned to fill slots in mixed team drives.	D
TITLE	Job Title	A listing of codes used in the Recruitment module to identify the title for a sponsor contact (for example, SUP – Supervisor).	D
TRGRP	Territory Groups	A listing of codes used in Recruitment to identify the types of sponsors that can exist within a territory (for example, UNIV – Universities).	D
TRRTY	Territory Types	A listing of codes used in Recruitment to differentiate between telerecruitment and mobile recruitment territories (for example, TRTMR - Mobile Recruitment Territory).	D
TSTGP	Test Groups	A listing of codes that define test groups (for example, HLA - HLA Testing). (Not applicable for entry or update.)	S
TUBE	Tube Types	Types of tubes that will be checked in during tube check-in in the On-Site module. In the Num Value, enter the number for sequence to display in the tube check-in form. **NOTE –** Currently only R1, R2, P1, and P2 can be used.	D
TZONE	Time Zones	A listing of time zones.	D/S
UNLDF	Unlink Deferral Reason codes	A listing of codes used in On-site Registration Module. When unlinking a deferral in the Link/Unlink screen requires a reason for the process. **NOTE –** Codes with a "1" in the NUM VALUE field will display in the LOV associated to linking a deferral to a donor. Codes with a "0" in the NUM VALUE field will display in the LOV associated to unlinking a deferral to a donor. Codes with a "0" in the NUM VALUE field will be in the LOV associated to unlinking a deferral to a donor.	D
UPDAT	Collection Date Tables	A listing of tables used in updating collection date.	S

Code Type	Description	Usage	Static or Dynamic
VDRSN	Void Reason	A listing of unit number void reason for Link/Unlink screen in On-Site Registration	D
VETYP	Vehicle Types	A listing of vehicle types used in assignment of vehicles for mobile collections and blood pick up. Static values are COACH and VAN.	(2) S
WKRSN	Walkout Reason	A listing of reason codes for Walkout during On-Site Registration used in the Donor Walkout (WALK) program. The maximum length is 30 characters.	D

WellSky Corporation
Proprietary and confidential



Appendix F - Donor Static Interdictions

These interdictions are used statically in programs or reports. Per definition of the interdiction, it must be used as shown. In some instances a different interdiction may be used, but these must stay in the table. Verify with WellSky before making changes for the use of these interdictions.

Code Type	Code	Information
HOLDS	AUHLD	Audit Registration Hold
DR	BADAD	Bad Address
INFOR	CMVN	CMV Negative
INFOR	CMVP	CMV Positive
DR	DCARD	Donor Requested a New Type Card
INTER	DDI	Deferred Indefinitely on Donation Record
INTER	DDT	Temporarily Deferred on Donation Record
DR	DGOAL	Personal Donor Goals
HOLDS	DNCUE	Donor CUE Not Present on Donor Record
HOLDS	DNELG	Donor Not Eligible to Donate
INFOR	DNWLK	Donor walked out during On-Site Registration
HOLDS	DRDEF	Donor Deferral Due to Deferral Reason
INTER	HDI	Health History Deferral - Permanent
INTER	HDT	Health History Deferral - Temporary
INTER	MERG1	Rebuild Multiple Not Allowed Inters for MERGE Process
INTER	MERGE	Rebuild Upgradeable Interdictions for Merge Process
DR	MOVED	Moved Out of Area
HOLDS	NODEF	Deferral Reason Not Recorded on the Donor Record

Code Type	Code	Information
HOLDS	NODON	No Donor Attached
HOLDS	NOTYP	Deferral Type Not Recorded on Card
HOLDS	OVRDF	Donor deferred/not eligible but override to donate. **NOTE –** This interdiction must have an owner of D. This interdiction is used in the On-Site module only.
INTER	PHYPD	Physical Findings Permanent Deferral
INTER	PHYTD	Physical Findings Temporary Deferral
INTER	RFI	Request for Information
INTER	RNFT	Nursing Audit Not for Transfusion - AUHLD Resolution
INTER	STSC	STS Rpt. Reactive, Confirmation Positive
HOLDS	UVOID	If a unit gets voided through On-Site Registration
INTER	VAHI	Visual Audit Health History Deferral (Indefinite)
INTER	VAHT	Visual Audit Health History Deferral (Temporary)
INTER	VAPI	Visual Audit Physical Deferral (Indefinite)

WellSky Corporation
Proprietary and confidential

Appendix G - Donor Miscellaneous Static Values

NOTE – This appendix contains some values that belong to modules that have been withdrawn and are under assessment for re-instatement

G.1.4 Table: Venipuncture Attributes

Code	Information
All	Codes 01 through 08 are static values associated to their description. If you chose to use other venipuncture codes verify your expected output.

G.1.5 Table: Donor Lists

Code	Information
LIST000000	Should be present in this table. Verify with WellSky for presence.

G.1.6 Table: Communication Types

Code	Information
ACTDC	Action Codes
COMTP	All Communication Types
DCMPL	Donor Complaints
DCORR	Donor Correspondence
DRQST	Donor Requests
DNSCH	Donor Scheduling

Code	Information
LSTST	List Status
NOTFY	Donor Notification
QANTE	QA Notes for Donor
SCHDL	Donor Scheduling
STATS	Schedule Status
TELE	Telerecruitment

G.1.7 Communication Types with associated Communication Codes and code description

Table: ACTCD

Code	Information
FCARD	Follow-up post-donation card to donor
MAILC	Mailed donor post-donation card (CHOL)
MAILL	Mail letter
MAILP	Mail gallon pin
PROMO	Mailed PR promotional item
REMND	Reminded donor of eligible date

Table: COMTP

Code	Information
COMTP	All Communication Types
DCMPL	Donor Complaints
DCORR	Donor Correspondence
DNSCH	Donor Scheduling
DRQST	Donor Requests
LSTST	List Status
NOTFY	Donor Notification
QANTE	QA Notes for Donors
SCHDL	Donor Scheduling
STATS	Schedule Status
TELE	Telerecruitment

WellSky Corporation
Proprietary and confidential

Table: DCMPL

Code	Information
MLD	Reaction, Mild
MOD	Reaction, Moderate
OTHER	Other

Table: DCOMT

Code	Information
COMPL	Compliment
SURV	Survey Response

Table: DCORR

Code	Information
BIRTH	Donor's Birthday
DCARD	Donor Requested Card (post-donation card)
FRTTM	First Time Donor
M1TMD	Mailed First Donor Letter

Table: DNSCH

Code	Information
REMCL	Reminder Call
SCHCL	Scheduling call

Table: DRQST

Code	Information
BP	Blood Pressure Reading
DRQST	Request for post donation card, which will be placed in the queue for later printing
GAL	6 Gallon Donor
HIST	Donation History

Table: LSTST

Code	Information
CLBCK	Call after specified time
MSG	Message left
NEW	Not called yet
NOCNT	No contact with donor
NOELG	Donor not eligible
SCHLD	Donation scheduled

Table: NOTFY

Code	Information
NOLET	No letter to be sent
NOTE	Notes from previous donor system
REINS	Donor Reinstatement
RFI	Request for Information

Table: QANTE

Code	Information
ABO	ABO related comments
MISC	Miscellaneous comments

Table: SCHDL

Code	Information
REMCL	Reminder call made for scheduled donation
SCHCL	Call made to schedule donation

Table: TELE

Code	Information
COMM	Comments on donor

WellSky Corporation
Proprietary and confidential

Table: VERIF

Code	Information
INVST	Data Investigation

G.1.8 Table: Define Day Status Codes

Code	Information
OPEN	Critical resources available to book drive as needed
LIMIT	Limited critical resources for booking a drive
BOOKD	Critical resources booked, ability to schedule unlikely

G.1.9 Table: Define Donation Types

Code	Information
99	Not recorded or Not Properly Recorded
AL	Allogeneic
AU	Autologous
DI	Directed
RE	Restricted (Directed)
RG	Reagent
SM	Samples Only (Testing Samples)
TH	Therapeutic

G.1.10 Table: List Types (no table entry)

Code	Information
CALL	Static list type for telerecruitment calling of donors
HRCAL	HLA/RBC call list of donors
MAIL	Mailing list to donors

G.1.11 Table: Define Procedure Codes

NOTE – You are not restricted in adding more procedure codes to accommodate your business or regulatory requirements.

Code	Information
99	Not Present
BM	Bone Marrow
CO	Concurrent Plasma
DP	Double Platelet
DR	Apheresis Double Red Cell
GP	Granulocytopheresis
LP	Lymphocytopheresis
PL	Plasmapheresis
PP	Plateletpheresis
RP	Apheresis Red Cell & Plasma
SM	Sample Only
TT	Test Tubes Only
WB	Whole Blood

G.1.12 Table: Define Procedure Groups

Code	Information
PLASM	Plasma
PLATE	Platelets
REDCL	Red Blood Cell

G.1.13 Table: Define Resource Master List 'Resc Code'

NOTE – You may associate other names to each type with the exception of STAFF.

Code	Information
BED	BED is associated to BEDS
COACH	COACH is associated to COACH
STAFF	STAFF is associated to STAFF
VAN	VAN is associated to VAN

WellSky Corporation
Proprietary and confidential

G.1.14 Table: Resource Types (In 'Type' in Define Resource Master List)

Code	Information
BEDS	same
COACH	Self contained bus
STAFF	Mobile staff
VAN	Mobile vans

G.1.15 Table: Define Tests

NOTE – Refer to documentation for Define Tests in Chapter 4, Application Administration

Code	Information
ABORH	ABO/Rh test
ALT	ALT test
CHOL	Cholesterol test
CMV	CMV test
HBC	HBC test
HBSAG	HbSAg test
HCV	HCV test
HIV-1/2	HIV-1/2 test
HIV1AG	HIV-1 Ag test
HTLV-I/II	HTLV-I/II test
IAT	Antibody screen (indirect antiglobulin test)
STS	Serological test for syphilis

G.1.16 Table: Define Test Results

Code	Information
06	A Negative
17	B Negative
28	AB Negative
51	O Positive
62	A Positive
73	B Positive
84	AB Positive
95	O Negative
IND	Indeterminate
NT	Not Tested




Appendix H - Venipuncture Codes

Venipuncture codes are defined in the Donor system and can be transferred over to the Lab system and affect the suitability of the unit for manufacture. Venipuncture codes, when applied to donations, can also have an effect on future eligibility of the donor. Since venipuncture codes can affect the future eligibility of the donor in certain circumstances, they are applied to donation records that are converted from a legacy Blood Establishment Computer System (BECS).

Venipuncture Attributes (VENATRR) Screen

Venipuncture codes are built in the Venipuncture Attributes (VENATRR) screen in the Donor application. The following rules apply:

- The code numbers 01 through 08 and 99 are static and cannot be changed.
- You can modify a venipuncture code description. However, if you modify a code description in the donor VENATRR screen, you should modify it the same way in the Lab Attribute Codes (ATTRIB) so that a given code description has the same meaning in both the VENATRR screen (Donor) and ATTRIB (Lab) screen. Also, you must remember that many codes are hard-coded on certain reports, so please give careful consideration before changing any description.
- The venipuncture code 99 is specifically used in OnSite Registration and is placed automatically by the system when certain conditions are met.

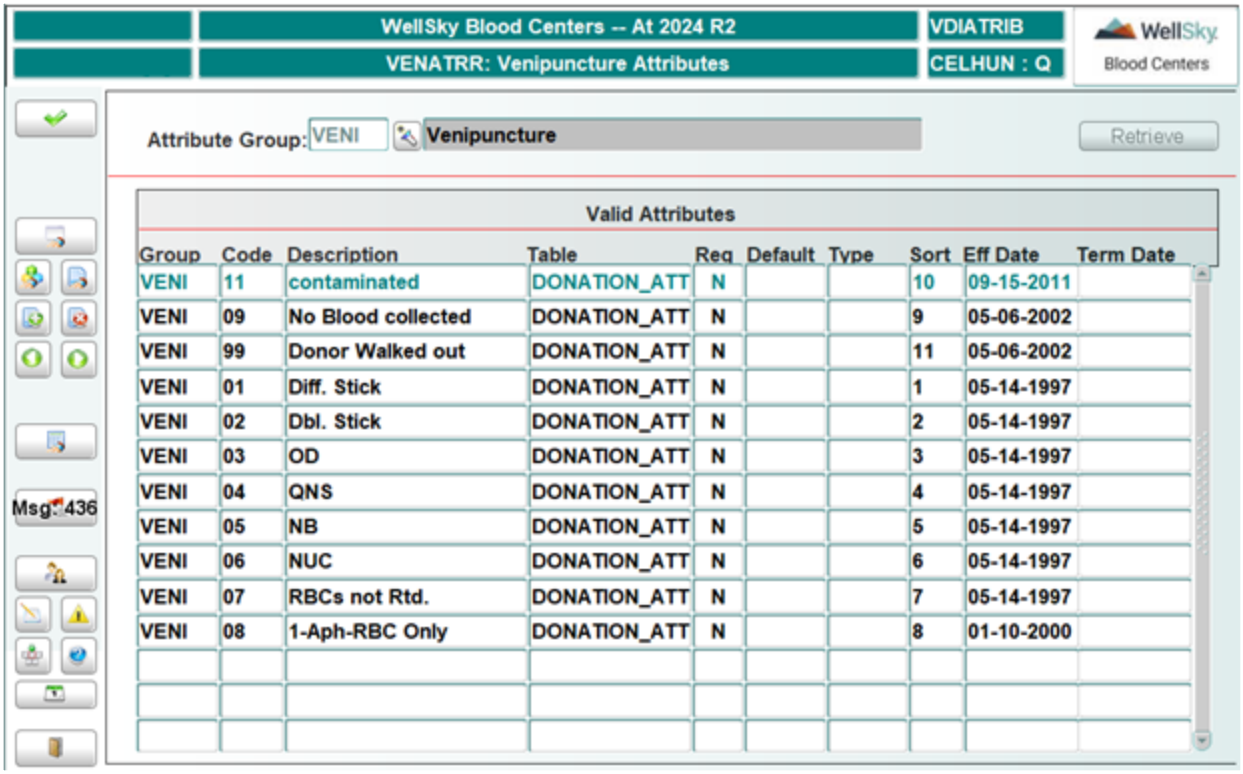

Screens

Venipuncture codes are applied to donations using the following screens:

- Bleed Time/Phlebotomy Data (BLEED)
- Bleed Time Entry - Back Office (BKBLEED)
- Register Donation (REGIS)
- Register Deferral (DEFREGIS)
- Update Donation (REGMAINT)
- Bleed Time / Phlebotomy Data (OnSite Application)
- Bleed Time Entry - Back Office (OnSite Application)

NOTE – If a venipuncture attribute was added after unit was received in Lab, Lab will not update donor attributes even if the status is changed using Reset Donor Interface Status in Lab (DIRESET) or Re-Interface Donor to Lab (REINTER). When an update is made on the donation for attributes, donation and venipuncture attributes must be updated on the unit manually using Modify Unit Check-In Details (MODDSC).

WellSky Corporation
Proprietary and confidential

Eligibility

Venipuncture (VENI) codes can affect eligibility if they are placed in the ELIGX master code. ELIGX is used to list venipuncture codes that, when they are present on the donation, the system will exclude the donation event from eligibility calculations. Therefore, it would not count specific donations with master codes listed in ELIGX against the donor's donations for the procedure group (too many times for this procedure).

The VENI codes are also applied to certain legacy units when converted from other BECS systems to preserve donor eligibility. It does NOT cause the system to ignore the standard loss for the procedure as defined in the PROCS table. You must put in actual values for the RBC and Plasma that was lost in the attempt; otherwise, standard loss will be applied.

Lab Attribute Codes

Venipuncture codes are sent to Lab and can have an effect on product suitability as defined under the Attribute Codes (ATTRIB) screen for the VENI code. If this venipuncture code causes an interdiction to be placed on the unit, the interdiction is mapped and applied as a result of the Lab ATTRIB table. In the following screen shot you can see that if the unit is checked in and it has a venipuncture code (in Donor) of 03, than Lab will place an OVER interdiction, which can be configured as an NFT interdiction type.

BC -- At 2019
ATTRIB: Attribute Codes

VATTRIB
ANNWAL: Q


WellSky Blood Centers
Formerly Mediware LifeTrak

Enter Attribute Group: VENI Venipuncture Code


Code	Description	Amt	U	S	Intr	L	A	SL	D	C	N	Cr	Srv Code	T	E	Grp	Cd
01	Difficult Stick		C	O		N	N	N				Y		A	N		
01	Difficult Stick		I	O		N	N	N				Y		A	N		
02	Double Stick		I	O		N	N	N				Y		A	N		
02	Double Stick		C	O		N	N	N				Y		A	N		
03	Overdrawn Unit: Exceed		C	N	OVER	Y	N	Y				Y		A	N		
03	Overdrawn Unit: Exceed		I	N	OVER	Y	N	Y				Y		A	N		
04	QNS: Quantity Not Suffic		C	N	QNS	Y	N	Y				Y		A	N		
04	QNS: Quantity Not Suffic		I	N	QNS	Y	N	Y				Y		A	N		
05	No Blood Collected		C	N	NBC	Y	N	Y				Y		A	N		
05	No Blood Collected		I	N	NBC	Y	N	Y				Y		A	N		
06	Non-usable Componen		I	N	NFT	Y	N	Y				Y		A	N		
06	Non-usable Componen		C	N	NFT	Y	N	Y				Y		A	N		
07	RBCs Not Returned (Ap		C	O		N	N	N				Y		A	N		
07	RBCs Not Returned (Ap		I	O		N	N	N				Y		A	N		

Drive Statistics

Venipuncture codes can be seen in the Drive Statistics window. Click **Drive Stat** in the Drive Details Query (DRIVEQ) screen and you can see the codes with the description and the counts.

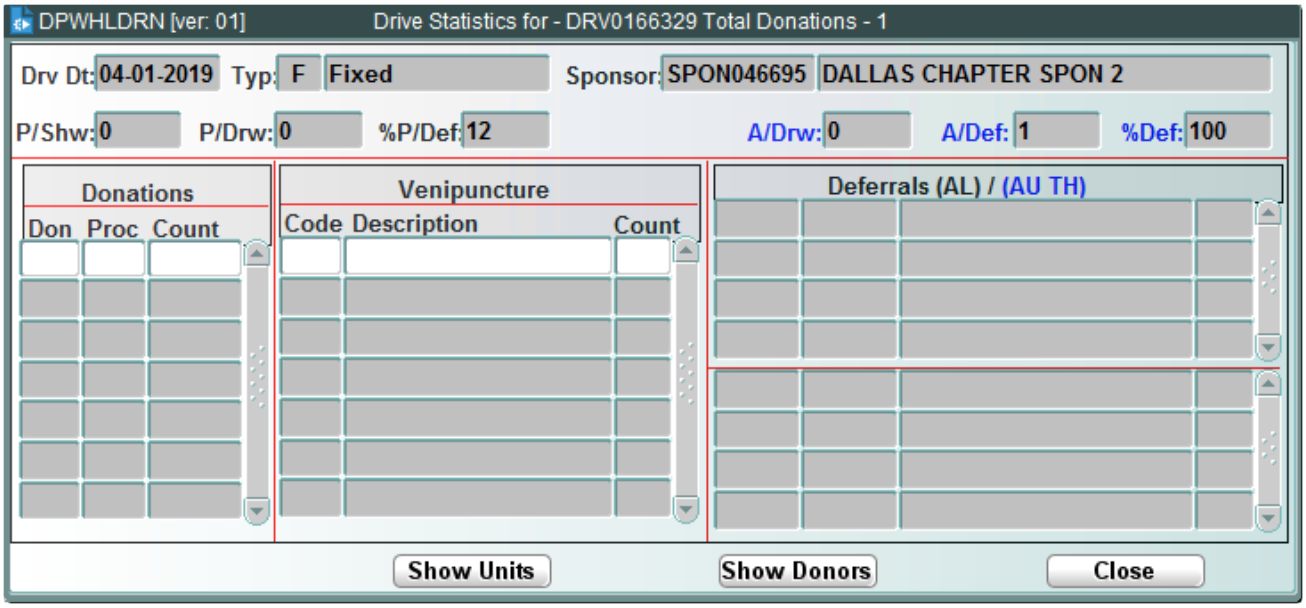

Click Show Units and you see the numeric codes with counts underneath:

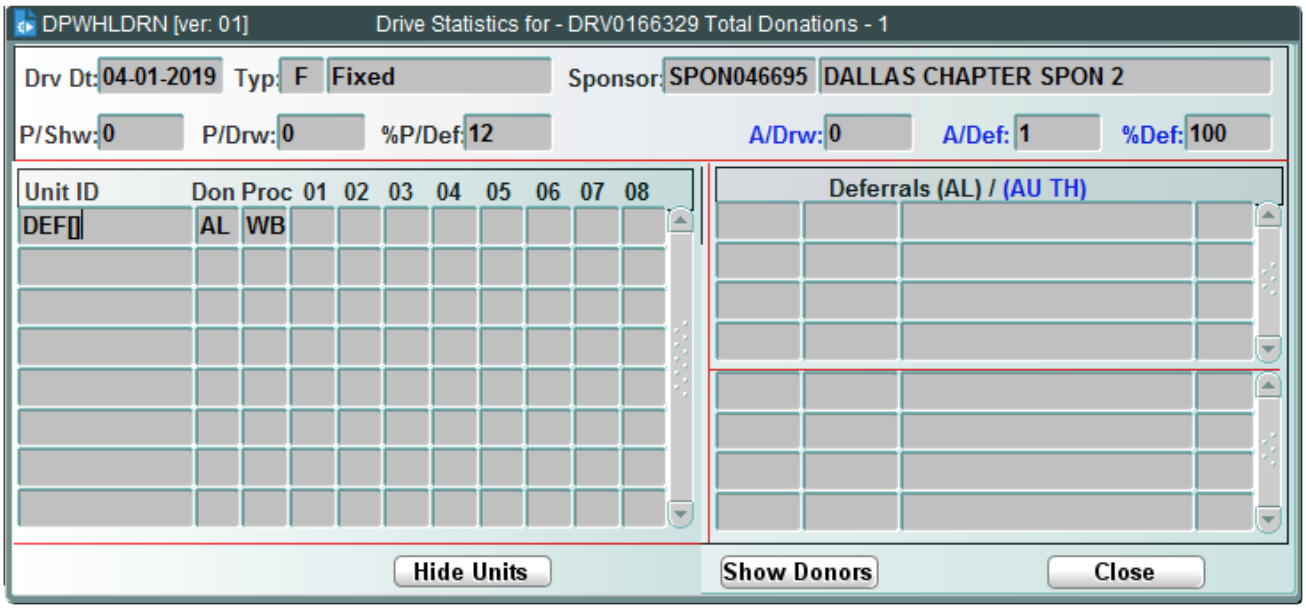

Blood Centers to Hemisphere Interface

There are specific venipuncture code numbers that are called out in the Blood Centers to Hemisphere interface. There are two columns that relate exactly to this venipuncture code in the HP_DONATIONS table: QNS and DOUBLE_STICK. The QNS column is populated if the donor has the venipuncture attribute of 04 or 05. The DOUBLE_STICK column is populated if a donation has the venipuncture attribute of 02.

Reports Related to Venipuncture Codes

SSRCSSUM- Collection Summary by Donor Center

The following venipuncture attributes are hard coded:

- 03 – OD (overdrawn)
- 04 – QNS (quantity not sufficient)
- 05 – NB (no blood collected)
- 06 – NUC (no unit collected)
- 07 – RNR (RBCs not returned)

These attributes can be viewed through the Venipuncture attributes (VENATRR) screen.

DNRCTFS- Detailed Collection Staff Statistics

The following venipuncture attributes are hard coded:

- 03 – OD (overdrawn)
- 04 – QNS (quantity not sufficient)
- 05 – NB (no blood collected)
- 06 – NUC (no unit collected)

These attributes can be viewed through the Venipuncture Attributes (VENATRR) screen.

The following procedure codes are hard coded on this report:

- PL
- PP
- GP
- LP

Other column headers on the report are as follows:

- VP– venipuncture
- HH– health history
- DEF– deferral

In order for deferrals to be counted on this report, the screener ID cannot be null.

This Page Intentionally Left Blank

Appendix I - Lab Master Codes

Code	Description	Use For	Static/ Dynamic
ABNEG	AB Negative	A listing of all valid tested ABOs allowed in AB Negative pools.	D
ABO	Valid ABO Codes	A listing of all valid ABO and Rh combinations.	S
ABOFD	Calculate ABO from Forward Type Only	These values are used on the RSM report to calculate Forward type	S
ABPOS	AB Positive	A listing of all valid tested ABOs allowed in AB Positive pools.	D
ACLAS	Access Class	A listing of access classes.	S
ACOAG	Anticoagulants	A listing of valid anticoagulants used in product bags and for the determination of ISBT product codes.	S
ADDTV	Additives	A listing of valid additive used in product bags.	D
ADTST	Tests Scheduled Automatically through Package	A listing of the test IDs that will automatically be scheduled through selective testing package. Entry of the test ID should be in the description field and test ID must have been defined in validation table Available Tests. Code field can be any code defined by the user. This code is used only in Regional Sample Management.	D
AFFCD	Affirmation Question Code for Recovered Plasma	Define the product code in the code field and in the description enter the Q code (Q1, Q2, Q3). If the product code does not have a corresponding affirmation code (Q1,Q2,Q3) then do not define the product code under AFFCD.	


Code	Description	Use For	Static/ Dynamic
AGMGR	RBC Antigen Manager	• ADTST – header for tie tag for additional testing performed • ATEST – list of tests that will print under the ADTST header, if present • CMVN – CMV negative • CMVP – CMV positive • CNFRM – Confirmed Historically header • CURDN – Tested on Current Donation • DBDIR – must contain AGDIR; this is static. • DNPP – tests IDs that you do not want to print positive results on the tie tag (CMV, HbS, IgA). Enter NONE for both negatives and positives to print. • ENBLE – Y if using the antigen manager; N if not using the antigen manager. • FDSEP – what character to use to separate antigens [comma (,) semicolon (;)] • PHENO – AG (serological), MAG (molecular), B (both serological and molecular), NO (no phenotype to print). • PRUNL – printing the unlicensed, unapproved section. Set to Y or N.	S/D
AIPRG	Auto Inter-Placement Programs	List programs that will call the LT_AUTO_INTER_PLACEMENT.pkg	S
ALL	All ABORh's	A listing of all ABORh values that can be used in POOL.	D
ALLNG	All Negative	A listing of all Rh negative ABO values that can be in a Rh negative pool.	D
ALLPS	All Positive	A listing of all Rh positive ABO values that can be in a Rh positive pool.	D
ANATT	NAT Testing	A listing of the flag that indicates whether or not NAT testing is performed on autologous units.	S
ANEG	A Negative	A listing of all valid tested ABOs allowed in A Negative pools.	D
ANTGR	Antigen Groups	A list of antigen tests by test group that can be resulted on an antigen worksheet.	S

WellSky Corporation
Proprietary and confidential

Code	Description	Use For	Static/ Dynamic
APADD	API Add Test or Interdiction	A list of parameters used in the API add test or interdiction function, as follows • CANR – Reason for cancelling a test (must be defined in the VOID Master Code) • DAYS – Number of days a record stays in the API table before archiving. This is linked to records in which the unit is not checked into the system when the record is processed in the API table.	S
APICV	API Contract Validation	Define the machine ID and test ID that will be used in determining test addition and resulting using APITS master code and the API Test Scheduling by Machine ID (IIFTST). The description field will be used to determine the entry. Entry must be in this format: MACHINE ID:MACHINE TEST ID	D
APITS	API Tests	FIN IDs that will have additional scheduling of test and results based on the entries in the API Test Scheduling by Machine ID (IIFTST) table.	D
APOS	A Positive	A listing of all valid tested ABOs allowed in A Positive pools.	D
ATRCF	Attribute Configurator Function Names	Functions are defined here to restrict the attributes that can be placed on products by program. Used in table Smart Manufacturer Attribute Configurator (VATTRCFG)	D
ATTR	Attribute Groups	A list of attribute groups used throughout the system.	S
AUBIO	Intended use flag for AUTO/BIO	A listing of codes that replaces the intended use flag on autologous units when BIO interdiction is present at labeling.	D
BACTB	BacT Alert Bottle Types	A listing of valid bottle types that can be included in the BacT Alert Microbial Detection System result upload (ATUPBACT .pkg). Results from bottles not defined in this Master Code will not upload into the system.	D
BAG	Product Bags	A listing of bags in which products can be defined. For Codabar, pheresis products the first character has to be D or P had the second character has to be less than or equal to 9. For ISBT, pheresis products, the first character has to be A, D, or P and the last character has to be less than or equal to 9. Bags defined in this Master Code, as well as in BAGID and PBAG must be defined with identical descriptions. **NOTE –** The P99 bag ID is static and cannot be terminated in the system.	D

Code	Description	Use For	Static/ Dynamic
BAGID	Bag ID	A listing of valid bags types, wafers, and filters that are used in component production and modification. Bags defined in this Master Code, as well as in BAG and PBAG must be defined with identical descriptions. **NOTE –** The P99 bag ID is static and cannot be terminated in the system.	D
BARCD	Barcode Symbology	A listing of barcode symbology used in the system.	S
BCODE	Special Testing Barcodes	Codes used to print on the labels for special testing.	D
BCRAH	Special Donations Interdiction Placement		
BCRAT	Attributes that are listed in Special Donations	These attributes display and can be selected for requirement and printing in the program Print Auto/Directed Tie Tag (SDIADTAG). **NOTE –** Irradiation is hard coded within the program (SDIADTAG) to print on the label. CMV attribute is used during distribution to determine if the facility requires this testing present. The description will have a number which will put them in that order, and beside the number the description that will print on the label. Code / Description CMV / 1. CMV IF / 2. Irradiate, Family Member IR / 3. Irradiation	D/S
BLFA	BLFA Interdiction	A listing of product types that automatically received a BLFA interdiction when the bleed time is greater than or equal to the slow bleed time and less than or equal to the maximum bleed time.	D
BNEG	B Negative	A listing of all valid tested ABOs allowed in B Negative pools.	D
BPOS	B Positive	A listing of all valid tested ABOs allowed in B Positive pools.	D
BREAC	Multiple Observation Reactive Result Codes	A listing of test result interpretations considered reactive using multiple observation testing, (i.e. final interpretation, not the observations.). (See REAC for other testing.)	D

WellSky Corporation
Proprietary and confidential

Code	Description	Use For	Static/ Dynamic
CBCID	Client Blood Center IDs	A listing of blood center IDs used as the client chapter in Regional Sample Management.	D
CBISB	Codabar Products to ISBT Products	Define the Codabar product codes that can be relabeled to the correct ISBT product code.	D
CFCOM	Confirmatory Canned Comments	A listing of confirmatory canned comments that are used in Sample Transfer In (STIN) when overriding a sample.	D
CFHLD	Confirmatory Hold Interdictions	A listing of confirmatory HOLD interdictions that will be placed when overriding samples in Sample Transfer In (STIN).	D
CFRSN	Confirmatory Override Reasons Codes	A listing of confirmatory override reasons that are used when sample notations need to be captured to describe the sample received.	D
CGMP	cGMP Parameters	A listing of valid cGMP parameters for apheresis collections.	S
CHCFG	Chagas Utility	A listing of codes used by the Chagas Utility. The interdiction code that is entered as the description for the code CHOLD cannot be removed manually by the user; it must be removed by the system. The defined interdiction code has a specific use related to the Chagas Utility and should not be used for any other purpose. **NOTE –** The codes under this master code are static; the description is dynamic.	S/D
CHKOP	Check-In Options	A listing of tube check-in options in Proficiency Testing (PTITUBE4).	S
CHKOT	Check-Out Reasons	A listing of reagent check-out reasons.	D
CHTST	Chemistry Test for RSM Report	A list of test IDs that will report the absorbence value in the RSM Report. The code value can be any 5 characters. The Donor Center Test ID needs to be in the Description field. 	D
CLASS	List of Product Classes (ICCBBA)	These classes have been defined by ICCBBA, and should not be changed. They are not hard coded but are used in determining the product code calculation.	D

<table>
<tr><th>Code</th><th>Description</th><th>Use For</th><th>Static/ Dynamic</th></tr>
<tr><td>CMC</td><td>Component Modification Containers</td><td>Container flags to restrict LOVs in defined component screens.
Code Description
P CPIPOOL2, CPIMPOOL
S FRICON2
T CPISDDFN, CPISDAL2, CPIPOOL
The code is the flag used for a specific program. The program that is listed in the description is used to restrict the catalogs and lots in LOVs. These flags are used in the VLOTS table for the CMC field.
These values are static and are hard coded and should not be modified:
Code Description
A BA
B BF
F FB
G SE
I FI
N NE
W WA</td><td>S/D</td></tr>
<tr><td>CMVBT</td><td>CMV Blood Type</td><td>A listing of blood type where CMV is automatically scheduled if there is no positive or historical CMV result.</td><td>D</td></tr>
<tr><td>CMVDT</td><td>CMV – Don’t Test</td><td>A listing of donation types for which CMV is not automatically scheduled if the donor has no historical CMV result or is CMV negative.</td><td>D</td></tr>
<tr><td>CMVPC</td><td>CMV Procedure Code</td><td>A listing of procedure codes for which CMV is automatically scheduled if the donor has no historical CMV result.</td><td>D</td></tr>
<tr><td>CNTRL</td><td>Positive Control Values</td><td>A listing of valid positive reagent control values.</td><td>D</td></tr>
<tr><td>CONID</td><td>Container ID Used in the Catalog Numbers</td><td>The container number used in defining container number + catalog number.
NOTE – Whole blood bag sets use numbers; apheresis sets use alpha characters.</td><td>D</td></tr>
<tr><td>CONT</td><td>Containers</td><td>A listing of valid reagent containers.</td><td>D</td></tr>
<tr><td>CONTR</td><td>Contract Types</td><td>A listing of valid contract types. The following contract types are static within the system:
CU, IM, IN, PO, PT, RG, TS.</td><td>S</td></tr>
</table>

Code	Description	Use For	Static/ Dynamic
CUEDI	Cue Discrepancy Interdiction	A listing of discrepancies between Donor and Lab.	D
DESTI	Reagent Destinations	A listing of valid destinations for shipping reagents.	D
DLBLT	Label Types	A listing of valid label types that can be printed. Valid label types are PFF (ISBT Full Face), PAD (ISBT ABO/Expiration), PPD (ISBT Product/Expiration), and PCA (Codabar ABO/Expiration).	S
DON	Donation Type Attribute	A listing of donation type attributes that when present on units, testing is not scheduled when the unit is checked in using Donor Source Card Entry (DSCE).	D
DONRD	Donor CUEs	A listing of valid donor Confidential Unit Exclusions.	S
DPRSN	Duplicate Check-In Reasons	A listing of reasons for duplicate tube check-in in Regional Sample Management.	S
EDABS	Edit Absorbance	A listing of tests where absorbance edit is allowed in Edit Test Results (EDIT). **NOTE –** Entry of the code can be a sequential number or the short name of the test (5-character limit). Enter the test ID in the description field. The test ID should match the test ID defined in Available Tests.	D
EDITP	Edit Reasons	A listing of valid reasons for editing test results received from a proficiency test survey.	D
EDITR	Result Edit Reasons	A listing of valid reasons for editing result data.	D
EXPAT	Expiration Attribute	A listing of the attribute code that is placed on products so the expiration is set properly when performing modifications or conversions that affect the product's expiration.	S
FCRYO	Frozen Cryo	A listing of CRYO product codes that can have freeze times entered in CPICRYOU, CPICRYO2, and CPIPOOL2 and that must have freeze times entered for ABO labeling in LAILABEL and LAILABE2.	D
FFSRC	FF Flag	A listing of information sources for ff flags used in VFFVALUE table for ISBT 128.	S
FLAGS	Reply Flags	A listing of valid flags given by the Olympus Reply.	S
FROZP	Frozen Products	A listing of product types that can go through the freeze screens (CPIFRZM and CPIFRZA) and that must have freeze times entered for ABO labeling in LAILABEL and LAILABE2.	D
GRPA	Group A	A listing of all valid tested ABOs allowed in Group A pools.	D

Code	Description	Use For	Static/ Dynamic
GRPAB	Group AB	A listing of all valid tested ABOs allowed in Group AB pools.	D
GRPB	Group B	A listing of all valid tested ABOs allowed in Group B pools.	D
GRPO	Group O	A listing of all valid tested ABOs allowed in Group O pools.	D
IDENT	ABO Intended Uses	A listing of valid intended uses for ABO labeling. Valid values are RG – Default/Intended Use not Specified, AB – For Autologous Use – Biohazardous, AO – For Autologous Use Only, and EM – For Emergency Use Only. The descriptions are dynamic and can be changed, but the codes are static and must not be modified.	S
INATT	Attributes to be transferred in Blood Centers-Transfusion transfer	A listing of the attribute code and enter the attribute group in the description area. The attributes will be contained in the Blood Centers-Transfusion transfer file.	D
INSTR	Instruments	A listing of valid testing instruments.	D
INTCL	Interdiction Classes	A listing of valid classes to which interdictions can be assigned. 'ALL' is static.	D
IUSE	Intended Use	A listing of valid ICCBBA approved intended uses used for determining ISBT product codes. The value defined in the Code field should be the value assigned to the 6th position of the ISBT product code. The value in the Description field is the DON type attribute code that should be present in order for the value in the Code field to be used. A single character should be entered in the *Code* field.	S
KTRAK	Quality & Compliance Interface	A listing of Quality & Compliance interface codes. Codes are as follows: • KTURL– URL to the site at customer location; can be secure http or regular http. • RCMD – Remote command program call to access Quality & Compliance. This code is static. • DNAME – Quality & Compliance database name; set by the client installation (for example, Donor Centers). • ACODE – Quality & Compliance designation for application. Value must be set to 1.	S
LABEL	Labels	A listing of valid labels.	S

WellSky Corporation
Proprietary and confidential

Code	Description	Use For	Static/ Dynamic
LBCMV	Special testing codes	Define the ICCBBA approved CMV negative special testing code. The value here is used when sending special testing (CMV Negative) information that should be printed on ISBT labels and also is the value that displays in the LOV when verifying Special Testing Labels. Only one valid value should be present in this code at a time. This is the CMV code that will be printed on the label in the CPIPOOL2 form. This is only used for pooling components.	S
LBVOL	Digitrax volume codes	A listing of codes used by Digi-Trax to print volumes on the labels for different product type.	S
LCMN	Negative CMV result	A listing of result codes that indicates a negative test result for CMV.	S
LCMP	Positive CMV result	A listing of result codes that indicates a positive test result for CMV.	S
LDOCS	Document Link Categories	Code is not used, description describes the table and column used to link the document. Use COMMON category for MAPS, GPS and REFRIG, so the COMMON part is static. Description will start with Link with specific entity:table_name:column in table. Examples: Link with Donor:DONORS:DONOR_ID Link with Unit ID: UNITS:UNIT_ID Common category:COMMON:MAPS	S/D


Code	Description	Use For	Static/ Dynamic
LOGDR	Error Log	A listing of the file path of logs: ARLOC –File location for the archived uploaded test result files FILOC – File location for the files from an outside source to be uploaded IDLOG – File location for the BacT Alert Daily Log IRLOG - File location for the BacT Alert Reactive Log IELOG – File location for the BacT Alert Error Log BACT – File location for BacT Alert Instrument File LOGDR – File location for the User Error Log ILOG – Instrument file location for DMS and the Abbott Commander EXEC- File location required for label printing PIARC – File location for the archival of the pathogen reduction file after processing PILOC – File location for the user to place the file for manual upload in the pathogen reduction process	D
MASTR	Master Code Definitions	A listing of master codes and their definitions/uses.	S
MFGCD	Bag Manufacturer Codes	Manufacturer of the blood sets defined in catalog table. These codes are from ICCBBA and are static. **NOTE –** User can add different manufacturer codes but need to make sure not conflicting with ICCBBA assignment.	D

<table>
<tr><th>Code</th><th>Description</th><th>Use For</th><th>Static/ Dynamic</th></tr>
<tr><td>MISC</td><td>Miscellaneous Codes used in Special Donations</td><td>These codes are used within the Special Donation Tie Tag logic and should not be changed. The descriptions are dynamic
Code Description Comments
ABOUN FABO
AINTC AUTC
ALQHL AHLD
BCAH1 00:07
BCAHF BCAH
BCIRR – which will list the attribute codes that will be printed on the label.
BCIRR IR
NOTE – IR indicates which of the attributes is the Irradiation one on the screen. It must match the code under BCRAT</td><td>S/D</td></tr>
<tr><td>MISST</td><td>Missing Tube Reasons</td><td>A listing of missing tube reasons.</td><td>D</td></tr>
<tr><td>MTYPE</td><td>Message Configuration to Print on Label</td><td>Message configuration that is used Labeling configuration (VDILBLCCF). Message is configured and will print on the 4x4 label.</td><td>D</td></tr>
<tr><td>NCTRL</td><td>Negative Control Values</td><td>A listing of valid negative reagent control values.</td><td>D</td></tr>
<tr><td>NOINR</td><td>No Interface</td><td>A listing of no interface reasons.</td><td>S</td></tr>
<tr><td>NREAC</td><td>Non-Reactive</td><td>A listing of test results that are equal to Negative.</td><td>D</td></tr>
<tr><td>ODTST</td><td>OD Test</td><td>A list of test codes for which extract will include the absorbance value in the extract file regardless of whether or not the contract is set to extract OD values.</td><td>D</td></tr>
<tr><td>OKABO</td><td>Transfusable ABOs</td><td>A listing of transfusable ABO types.</td><td>D</td></tr>
<tr><td>ONEG</td><td>O Negative</td><td>A listing of all valid tested ABOs allowed in O Negative pools.</td><td>D</td></tr>
<tr><td>OPOS</td><td>O Positive</td><td>A listing of all valid tested ABOs allowed in O Positive pools.</td><td>D</td></tr>
<tr><td>OPS</td><td>Operating System for SafeBlood</td><td>A listing of the operating system for extract process for SafeBlood Format. If using the UNIX operating system, define code as U; if using the LINUX operating system, define code as L.</td><td>S</td></tr>
<tr><td>OVERR</td><td>Special Labeling Reasons</td><td>A listing of valid reasons for labeling products as EMERGENCY RELEASE or re-labeling a product as HOLD.</td><td>D</td></tr>
</table>

<table>
<tr><th>Code</th><th>Description</th><th>Use For</th><th>Static/ Dynamic</th></tr>
<tr><td>PABO</td><td>Pooled ABO used in Import</td><td>List of pooled ABO values that can be imported.<table><tr><th>Code</th><th>Description</th></tr><tr><td>55</td><td>Group O</td></tr><tr><td>66</td><td>Group A</td></tr><tr><td>77</td><td>Group B</td></tr><tr><td>88</td><td>Group AB</td></tr><tr><td>A0</td><td>Group A Pooled Rh</td></tr><tr><td>B0</td><td>Group B Pooled Rh</td></tr><tr><td>C0</td><td>Group AB Pooled Rh</td></tr><tr><td>D0</td><td>Group O Pooled Rh</td></tr><tr><td>E0</td><td>Pooled ABO Rh Pos</td></tr><tr><td>F0</td><td>Pooled ABO Rh Neg</td></tr><tr><td>G0</td><td>Pooled ABO Pooled Rh</td></tr></table></td><td>D</td></tr>
<tr><td>PARDT</td><td>Pathogen Reduction Product Types</td><td>Product types that can be used for pathogen reduction. The code can be anything, but the description has to be defined for PLT or PLAS (this is hard coded). Each product category must be defined with the product types that will be used in the category. Define the descriptions with the following format:
Examples:
PLT:PLT PLAS:FFP
PLT:PLRF PLAS:PLAS</td><td>D</td></tr>
<tr><td>PBAG</td><td>Primary Bags</td><td>A listing of product bags used in defining products in primary bags in the COMPENT (CPICOMP) and PHER (CPIPHER) screens. Bags defined in this Master Code, as well as in BAG and BAGID must be defined with identical descriptions.
NOTE – The P99 bag ID is static and cannot be terminated in the system.</td><td>D</td></tr>
<tr><td>PEQUP</td><td>Pathogen Reduction Equipment Types</td><td>The equipment that a platelet could be collected by, and the platelet can have pathogen reduction preformed (AMICUS, TRIMA).
Plasma collections can be performed on any equipment. Recommend setting up a generic equipment code for plasma to be used on all plasma collections that have pathogen reduction process performed.
Example: PLSET (Plasma Set)</td><td>D</td></tr>
</table>

WellSky Corporation
Proprietary and confidential


Code	Description	Use For	Static/ Dynamic
PILL	Pathogen Reduction Illuminator Equipment	The code should be the equipment master code used for defining the Illuminators. If the equipment master codes do not match, users will not be able to find the serial numbers of the equipment.	D
PLCAP	Rack Capacity	A listing of rack capacity for MCITSHIP.	D
PLT	Platelet Product Types	A listing of platelet product types used for various component production reports. Product types defined under this code will appear under PLT or PLATELET in reports. Any platelet product type not defined under this code will appear under OTHERS in reports.	D
PMDFR	Product Modifiers	These modifier codes are used in the product code table. These modifiers are assigned by ICCBBA and should not be changed.	D
POCRY	POCRY Pools	A listing of valid product types allowed in a pool with a product type of POCRY.	D
POOL	Pool ABO/Rh	A listing of valid pool ABO/Rh types.	D
POPLR	POPLR Pools	A listing of valid product types allowed in a pool with a product type of POPLR.	D
POPLT	POPLT Pools	A listing of valid product types allowed in a pool with a product type of POPLT.	D
PRDTY	Product Types	A listing of valid base lab product types. **NOTE –** Product types are static in Lab. If a new product type is required, it must be validated by the facility for their internal use.	S
PRTYP	Product Types that can be Pre-Labeled	List the Lab product type under code with description.	D
QCFRQ	Quality Control Frequency	A listing of quality control frequencies.	D
QCIRM	Interim Results	A listing of valid interim results for batch release in Regional Sample Management.	D
RBC	RBC Product Types	A listing of platelet product types used for various component production reports. Product types defined under this code will appear under RBC, RBC/WB, or LRBC/RBC in reports. Any RBC product type not defined under this code will appear under OTHERS in reports.	D
REAC	Reactive Result Codes	A listing of test results considered reactive (see BREAC for Multiple Observation Testing).	D
RECON	Warehouse Transfer Reconciliation	A listing of valid warehouse transfer reconciliation codes.	D

Code	Description	Use For	Static/ Dynamic
REJEC	Product Reject Reasons	A listing of all product reject reasons.	D
RESTY	Extract File Formats	A listing of the file formats supported for transmitting extracted test results to a client via Regional Sample Management.	S
RESUL	Result Codes	A listing of all valid test result codes. The following result codes are static in the system and cannot be terminated: 00, 06, 17, 28, 51, 62, 73, 84, 95, ANT, IND, NEG, NR, NT, POS, SE, TO, UND.	D
RETST	Test IDs Linked to Messages	Test IDs that are linked to messages in labeling screen. The code is not used, enter the lab test IDs in the description area	D
RETYP	Research Intended Use Type	Code will be the intended use character for the research products, description field should contain volunteer or paid donor. R = VOLUNTEER DONOR R = PAID DONOR	D
RGREJ	Reject Reasons	A listing of reagent reject reason codes.	D
RGTYP	Reagent Control Types	A listing of reagent control types.	S
RLGND	Result Legend for RSM report	Codes defined as dynamic. The RSM report uses the description of the code to display in the results legend. Sequence 1 places the results in order in the legened.	D
RSKIP	Reset Extract Skip	A listing of reasons to allow a 'skipped' sample to be extracted in Regional Sample Management (see SSKIP).	D
RSMPR	Number of Columns on RSM Report	The NMCOLM code is hard-coded; the maximum number is 12, but can update to a lower number.	S
RSMRR	RSM Report	A listing of RSM reports. Used only by Regional Sample Management RSM report.	
RSTAT	Reagent Status	A listing of status assigned by the system to reagents.	S
SALUT	Salutation	A listing of salutations. Used in views, but no codes required.	D
SDD	Valid Attribute Groups Allowed in SDD program	This is a list of attributes that can be placed based on docking type. The code is the docking type and in description list the attribute groups that can be placed during that sterile docking type. The (+) attribute should have the specific attribute listed and not just (+). 	D

<table>
<tr><th>Code</th><th>Description</th><th>Use For</th><th>Static/ Dynamic</th></tr>
<tr><td>SEP1</td><td>1st Separation</td><td>A listing of product types that can be made after the 1st separation is performed. Entries here are used solely for the purpose of the Separation Done – Component not Defined (CPRSEPUC) report.</td><td>D</td></tr>
<tr><td>SEP2</td><td>2nd Separation</td><td>A listing of product types that can be made after the 2nd separation is performed. Entries here are used solely for the purpose of the Separation Done – Component not Defined (CPRSEPUC) report .</td><td>D</td></tr>
<tr><td>SEP3</td><td>3rd Separation</td><td>A listing of product types that can be made after the 3rd separation is performed. Entries here are used solely for the purpose of the Separation Done – Component not Defined (CPRSEPUC) report.</td><td>D</td></tr>
<tr><td>SERVF</td><td>HL7 – Servicing Facility</td><td>A listing of the HL7 Serving Facility. In the description field enter the code that will be used in the PV1 segment for servicing facility.</td><td>D</td></tr>
<tr><td>SKPST</td><td>Skip/Reset</td><td>A listing of skip or reset test results. Used in Regional Sample Management to define ‘Skip’ or ‘Reset’ test results for extraction.</td><td>S</td></tr>
<tr><td>SMAGE</td><td>Sample Age Ques</td><td>Code that will be used within Regional Sample Management to determine sample age date ranges.
<table><tr><th>Code</th><th>Description</th><th>Seq 1</th><th>Seq 2</th></tr><tr><td>BLUE</td><td>8+ days</td><td>8</td><td>999</td></tr><tr><td>GREEN</td><td>5 days</td><td>5</td><td>5</td></tr><tr><td>RED</td><td>6-7 days</td><td>6</td><td>7</td></tr><tr><td>WHITE</td><td>0-2 days</td><td>0</td><td>2</td></tr><tr><td>YELLW</td><td>3-4 days</td><td>3</td><td>4</td></tr></table>The sequence (Seq) 1 is the start of the range of dates and Seq 2 is the end of the range.
<u>Limitations:</u>
The sequence numbers should not overlap between codes.
The Code values are static. The Description can change and the Sequence 1 and Sequence 2 values can be updated.
No other values can be added to this list.</td><td>S</td></tr>
</table>

<table>
<tr><th>Code</th><th>Description</th><th>Use For</th><th>Static/ Dynamic</th></tr>
<tr><td>SPATR</td><td>ISBT/SP Attributes</td><td>A listing of codes used to map ISBT to SP attributes so during the ordering process in Distribution, one attribute is ordered but will locate both ISBT and Codabar units.

To map two or more attributes using one code, separate the attributes with commas, as shown:

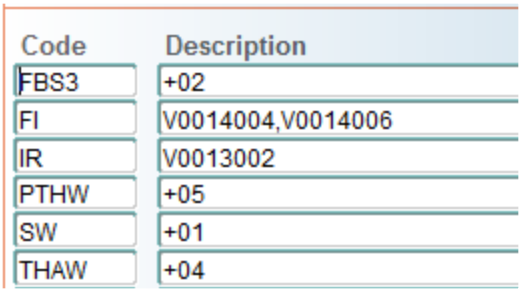 
<table>
<tr><th>Code</th><th>Description</th></tr>
<tr><td>FBS3</td><td>+02</td></tr>
<tr><td>FI</td><td>V0014004,V0014006</td></tr>
<tr><td>IR</td><td>V0013002</td></tr>
<tr><td>PTHW</td><td>+05</td></tr>
<tr><td>SW</td><td>+01</td></tr>
<tr><td>THAW</td><td>+04</td></tr>
</table>

The code will be the SP attribute code, description is the ISBT attributes that match

NOTE – Time will not print on the label if the SP attribute has a shorter life span than the ISBT attribute.</td><td>D</td></tr>
<tr><td>SRVCK</td><td>Product Suitability Check</td><td>A listing of codes used to identify Facility Identification Numbers (FIN) within different chapters of the institution to check product suitability of imported products.</td><td>D</td></tr>
<tr><td>SSKIP</td><td>Skip Extract Codes</td><td>A listing of reasons to ‘skip’ results extract for a particular sample in Regional Sample Management (see RSKIP).</td><td>D</td></tr>
<tr><td>STATE</td><td>State Abbreviations</td><td>A listing of valid state abbreviations.</td><td>D</td></tr>
<tr><td>STER</td><td>Sterile Connection Devices</td><td>A listing of valid sterile connection devices.</td><td>D</td></tr>
<tr><td>STFAC</td><td>Sample Transfer Facilities</td><td>A list of codes that will represent outside facilities or internal chapters. Internal chapters should be entered with the same Chapter ID defined in the Chapters table. If the code is for an external facility, place a '1' in the Sequence 1 column.</td><td>D</td></tr>
<tr><td>STRLC</td><td>Storage Locations</td><td>A listing of valid reagent storage locations.</td><td>D</td></tr>
<tr><td>STTYP</td><td>Sample Transfer Types</td><td>A list of sample types used in the Sample Transfer Out (STOUT) and Sample Transfer In (STIN). These sample types are only used in the confirmatory sample module.</td><td>D</td></tr>
<tr><td>SUPPL</td><td>Supplier</td><td>A listing of suppliers.</td><td>D</td></tr>
</table>

WellSky Corporation
Proprietary and confidential

Code	Description	Use For	Static/ Dynamic
SURND	Surround for Mapping	A listing of codes used to map Surround interface file to RTURLOAD. The codes are dynamic; the description is user defined.	D/S
SUSTY	Pathogen Reduction Suspension Types	Suspension types in which platelets are collected. Currently, there are two types: PAS-3 and 100% Plasma. The code can be anything, but the description should accurately say the type of suspension.	D
TANCM	Tango Comments	A listing Tango comments that should cause results to be rejected.	D
TANGO	Tango Universal Test IDs	A listing of Tango universal test IDs and the corresponding result records.	D
TEGRP	Test Groups	A listing of valid test groups. The following test groups cannot be changed: ABORH, AG, CHEM, CNFRM, MAN, ROUAG, SUPP, VIRAL.	S
TELAB	Testing Lab Codes	A listing of valid test lab codes to which users can be assigned. '99' is hard-coded and should not be removed.	D
TRGID	Test Series ID	Test Series IDs for the Confirmatory Sample Module used in the Test Series table configuration.	D
TSOLY	Olympus Tests	A listing of valid tests that can be performed on the Olympus.	D
TSTGP	Test Groups Used in Confirmatory Module	A list of test groups that are reported through the Confirmatory Module.	D
TUBE4	Tube 4 Check-In	A listing of tubes that can be checked into MCITUBE4.	S
TUBES	Tube Check-In	A listing of tube combinations that can be checked-in using Material Check-In and Regional Sample Management.	S
TZONE	Time Zone	A listing of the offsets (plus or minus) time zones from Greenwich Mean Time (GMT).	S
UTSPN	Unit Span	A listing of the unit span. IFDYS (interface days) – number of days in the past a unit can be interfaced from Donor to Lab. Value entered for IFDYS is dynamic, but IFDYS is static.	D
VERFY	Label Verification	A listing of the indicator for label verification for label printing programs.	D
VNDER	Label Vendors	A listing of valid label vendors.	D

Code	Description	Use For	Static/ Dynamic
VOID	Void Reasons	A listing of valid reasons for voiding a test or test batch. **NOTE –** The system allows a maximum of 5 digits for the code name. However, the programs that use this master code limit the code name length to a maximum of 4 digits; therefore, do not create a code name greater than 4 characters.	D
VTYST	Pathogen Reduction Volume Set Types	Volume set types defined by the manufacturer, small volume, large volume, Dual storage, plasma set. These codes are dynamic. Dual storage sets have multiple suitability requirements so multiple codes will need to be defined for this set type. **NOTE –** These set types need to be defined in BAGID, BAG master codes so the lot numbers can be defined.	D
WSNGR	Non-Manual Tests	A listing of tests that cannot go on manual worksheets.	D
XMTST	Result Transmission Status Codes	A listing of valid result transmission status codes.	S

Appendix J - Lab Special Processing

Code	Detail	Description	Used For	Static/ Dynamic
ANTG	Y	Antigen Groups	A listing of rare antigen combinations.	D
DIFF	Y	Differential Results	A listing of component differential tests.	D
PROC	Y	Processes	A listing of valid special processes.	D
SPIKE	Y	Spike Types	A listing of valid spiking techniques.	D
STAG	Y	Stages	A listing of valid stages for special processes. A maximum of 4 stages can be defined.	D

NOTE – All Code types are static: ANTG, DIFF, PROC, SPIKE, STAG.

This Page Intentionally Left Blank

Appendix K - Equipment

	Detail	Description	Used For	Static/ Dynamic
DAYS	Y	Days of the Week	A listing of the days of the week. MON, TUE, WED, THU, FRI, SAT, SUN	S
DOWN	Y	Downtime Types	A listing of downtime reasons. DOWN, SERV static down time type	D
EQUIP	Y	Equipment	A listing of valid equipment. CENT is a static equipment type **NOTE –** The Code Name is restricted to a maximum of 4 characters.	D
LOCAT	Y	Equipment Locations	A listing of valid equipment locations. CENT and RT are static locations.	D
QCRES	Y	Quality Control Results	A listing of valid quality control results.	D
QCREV	Y	Quality Control Review	A listing of valid quality control reviews. 1, 2D, 2H are static review codes	S
QCSTS	Y	Quality Control Status	A listing of valid quality control statuses.	D
QCTYP	Y	Quality Control Types	A listing of valid quality control types. DAY, SRV, QC, MON are static QC types.	D
RESUL	Y	Valid Quality Control Results	A listing of valid quality control results.	S

	Detail	Description	Used For	Static/ Dynamic
SRV	Y	Service Types	A listing of valid equipment service types.	D
STATS	Y	Equipment Statuses	A listing of valid equipment statuses. IN, OUT, NEW, DOWN are static equipment statuses.	S
TOD	Y	Data Types	A listing of valid data types. CHAR and DATE are static data types.	S
TYPES	Y	Equipment Master Code Types	A listing of all equipment master codes and their definition. TYPES, EQUIP, TOD, QCSTS, QCRES, QCREV, LOCAT, DOWN, QCTYP, SRV, UNITS, STATS, RESUL are all static equipment master code types.	S
UNITS	Y	Units of Measure	A listing of valid units of measure used. MG, LB, OD are static units of measure.	D

Appendix L - Lab Static Attributes

Code	Group	Description	Static/Dynamic
A1	ALERT	A1 Subgroup	S
A2	ALERT	A2 Subgroup	S
CMV	ALERT	CMV negative	S
CP6I	ALERT	Product Was in Distribution	S
CROS	ALERT	Crossover allowed	S
DISD	ALERT	Donor Tested Discrepancy	S
DISU	ALERT	Tested Result Discrepancy	S
IAT	ALERT	IAT Identify Antibody	S
NCRS	ALERT	No Crossover allowed	S
RPDN	ALERT	Repeat donor	S
UIBT	ALERT	Illogical Bleed Time	S
00	DON	Autologous	S
01	DON	Autologous: DSC	S
02	DON	Auto: RBC	S
03	DON	Auto: Cryo	S
04	DON	Auto: FFP (or Plasma)	S
05	DON	Auto: Platelet	S
06	DON	Auto: Pheresis	S
07	DON	Directed	S
08	DON	Directed: RBC	S
09	DON	Directed: Cryo	S
10	DON	Directed: FFP	S
11	DON	Directed: Platelet	S
12	DON	Directed: Pheresis	S

Code	Group	Description	Static/Dynamic
13	DON	Reagent Donor	S
14	DON	Therapeutic Withdrawal	S
15	DON	Autologous: Whole Blood	S
16	DON	Directed: Whole Blood	S
17	DON	Restricted Donation	S
27	DON	Sample Collected	S
WB	DON	Whole Blood	S
DP	PHER	Double Platelet Pheresis	S
PP	PHER	Pheresis Platelet	S
ER	SP	Emergency Release	S
FI	SP	Leukoreduced by Filtration	S
IF	SP	Irradiated, Blood Related Family Member, Directed	S
IR	SP	Irradiated	S
JUMB	SP	Jumbo Single Apheresis Collection	S
LRS	SP	Leukoreduced- Spike 4 Hr EXP Product	S
OPEN	SP	Open System	S
PE	SP	Pedi Satellite	S
POOL	SP	Pooled Product	S
OPEN	SP	Open System	S
SW	SP	Saline Washed	S
THAW	SP	Deglyc. Thaw Only	S
01	VENI	Difficult Stick	S
02	VENI	Double Stick	S
03	VENI	Overdrawn Unit: Exceeds Maximum Limit	S
04	VENI	QNS: Quantity not Sufficient	S
05	VENI	No Blood Collected	S
06	VENI	Non-Usable Component	S
07	VENI	RBCs Not returned (Apheresis)	S
08	VENI	Slow Bleed	S

WellSky Corporation
Proprietary and confidential

Appendix M - Lab Static Interdictions

Type*	Code	Static/Dynamic
B	ALT	S
B	IBIO	S
H	ABOD	S
H	BLHO	S
H	BLSE	S
H	CBDT	S
H	CMCO	S
H	CUED	S
H	DATA	S
H	DEFR	S
H	DISD	S
H	DISU	S
H	DMIT	S
H	DSEN	S
H	ELIG	S
H	HOLD	S
H	INTR	S
H	NITB	S
H	PDEF	S
H	QCRE	S
H	RHLD	S

Type*	Code	Static/Dynamic
H	TDEF	S
H	TEST	S
H	VOID	S
H	WTP	S
N	AMBI	S
N	BLFA	S
N	CBEX	S
N	CENT	S
N	CMT	S
N	CMTI	S
N	CMW	S
N	CONV	S
N	CRSE	S
N	CRTE	S
N	CRWS	S
N	CRYO	S
N	DMIP	S
N	EXPR	S
N	FILT	S
N	IATR	S
N	NBC	S
N	NCP	S
N	NFT	S
N	OVER	S
N	POOL	S
N	QNS	S
N	RNFT	S
N	RPT	S
N	SELF	S
N	TEMP	S
N	THER	S
N	UIBT	S
N	WELD	S

* Interdiction Types are as follows:

- H for HOLD
- N for NFT
- B for BIO
- I for INITIAL

This Page Intentionally Left Blank

Appendix N - Distribution Master Codes

Code	Description	Used For	Static/ Dynamic
ABO	ABO/Rh Values	Listing of system used codes of ABO/Rh values used in queries and routines.	S
ALERT	ALERT Attributes to be charged for Auto/Directed Products	Listing of ALERT type attributes that are to be charged, if present, for Autologous or Directed products.	D
ATTR	Attribute Groups	Listing of attribute groups that can be used in Distribution. Restrict entry to attribute groups from the Attribute Codes (ATTRIB) table in Lab. (2) are static: ALERT, SP	See Usage
BOXST	Box Statuses	Listing of system used codes to define the status of a box. • CL – Closed • DL – Delivered • EP – Empty • OP – Open • SH – Shipped	S
BOXTP	Box Types	Listing of box types used in packing functions. Box types can be defined as needed for use in the routine packing and offline packing functions. Pack Recovered Plasma (PACKRP) uses 'CA' for RPL and RPFF; leave 'CO' in table even if not used.	(2) S
CANCL	Cancellation Codes	Listing of user defined codes for a list of cancellation reasons for canceling an entire order.	D

Code	Description	Used For	Static/ Dynamic
CONTT	Contact Types	Listing of user defined codes of contact people for a customer in Customer Contact Names (CONTACT). Static: F, D but use not required	D
CRDBI	Credit/Debit Indicators	Listing of system used codes to indicate if a transaction causes a credit or debit to a customer.	S
CRRSN	Credit Reason	Listing of user defined codes of reasons to allow credit for products or services.	D
CSLFL	CSL Electronic File Configuration	List of fields that are used in generating the CSL plasma file. There are certain fields that must be defined in the master code: RESUL, DELIM, CSLDR, CSLER, 01, 02, 06, 13, 17, 25, 26, 27, 29, 32 and 33.	D
CUST	Customer Types	Listing of system defined codes for types of customers Distribution recognizes. Restricts selection of customers in packing programs.	S
DBRSN	Debit Reason	Listing of user defined codes of reasons to allow debit for products or services.	D
DESTS	Device Statuses	Listing of system used flag to determined usability status of a storage device.	S
DISCD	Discard Types	Listing of system defined discard types used in background processes.	S
DVTYP	Device Types	Listing of user defined codes for storage device types.	D
FACLT	Facility Codes	Listing of facility codes that have been defined in Transfusion. *Codes are dynamic, but they must exactly match the facility codes defined in Transfusion. Codes are used in the Blood Centers to Transfusion product batch transfer process.	D*
INATT	Transfer Attributes	Listing of transfer attributes. Enter attribute code in the code field and the attribute group in the description field. These attributes will be transferred to the Transfusion application through the batch transfer process.	D
IDENT	ABO Identifiers	Listing of system used codes of ABO identifiers for ISBT 128 labeled products.	S
INVCL	Inventory Classes	Listing of system used codes to identify classes of inventory products. 'DI' used in background processes.	S
INVTP	Inventory Types	Listing of system used codes to designate inventory level requirements for inventory product types.	S

WellSky Corporation
Proprietary and confidential

Code	Description	Used For	Static/ Dynamic
LOCTY	Location Types	Listing of system used codes in Return Reason Codes (REASON) to designate the stock status of a returned product for a specific code.	S
LTTYP	Blood Centers Target Type	Listing of user defined codes that will populate the description field for the Target Type value in the API conversion table.	D
LTYPE	Warehouses	Listing of user defined codes to differentiate internal warehouses for products. Codes are limited to a maximum of one letter or number.	D
MISC	Miscellaneous	Currently contains LOGDR, log directory .	S
NOCHK	Recovered Plasma Check-In	Listing of ser defined date flag to identify if recovered plasma products must be checked-in from Lab to pack. If 'Term Date' is null, recovered plasma products can be packed in PACKRP from Lab.	D
ORCLS	Order Class	Listing of system used only as the LOV in the 'Priority' field of Customer Orders Query (OCQ). This should match Order Class Codes (ORDCL).	S
ORDMD	Order Modes	Listing of user defined codes of ways to receive orders.	D
ORSTS	Order Statuses	Listing of system defined codes for list of statuses that are applied to orders depending on actions taken in or by the system.	S
ORTYP	Order Types	Listing of system defined codes for types of orders that can be generated.	S
OSAPP	Outside Source ID	Listing of the code used to identify the outside application that is interfacing to Blood Centers for the API interface.	D
PKLST	Alternate Pack List Printing	Listing of Alternate Pack List Printing codes. PKLST should be defined as the code for the code type only if the alternate Pack List (SHRPKLS2) is to be printed in SHIP, SHIPO, and SHIPD.	D
PKPLM	Recovered Plasma Product Groups	Listing of codes used to allow multiple ISBT product codes to be packed together in one box. The codes should be defined in a sequential order with RPF or RPL preceding the number. These code description will contain the product codes that will be packed together separated by a comma and a space.	D
PLFIL	Plasma File Types	Listing of the types of electronic plasma files that will be generated in the SHIP, GENXML, and XMLLOG screens.	S

Code	Description	Used For	Static/ Dynamic
PPLST	Plasma Packlist	Listing of Plasma Packlist codes. Should be defined with the following codes: • BAGWT – Bag weight • BOXWT – box weight • WUNIT – Unit of measure (can only be used for pound or kilograms) If these codes are not defined, the plasma packing program will calculate the volume based on the plasma weights only.	S
PRDGP	Product Groupings	Listing of user defined codes of identifiers for products that can be packed in the same box. Used in the 'Grouping' filed in Inventory Product Types (PRODTYP).	D
PRDST	Product Statuses	Listing of system used codes to identify the status of a product. Similar codes used alike are PRDST, SKSTE, SKSTS.	S
PRTYP	Product Types	Listing of user defined codes for use in Cancel Unfilled Orders (CUO). If inventory product type is not entered here, 'Unknown' will appear on screen. This use is for a limited duration and will be replaced.	D
PSLST	Pick Slip Statuses	Listing of system used codes to determine/display the status of a pick slip. The following must be defined: CA, CL, OP, RP, and UF.	S
PSLTP	Pick Slip Types	Listing of system used codes to define types of pick slips utilized. The following must be defined: AL, DI, ID, LD, OD, UP, and XR.	S
QUATP	Quarantine Types	Listing of system used codes to define types of quarantine; internal (available) stock or return product.	S
QURSN	Quarantine Reasons	Listing of user defined list of reasons to place a product in available inventory in quarantine.	D
REJCD	Reject Codes	Listing of user defined list of reasons to place a product in discard from available inventory or quarantine.	D
SAL	Salutations	Listing of salutations. Used in views, but no codes required.	N/A
SHIP	Shipment Statuses	Listing of system used codes to define the status of a shipment.	S
SHIPR	Shipper Codes	Listing of user defined list of carriers in all ship programs: SHIP, SHIPD, SHIPO. *XFER is a static code used for transfers and must be defined; all other codes are dynamic.	S*
SHPTP	Shipment Types	Listing of system used code to determine/set shipment type.	S
SKSTE	Stock States	Listing of system used code to identify the status of a product. Similar codes used alike are PRDST, SKSTE, SKSTS.	S

WellSky Corporation
Proprietary and confidential

Code	Description	Used For	Static/ Dynamic
SKSTS	Stock Statuses	Listing of system used code to identify the status of a product. Similar codes used alike are PRDST, SKSTE, SKSTS.	S
SRVCK	Check of FIN for Import Units	Code field contains the collection ID of the chapters within the institution, description is the chapter ID. These collection IDs listed, so when checked into the system will have the SRVDON.pkg to check for interdictions placed after they have been shipped from the chapter.	D
STATE	States	Listing of state abbreviations. These codes are static unless otherwise required.	S
STORE	Storage Types	Listing of system used codes to define storage for classes of inventory product types. Only define storage for inventory product types you decide to keep in stock, (for example, RE, SP); *however, AU must be defined for Autologous products, AB must be defined for Biozahardous Autologous products, and DR must be defined for Directed products.	S*
TRYST	Tray Statuses	Listing of system used code to identify the status of a tray for storage of products. Used in Tray Definition (TSTORE). No entry required.	D
WHREJ	Warehouse Reconciliation Reasons	Listing of user defined list of reasons to reconcile products that could not be reconciled during warehouse transfer.	D
WRKOP	Work Operations	Listing of code for entering Special Orders for pooled products. Only POOL should be defined under this code type.	S
XMLDR	XML File Location	Listing of file paths for generation of the XML file and error logs. Codes: XMLDR and XMLER must be defined under this code type.	S
ZONE	Delivery Zones	Listing of user defined list of codes used to identify customers in the same geographic region to group deliveries. Used in Create Consignee Details (CONSIGN).	D

This Page Intentionally Left Blank

Appendix O - Creating a New Test in Blood Centers

This appendix identifies the steps required to create a new test in Lab and Donor. You may only need to use a portion of this process; for example, there may not be any interdictions associated to the test, or certain steps may not be required in the Donor system, etc. It is very important to use your Lab and Donor Administration Guides for reference and assistance setting up the tables.

Assumption: You have identified a test and any supplemental or confirmatory tests that are applicable.

Lab Configuration

1. Review the Master Codes RESULT, REAC, and BREAC.
    - RESUL - make sure any test result that will be used for the test is defined.
    - REAC (subset of RESUL) - make sure any reactive result is defined here.
    - BREAC (subset of RESUL) - make sure any reactive result for a test in Multiple Observation Testing is defined here.
2. Create any interdiction(s) (LINTER) that will be automatically assigned by a result in the TEST table for the test (including supplemental/confirmatory).
3. Create any ALERT attribute (ATTRIB) that will be automatically assigned by a result in the TEST table for the test (including supplemental/confirmatory).
4. Create the test(s) in the TEST table. Follow your convention for testing. You will want to reference related testing already set in your Lab environment. It is easier to create the supplemental or confirmatory test first so it can be added to reflex based on a result for the screening test when it is created.
5. If an ALERT attribute from the test result is required for successful labeling of a product type, identify it in Product Type Attributes (PRDATTR) with a Y in the "L" column for the product type and attribute.
6. If the test results will be interfaced directly from a testing instrument or reference lab, upload the following into Lab:

- Go to Master Code INSTR to verify that the instrument is identified.
- Go to Instrument Tests (INTST) to identify the test.
- Go to Instrument Test Results (INTSTRS) to map instrument test results.
- Go to Valid Test Staging Parameters (TPARM) to identify any parameters that will be captured for an instrument test. At least one is required; the Date/Time is most commonly used.
- Go to Define Critical Controls for a Test (TSTPARM) to associate your parameter(s) to the instrument test.
- The specific instrument interface must be installed and configured.
- Access the Horizontal Test File Mapping (HTFM), and define the test and position for reference lab uploads. This is used for the SURROUND format for test uploads.

7. If this is a test where observations are captured for a final interpretation (e.g. ABO/Rh, Western Blot, Titer), go to Multiple Observation Test Admin (MOTADM) and follow the function sequence for creation:
    - Valid Multiple Observation Results (VMOR)
    - Multiple Observation Test Types by MFG (MOTMFG)
    - Multiple Observation Fields (MOF)
    - Multiple Observation Result Matrix (MORM)
8. If any Lab interdictions from either test results or ALERT attributes will be overridden for an Autologous or other donation type and its respective product type at Labeling, map it in:
    - Labeling Interdiction Override: Tech1 (INTOVER)
    - Labeling Interdiction Override: Tech2 (INTOVER2) - Will require second user to approve
9. If any donor interdictions from test results will be overridden for an Autologous or other donation type and its respective product type at PACK and PACKRP, map it in:
    - Donor Interdiction Override: Tech1 (OVERDON1)
    - Donor Interdiction Override: Tech2 (OVERDON2) - Will require second user to approve

Additionally, you may need reagents or a reagent kit created for in-house test entry. The reagents may go through qualification, or they can be used without pre-qualification based on your configuration. For a simple kit, use the 'No Pre-Qualification' process:

- Valid Reagent Supplier Codes (VSUPL)
- Valid Reagent Codes (VREAG) - set Prep and Qual fields to 'N'
- Enters Reagents into Repository (STORE)
- Reagent Kit (No Pre-Qualification) (RKNPQ)
- Refer to Reagent Management in the Testing Module.

WellSky Corporation
Proprietary and confidential

Donor Configuration

1. Review the Master Codes RESULT, REAC, and IRESU.
    - RESUL - make sure any test result that will be used for the test is defined.
    - REAC (subset of RESUL) - make sure any reactive result is defined here.
    - IRESU (subset of RESUL) - make sure any indeterminate result for a test is defined here.
2. Create any interdiction(s) that will be automatically assigned by a result in the Define Test Results (RESULT) table for the test (including supplemental/confirmatory) in INTER.
3. Create any informational attribute(s) that will be automatically assigned by a result in the Define Test Results (RESULT) table for the test (including supplemental/confirmatory) in INTER.
4. Define the test(s) in the TESTS table. Follow your convention for testing. You will want to reference related testing already set in your Donor environment.
5. Define the test results in Define Test Results (RESULT). Map interdictions and attributes to test results here.
6. Identify rules for overriding existing Donor test results already interfaced from Lab in Test Result Override Rules (RESOV).
7. Identify the upgrade/downgrade rules for testing interdictions and attributes in the Interdiction Upgrade Matrix (INTUP).

Configuration for Donor Notification

Donor Notification letters and assignment of interdictions need to be done at the same time so that letters can be generated.

1. Define Notification Letters (DEFLET) - letters need to be defined if interdictions being placed by test results need to generate a notification letter.

    NOTE – Letter codes need to make sure the effective date is prior to receiving the actual results over into Donor, otherwise the system will not be able to send letters.

2. Associate Letter code to Interdiction (INTERLET) - interdiction that is being placed by result will be linked to the letter code that will display in the DONNOTE form.

    NOTE – Make sure the effective date is prior to receiving the actual results over into Donor, otherwise the system will not be able to send letters.

This Page Intentionally Left Blank



Glossary

– # –

2D Barcode
A matrix code that provides a two-dimensional way of representing information in a scannable form.

– A –

Access Class
A numeric or alpha code that defines which kind of interdictions the user can view, place, or remove or if a user has special permissions within the application such as overrides.

Access Level
Defines the specific level of permission granted to the user to access system functions. Access Levels rank as follows: 0 = lowest; 9 = highest.

Action Interdiction
An Interdiction that can be placed on the Donor record that can be the source, existing, or a new interdiction.

Active Template
The status of the selected Health History template. The current template's status is Active. A terminated template's status is Inactive.

Alert Message
A message created by a user for other system users. Messages can be created and sent to a single recipient or multiple recipients or messages from a user can be forwarded to other designated recipients.

ALL
A Static Access Class that provides the user access to all interdictions (1-9 level) if all the interdictions are assigned to that class.

Allowable Results
A table defining the testing and qualification tests needed for a donor to become qualified.

Alpha Character
Letter(s) from the alphabet (as opposed to numeric character).

Alternate ID
A form of identification presented by a donor, such as a driver's license or passport.

ALTS
A Static Access Class that enables the user to update the alternate sponsor in the Registration program.

Answer
Defines the text that qualifies as a valid answer to a question in the Health History Question Bank.

API
Application Program Interface

Application ID
An alpha code that has been assigned to describe a particular Module.

Attribute
Coded information to identify special characteristics of a donor or unit; an informational type of interdiction. For example: Donor prefers non latex gloves for phlebotomy.

Attribute Code
An alpha/numeric code naming convention, associated to a specifric attribute to identify special characteristics of a donor or unit.

Audit Screen
Donation or deferral final review for acceptability.

Automatic Printing
An option available when generating a report; the report automatically prints to the default printer determined by your user login.

– B –

Band Code
Used as the header when resulting cellular level results for ABORH or other tests as configured.

Band Name
Used as the header when resulting cellular level results for ABORH or other tests as configured.

Banner Block
The very top of any Blood Centers screen that displays the name of the application, user ID, name of the screen/function that you are accessing, warehouse ID if needed, date and time of screen access, keyword, and program ID.

BDMS
Blood Donor Management System

Bill of Lading
The carrier's tracking identifier for the shipment.

BIO
A label that is placed on a product to indicate a Biohazard. Products with a BIO interdiction are labeled as Biohazard and the label will be printed with the universal Biohazard symbol.

BO Status
Designates that the status of an order is "back ordered."

Box Type
The type of box that you are packing products for shipment in, such as 'igloo cooler' or carton.

Box/Carton/Case
Interchangeable terms used to describe the container into which samples or products are packed.

– C –

CAC
Common Access Card A standard identification smart card issued by the Department of Defense that identifies active duty members of the Uniformed Services and other related personnel and contractors.

Campaign Theme
The theme that you are using for your campaign to market your mobile blood drive, such as pint-for-pint (pint of ice cream for pint of blood), football challenge (win football tickets), or free gift wrapping during the holidays when you donate blood.

Campaign Type
The type of campaign that you are using to market your mobile blood drive, such as media campaign or billboard campaign.

Cell Type
Identifies groupings of products collected for use in eligibility determination. There are two kinds of cell types: RBC – Red Blood Cell and PLASM – Plasma

Center
One of many physical locations of a blood donor center. A Center may be referred to as a Chapter.

cGMP
Current Good Manufacturing Practice.

Chapter
One of many physical locations of a blood donor center. A Chapter may be referred to as a Center.

Charge Code
Code defined by each facility to indicate a specific charge for services and or products.

checksum
A character that is used to validate a string of numbers.

CMV
Cytomegalovirus

Codabar ABORh Values
Numeric values that are associated to specified ABORHs used in barcoding and resulting ABORH tests in Blood Centers.

Codabar Unit Scheme
Indicates if the unit number is Codabar alpha or Codabar numeric.

Common Access Card (CAC)
A standard identification smart card issued by the Department of Defense that identifies active duty members of the Uniformed Services and other related personnel and contractors.

Communication Code
A code for the specific type of communication sent to a donor. For example, customer service communication may have several sub codes to further idtentify the specific communication such as T-Shirt mailed, request for donation history, or donor apology.

Communication Letter
Letter that could be sent to a donor that is not related to interdictions. These communications mainly relate to infomration that the donor may have requested or customer service.

Communication Type
A code to indicate the type or category of communication that you would send to a donor, such as; Notification, Customer Service, Scheduling, Nursing Service, Medical Director or General.

Communications Log
A log of cummnications that are associated to a donor, these could include notification communications, donor relationship codes, request for information codes, medical director communication, and donor appointment scheduling as a few examples.

Compensation Card
A card number issued to the donor to maintain a record of the funds received by the donor for current and previous donations.

Component
Individual part of a pheresis or whole blood donation.

Consignee
Identifies to whom the product was shipped.

Consignee ID
A delivery address or site of the customer.

Consumable
Items that are used during the donation and manufacturing processes, that must be inventoried and replenished as needed.

Contact Type
Indication of the type of contact you are associating to a contract, such as Designated or Financial.

Contract Code
Two character code that indicates the type of contract that is being defined, such as Internal, Testing, Proficiency Testing, or Imported Blood.

CORE Routine
A system routine that reads uploaded test results and schedules additional tests, as needed, and places indicated interdictions.

CPU
Cost per unit

cron job
Cron is a time-based job scheduler. It enables you to schedule jobs (scripts) to run periodically at certain times or dates.

CUE
Confidential Unit Exclusion. A barcode applied by the donor to the donor record to indicate 'USE' or 'Do NOT Use' my blood. The system will still display the CUE on specific screens, even if the CUE is not in use by the facility.

Customer
The purchaser of the product.

Customer Type
A code categorizing the customer as one of the following: o IN for Internal o DI for Discard o EX for Export o MG for Manufacturing o RD for Research and Development o RG for Regular Customers

– D –

Data access
Authorized user access that is limited to information specifically required to perform a user's assigned tasks.

DBA Privileges
A user with DBA privileges has the authority to write to the database and create users.

Deferral
A code indicating if an interdiction is associated to a deferral period. For example: Y = Yes, donor or unit is deferred for this location. N = this interdiction is not associated to a deferral period.

Deferral Period
An amount of time associated to an interdiction that defines the duration of the interdiction. A Deferral Period can be defined as a fixed or variable amount of time.

Deferral Type
Defines whether a deferral is or is not for a fixed amount of time. An interdiction may have a fixed deferral period or various deferral periods associated with it. For example: A generic interdiction, HDT; Health History Deferral – Temporary, can have different deferral periods associated with the answer.

Device Type
Type of storage device for example Refrigerator, Freezer, Platelet Rotator, or Room Temperature Table.

Differential Code
Cellular differential code.

Discard Product
Product from a unit that has been discarded.

Discrepancy Check
A review of test results to check for discrepancies and validate the findings.

DNRSG
Donor signature.

Donation Class
The classification of a donor specific to a particular collection. Valid Donation Classes are: AP = Applicant; QL = Qualified; AN = Annual Donation; RG = Regular Donation. Donation Classes are static values and are defined in the Donation Class table. A user is not allowed to choose a donor's donation class. System logic determines a donor's donation class at registration.

Donation Credit
The number of credits the donor will receive for a particular procedure.

Donation Group
A group of donation types. Associating certain donation types together under a group such as Special group would include Autologous, Directed, or Therapeutic. Grouping donation types together aids in appointment scheduling.

Donation Type
The classification of a donor specific to a particular collection.

Donor Grade Match
Donors are given a numeric grade ranging from 0 to 5 according to the Donor Grading Matrix (GRADMAT) controlled under WellSky Restricted Validation Tables (MEDRVT). A valid entry is required to retrieve the donor grade matches. For example: An entry of 3 would return donor grade matches 3, 2 and 1. Refer to the Grading Matrix Query (QGRADMAT) screen.

Donor Grading Matrix
Defines critical donor data elements and assigns a grade based on a comparison with other donor data elements using the Find Donor block and other processes.

Double Blind Entry
Manual entry of a value twice prior to the system allowing the cursor to advance to the next field.

Download
To move data that was captured in a Cron job export file from the Blood Centers application server to the master mobile laptop.

DR Type Interdiction
An Informational type of interdiction related to donor recruitment, such as call after 5:00 p.m. or do not send e-mail.

DRIVE
A Static Access Class that enables the user to create and modify drives other than their own.

Drive Category
A category of drives that aids in the ability to schedule staff or limit the number of drives within that category from being booked on the same day. Example would be High School Drives, you may want extra staff as well as to limit that only 2 High School drives could be booked on the same day.

DRVBK
A Static Access Class that enables the user to enter a drive date in the past in the onsite registration module only.

DUFFP
Dummy FFP. This is a product type that allows further manufacturing into a cryo precipitate or a cryo precipitate and cryo poor plasma products.

Duplicate Donor
When a donor has two or more separate records in the database.

Dynamic Access Class

Those access classes that can be defined internally for classes of interdictions or properties (attributes).

Dynamic Master Code

An existing code type that may be added to internally or removed from (terminated) a code type. Compare to Static Master Code. Refer to the Master Codes appendix.

– E –

EDIPI

Electronic Data Interchange Person Identifier A unique number assigned to a record in a database that identifies a person and a personnel category.

EDN

Electronic Delivery Note

EIE

Enterprise Integration Engine - This is WellSky's enterprise level interface sub-system for the automatic transmission of data between a transmitting and target system.

Employee ID

The code that has been associated to the User ID or the employee ID associated to the User ID.

Enlistment Type

Types of enlistment lists to group enlistment criteria under the enlistment type.

EPASS

A Static Access Class that enables the user to change laptop passwords for mobile staff.

Equipment ID

The location where the product is stored.

Equipment Master Code

Master Codes that are related to the Equipment management module in Lab.

Equipment Type

The type of location where the product is stored or a type of laboratory/screening equipment.

Error Message

There are four types of Messages: System Error Messages must be acknowledged to continue. User Error Messages appear when the user makes an entry that cannot be accepted. Warning Messages display when a user attempts to perform an operation that should be considered carefully before committing data. Informational Messages provide information only and require no action to continue.

Existing Interdiction

The interdiction currently existing on the Donor; the interdiction is either a SURVE or INTER type, as defined by the Interdiction Codes table.

Export

To transfer data from the Blood Centers primary database server to a Blood Centers application server.

Extract

To move donor data that was captured offline during a mobile drive from the donor database on the mobile master laptop to the designated location on the mobile laptop hard drive.

– F –

Facility Code

Code defined in HCLL Transfusion for physical locations for transfusion service.

False Duplicates

Two donor records that appear to be the same donor but are, in fact, different donors.

FFP
Fresh Frozen Plasma

Find Donor (vs. Search for)
Used to search for, identify, and retrieve donor records in critical programs. A window that displays automatically in the ONILK-REG (Lookup and Registration) screen. The functionality of the window can be customized and configured independently for each program that uses it.

Find Donor Block
Screen that allows a user to find a graded result for donors with the input demographic data.

Flat File
A file that is generated to send test results into the system.

Frequency Code
A code that has been assigned to identify how often a particular donor task is performed, as defined in the Master Code FRQCD.

Functional/Working Group
The user's group that defines their function within the organization. For example: accounting, registration, collections. Each user is assigned a group when created.

Future Template
The status of the selected Health History template. A Future Template will become Active on a specified effective date in the future and replace the current Active template. When the Future template replaces the current template, the current Active template is terminated and becomes Inactive.

– G –

GMT Offset
Greenwich Mean Time plus or minus a specified number of hours and minutes

Goal Type
Collection Goals used in Donor, Types of goals could be institution level, sponsor, recruiter, or even collection site.

Group ID
The working/functional group code that has been assigned to a user.

– H –

Half Address
When the number portion of an address contains one half; for example, 123 1/2.

HLA/RBC searches
Searches that will locate RBC and/or HLA antigen matched donors and/or units for recruitment.

HOLD Type Interdiction
A type of interdiction, such as a data entry hold or a hold on physical findings.

– I –

INFOR Type Interdiction
A type of interdiction, such as donor attributes, that should display during donor look up.

Informational Message
A message that provides information only and requires no action to continue; the user is only required to close the pop-up.

Institution
The code that represents the name of the institution.

Intended Use Code
Letter or number code that is in the 6th position of the product code that specify the usage of the product.

Inter Classes (Interdiction Classes)
Classes set up to group interdictions for ease of security assignments.

INTER Type Interdiction
An Interdiction category that is associated to a deferral or a process control in the system, such as test result related interdictions and donor history related interdictions.

Interdiction
A type of identifier for a unit or donor that can be a deferral type identifier or used to aid in management of a process.

Interdiction Owner
A code assigned to designate the owner of the interdiction. For example, D = Donor, U = Unit, B = Both.

Interdiction Type
A sub-type of interdictions such as informational, deferral, hold.

Interdiction Upgrade/Downgrade Logic
An interdiction that is not allowed multiple placements on the unit/donor and must be set to N to go through. See Interdiction Upgrade Matrix (INTUP) for more information.

INTUP Function
Interdiction Upgrade Matrix function.

Inventory Class
A code catezorizing an inventoried product as one of the following: - RE -- Regular - AD -- Autologous/directed - SP -- Special

Inventory Product Type
A category to place common products together. Valid inventory product types are associated in Master Codes, code type PRTYP in Distribution.

ISBT
International Society Blood Transfusion

ISBT Code 128
ISBT 128 is the global standard for the identification, labeling, and information processing of human blood, cell, tissue, and organ products across international borders and disparate health care systems. The standard has been designed and perfected over a period of almost two decades to ensure the highest levels of accuracy, safety, and efficiency for the benefit of donors, patients, and health care professionals around the world.

– J –

Job Code
Specific code that indicates what job the staff member can perform.

– K –

Keyword
An abbreviation for a program name, a menu command, a master code, a system parameter or a validation table.

– L –

Lab Code
Lab user affiliation, which should be RT for all users.

Label Code
Code associated to a specific testing and storage statement for labels.

Line-by-line Basis
Where data is committed to the system as each field is completed by pressing ENTER.

LOB
Line of Business

Long Audit Process
When you use the DONAUDIT or the DEFAUDIT screens to audit the donation back office. This will record questions and answers as well as physical findings codes.

Lot Category
A code that identifies a valid lot category each consumable bag is associated to, as defined in Master Code BAGID.

Lot Number
A required entry code that identifies each consumable bag using a maximum of 30 characters.

LOV
The List of Values contains all valid data for a particular field.

– M –

Manual Hold
A hold that is placed manually on the Donor during the registration process. If a suspect duplicate donor is found during registration, two or more donors can be placed on hold and not allowed to continue.

Manufacturing Process
The steps used to transform the units collected into products that can be shipped.

Mapsco
A company that provides printed street level maps.

MAS90 Data
Financial or Billing interface file format.

Master Code Type
A classification under which Master Codes are grouped. A table of underlying codes is associated to each code type. Master Code types are defined and stored by WellSky.

Master Codes
A set of code types used by individual modules to provide flexibility to the application. Some Master Codes define valid data/values for other tables in the system (for example, Street Types: CIR, AVE, ST, BLVD). WellSky may be required to add new or modify existing Master Codes.

Maximum Cell Loss
The maximum loss of red cell or plasma a donor may have over a specified number of days and still maintain eligibility. If the donor goes over the maximum amount in the specified number of days, he becomes ineligible.

Merge Donors
To join two donor records that belong to the same donor into a single donor record.

Message ID
The code that identifies an Alert Message.

Mul Flag
Multiple Flag in the interdiction table for donor.

My Term
My definition

– N –

New Donor
A first time donor.

NFT
Not for Transfusion. A label that is placed on a product. Not for Transfusion for ISBT the system will print Discard, for codabar the system will print 'NFT' on the label.

Nickname
The donor's familiar name that is associated to a first name for use in the donor grading matrix for possible donor matches when searching for a donor record.

Notification Letter Template
A template that defines the information included in a letter sent to a donor. A Notification Letter is a Controlled Document.

Notification Mode
One of two modes, Standard and Notification, in which the Donor Detail Query screen can operate. If this screen is called from the Donor Notification functions of the application, the Donor Detail Query screen will run in Notification mode.

NT Results
Results that are not tested.

Number Value (for a Master Code)
An optional entry made when defining a Master Code; entering Number Values establishes the valid entries for a specific parameter defined by a particular Master Code. Refer to the Master Codes appendix before making an entry.

– O –

Offline Data Entry
Entry of data when recovering from downtime that bypasses certain system controls to allow proper documentation of activities that occurred while system was down.

OR Status
Designates that the status of an order is "ordered."

Order Class
Defines the urgency of the order- stat, asap, emergency, routine.

Order Entry Module
Provides computer aids to take, record, and track orders for the blood center.

Order Mode
A code that indicates how the order was placed (e-mail, phone, interface).

Order Number
A number that identifies an order; it is generated by the system after the first line item is entered.

Order Type
Special, Auto Directed, Regular, Export.

Ordered Tier
Freshness indicator for the products orderd.

OSUPR
A Static Access Class that enables Supervisor override in the onsite registration module. It allows the user the ability to re-enter data for health history, physical findings and to modify registration information.

Overlapping Interdictions
Interdictions associated to more than one class.

– P –

Parent Question
A question in the Health History Question Bank that can trigger a related question to display. The related question usually requires more detailed information from the donor.

Payee
The billing address of the Customer. Use the Payee screen to define new payees in the system or to revise details on previously entered payees. The payee can be different from the customer. This is the second screen required in entry of new customer accounts.

PDF 417 Barcode format
A stacked, linear barcode symbol format. This is a 2D barcode used by a CAC, State driver's license, and other State-issued IDs.

Physical Code
A type of physical finding, such as temperature.

WellSky Corporation
Proprietary and confidential

Physical Findings Template

A template for the donor physical. You may define a specific template for each of the different donation cycles, as well as a template for future use. This table is institutional and can only be defined once for all chapters. The chapter should remain at the default value.

Physical Findings Values

A screen used to set up physical entries that the donor must pass in order to donate. The allowable range or the allowable character value can be documented and/or associated to an interdiction for placement if the physical does not match the allowed. This table is institutional.

PLASM Loss

Defines the acceptable amount of plasma loss for the specified procedure to be considered valid by the system. The standard loss includes the amount of blood that is routinely taken for the procedure and all test tubes collected. If the blood center desires, the amount of blood circulating in an apheresis machine (extra-corporeal volume) can be added into the eligibility calculations. The value entered in Define Procedure Codes (PROCS) is used if the PLASMA Loss field is left blank during collection.

Plate Sequence

Determines which type of result it is. I = The result code is for initial results; R = The result code is for repeat results; If the result can be both initial and repeat entry it must entered twice.

Point of data responsibility

The person who has authority to enter or change data in any database within Life-Trak/Distribution.

PRINT

A print mode that enables all non-supervisory users to view, print, or delete reports that only they have generated. The print mode for supervisors is SPRINT.

Print Header

The name that displays on the header for reports run at the institution level.

Procedure Code

The type of draw the donor will have.

Product Type

A code categorizing the product as one of the following:

Program

Each screen or window is a separate functional program governed by a set of codes.

– Q –

QC

Quality Control.

Quarantine

A status assigned to suspect products that prevents them from being allocated, packed, and shipped; pending investigation into their viability.

Question Code

The five-letter code associated with a particular question that is available to be included on the Health History Questionnaire.

– R –

Randomize Flag

A code used to designate the order in which the questions are displayed on the Donor response screen. For example: Y = Display the questions in no particular order. N = Display the questions in numerical order according to the template.

RBC Loss

Defines the acceptable amount of red cell loss for the specified procedure to be considered valid by the system. The standard loss includes the amount of blood that is routinely taken for

the procedure and all test tubes collected. If the center desires, the amount of blood circulating in an apheresis machine (extra-corporeal volume) can be added into the eligibility calculations. The RBC value entered in Define Procedure Codes (PROCS) is used if the RBC Loss field is left blank during collection.

Recruiter Caretaker

Staff member that will have access to drives created by specific recruiter to allow modifications to those blood drives.

Reference Code

The data that is used in query or audit screens. This is the value that users see in other screens.

Registration Hold

A type of interdiction that is placed automatically on a donor record at a defined process in the system as a result of unexpected field level entries, or placed manually during the registration process. Deferral period and manual placement allowance must be verified. Registration Holds are defined in Interdiction Codes (INTER), type HOLDS. Holds placed on the donor record can be removed by using the Remove Donor Interdiction or Remove Unit Interdiction functionality by a System Administrator or WellSky Staff.

Registration Holds Mapping Table (PLIREGIN)

Configuration table that allows definition of various interdictions that are placed by certain outcomes in the application.

Registration Override

When a donor is not suitable for donation but is allowed to donate by a user with appropriate authority, who overrides the restriction.

Releasing an Interdiction

The action that should be taken if the interdiction should not have been placed on a donor or unit record.

Repeat Donor

A donor who has donated previously.

Response Code

Designates the code for the valid responses to each question in the question bank. Y = Yes, N = No, U = Unanswered.

Restricted Validation Table

Tables that are set up to run the system. Valid values define the functionality pieces of the system.

Return Slip

A report of products that were returned to a center.

RMF Read More Field

This field is used when a question code has a –D suffix, indicating that the question has additional information to be displayed. Valid entries are Y or N, which designates whether or not the Question Details window automatically pops up in the Donor Response screen. Entering a Y in the RMF field will require the donor to see additional information related to a question.
Example: Referring to the screen picture, Q Code H0010 is the basic question (Are you allergic to iodine and/or latex?). Q Code H0010-D displays more detailed information, which appears in the Question Details window. The RMF field is set to Y, so the window will pop up automatically. If the RMF field is set to N (or blank), the donor must click the Read More button to display the Question Details window.

RPFF

Recovered Plasma Fresh Frozen

RPL

Recovered Plasma Liquid

WellSky Corporation
Proprietary and confidential

– S –

Safeblood Format
Electronic resulting file format.

Salvage
Products that are used for further manufacturing.

Sample Pack List Report
A report of samples that are being sent to a specific laboratory for testing.

Scheduled Test
Tests that are automatically assigned to a unit. An expected test.

Sequence (For a Master Code)
An optional entry made when defining a Master Code; the Sequence is specific to each code type. WellSky will note if Sequence entry is required. Otherwise, this field may be left blank. Refer to the Master Codes appendix before making an entry.

SLD
System Label Decision--whether to label the product either NFT or BIO.

SOP
Standard operational procedures.

Source Interdiction
The interdiction being placed on the donor record; the interdiction being placed is either a SURVE or INTER type, as defined by the Interdiction Codes table.

Source Product Type
Product type that will be used to make another product type via modification or conversion.

SPKEY
A Static Access Class that enables the user to reprint a donor card in donor look-up.

Sponsor Category
Indicator for how successful the drives have been or should be for the sponsor.

Sponsor Rating
Indicator for how successful the drives have been or should be for the sponsor.

SPRINT
A print mode that enables supervisors to view, print, or delete reports that other users have generated. The print mode for non-supervisory users is PRINT.

SQL
Structured Query Language

STAFF
A Static Access Class that enables the user to have access to the drive sign off process.

Standard Mode
One of two modes, Standard and Notification, in which the Donor Detail Query screen can operate. If this screen is called from the Donor Profile or Shipment functions of the application, the Donor Detail Query screen will run in Standard mode.

STAT
Used to indicate urgent or rushed.

Static Access Class
Those access classes that cannot be defined internally due to their explicit functionality. These are defined only by WellSky.

Static Master Code
An existing code type that may not be added to internally or removed from a code type. Only

WellSky may add, modify, or remove a Static Master Code. Compare to Dynamic Master

Strong Password

A password that has more complex configuration than a traditional password. For example, a strong password could consist of at least 15 characters (and no more than 50 characters) with at least two upper case and two lower case alpha characters, two numbers, and two special characters.

SUPER Mode

One of two modes in which the Notification Letters screen can operate. SUPER mode enables you to authorize, print, and send the letter to the donor. USER mode allows you to generate a notification letter.

Super User

A user who is defined by a site as having additional privileges/security access than other users in the system.

Supervisor Mode

Allows the user to access reports generated by all users.

SURVE Type Interdiction

A surveillance-type interdiction related to test results and whether or not a donor deferral period should be upgraded depending on a donor incurring a second occurrence of the same interdiction code.

System Date

The current date and time to which the system is set using the set date screen.

System Error Message

A message that informs the user of any system errors that have occurred.

System Name

The name that displays on the Application Menu at the first entry screen at log on.

System news

A notification system to inform the user of occurrences that may affect the Blood Centers application; for example, when down time is scheduled for maintenance or when changes have been made to the system.

System Parameters

Configurable elements that define various components, types of values to enter. For example: The amount of time a password is valid for.

System User

A user who has the appropriate access level, has a login/password and can access the system, and is found in the ADD USER list.

– T –

Tax ID

The Federal Employment Identification Number (FEIN).

Test Kit

A table that lists the test kit associated to each screening test that was performed in order to print the testing table onto the COA report.

Test Lab

The laboratory that performs the designated tests on the samples. The specific tests conducted by a particular lab are defined in Lab Test Table (PLLABTES). The Test Lab is used to define the results that should post onto the donor's record.

Tier

Tiers define timeframes until product expiration. • Tier 1 = 0 to 7 (days to expiration, oldest) • Tier 2 = 8 to 37 (days to expiration) • Tier 3 = 38 to 42 (days to expiration, freshest) Minimum and

maximum values cannot overlap from one tier to another.

Tracking Number

Identifier that is attached to shipments and is used to track the shipment.

Traditional Password

A password that has a less complex configuration than a strong password. A traditional password must contain at least six characters (and no more than 50 characters) and must contain at least one alpha character and one numeric character.

Transfusion Implicated Interdiction

A type of interdiction that is mapped to the appropriate test result in the Define Test Results (RESULT) table and is manually placed on the donor, but automatically goes through this logic when appropriately mapped.

TVIEW

A Static Access Class that provides the user with the ability to view test results; View ability is associated to the view level, V Level field in Define Tests (TESTS).

– U –

Unit Interdiction

An interdiction placed on a unit for deferral purposes.

Unit Scheme

The one-digit Scheme currently in use at your institution, as defined in the Master Code BARCD. Valid Unit Schemes are C for Codabar or I for ISBT.

UNLDF

A Static Access Class that enables the user to access the Unlink Deferral button.

UNOTE

A Static Access Class that enables the user to add notes to donation in Donation window.

Unpack Slip

A list of items that the system generates if the entire order is cancelled, accounting for the items to be unpacked from the order.

Unscheduled Test

A test that is not expected on a unit but is interfaced into the system. Or an additional test result on an already-resulted, scheduled test.

Up Flag

Upgrade Flag, in the Donor Interdiction Code table that indicates if the interdiction should be upgraded or not via the INTUP table (upgrade matrix).

Upgrade Matrix

Configuration table that defines the action of two interdictions that when used in conjunction can elicit the placement or removal of another interdiction.

Upload

To move data that was captured offline from the hard drive of the mobile master laptop to the Blood Centers application server.

User Class

A group of valid users that the administrator can assign to an access class.- Not used

User Error Message

A message that appears when the user makes an entry that cannot be accepted.

User Mode

Restricts access to only reports generated by the user.

USER Mode
One of two modes in which the Notification Letters screen can operate. USER mode allows you to generate a notification letter. SUPER mode allows you to authorize, print, and send the letter to the donor.

UTB
Unit Test Base

– V –

Valid System User
A user who has the appropriate access level, has a login/password and can access the system, and is found in the ADD USER list.

Validation Table
A list of restricted functions that can only be accessed by Users with administrator-level access due to their impact and interaction with the Blood Centers application.

VBN
Vendor Batch Number

Venipuncture Attribute Code
A code that is associated to information about a particular venipuncture during the donation process. For example: No Blood Collected, Donor Walked Out, or Double Stick.

View Level
Numeric value attached to interdictions and test results that will limit the ability of end users to see specific test results and interdiction codes.

VWSSN
A Static Access Class that provides a user with access to view the SSN of the donor in the list browser.

– W –

Walkout
A donor who signed in but did not complete the donation process.

Warning Message
A message that displays when a user attempts to perform an operation that should be carefully considered before committing data to the database.

Working/Functional Group
The user's group that defines their function within the organization. For example: accounting, registration, collections. Each user is assigned a group when created.



Index

#

Bags field 355

A

A field 133, 166, 349, 380, 481
A Neg field 398
A Pos field 398
AB Neg field 399
AB Pos field 398
Abbreviated Questionnaire Setup (ADHQ) 301
ABO 131
ABO and Product Compatibility (ABPCOMP) 168
ABO Batch Size field 17
ABO field 166
ABORh field 481
ABPCOMP 168
AC field 159, 374
Accept Expired Returns field 20
access 216
  Class by Inter Code Query (ACCQ) 225
  Class by Inter Code Query screen 225
  terminating 197
access level 221
  field 200
  modifying an 197
  within a group 188
access level, setting 194
ACCQ 225
ACLAS master code 216, 219
ACOAG Lab master code 353, 373
ACTCD master code 246
Action field 55
Action Inter field 55
Add System User (ADDUSER) 197
Add System User screen 197
adding attributes 379
ADDTV Lab master code 353
Addtv Soln field 355
ADDUSER 197
ADHQ 301
AIPRG master code 405
ALLRES 233
Alq field 409
ALT – Super ELE field 18
ALT Level – ELE field 18
Amt field 348
ANTG special processing master code 394
ANTGGRP 394
ANTGN 162
Anticoagulant field 355
Antigen Code field 162
antigen combinations, defining 394

Antigen Tests (ANTGN) 162
APICONV 342
application password 190
Assign Interdiction Class (ICLASS) 145
Assign User Interdiction Class (UCLASS) 211
Assign User to a Warehouse (WUSER) 213
assigning functional areas 3
assigning multiple mnemonics 131
assigning user IDs 3
Associate Letter to Interdiction (INTERLET) 324
Associate Nickname to Name (NICK) 89
associating interdictions to interdiction classes 145
ATGRP master code 81
ATRCF Lab master code 352
ATRCFG 351
Attached Users button 218
Attr Cd field 126, 411
Attr Class field 353
Attr Code field 353, 429
Attr Grp field 126, 411
ATTR Lab master code 347, 373, 378
ATTR master code 125, 375
ATTREQUP 383
ATTRIB 347
ATTRIB attriburte code 373
ATTRIB master code 375
Attribute Code field 400
attribute codes
  ATTRIB 373
Attribute Codes (ATTRIB) 347
Attribute Expiration Override - ISBT (OVR) 399
Attribute field 151
Attribute Group field 82
attributes 44
  adding 379
  associated Coabar product code, defining 409
  associated to don types/proc codes, defining 125
  deleting 378
  for apheresis prod collection equip, defining 383
  that can be added to specific prod types, defining 375, 379
  with associated lifespans, defining 399
ATTRMAT 377
ATTRPRD 409
Auto Cross field 19
Auto Generate button 262
Automatic Sched field 426
Available Tests (TEST) 424

B

B Neg field 398
B Po field 398
bag
  Code field 404
  Description field 415
  ID field 415
  master code 404
  Vol field 374
  Volume field 355
BAGID Lab master code 353, 414
BAGID master code 357
Band field 448
Bar Code field 155
BARCD field 430
Batch Seq field 18
Box Type and Description field 172
BOXCAP 171
BOXTP master code 171
buttons
  Attached Users 218
  Auto Generate 262
  Create Goals 245

Create Letter 320, 335
Create Slots 268
Delete Slots 269
Hide Letter 320, 336
Hold 87
Interdictions 229
Interdictions Associated 221
Interdictions in Class 226
New Template 283, 298
Notes 260
Other User 228
Overlapping Interdictions 222
PHYRULE 277
Preview Letter 336
Read More 285
Redisplay 227
Re-Sync 272
Retrieve Goals 245
Revise Letter 317-318, 333
Show All Definitions 265
Test Results 56
Users in Class 228
View Active Resources 237
View Letter 320, 336

C

C field 174, 350
Cap field 172
catalog 353
field 359, 362
No field 354
Number field 404
Catalog field 358
Catalog No field 355-356
Cd field 351
Cell Count Flag field 368
Cell Type field 78
cGMP
Lab master code 383, 385
parameters, defining 385
parameters, querying 385
Chap ID field 439
chapter 13
Details (CHAPTER) 13
field 432
ID field 14, 130
level information, entering or maintaining 13
Chapter field 420
check-box Int Address 11, 432
Class field 146, 221, 380
CLASS Lab master code 352, 363, 373
CLASS master code 379
classification priority and response time, defining 169
CLIA No field 439
Codabar
and ISBT product code information, defining 362
Scheme field 12
code 158
field 124, 132, 143, 159, 161, 348, 384, 390, 467
Type field 124
Code field 406
Coll ID field 157
Com Date field 476
Combination No field 396
COMLET 331
Comp Prd Cd field 369
Company field 431
Company Number field 18
Compatible ABO field 169
Compatible Product 167

COMTYPE 328
configuration tables 38
Configure Find Donor Block for a Program (DONBLOCK) . 83
Configure Interdiction Placement 405
configuring Fasttrak donor response web page 314
configuring interdictions 405
configuring valication tables 2
Confirm Test 1 field 429
Confirm Test 2 field 429
Confirm Test 3 field 429
Confirm Test 4 field 429
Confirm Test 5 field 429
Confirm Test 6 field 429
Confirm Tests field 433
CONID Lab master code 353
Cont. ID field 356
CONTR 430
Contract Code field 439
Contract ID field 431
Contract Prefix field 13
Contract Type field 431
Control No field 19
Convert External Data to LT Data (APICONV) 342
converting outside source application data 342
Count field 367
Cr field 350
create
  Goals button 245
  Health History Template (HHQTEMP) 290
  Letter button 320, 335
  Maintain Territories (TERINFO) 239
  Physical Findings Template (PHYTEMP) 281
  Slots button 268
Credit field (donation credits) 67, 74
CRYO Methods (CRYOMET) 401
CRYO Time Limit field 17
CRYO Worksheet Seq field 18
CRYOMET 401
Ctns field 359
Ctrl field 446
CUE field 147, 151
Cur Prd field 407
Current Donation field 71-72
Current Procedure field 71-72
Customer Consignee Product Details(VCUSTPRD) 470
customer support 3
customizing the Find Donor window 83

D

D field 350
Days field 67, 72, 362
DAYSTAT 238
DBETP 70
DDCODES 154
default core conditions, defining 373
Default Printer field 214
Default Product Code Attribute–ISBT (PRDTYAT) 373
DEFCLIST 246
define
  Access Class (ACCESS) 216
  Collection Goals by Date Range (GOALDT) 243
  Collection Goals by Month (GOALMON) 241
  Communication Letters (COMLET) 331
  Communication Letters screen 331
  Communication Types (COMTYPE) 328
  Communication Types screen 329
  Day Status Codes (DAYSTAT) 238
  Default Drive Checklist (DEFCLIST) 246
  Donation Procedures (DONPROC) 69
  Donation Types (DONS) 64
  Donor Center (FSITE) 255
  Drive Category Rules (DRULE) 247

Duration Between Procedures (DBETP) 70
Eligible Cell & Plasma Loss (LOSS) 77
Flexible Time Slots and Capacity (UCAP) 263
Flexible Time Slots and Capacity screen 264
Health History Responses (HHR) 286
HH response groups (HHGROUP) 309
Max Donations for Proc Groups (MAXDON) 75
Notification Letters (DEFLET) 314
Physical Findings Values (PHYRULE) 277
Physical Findings Values screen 278
Procedure Codes (PROCS) 66
Procedure Exclusions (XCLU) 79
Procedure Groups (PROCGRP) 73
Resource Availability Rules (RESRULE) 235
Resource Master List (ALLRES) 233
Test Results (RESULT) 59
Tests (TESTS) 55
User Access (UACCESS) 201, 219
User Access screen 219
Define Distribution Master Code Types (CODE) 158
Define Groups (GROUPS) 192
Define Lab User Access (LUACCESS) 214
defining
and viewing sponsor groups and sites 129
antigen combos associated with antigen groups 394
attributes assoc to Coabar prod code 409
attributes associated to don types/proc codes 125
attributes that can be added to specific prod types .. 379
attributes with associated lifespans 399
attrributes for apheresis prod collection equipment ..383
cGMP parameters 385
classifications for orders priority and response time .169
Codabar and ISBT product code information 362
default core conditions 373
filter information 361
internal contract information 430
inventory prod substitutions 166
lot numbers 357
manufactured products 163
manufacturer catalog numbers 353
num prod that can be packed in single container 171
ordered product and ABO combinations 168
process used in component special processing 390
prod types associated to pooled prod types 174
prod types collected from apheresis procedures 381
prod types to be stored on a specific rack 479
product code labels that will not print 403
product codes 407
rare antigen combinations 396
special processes 392
standard pricing 163
valid ABO types 131
valid parameters for CRYO preparation 401
valid product conversions 387
valid product storage information 477
valid product to bag combinations 414
valid reasons for return of products 173
valid storage devices and locations 474
valid tests 424
working/functional groups 192
DEFLET 314
delete
All button 272
Slots button 269
Delete Product Combination (DPRODCOM) 413
deleting
attributes 378
product combinations for set bag configurations 413

DESTS master code 474
Device Number field 480
Device Type field 475, 478, 480
DF field (deferral period) 46
Directed Cross field 19
Disc Check field 427
Display field 170
Distribution Master Codes (DMASTER) 160
DMASTER 160
DNCUE interdiction code 49
DNELG interdiction code 49
Don field 76
donation credits 66
Donation Type field 70
DONBLOCK 83
Donor CUE Scanned field 16
Donor Decision Code field 155
Donor Decision Codes (DDCODES) 154
donor decision codes, updating 154
Donor Interdiction Codes (INTER) 44
Donor Interdiction Override
Tech 1 (OVERDON1) 150
Tech 2 (OVERDON2) 152
Donor Interdiction Override Query (OVERDONQ) 153
donor interdiction overrides, querying 153
DONPP 125
DONPROC 69
DONS 64
DPRODCOM 413
DRCAT master code 247
drive information, viewing 127
Drive Seq field 18
DRIVES 127
DRULE 247
DST Offset field 24
DSTORE 474
DTGRP master code 261, 264, 267
Dummy field 367
Duration field 67
duration of procedure 66
DVTYP master code 474, 477, 479
DYSTS master code 238

E

E field 174, 351
EDI Input field 433
Edit Result field 427
Enter Attribute Group field 348, 384
Enter Interdiction Code field 143
Enter New Password field 196
Enter Search Text field 22
Enter the Code Type field 161, 390, 395
Enter the Machine ID field 436
Enter Time Slots and Capacity (TIMESLOT) 260
entering chapter level information 13
entering ff flag value 156
entering interdictions to be overridden 146
entering prod combos for set bag configurations 411
EPL field 68
EQMASTER 466
EQUIP equipment master code 383, 385
EQUIP master code 278
Equip Type field 420
equipment master codes
EQUIP 383, 385
Equipment Master Codes (EQMAST) 466
Equipment Type field 384
Equipment/Product cGMP Matrix (EQUIPROD) 385
EQUIPROD 385
ERL field 68
Etyp field 386
Exist field 54
Exist Inter field 55

external testing lab results, mapping 436

F

Face Label field 404
Facility/Short Name field 12
FastTrak donor response, configuring web page 314
FastTrak Web Configuration (Onsite) (WEBCFG) 303
Fee1 field 174
Fee2 field 174
FF Flag (Y/N) field 19
ff flag value, entering 156
FFP Freeze Durn field 17
FFSRC master code 156
FFVAL 156
field
  Type 450
fields
  # Bags 355
  A 133, 166, 349, 380, 481
  A Neg 398
  A Pos 398
  AB Pos 398
  ABO 166
  ABO Batch Size 17
  ABORh 481
  AC 159, 374
  Accept Expired Returns 20
  Access Level 200
  Action Inter 55
  Addtv Soln 355
  Alq 409
  ALT – Super ELE 18
  ALT Level – ELE 18
  Amt 348
  Anticoagulant 355
  Antigen Code 162
Attr Cd 126, 411
Attr Class 353
Attr Code 353, 429
Attr Grp 126, 411
Attribute 151
Attribute Code 400
Attribute Group 82
Auto Cross 19
Automatic Sched 426
B Neg 398
B Po 398
Bag Code 404
Bag Description 415
Bag ID 415
Bag Vol 374
Bag Volume 355
Band 448
Bar Code 155
BARCD 430
Batch Seq 18
Box Type and Description 172
C 174, 350
Cap 172
Catalog 358-359, 362
Catalog No 354-356
Catalog Number 404
Cd 351
Cell Count Flag 368
Cell Type 78
Chap ID 439
Chapter 420, 432
Chapter ID 14, 130
Class 146, 221, 380

CLIA No 439
Codabar Scheme 12
Code 124, 132, 143, 159, 161, 348, 384, 390, 406, 467
Code (Procedure) 67
Code Type 124
Coll ID 157
Com Date 476
Combination No 396
Comp Prd Cd 369
Company 431
Company Number 18
Compatible ABO 169
Compatible Product 167
Confirm Test 1 429
Confirm Test 2 429
Confirm Test 3 429
Confirm Test 4 429
Confirm Test 5 429
Confirm Test 6 429
Confirm Tests 433
Cont. ID 356
Contract Code 439
Contract ID 431
Contract Prefix 13
Contract Type 431
Control No 19
Count 367
Cr 350
Credit (donation credits) 67, 74
CRYO Time Limit 17
CRYO Worksheet Seq 18
CRYOMET 401
Ctns 359
Ctrl 446
CUE 147, 151
Cur Prd 407
Current Donation 71-72
Current Procedure 71-72
D 350
Days 67, 72, 362
Default Printer 214
Device Number 480
Device Type 475, 478, 480
DF (deferral period) 46
Directed Cross 19
Disc Check 427
Display 170
Don 76
Donation Type 70
Donor CUE Scanned 16
Donor Decision Code 155
Drive Seq 18
DST Offset 24
Dummy 367
Duration 67
E 174, 351
EDI Input 433
Edit Result 427
Enter Attribute Group 348, 384
Enter Interdiction Code 143
Enter New Password 196
Enter Search Text 22
Enter the Code Type 161, 390, 395
Enter the Machine ID 436
EPL 68
Equip Type 420

Equipment Type 384
ERL 68
Etyp 386
Exist 54
Exist Inter 55
Face Label 404
Facility/Short Name 12
Fee1 174
Fee2 174
FF Flag (Y/N) 19
FFP Freeze Durn 17
FIN 44
Final Max No of Bags 421
Final Max Volume 421
Final Plt Count (Max) 421
Final Plt Count (Min) 421
Final Volume (Min) 420
Flag 65
Fld Name 88
Formula 364
FP (fixed deferral period) 46
Full Res 2 427
Function 406
Function Check 88
function name 352
Function Name 406
G 132
Grad (Donor Grade Matches) 86
Group 58, 74, 200, 426
Group/Site Seq 19
Grouping 165
Grp 351
Hold 87
Hours 170
I 132
ILF Flg 356
Ind 130, 365
Inst Result 437
Institution ID 10, 14
Instr Test 436
Inter Code 50, 407
Inter Reason 50
Interddiction 147
Interdiction 152
Interdiction Class and Description 212
Interdiction Code and Description 146
Interval 77
Intr 349
Intr Code 428
Inv Class 368
Inv Product Type 367
ISBT Start Date 16
L 349, 376, 399
Lab 48
Lab Flg 48
Label Review 20
Last Srv 476
Lbl 434
LC 173
Lf 165
License Number 13
Life Span 365
Lot Number 358
Lst Tmp 476
Machine ID 437
Man Flg (manual flag) 48

Manuf Prd Flg 369
Manufacturer 354
Manufacturer and Description 355
Master Code Type 467
Max Bleed Time 17, 365
Max CAD Time 420
Max Discount 20
Max Don 77
Max Lab Check-in 18
Max Loss In (mL) field 79
Max Plt Count 420
Max Rcv Temp 367
Max Temp 366, 402
Max Val 387
Max Volume 420
Max Weight 366
Mfg Name 361
Min CAD Time 420
Min Plt Count 420
Min Rcv Temp 367
Min Temp 365, 402
Min Val 387
Min Volume 420
Min Weight 366
Mnem1 133
Mnem2 133
Mod By 468
Modifier 353, 365
MR 429
Mul (multiple) 47
N 350, 383
Name 10, 14, 130
New Allowed 88
New Prod 377
Next Srv 476
No. of Prods 355
Notify 61
NS 129
Num Entries 88
Num Value (Seq 1 - Seq 3) 42
Number of Bags 413
Nursing Audit 17
O 380, 447
O Neg 398
O Pos 398
OK for Trns 366
Old Inter 48
Order Class 170
Order Lifetime 20
OS 129-130
OSOK 371
Other Product Types 357, 407
Other Products 407
Out of State 368
Override Attr 400
Override Flag 64
Owner 46
P 166, 481
Parameter Code 384
Password to be Changed for 196
Pathogen Flag 368
Period in Days 79
Pher Flag 367
Pl Sq 428
PLT Designated Return 20
PLT HLA Match Return 20

PLT Returnable Hrs 20
Pool Prd Cd 368
Pool Seq 19
Pool SLD 399
Prd 478
Prd (deferral time period) 46
PrePrt Lbl 369
Previous Proc 72
Price 163-164
Print Header 12, 16
Priority 170
Procedure 70, 75
Procedure Group 74, 76
Prod 175, 374
Prod Code 406
Prod Typ 356
Prod type 362
Prod Type and Description 352
Product 410
Product Class 365
Product Code 364
Product Code Description 371
product Type 147
Product Type 151, 172, 404, 478
Program Name 85, 88
Protected Entry 88
QC for Label 17
Quarantine Alert Time 21
R 446
Rarity Percent 397
Rarity% 21
RBC Designated Return 20
RBC Reduced Price Days 20
RBC Returnable Days 20
Rck Number 481
Rd Date 476
Reason Code 173
Re-enter Password 196
Registration Number 12
Req 83
Request ABO 169
Request Product Type 167
Res (result code) 60
Research 370
Result 437, 445
Result Code 428
Result Intp 450
Result Status Current 63
Result Status New 63
Results Ind 433
Returnable 368
RH Label Reqd 366
Rpt Ind 428
S 133, 149, 153, 166, 349, 399
Sample Age 18
Sch Date 129
Schd Man Rpts 426
Select Allowed 87
Select If Multiple 88
Sep Thw Time Max 403
Sep Thw Time Min 402
Seq 65, 68, 409, 448
seq 1 125
seq 2 125
seq 3 125
Seq Check-in 17

Seq No. 445
Shelf 481
Short Name 16, 164, 364, 426
Show Exp Lot 358
Show Terminated 354, 356
Site 130
SL 349
Slow Bleed Time 17
Sort 83
Source 54, 408
Source ID 343
Source Inter 54
Source Product 388, 408
Source Value 343
Span 165
Spf 367
SPL 68
Sq 165
Src code 157
Src Type 157
SRL 68
Srv Code 350, 370
Staff No 199
Stage Code 391
Std Price 368
Sterile Doc WS Seq 18
Storage Days 421
Storage Type 480
STS 475
Suspension Type 420
Sys 144
System Name 12
T 133, 147, 152, 350, 434, 447
Table 82
Target 408
Target ID 343
Target Product 388
Target Type 343
Target Value 343
Tax ID 12, 18
Tax ID Form 432
Tc 479
Test Batch Seq 18
Test ID 426, 434, 436-437, 441, 443-444, 446, 448, 450
Test ID (Control Block) 441
Test Kit Seq 18
Test Lab ID 438
Testing Chapter 16
Text Search 46
Thaw Method 401
Time Limit 365
Time Zone 24
Time Zone Region 25
Tolerance 19
Total Number of Bags 412
Tray 481
Trm Rsn (termination reason) 47
Type 143, 159, 164, 168, 175, 364, 446, 448
U 132, 348
Unit ID Pattern 433
Unit Lvl 407
Unit Sch 369
Unit Scheme 16, 433
Unts 359
Up Flg 47
User ID 213

User ID and Name 212
Usr Grp 468
V Level 58
Vend Name 359
Very Rare% 21
View 47
Vol Type set 419
Vol Type Set Description 420
W 381
Warehouse 214, 478
Warehouse ID 475, 480
Work No Seq 18
Work Option 175
WS Thw Time Max 402
WS Thw Time Min 402
X 414
fields and headers resulted for each test ID, identifying ..447
fieldsAB Neg 399
filter information, defining or updating 361
FILTERS 361
FIN field 44
Final Max No of Bags field 421
Final Plt Count (Max) field 421
Final Plt Count (Min) field 421
Final Volume (Max) field 421
Final Volume (Min) field 420
FINCD 43
Find Donor window 83
Find Donor window, customizing 83
fInv Product Type field 367
Flag field 65
Fld Name field 88
Formula field 364
FP field (fixed deferral period) 46
FRMASTER 389
FSITE 255
Full Res 2 field 427
Function Check field 88
Function field 406
Function Name field 352, 406
functional areas, assigning 3

G

G field 132
GOALDT 243
GOALMON 241
GOALS master code 242, 244
Grad field (Donor Grade Matches) 86
Group field 58, 74, 200, 426
group, access level within a 188
group, modifying a 197
Group/Site Seq field 19
Group/Sites (SITES) 129
Grouping field 165
GROUPS 192
Grp field 351

H

Health History Question Bank screen 284
Health History Questions Bank (HHQBANK) 283
HHGROUP 309
HHQBANK 283
HHQTEMP 290
HHR 286
Hide Letter button 320, 336
Hold button 87
Hold field 87
HOLDS interdiction type 49
Horizontal Test File Test Mapping (HTFM) 442
Hours field 170
HTFM 442

I

I field 132

ICLASS 145
identifying
fields and headers resulted for each test ID 447
instrument tests 435
result codes used in resulting multiple observation tests 444
static and dynamic data 2
testing facilities to which samples may be sent 438
tests to include in a remote sample file 440
valid attribute codes 347
valid combos of bands/acceptable band value 449
IDPDR master code 339
IDPEP master code 339
ILF Flg field 356
Ind field 130, 365
INST 10
Inst Result field 437
institution codes
WDLY 10
Institution Details (INST) 10
institution details, viewing or modifying 10
Institution ID fields 10, 14
Instr Test field 436
instrument
results to test results, mapping 436
Test Results (INTSTRS) 436
Tests (INTST) 435
tests, identifying 435
Int Address (check box) 11, 432
INTCL Master Code 145
INTER 44
Inter 1 field 61
Inter 2 field 61
Inter 3 field 61
Inter Code field 50, 407
INTER master code 45
Inter Reason field 50
interddiction
field 147
interdiction
associating interdiction classes to 145
Class and Description field 212
Code and Description field 146
field 152
to be overridden, entering 146
to be overridden, verifying 148
interdiction codes
DNCUE 49
DNELG 49
NODEF 49
NODON 49
Interdiction Upgrade Matrix (INTUP) 52
interdictions
configuring 405
Interdictions Associated button 221
Interdictions button 229
Interdictions in Class button 226
INTERLET 324
Internal Contract (CONTR) 430
internal contract information, defining 430
Interval field 77
INTOVER 146
INTOVER2 148
INTOVERQ 149
Intr Code field 428
Intr field 349
INTST 435
INTSTRS 436
Inv Class field 368
inv prod that may be substituted ordered prod, defining 166

INVCL Lab master code 363
inventory prod groupings, defining and modifying 163
Inventory Product Types (PRODTYP) 163
ISBT Start Date field 16

K

keywords
ABO 131
ABPCOMP 168
ACCESS 216, 233
ACCQ 225
ADDUSER 197
ADHQ 301
ANTGGRP 394
ANTGN 162
APICONV 342
ATRCFG 351
ATTREQUP 383
ATTRIB 347
ATTRMAT 377
ATTRPRD 409
BOXCAP 171
CATALOG 353
CHAPTER 13
CIP 405
CODE 158
COMLET 331
COMTYPE 328
CONTR 430
DAYSTAT 238
DBETP 70
DDCODES 154
DEFCLIST 246
DEFLET 314
DMASTER 160
DONBLOCK 83
DONPP 125
DONPROC 69
DONS 64
DPRODCOM 413
DRIVES 127
DRULE 247
DSTORE 474
EQMAST 466
EQUIPROD 385
FFVAL 156
FILTERS 361
FINCD 43
FRMASTER 389
FSITE 255
GOALDT 243
GOALMON 241
GROUPS 192
HHQBANK 283
HHQTEMP 290
HHR 286
HTFM 442
ICLASS 145
INST 10
INTER 44
INTERLET 324
INTOVER 146
INTOVER2 148
INTOVERQ 149
INTST 435
INTSTRS 436
INTUP 52
LBLCF 133

LINTER 142
LMASTER 123
LOSS 77
LOTS 357
LUACCESS 214
MASTER 40
MAXDON 75
MENUITM 188
MENUQ 226
MODLOAD 270
MOF 447
MORM 449
MOTADM 444
MOTTMFG 445
MUAG 223
NICK 89
OPENSITE 267
ORDCL 169
OVERDON 152
OVERDON1 150
OVERDONQ 153
OVR 399
PHYTEMP 281
POOLSLD 397
PRCONFG 418
PRDATTR 375
PRDTYAT 373
PREPRINT 403
PROCGRP 73
PROCS 66
PROCSTAG 390
PRODBAG 414
PRODCOM 411
PRODCONV 387
PRODPROC 381
PRODTYP 163
PRODUCT 362
PSCOMP 174
PSTORE 477
PWDCFG 201
RARITY 396
REASON 173
RESET 195
RESOV 62
RESRULE 235
RESULT 59
RHOLDS 48
RMASTER 183
RSTORE 479
SITES 129
SPPROC 392
STAFF 204
SUB 166
SYSPARM 21
TERINFO 239
TEST 424
TESTS 55
TIMESLOT 260
UACCESS 219
UCAP 263
UCLASS) 211
VADDTST 440
VALALI 407
VCUSTPRD 470
VDRNLTR 325
VEHICLE 249

VENATRR 81
VMOR 444
VTILABS 438
WEBCFG 303
WEBITM 194
WUSER 213
XCLU 79

L

L field 349, 376, 399
Lab field 48
Lab Flg field 48
Lab interdiction
Codes (LINTER) 142
Lab master codes
ACOAG 353, 373
ADDTV 353
ATRCF 352
ATTR 347, 373, 378
BAGID 353, 414
CGMP 383, 385
CLASS 352, 363, 373
CONID 353
INVCL 363
MFGCD 353
PMDFR 352, 363, 373, 378
PRDTY 361, 363, 375, 379, 381, 404, 411
Lab Master Codes (LMASTER) 123
Label Review field 20
Labeling Configuration (LBLCF) 133
Labeling Interdiction Override
Tech 1 (INTOVER) 146
Tech 2 (INTOVER2) 148
Labeling Interdiction Override Query (INTOVERQ) 149
labeling interdiction overrides, uerying 149
Last Srv field 476
LBHLD master code 45
Lbl field 434
LBLCF 133
LC field 173
level, group access 188
Lf field 165
License Number field 13
Licensed Products (LICPROD) 370
LICPROD 370
Life Span field 365, 377
LINTER 142
LMASTER 123
LOCTY master code 173
logical sequence of events 2
LOSS 77
Lot Details for Bags (LOTS) 357
Lot Number field 358
lot numbers, defining 357
LOTS 357
Lst Tmp field 476
LTTYP master code 342
LTYPE master code 474, 477, 479
LUACCESS 214

M

Machine ID field 437
Maintain Menu Items (MENUITM) 188
Maintain Menu Items screen 188
Maintain Reports Master Table (RMASTER) 183
Maintain Reports Master table (RMASTER) 197
Maintain Reports Master Table screen 184
Maintain Staff Details (STAFF 204
Maintain Staff Details (STAFF) table 199
Maintain Vehicle Details (VEHICLE) 249
Maintain Web Menu Items (WEBITM) 194
maintaining chapter level information 13

Man Flg field (manual flag) 48
Manuf Prd Flg field 369
manufactured products, defining and modifying 163
Manufacturer and Description field 355
manufacturer catalog numbers, defining 353
manufacturer catalog numbers, viewing 353
Manufacturer field 354
map external testing lab results 436
map registration holds 48
mapping instrument results to test results 436
MASTER 40
Master Code Type field 467
master codes
ACLAS 215-216, 219
ACTCD 246
AIPRG 405
ATGRP 81
ATTR 125, 375
ATTRIB 375
BAG 404
BAGID 357
BOXTP 171
CLASS 379
DESTS 474
DRCAT 247
DTGRP 261, 264, 267
DVTYP 474, 477, 479
DYSTS 238
EQUIP 278
FFSRC 156
GOALS 242, 244
IDPDR 339
IDPEP 339
INTER 45
INVCL 145
LBHLD 45
LOCTY 173
LTTYP 342
LTYPE 474, 477, 479
OSAPP 342
PEQUP 419
PHYCD 278
PRDTY 146, 151, 373
PRGRP 73
PROC 391
PRTYP 45
REJECT 405
RESTY 233
RESUL 59, 62, 425
STAG 391
STORE 479
SUSTY 419
TEGRP 425
TRGRP 240
TRRTY 240
TSTGP 56
VTYST 419
WRKOP 174
Master Codes (MASTER) 40
Max Bleed Time field 17, 365
Max CAD Time field 420
Max Discount field 20
Max Don field 77
Max Inventory Checkin Days field 21
Max Lab Check-in field 18
Max Loss In (mL) field 79
Max Plt Count field 420
Max Rcv Temp field 367

Max Temp field 366, 402
Max Val field 387
Max Volume field 420
Max Weight field 366
MAXDON 75
menu items 188
MENUITM 188
Mfg Name field 361
MFGCD Lab master code 353
Min CAD Time field 420
Min Plt Count field 420
Min Rcv Temp field 367
Min Temp field 365, 402
Min Val field 387
Min Volume field 420
Min Weight field 366
Mnem1 field 133
Mnem2 field 133
Mod By field 468
Modifier field 353, 365
Modify Calendar and Capacity (MODLOAD) 270
Modify Calendar and Capacity screen 270
modify tests 55
Modify User Access within a Group (MUAG) 201, 223
Modify User Access within a Group screen 223
modifying institution details 10
modifying manufactured products 163
modifying standard pricing 163
MODLOAD 270
MOF 447
MORM 449
MOTADM 444
MOTTMFG 445
MR field 429
MUAG 223
Mul field (multiple) 47
multiple mnemonics, assigning 131
Multiple Observation Fields (MOF) 447
Multiple Observation Result Matrix (MORM) 449
Multiple Observation Test Types by MFG (MOTTMFG) 445
Multiple Observation Testing Administration (MOTADM) 444

N

N field 350, 383
Name field 10, 14, 130
names, screen 3
New Allowed field 88
New Prod field 377
New Template button 283, 298
Next Srv field 476
NICK 89
nickname 89
No. of Prods field 355
NODEF interdiction code 49
NODON interdiction code 49
Notes button 260
Notify field 61
NS field 129
Num Entries field 88
num prods that can be packed in single cont, defining 171
Num Value (Seq 1 – Seq 3) field 42
Number of Bags field 413
Nursing Audit field 17

O

O field 380, 447
O Neg field 398
O Pos field 398
OK for Trns field 366
Old Inter field 48
Open Appointment Calendar (OPENSITE) 267
OPENSITE 267
ORDCL 169
Order Class Codes (ORDCL) 169

Order Class field 170
Order Lifetime field 20
ordered product and ABO combinations, defining 168
OS field 129-130
OSAPP master code 342
OSOK field 371
Other Product Types field 357, 407
Other Products field 407
Other Users button 228
Out of State field 368
outside source application data, converting 342
OVERDON1 150
OVERDON2 152
OVERDONQ 153
Overlapping Interdictions button 222
Override Attr field 400
Override Flag field 64
OVR 399
Owner field 46

P

P field 166, 481
Parameter Code field 384
password configuration 196
Password Configuration (PWDCFG) 201
password securing 3
Password to be Changed for field 196
password, application 190
password, resetting a 195
Pathogen Flag field 368
Pathogen Reduction Process Configurator (PRCONFG) . 418
PEQUP master code 419
Period in Days field 79
Pher Flag field 367
PHYCD master code 278
PHYRULE 277
PHYTEMP 281
Pl Sq field 428
PLASM loss 66
PLT Designated Return field 20
PLT HLA Match Return field 20
PLT Returnable Hrs field 20
PMDFR Lab master code 352, 363, 373, 378
ponsor groups and sites, defining and viewing 129
Pool Compatibility Matrix (PSCOMP) 174
Pool Prd Cd field 368
Pool Seq field 19
Pool SLD field 399
POOLSLD 397
PRCONFG 418
Prd field 478
Prd field (deferral time period) 46
PRDATTR 375
PRDTY Lab master code 363
PRDTY master code 146, 151
PRDTY Lab master code ...361, 373, 375, 379, 381, 404, 411
PRDTYAT 373
PREPRINT 403
Pre-Printed Product Labels – ISBT (PREPRINT) 403
PrePrt Lbl field 369
Preview Letter button 336
Previous and Next buttons 243
Previous Proc field 72
PRGRP master code 73
Price field 163-164
Print Header field 12, 16
Priority field 170
PROC master code 391
PROC special processing master code 392
Procedure Attribute/Equipment Matrix (ATTREQUP) 383
Procedure Code field 67
Procedure field 70, 75
Procedure Group field 74, 76

process used in comp special processing, defining 390
PROCGRP 73
PROCS 66
PROCSTAG 390
Prod Code field 406
Prod field 175, 374
Prod Typ field 356
Prod Type and Description field 352
Prod type field 362
PRODBAG 414
PRODCOM 411
PRODCONV 387
PRODPROC 381
PRODTYP 163
PRODUCT 362
Product Bags (PRODBAG) 414
Product Class field 365
Product Code Description field 371
Product Code field 364
product code labels that will not print, defining 403
Product Codes (PRODUCT) 362
product codes, defining and updating 407
product combinations
(PRODCOM) 411
for set bag configurations, deleting 413
for set bag configurations, viewing 413
for set bag configurations. entering 411
Product Conversions (ISBT 'SP'/Codabar) (PRODCONV) 387
Product field 410
Product Storage Definition (PSTORE) 477
Product Type Attributes (ISBT/Codabar (PRDATTR) 375
Product Type Data - (Codabar/ISBT) 379
Product Type field 147, 151, 172, 404, 478
product types
associated to pooled product types 174
associated to pooled product types, defining 174
collected from specific apheresis procedures, defining 381
collected from specific apheresis procedures, querying 381
Product/Procedure Matrix - Pheresis (PRODPROC) 381
Program Name field 85, 88
Protected Entry field 88
PRTYP master code 45
PSCOMP 174
PSTORE 477
PWDCFG 201

Q

QC for Label field 17
Quarantine Alert Time field 21
querying cGMP parameters 385
querying donor interdiction overrides 153
querying labeling interdiction overrides 149
querying product types collected from specific apheresis proc 381

R

R field 446
Rack Definition (RSTORE) 479
rare antigen combinations, defining 396
rare antigen combinations, viewing 396
RARITY 396
Rarity Percent field 397
Rarity% field 21
RBC Designated Return field 20
RBC loss 66
RBC Reduced Price Days field 20
RBC Returnable Days field 20
Rck Number field 481
Rd Date field 476
read more button 285
REASON 173
Reason Code field 173
Redisplay button 227

Re-enter Password field 196
Registration Holds Mapping (RHOLDS) 48
Registration Number field 12
REJECT master code 405
Report Maintenance, WellSky 187
Req field 83
Request ABO field 169
Request Product Type field 167
Res field (result code) 60
Research field 370
RESET 195
Reset User Password (RESET) 195
Reset User Password screen 195
RESOV 62
RESRULE 235
Restricted Menu Administration, WellSky 194
RESTY master code 233
RESUL master code 59, 62, 425
RESULT 59
Result Code field 428
result codes used in resulting multiple obs tests, identifying 444
Result field 437, 445
Result Intp field 450
Result Status Current field 63
Result Status New field 63
Results Ind field 433
Re-Sync button 272
Retrieve Goals button 245
Return Reason Codes (REASON) 173
Returnable field 368
Revise Letter button 317-318, 333
RH Label Reqd field 366
RHOLDS 48
RMASTER 183
Rpt Ind field 428
RSTORE 479

S

S field 133, 149, 153, 166, 349, 399
Sample Age field 18
Sch Date field 129
Schd Man Rpts field 426
screen names 3
securing, password 3
Select If Multiple field 88
Select Allowed field 87
Sep Thw Time Max field 403
Sep Thw Time Min field 402
seq 1 field 125
seq 2 field 125
seq 3 field 125
Seq Check-in field 17
Seq field 65, 68, 409, 448
Seq No. field 445
sequence of events, logical 2
set
Day Light Savings (SETDST) 23
SETDST 23
setting access level 194
Shelf field 481
Shipping Box Capacity (BOXCAP) 171
Short Name field 16, 164, 364, 426
Show All Definitions button 265
Show Exp Lot field 358
Show Terminated field 354, 356
Single User Parameter 3
Site field 130
SITES 129
SL field 349
Slow Bleed Time field 17
Smart Manufacture Attribute Configurator (ATRCFG) 351
Sort field 83

Source field 54, 408
Source ID field 343
Source Inter field 54
Source Product field 388, 408
Source Value field 343
SP Antigen Group Definitions (ANTGGRP) 394

'

'SP' Antigen Rarity Combinations (RARITY) 396
'SP' Processes and Stages (PROCSTAG) 390
'SP' Products and Special Processes (SPPROC) 392
'SP' Special Processing Master Codes (FRMASTER) 389

S

Span field 165

S

special processes performed on diff prod types, defining 392

S

special processing master codes
special processes that can be performed on different product types 392

S

Special Processing Master Codes (FRMASTER) 394

S

specific product types stored on specific rack, defining ..479

S

Spf field 367

S

SPL field 68

S

SPPROC 392

S

Sq field 165

S

Src Code field 157

S

Src Type field 157

S

SRL field 68

S

Srv Code field 350, 370

S

STAFF 204

S

Staff No field 199

S

STAG master code 391

S

Stage Code field 391

S

standard pricing, defining and modifying 163

S

static and dynamic data, identifying 2

S

Std Price field 368

S

Sterile Doc WS Seq field 18

S

Storage Days field 421

S

Storage Device Details (DSTORE) 474

S

Storage Type field 480

S

STORE master code 479

S

strong password configuration 195-196

S

STS field 475

S

SUB 166

S

support, customer 3

S

Suspension Type field 420

S

SUSTY master code 419

S

Sys field 144

S

SysCd field 144

S

SYSPARM 21

S

System Name field 12

S

System Parameters (SYSPARM) 21

T

T field 133, 147, 152, 350, 434, 447

Table field 82

tables

Maintain Reports Master (RMASTER) 197

Maintain Staff Details (STAFF) 199

Target field 408

Target ID field 343

Target Product field 388

Target Type field 343

Target Value field 343

Tax ID field 12, 18

Tax ID Form field 432

Tc field 479

TEGRP master code 425

TERINFO 239

terminating access 197

TEST 424

Test Batch Seq field 18

Test ID (Control Block) field 441

Test ID field ..426, 434, 436-437, 441, 443-444, 446, 448, 450

Test Kit Seq field 18

Test Lab ID field 438

Test Result Override Rules (RESOV) 62

Test Results button 56

Testing Chapter field 16

testing facilities to receive samples, identifying 438

TESTS 55

tests to include in a remote sample file, idenifying 440

Text Search field 46

Thaw Method field 401

Time Limit field 365

Time Zone field 24

Time Zone Region field 25

TIMESLOT 260

Tolerance field 19

Total Number of Bags field 412

traditional password configuration 196

Tray field 481

TRGRP master code 240

Trm Rsn field (termination reason) 47

TRRTY master code 240

TSTGP master code 56

TVIEW access class 56

Type field 143, 159, 164, 168, 175, 364, 446, 448, 450

U

U field 132, 348

UACCESS 219

UACCESS master code 215

UCAP 263

UCLASS 211

Unit ID Pattern field 433

Unit Lvl field 407

Unit Sch field 369

Unit Scheme field 16, 433

Unts field 359

Up Flg field 47

updating donor decision codes 154

updating filter information 361

updating product codes 407

User Access to Menus and Interdictions (MENUQ) 226

User Access to Menus and Interdictions screen 227

User ID and Name field 212

User ID field 213
user IDs, assigning 3
Users in Class button 228
Usr Grp field 468

V

V Level field 58
VADDTST 440
VALALI 407
valication tables, configuring 2
Valid ABO (ABO) 131
valid ABO types, defining 131
Valid Additional Tests 440
Valid Aliquots (VALALI) 407
valid antigen tests, viewing 162
valid attribute codes, identifying 347
Valid Attribute Matrix – ISBT (ATTRMAT) 377
Valid Catalog Numbers (CATALOG) 353
valid combos of bands/acceptable band value, identifying 449
Valid Donation Type/Procedure Codes (DONPP) 125
Valid Drives (DRIVES) 127
Valid Facility Identifiers (FINCD) 43
Valid ff Flag Values – ISBT (FFVAL) 156
Valid Filters (FILTERS) 361
Valid Multiple Observation Results (VMOR) 444
Valid Notification Letters (VDRNTLTR) 325
valid parameters for CRYO preparation, defining 401
Valid Pool ABO Values (POOLSLD) 397
Valid Product Code Attributes (ATTRPRD) 409
valid product conversions, defining 387
valid product storage information, defining 477
Valid Product Substitutions (SUB) 166
valid product to bag combinations, defining 414
valid reasons for return of products, defining 173
Valid Remote Testing Labs (VTILABS) 438
valid storage devices and locations, defining 474
valid tests, defining 424
validation tables 38
Value field 22, 46
VCUSTPRD 470
VDRNTLTR 325
VEHICLE 249
VENATRR 81
Vend Name field 359
Venipuncture Attributes (VENATRR) 81
verifying interdictions to be overridden 148
Very Rare% field 21
View Active Resources button 237
View field 47
View Letter button 320, 336
View Letter Templates (VDRVWLT2) 325
viewing drive information 127
viewing institution details 10
viewing manufacturer catalog numbers 353
viewing product combinations for set bag configurations 413
viewing rare antigen combinations 396
viewing valid antigen tests 162
VMOR 444
Vol Type Set Description field 420
Vol Type Set field 419
VTILABS 438
VTYST master code 419

W

W field 381
Warehouse field 214, 478
Warehouse ID field 475, 480
WDLY Institution Code 10
WEBCFG 303
WEBITM 194
WellSky Report Maintenance 187
WellSky Restricted Menu Administration 194
Work No Seq field 18
Work Option field 175

working/functional groups, defining 192
WRKOP master code 174
WS Thw Time Max field 402
WS Thw Time Min field 402
WUSER 213

X

X field 414
XCLU 79

Keyboard Templates

CTRL+	Show Keys	Create Record	Next Block	Previous Block		Clear Form	Dup Field (DUPFLD)	Display Error	Delete Record		More Windows			Enter Query (ENTQRY)
ALT+		Scroll				Clear Record	Redisplay							Execute Query (EXEQRY)
	F1	F2	F3	F4		F5	F6	F7	F8		F9	F10	F11	F12
		List of `Values (LOV)	Next Field	Previous Field		Clear Field	Menu	Screen Print	Exit Screen		Alert Messages		History	Commit

END = Enter Query
HOME = Execute Query


PGDN = Next Block
PGUP = Previous Block

WellSky | Blood Centers

– cut here –

CTRL+	Show Keys	Create Record	Next Block	Previous Block		Clear Form	Dup Field (DUPFLD)	Display Error	Delete Record		More Windows			Enter Query (ENTQRY)
ALT+		Scroll				Clear Record	Redisplay							Execute Query (EXEQRY)
END=ENTQRY HOME=EXEQRY PGDN=Next Blk PGUP=Prev Blk														
Blood Centers		List of Values (LOV)	Next Field	Previous Field		Clear Field	Menu	Screen Print	Exit Screen		Alert Messages		History	Commit

The following is an alternate template option:

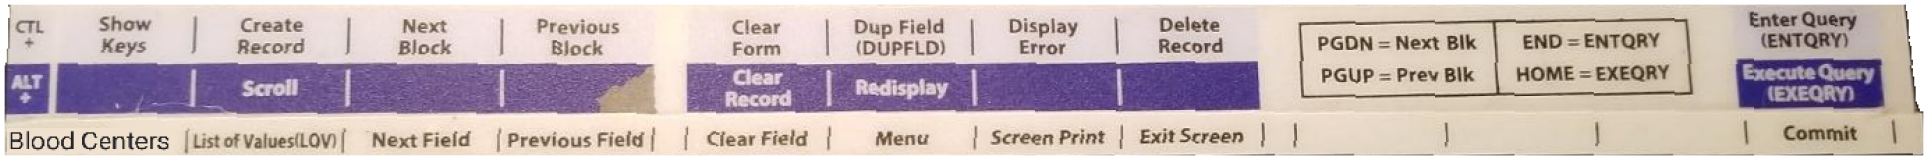

WellSky Corporation
Proprietary and confidential