

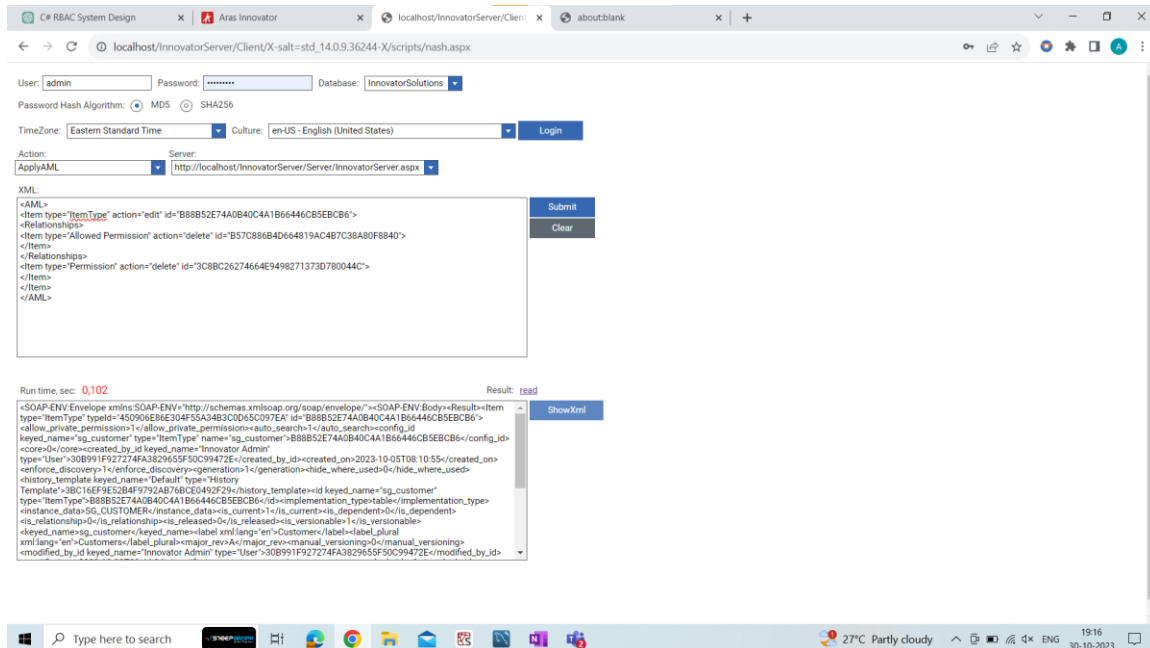
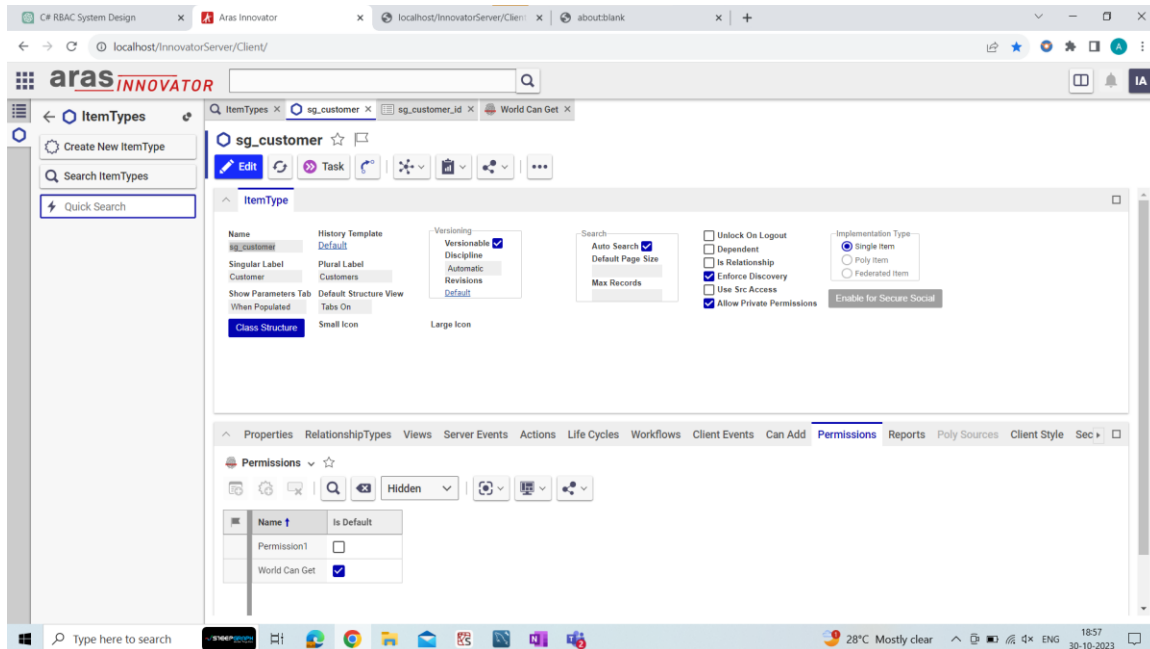



AML Task

Question 1 - To delete the permission from the itemtype

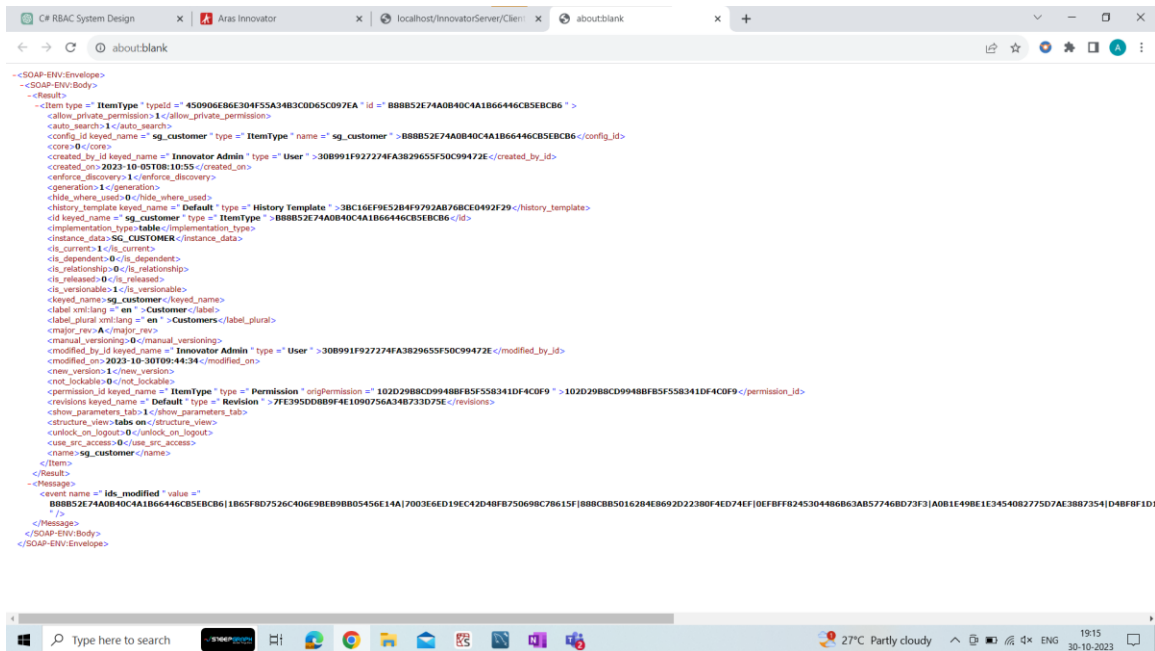

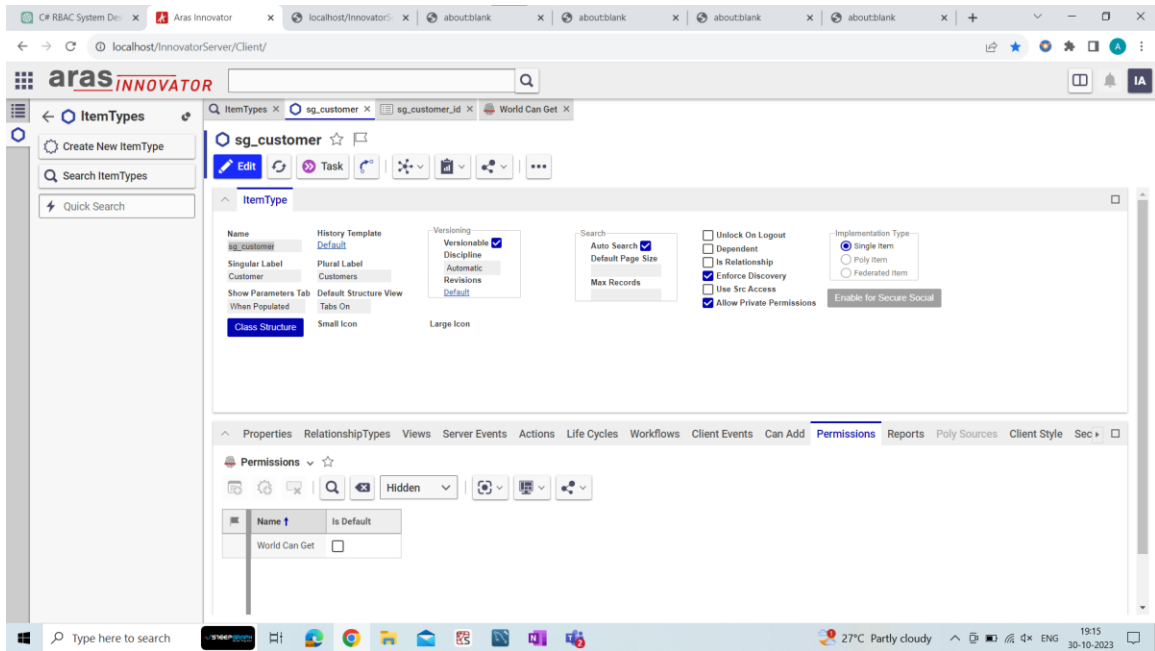


Question 2 - To delete the Can Add from the itemtype

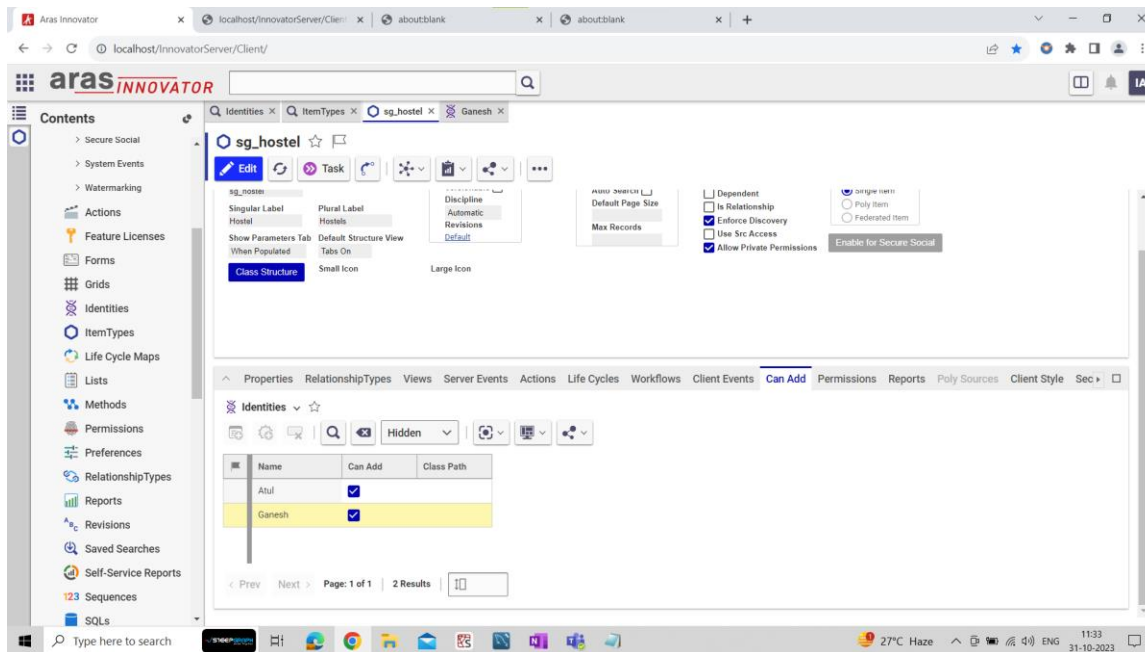

The screenshot shows the Aras Innovator web application interface. The left sidebar contains a navigation menu with options like Contents, Actions, Feature Licenses, Forms, Grids, Identities, ItemTypes, Life Cycle Maps, Lists, Methods, Permissions, Preferences, RelationshipTypes, Reports, Revisions, Saved Searches, Self-Service Reports, Sequences, and SQLs. The main area displays the configuration for the 'sg_hostel' item type. The 'Can Add' tab is selected, showing a table with two users, Atul and Ganesh, both having the 'Can Add' permission checked. The table has columns for Name, Can Add, and Class Path.

Name	Can Add	Class Path
Atul	<input checked="" type="checkbox"/>	
Ganesh	<input checked="" type="checkbox"/>	

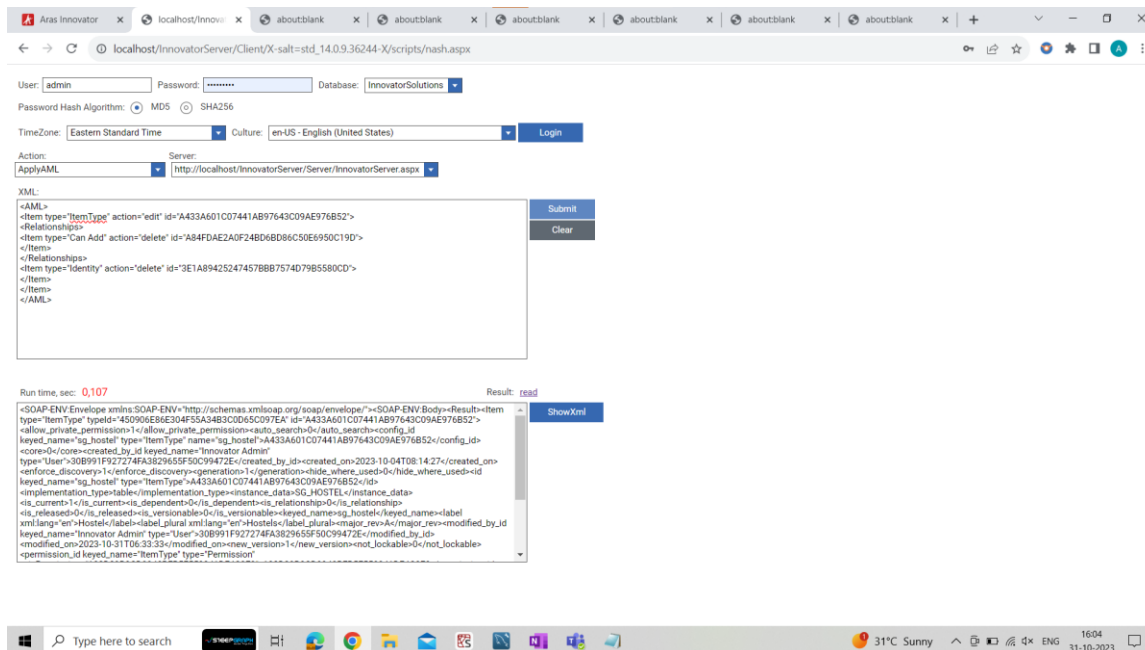


The screenshot shows the Aras Innovator web application interface for the SOAP API configuration. The 'Action' is set to 'ApplyAML' and the 'Server' is 'http://localhost/InnovatorServer/Server/InnovatorServer.aspx'. The XML payload is shown, and the 'Run' button is clicked, resulting in a SOAP response.



Run time, sec: 0.107



Result: read

```
<?xml version='1.0' encoding='utf-8'>
<SOAP-ENV:Envelope xmlns:SOAP-ENV='http://schemas.xmlsoap.org/soap/envelope/'>
  <SOAP-ENV:Header/>
  <SOAP-ENV:Body>
    <Result>
      <item type='Item' typeId='450906E8E304F55A34B3C0D65C097EA' id='A433A601C07441AB97643C09AE976B52'>
        <allow_private_permission>1</allow_private_permission>
        <auto_search>0</auto_search>
        <config_id>
          <keyed_name>'sg_hostel' type='Item' name='sg_hostel'>A433A601C07441AB97643C09AE976B52</keyed_name>
        </keyed_name>
        <relationships>
          <item type='Can Add' action='delete' id='A84FDAE2A0F24BD6B86C50E6950C19D'>
            </item>
        </relationships>
        <item type='Identity' action='delete' id='3E1A89425247457B8B754D79B5580CD'>
          </item>
        </item>
      </Result>
    </SOAP-ENV:Body>
  </SOAP-ENV:Envelope>
</?xml>
```

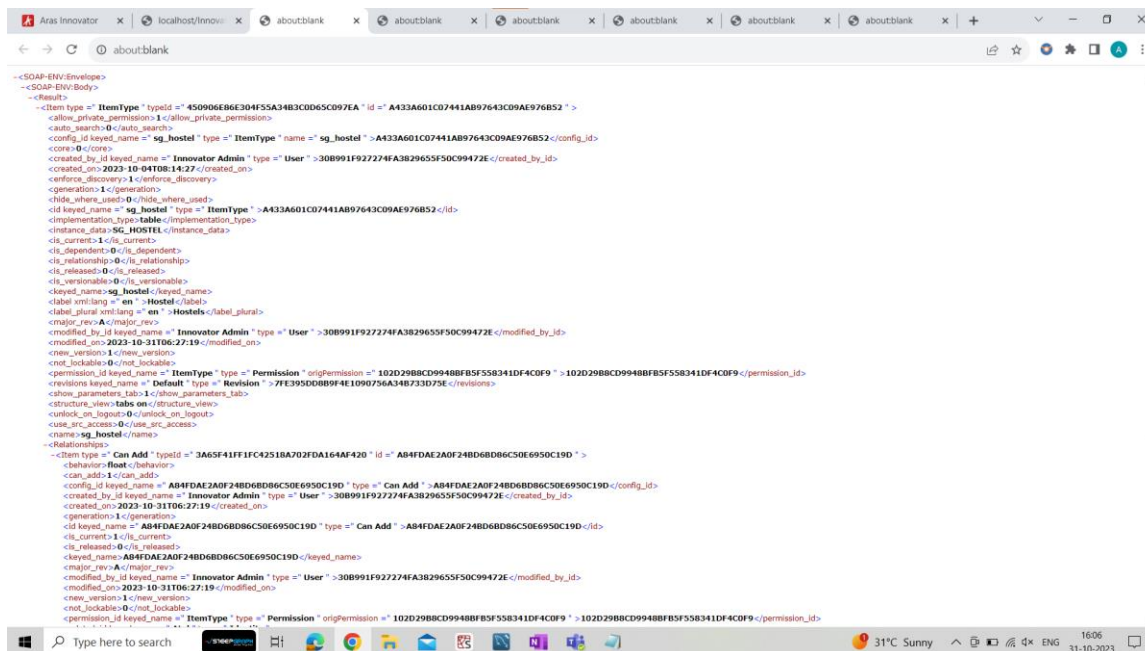


Question 3 - To delete the Client Style from the itemtype.

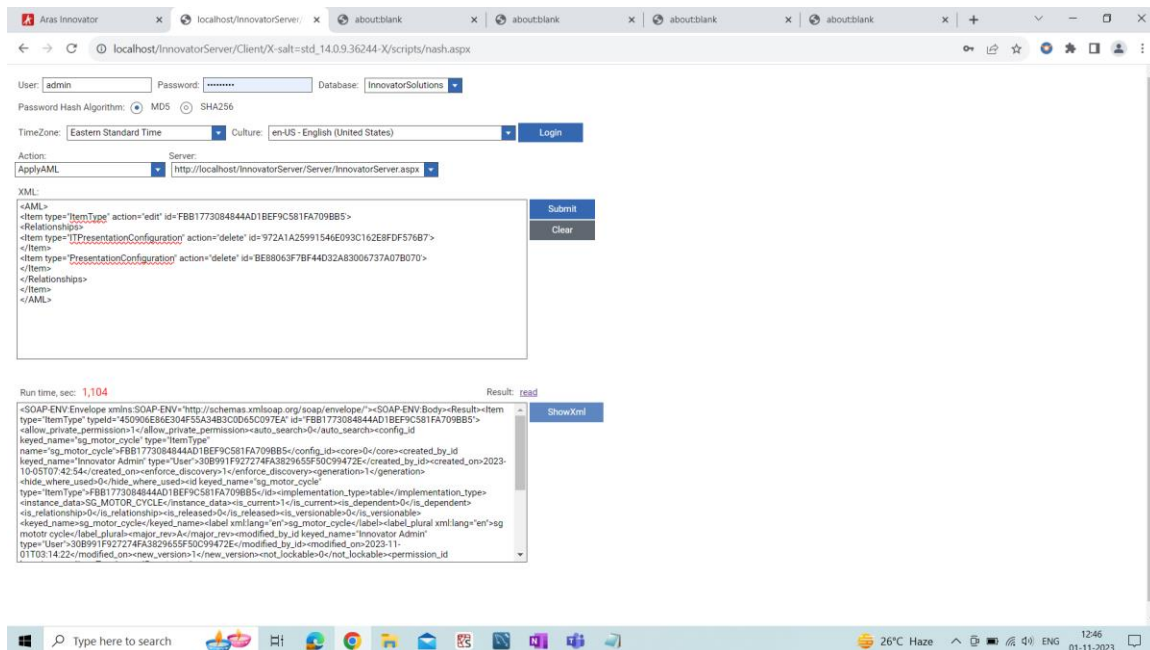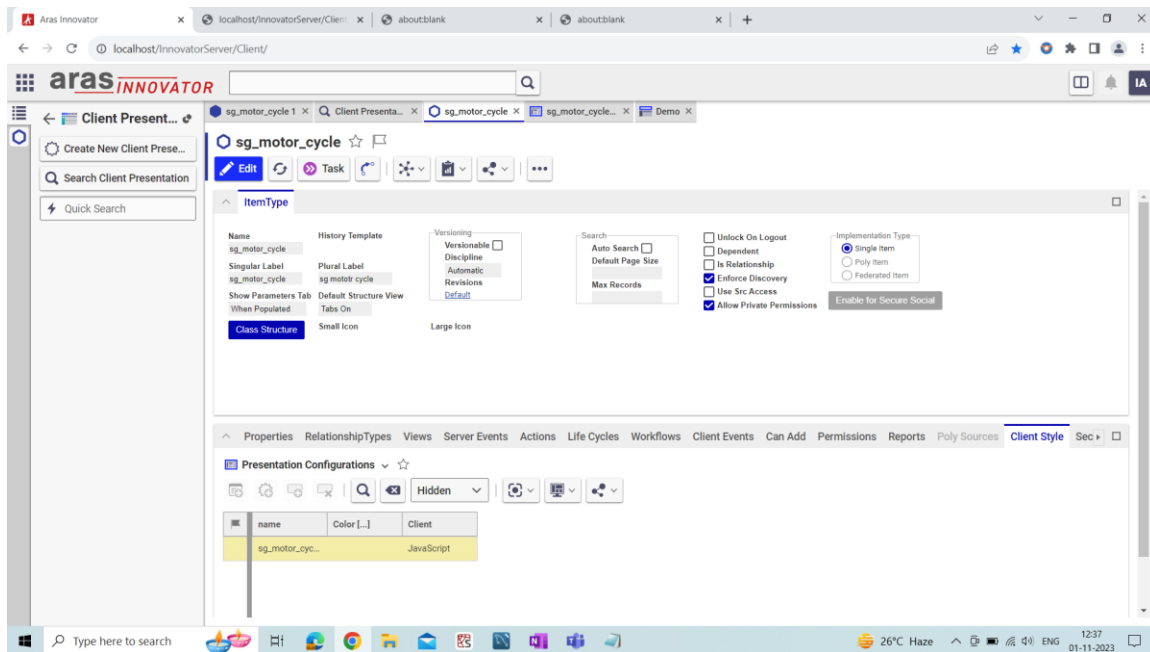

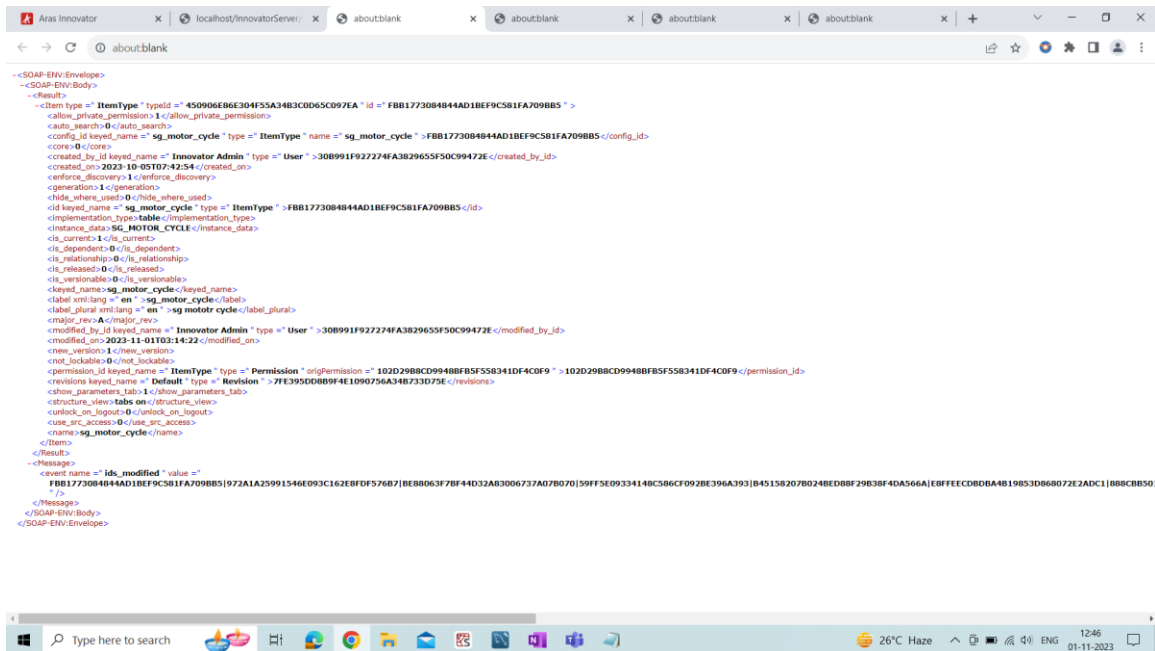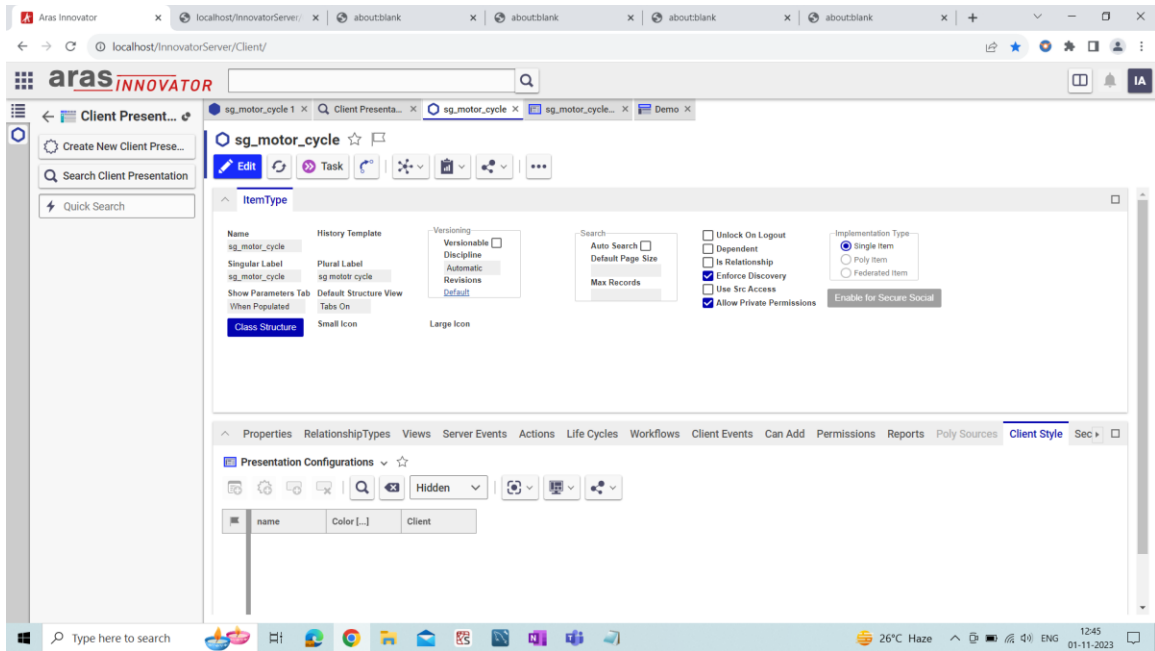


Question 4 - To delete the Forms from the itemtype.

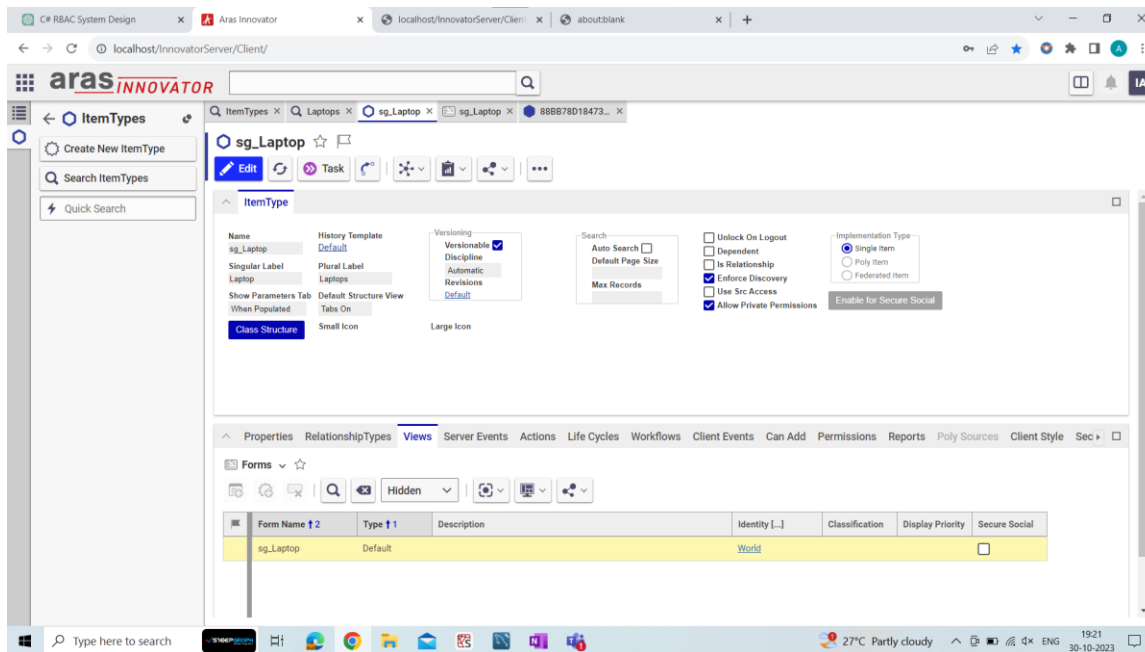



The screenshot shows the Aras Innovator web application interface. The left sidebar contains navigation options: 'Create New ItemType', 'Search ItemTypes', and 'Quick Search'. The main area displays the configuration for the 'sg_Laptop' item type. The 'Forms' tab is active, showing a table with the following data:

Form Name	Type	Description	Identity	Classification	Display Priority	Secure Social
sg_Laptop	Default		World			<input type="checkbox"/>


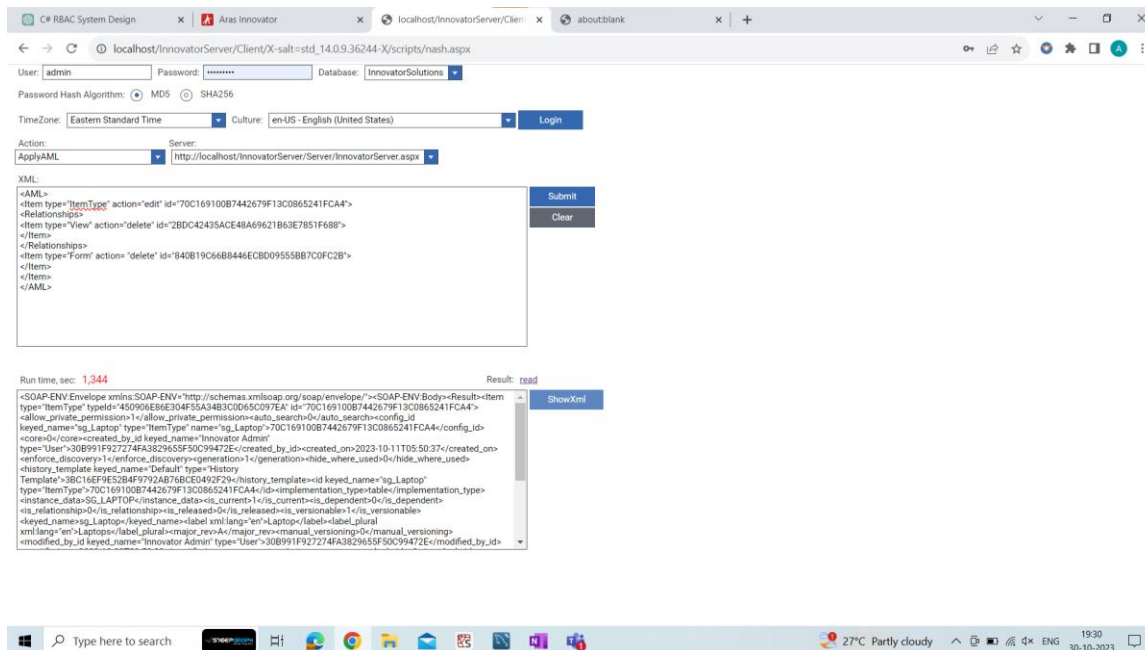


The screenshot shows the Aras Innovator web application interface. The left sidebar contains navigation options: 'Create New ItemType', 'Search ItemTypes', and 'Quick Search'. The main area displays the configuration for the 'sg_Laptop' item type. The 'Forms' tab is active, showing a table with the following data:

Form Name	Type	Description	Identity	Classification	Display Priority	Secure Social
sg_Laptop	Default		World			<input type="checkbox"/>

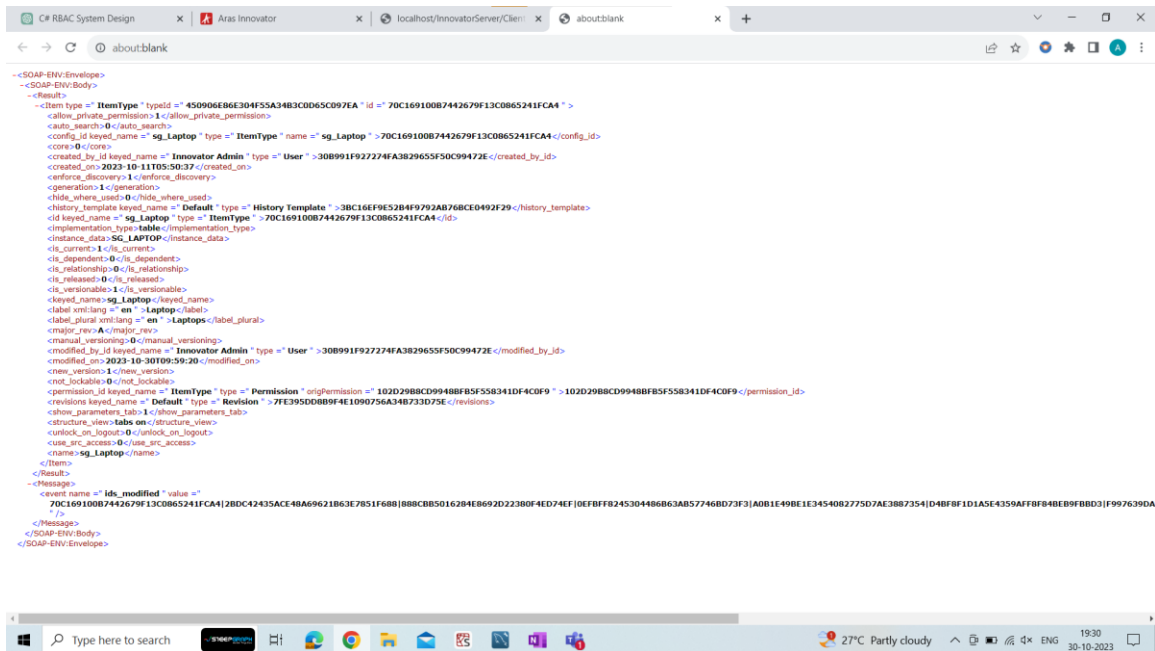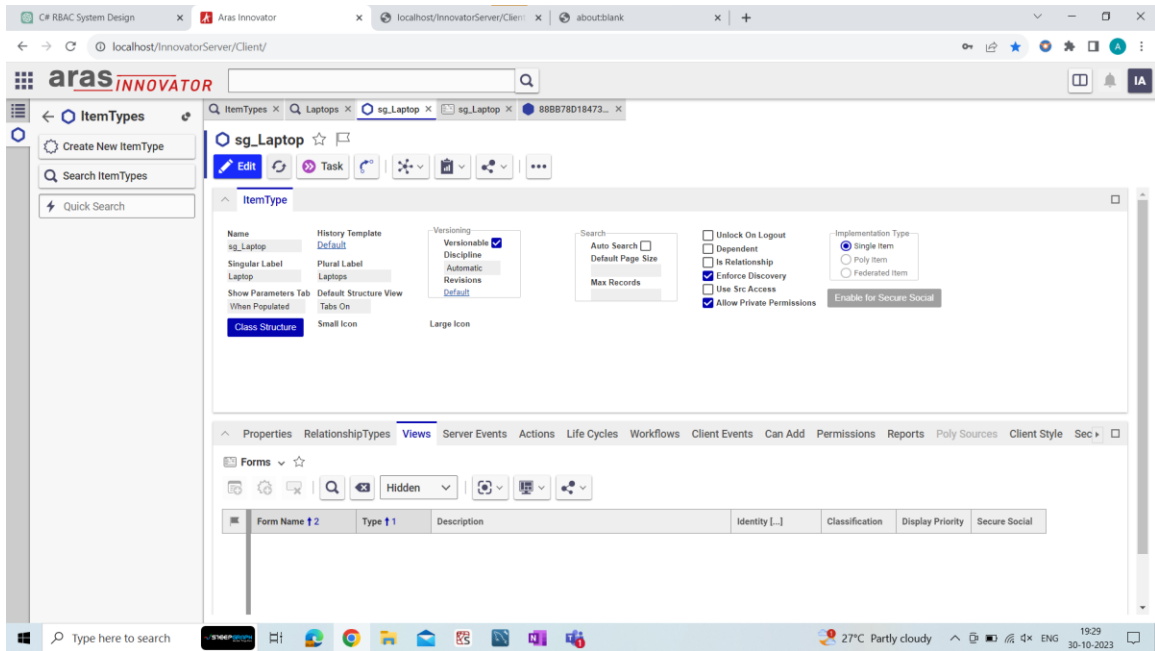

Question 5 - To delete the Transition from LifeCycle.

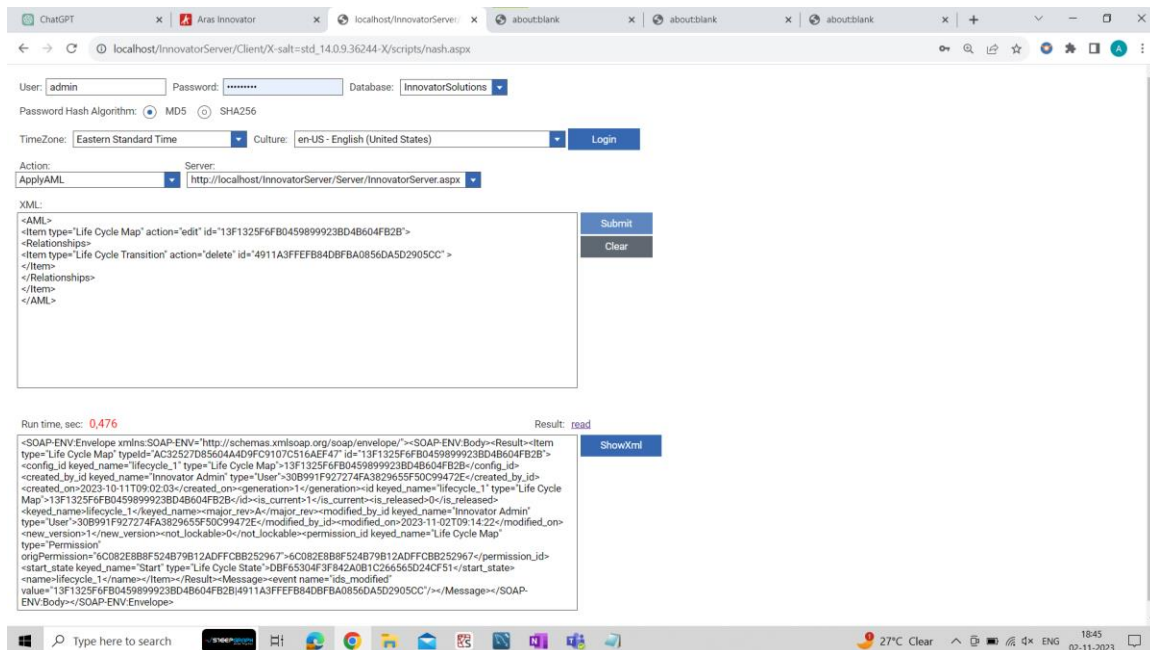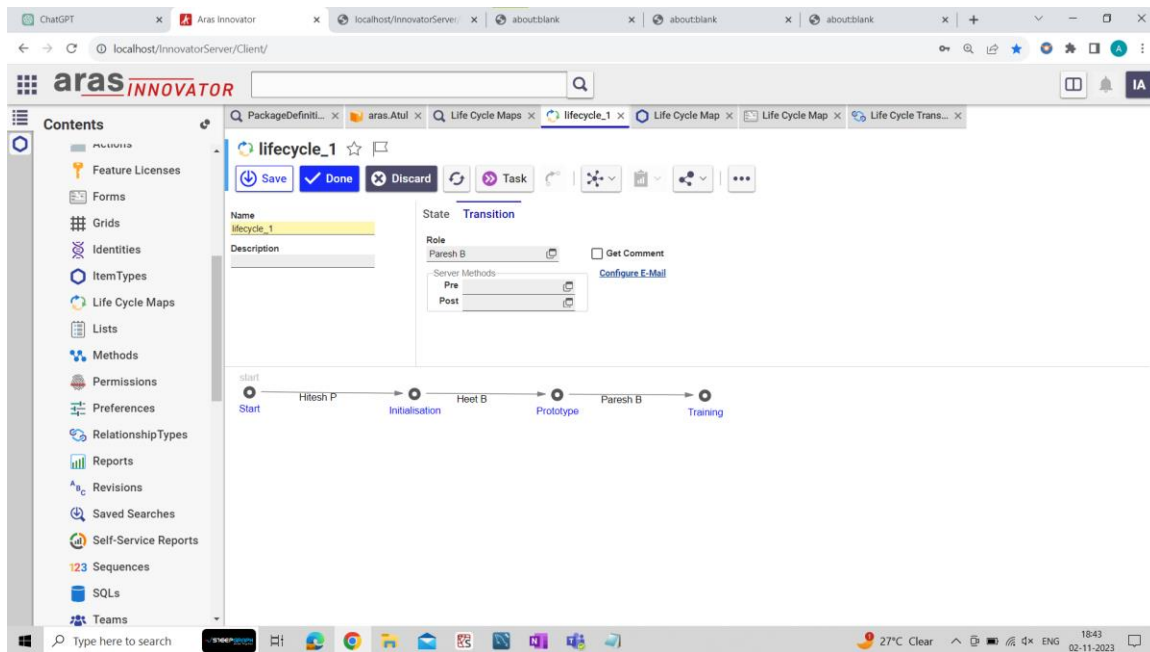

Aras Innovator interface showing the lifecycle map editor. The left sidebar contains a navigation menu with options like Feature Licenses, Forms, Grids, Identities, Item Types, Life Cycle Maps, Lists, Methods, Permissions, Preferences, Relationship Types, Reports, Revisions, Saved Searches, Self-Service Reports, Sequences, SQLs, and Teams. The main area displays the 'lifecycle_1' map, which includes a table for State and Transition, and a visual flow diagram showing the process from Start to Training.

State	Transition
Start	Initiation
Initiation	Prototype
Prototype	Training

SOAP-ENV:Envelope XML snippet showing the configuration details for the 'lifecycle_1' Life Cycle Map. The XML includes metadata such as configuration ID, key name, creation date, and version information, along with a list of states and transitions.

```
<SOAP-ENV:Envelope>
  <SOAP-ENV:Body>
    <Result>
      <Item type="Life Cycle Map" typeId="AC32527DB5604A4D9FC9107C516AEF47" id="13F1325F6F80459899923BD4B604FB2B">
        <config_id key_name="lifecycle_1" type="Life Cycle Map">13F1325F6F80459899923BD4B604FB2B</config_id>
        <created_by_id key_name="Innovator Admin" type="User">30B991F927274FA3B29655F50C99472E</created_by_id>
        <created_on>2023-10-11T05:02:03</created_on>
        <generation>1</generation>
        <id key_name="lifecycle_1" type="Life Cycle Map">13F1325F6F80459899923BD4B604FB2B</id>
        <is_current>1</is_current>
        <is_released>0</is_released>
        <key_name="lifecycle_1" type="Life Cycle Map">lifecycle_1</key_name>
        <major_rev>A</major_rev>
        <modified_by_id key_name="Innovator Admin" type="User">30B991F927274FA3B29655F50C99472E</modified_by_id>
        <modified_on>2023-11-02T09:14:22</modified_on>
        <new_version>1</new_version>
        <not_lockable>0</not_lockable>
        <permission_id key_name="Life Cycle Map" type="Permission" origPermission="6C0B2E0BBF524B79B12ADFFCB8252967">6C0B2E0BBF524B79B12ADFFCB8252967</permission_id>
        <start_state key_name="Start" type="Life Cycle State">DBF65304F3FB42A0B1C266565D24CF31</start_state>
        <name="lifecycle_1" type="Life Cycle Map">lifecycle_1</name>
      </Item>
    </Result>
    <Message>
      <event name="ids_modified" value="13F1325F6F80459899923BD4B604FB2B|4911A3FEF8B4DBF8A0856DA502905CC"/>
    </Message>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

Question 6 - To delete the Property from ItemType.

The screenshot shows the Aras Innovator web application interface. The left sidebar contains navigation options: 'ItemTypes', 'Create New ItemType', 'Search ItemTypes', and 'Quick Search'. The main content area displays the 'sg_customer' ItemType. A tab labeled 'Properties' is active, showing a table of properties. The table has columns: Name, Label, Data Type, Data Source, and various flags (Le., Pr., Sc., Req., Uni., Inde., Fed., Hid., Hid., Align., Width, Sort O., Keyed Name, Orde). The 'sg_customer_id' property is highlighted in yellow.

Name	Label	Data Type	Data Source	Le.	Pr.	Sc.	Req.	Uni.	Inde.	Fed.	Hid.	Hid.	Align.	Width	Sort O.	Keyed Name	Orde
not_lockable	Not Lockable	Boolean						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Left		2176		
owned_by_id		Item	Identity					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Left		768		
permission_id		Item	Permission				<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Left		2816		
release_date	Release Date	Date					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Left		2944		
sg_customer_add...	Customer Address	Text					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Left		3712		
sg_customer_id	sg_customer_id	Integer					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Left		3584		
sg_customer_na...	Customer Name	String		32			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Left		3456		
state		String		32			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Left		1408		
superseded_date	Superseded Date	Date					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Left		3200		
team_id	Team	Item	Team				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Left		3328		

The screenshot shows the Aras Innovator web application interface for the SOAP API. The 'User' field is set to 'admin' and the 'Database' is 'InnovatorSolutions'. The 'Password Hash Algorithm' is set to 'MD5'. The 'TimeZone' is 'Eastern Standard Time' and the 'Culture' is 'en-US - English (United States)'. The 'Action' is 'ApplyAML' and the 'Server' is 'http://localhost/InnovatorServer/Server/InnovatorServer.aspx'. The 'XML' field contains a SOAP request to delete a property. The 'Submit' button is visible. Below the XML field, the 'Run time' is 0.100 and the 'Result' is shown as a SOAP response.

Run time, sec: 0.100

Result: read

```
<?xml version='1.0' encoding='utf-8'>
<SOAP-ENV:Envelope xmlns:SOAP-ENV='http://schemas.xmlsoap.org/soap/envelope/'>
  <SOAP-ENV:Body>
    <Result>
      <Item type='ItemType' typeId='450906E8E3D4F5A34B3C0D45C097EA' id='B88B52E74A0B40C4A1B66446CB5EBCB6'>
        <Relationships>
          <Item type='Property' action='delete' id='B64970C10EB4BE5BF8FED03A646A65'>
            </Item>
          </Relationships>
        </Item>
      </Result>
    </SOAP-ENV:Body>
  </SOAP-ENV:Envelope>
</?xml>
```

Aras Innovator interface showing the 'sg_customer' item type configuration. The left sidebar contains 'ItemTypes', 'Create New ItemType', 'Search ItemTypes', and 'Quick Search'. The main area displays the 'Properties' tab for 'sg_customer', showing a table of attributes and their configurations.

Name	Label	Data Type	Data Source	Le...	Pr...	Sc...	Req...	Uni...	Inde...	Fed...	Hid...	Hid...	Align...	Width	Sort O...	Keyed Name ...	Orde
new_version		Boolean															2560
not_lockable	Not Lockable	Boolean															2176
owned_by_id		Item	Identity														768
permission_id		Item	Permission														2816
release_date	Release Date	Date															2944
sg_customer_add...	Customer Address	Text															3712
sg_customer_na...	Customer Name	String															3456
state		String															1408
superseded_date	Superseded Date	Date															3200
team_id	Team	Item	Team														3328



Page 1 of 1 | 28 Results

Aras Innovator interface showing the 'sg_customer' item type configuration. The left sidebar contains 'ItemTypes', 'Create New ItemType', 'Search ItemTypes', and 'Quick Search'. The main area displays the 'Properties' tab for 'sg_customer', showing a table of attributes and their configurations.

Name	Label	Data Type	Data Source	Le...	Pr...	Sc...	Req...	Uni...	Inde...	Fed...	Hid...	Hid...	Align...	Width	Sort O...	Keyed Name ...	Orde
new_version		Boolean															2560
not_lockable	Not Lockable	Boolean															2176
owned_by_id		Item	Identity														768
permission_id		Item	Permission														2816
release_date	Release Date	Date															2944
sg_customer_add...	Customer Address	Text															3712
sg_customer_na...	Customer Name	String															3456
state		String															1408
superseded_date	Superseded Date	Date															3200
team_id	Team	Item	Team														3328

Page 1 of 1 | 28 Results

Question 7 - To delete the access of particular permission.

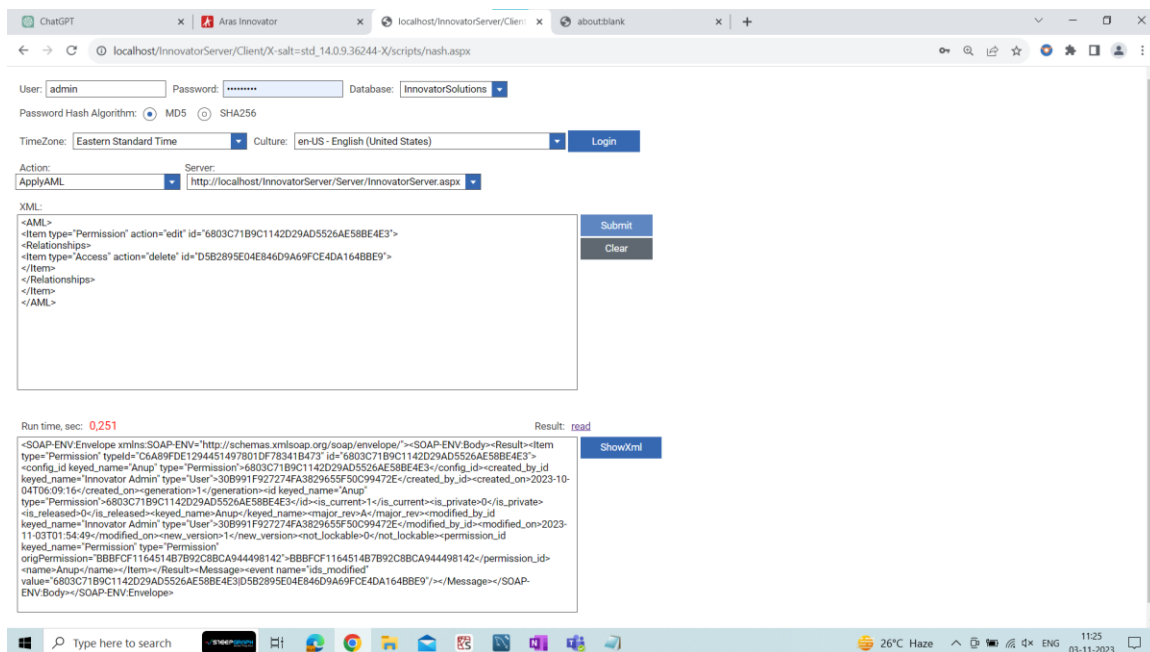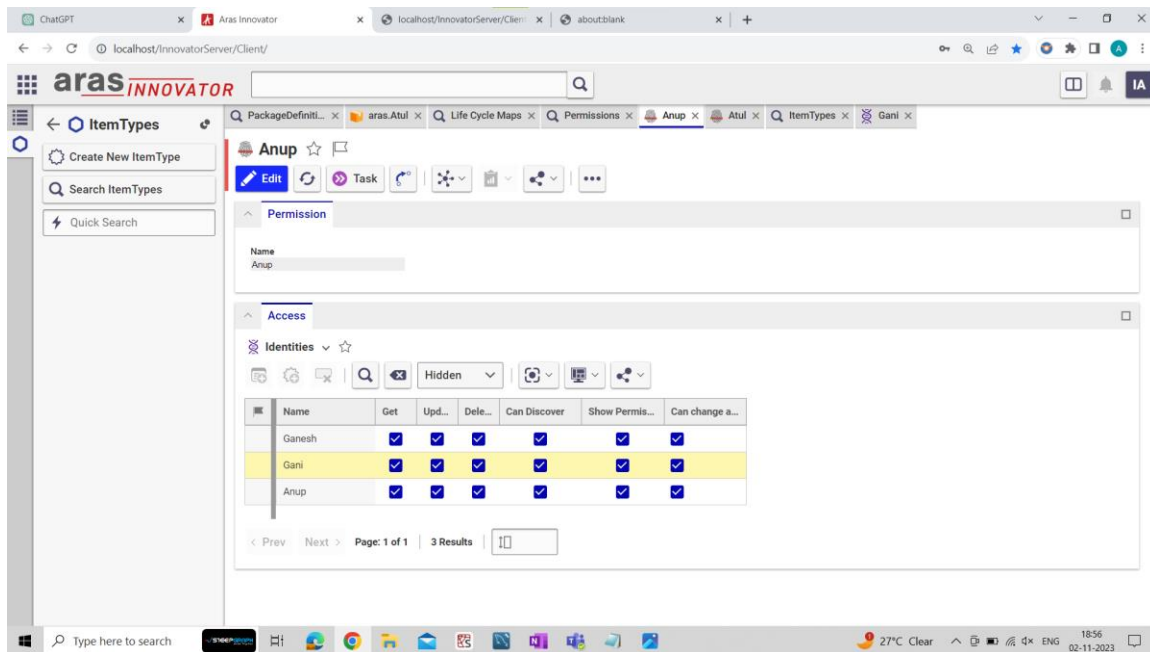

ChatGPT x Aras Innovator x localhost/InnovatorServer/Client/ x about:blank x about:blank x +

localhost/InnovatorServer/Client/

aras INNOVATOR

Permissions x Anup x Gani x

Create New Permission

Search Permissions

Quick Search

Permission

Name

Anup

Access

Identities

Hidden

Name	Get	Upd...	Dele...	Can Discover	Show Permis...	Can change a...
Ganesh	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Anup	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

< Prev Next > Page: 1 of 1 2 Results

Type here to search

26°C Haze 11:27 03-11-2023

ChatGPT x Aras Innovator x localhost/InnovatorServer/Client/ x about:blank x about:blank x +

about:blank

```
<?xml version='1.0' encoding='utf-8' ?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV='http://schemas.xmlsoap.org/soap/envelope/'>
  <SOAP-ENV:Body>
    <Result>
      <Item type='Permission' typeId='C6A89FDC1294451497801DF78241B472' id='6803C71B9C1142D29AD5526AE58BE4E3'>
        <config_id keyed_name='Anup' type='Permission'>6803C71B9C1142D29AD5526AE58BE4E3</config_id>
        <created_by_id keyed_name='Innovator Admin' type='User'>30B991F927274FA3B29655F50C99472E</created_by_id>
        <created_on>2023-10-04T06:09:16</created_on>
        <generation>1</generation>
        <id keyed_name='Anup' type='Permission'>6803C71B9C1142D29AD5526AE58BE4E3</id>
        <is_current>1</is_current>
        <is_private>0</is_private>
        <is_released>0</is_released>
        <keyed_name>Anup</keyed_name>
        <major_rev>A</major_rev>
        <modified_by_id keyed_name='Innovator Admin' type='User'>30B991F927274FA3B29655F50C99472E</modified_by_id>
        <modified_on>2023-11-03T01:54:49</modified_on>
        <new_version>1</new_version>
        <not_lockable>0</not_lockable>
        <permission_id keyed_name='Permission' type='Permission' origpermission='BBBFCF1164514B7B92CBBCA944498142'>BBBFCF1164514B7B92CBBCA944498142</permission_id>
        <name>Anup</name>
      </Item>
    </Result>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

Type here to search

26°C Haze 11:26 03-11-2023