

UniController

Wireless LAN Controller

SKU: UC-200



PRODUCT OVERVIEW

UniController is Indio Networks' on-premise network management platform that unifies Wi-Fi, wired switching, and edge gateway management under a single operator console. Built on the Telecom Infra Project's OpenWiFi and OpenLAN open-source frameworks, UniController extends the proven TIP CloudSDK architecture to give service providers, enterprises, and system integrators complete control over their network estate without dependency on third-party cloud services. It offers centralized management, monitoring, configuration, and policy control for OpenWiFi Access Points, OpenOLS managed switches, and UniBox access controllers.

The appliance enables customers to deploy a scalable and vendor-independent network management infrastructure within their premises, while simplifying network operations through a single management platform. UniController is offered in multiple licensing/capacity models based on the number of network devices managed, allowing customers to select the appropriate solution according to their network size and growth requirements.



**All-in-one
Controller**



**OpenWiFi &
OpenLAN
Compliant**



**Advanced
Networking**



**Compliance
Ready**



**HA & Fault
Tolerant**

KEY FEATURES

- | | |
|-------------------------------|--|
| ✓ OpenWiFi Based Architecture | ✓ OpenLAN Switch Management |
| ✓ Unified Network Management | ✓ On-Premise Deployment |
| ✓ Real-time Monitoring | ✓ Device Lifecycle Management |
| ✓ Management Hierarchy | ✓ Firmware Management |
| ✓ Compliance Ready | ✓ Zero Touch Provisioning |
| ✓ Micro-Service Architecture | ✓ Remote Troubleshooting |
| ✓ AI-based Analytics | ✓ High Performance and High Availability |

USE CASES

- ✓ Corporate Offices
- ✓ Colleges / Universities
- ✓ Public Wi-Fi Networks
- ✓ Campus Networks
- ✓ Hospitals & Hotels
- ✓ Government Projects

TECHNICAL SPECIFICATIONS

Key Features	
Deployment Model	On-Premise, bare-metal / private VM or Docker/Kubernetes
Device Protocol	uCentral (WebSocket/JSON-RPC)
Supported Devices	Wi-Fi Access Points, L2/L3 Switches, UniBox Edge Controllers
Firmware Framework	OpenWrt-based (OpenWiFi/OpenLAN firmware)
Management Interface	Web console (HTML-5), REST-API, Web-Socket Real-time event stream
High Availability	Active-active clustering
Database	PostGRE / SQLite
Authentication	Local Accounts, OAuth/SSO
Multi-Tenancy	Hierarchical tenant, venue and site structure
Northbound Interface	REST/OpenAPI
Scalability	Horizontally scalable gateway
Notifications	Email/SMS
Operating System	Linux
Hardware	4 vCPU, 8-16 GB RAM, 250 GB Storage
Interfaces	6 x 10/100/1000 base (T/Tx) – RJ 45 ports
	1 x 10/100/1000 RJ-45 Console Port
	2 x USB 3.0 ports
Managed Devices	200 devices
Maximum Clients	5,000

Controller Features	
Wireless Management	Zero Touch Provisioning
	Support Wi-Fi 7 , Wi-Fi 6/6E and Wi-Fi 5
	Multi-SSID per Radio
	WPA / WPA2 / WPA3 – Mixed, PSK and Enterprise
	802.1Q VLANs per SSID
	802.1d Bridge Mode per SSID
	NAT gateway mode
	NTP Client
	Management VLAN
	BSS Coloring
	UL/DL ODFMA sub-carrier allocation
	WMM – Wi-Fi Multi-Media, WMM-Power Save
	Wi-Fi Agile Multiband
	Management Frame Protection
	Dynamic Frequency Selection and Transmit Power Control
	Per SSID Rate Limiting
	Embedded Captive Portal
	Dyanmic Airtime Fairness
	Client Steering
Switch Management	Switch discovery and onboarding
	Switch Configurations
	Port Management
	VLAN Configuration
	Port Status and Utilization Monitoring
	PoE Monitoring
	Uplink Monitoring
	Interface Statistics
	Firmware Management
UniBox Management	Centralized UniBox Monitoring
	Device Health and Statistics
	Configuration Management
	VPN Configuration

	GRE Tunnels
	One-click Web Admin Access
	Captive Portal Design and Hosting
Controller Services	Device Provisioning
	Firmware Upgrades
	Multiple SSID Configuration
	Radio Configurations
	AP Network Modes (NAT/Bridge)
	Wireless Security Configuration
	VLAN / VxLAN per SSID
	Fast Roaming (802.11r/k/v)
	RRM Location AP Channel / RRM Client Steering
Troubleshooting & Diagnostics	Syslogs
	Remote TTY Shell
	Packet Capture Analysis
	Health Checks
	Remote Command
	Audit Trials

Reliability & Scalability

High Availability	Active – Active, Active - Passive
Config Backups	Yes
Scaling	Horizontal

Reporting & Analytics

Real-time Dashboard	Yes
Bandwidth Consumption	Yes
Network Health	Yes
Uptime Report	Yes
Wi-Fi Scan Report	Yes
System Logs	Yes
Automated Email Reporting	Yes

HARDWARE SPECIFICATIONS

Platform & Interfaces	
Interface	6 x 10/100/1000 base T/Tx RJ-45 Ports
Console	1 Console Port
USB	2 USB Ports
Serial Port	Yes
On-Off Switch	Yes
Power	
Input Voltage	110-230V AC, 5A
Power Consumption	300W
Heat Dissipation	300 BTU
Physical & Environmental	
Form Factor	Rackmount 1U
Dimensions (mm)	482 x 680 x 44 mm
Weight	≤ 4 kg
Operating Temp	-10°C to 55°C (Indoor)
Storage Temp	-40°C to 70°C
Humidity	5% – 95% non-condensing
Ingress Protection	IP40 (Indoor)
Mounting	Mounting brackets (rack ears)


Supported Models

OpenWiFi Vendors	
Indio Networks	Wi-Fi 6 indoor: UM-225AX , UM-235AX
	Wi-Fi 6 indoor, enterprise: UM-305AX, UM-325AX, UM-335AX
	Wi-Fi 6 outdoor: UM-525AX-P, UM-525AX-P
	Wi-Fi 7 indoor: UM-325BE
	Wi-Fi 7 outdoor: UM-525BE-P
Edgecore	Wi-Fi 6 indoor: EAP 101, EAP 102, EAP 112, EAP 104
	Wi-Fi 6 outdoor: OAP 101
	Wi-Fi 7 indoor: EAP105, EAP 115, EAP 106
	Wi-Fi 7 outdoor: OAP105,
Cybertan	Wi-Fi 6 indoor: RAP630W, RAP63XC

Wi-Fi 7 indoor: RAP7110c, RAP750w

Wi-Fi 7 outdoor: RAP750E

DEPLOYMENT ARCHITECTURE

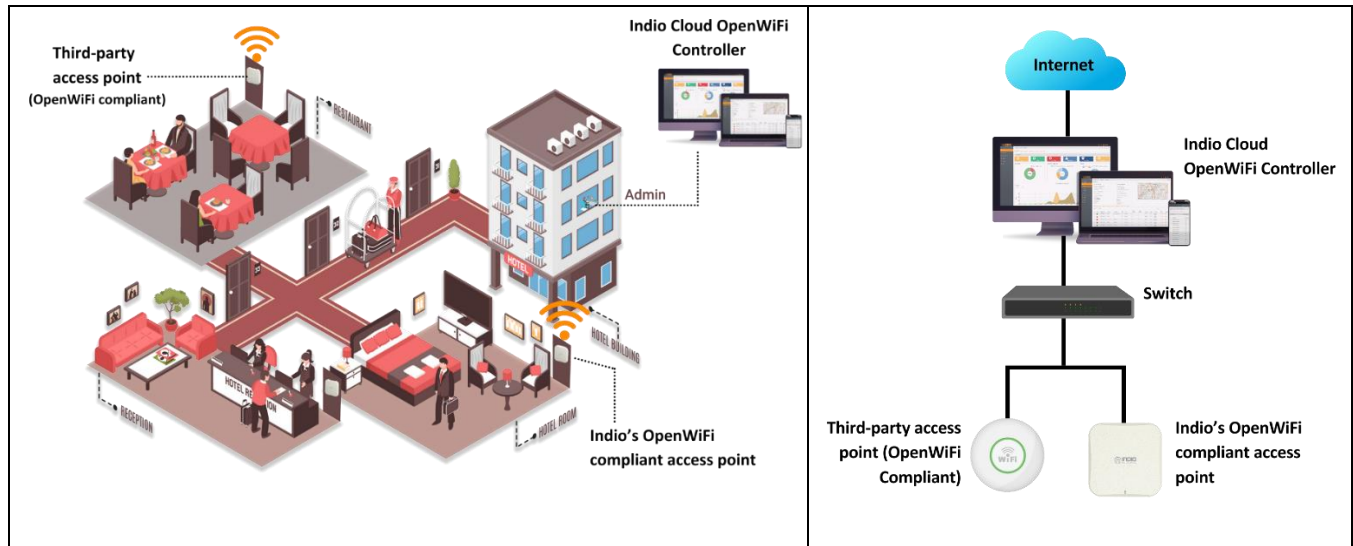

ORDERING INFORMATION

Part Numbers

UniController UC-100	On-Premise Wireless LAN Controller
UniController UC-100-HA	High Availability HSIA network controller

IN THE BOX

- 1 × UC-100 UniController Controller Appliance
- 1 × Power Cord
- 1 × Quick Start Guide
- 1 × Warranty card

WARRANTY & SUPPORT

Hardware Warranty	1 year hardware warranty
Firmware Support	Active firmware releases (Indio builds)
RMA Process	Contact support@indionetworks.com
Support Email	support@indionetworks.com
Documentation	www.indionetworks.com/docs

COMPANY INFORMATION

Company Name	Indio Networks Private Limited
Address	C-410, Teerth Technospace IT Park, Baner, Pune – 411045, India
Phone (Sales)	+91-20-6715-7377 / +91-86980-07222
Email (Sales)	sales@indionetworks.com

For technical specifications, datasheets, and partner pricing, contact: sales@indionetworks.com
Specifications subject to change without notice. All rights reserved.