```cpp
#include <iostream>
#include <fstream>
#include <string>

using namespace std;

int main()
{
  ofstream inputFile("empty.txt");
  string W1,W2;
  cout<<"Enter Wrd 1:";
  cin>>W1;
  cout<<endl;
  cout<<"Enter Wrd 2:";
  cin>>W2;
  cout<<endl;
  inputFile << W1 << ", ";
  inputFile << W2 << endl;
  inputFile.close();
  return 0;
}
```
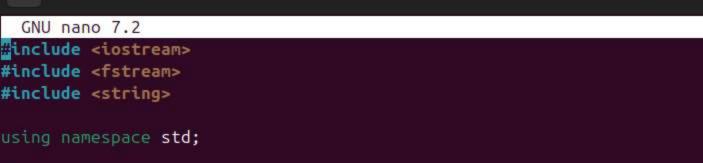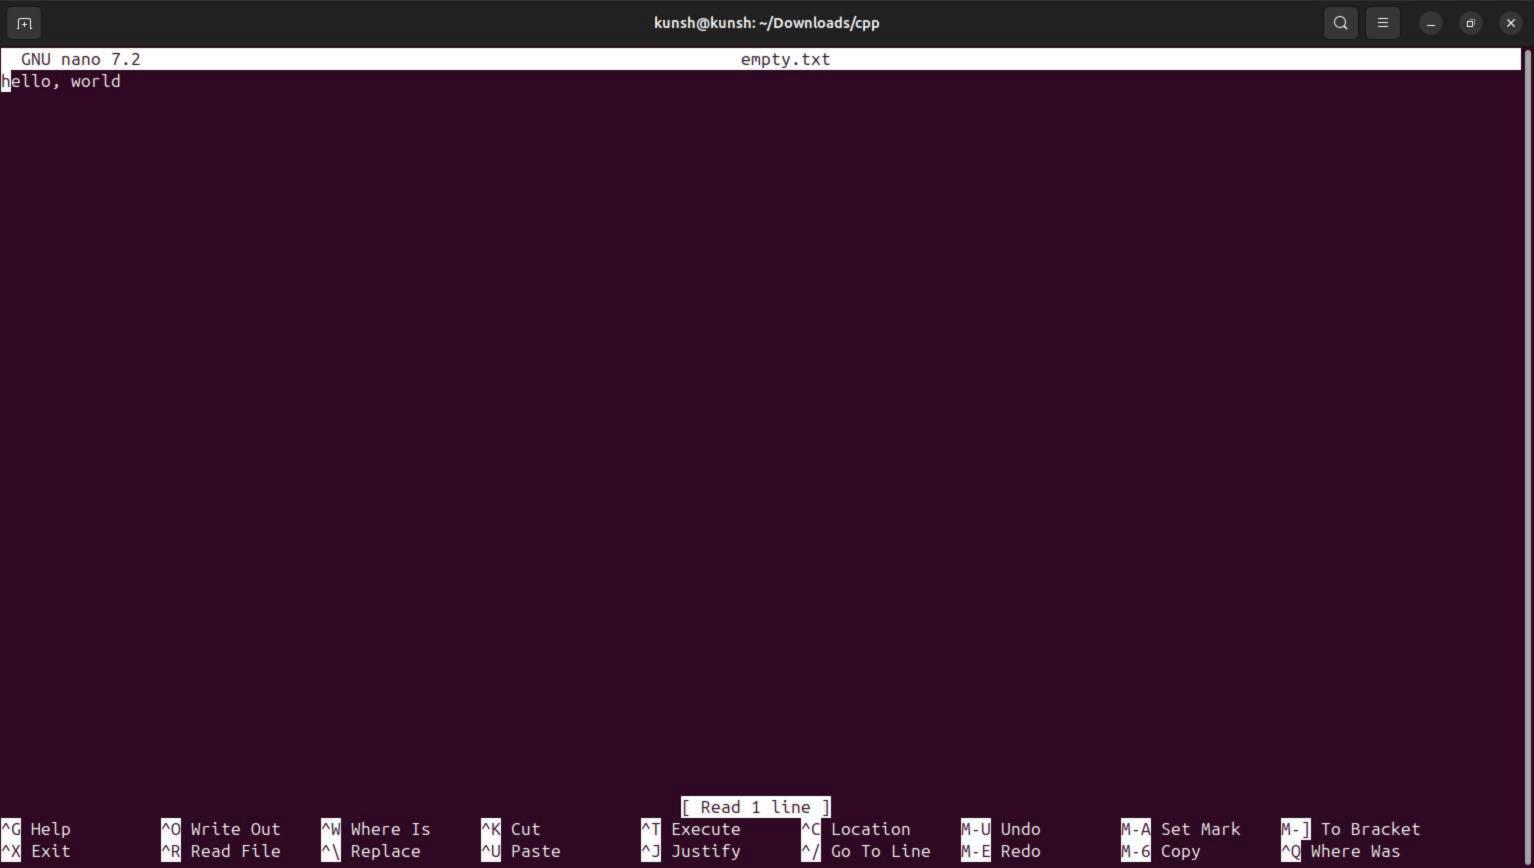
```
  GNU nano 7.2                              empty.txt
hello, world
```

```
                           [ Read 1 line ]
^G Help          ^O Write Out    ^W Where Is     ^K Cut          ^T Execute      ^C Location     M-U Undo        M-A Set Mark    M-] To Bracket
^X Exit          ^R Read File    ^\ Replace      ^U Paste        ^J Justify      ^/ Go To Line   M-E Redo        M-6 Copy        ^Q Where Was
```

```
(base) kunsh@kunsh:~/Downloads/cpp$ nano lab3.cpp
(base) kunsh@kunsh:~/Downloads/cpp$ g++ lab3.cpp -oanswer
(base) kunsh@kunsh:~/Downloads/cpp$ ./answer
Enter Wrd 1:hello

Enter Wrd 2:world

(base) kunsh@kunsh:~/Downloads/cpp$ nano empty.txt
(base) kunsh@kunsh:~/Downloads/cpp$
```