

# Need Of Collections

An array is an indexed Collection of fixed number of homogeneous data elements.

The Main advantage of Arrays is we can represent multiple values with a single variable.

So that reusability of the code will be improved.

**Limitations of Object type Arrays:**

Arrays are fixed in size i.e. once we created an array with some size there is no chance of increasing or decreasing it's size based on our requirement. Hence to use arrays compulsory we should know the size in advance which may not possible always.

**2) Arrays can hold only homogeneous data elements.**

**Ex:-**

```
Student [] s = new Student [10000];
s[0] = new Student; (correct)
s[1] = new Customer(); (wrong)
```

But We can resolve this problem by using object Arrays.

```
Object [] o = new Object [10000];
o[0] = new Student();
o[1] = new Customer();
```

Arrays Concept is not implemented based on some standard data structure hence readymade method support is not available for every requirement we have to write the code explicitly. Which is complexity of programming.

**DURGASOFT**



## Difference between Arrays and Collections:

Arrays	Collections
1. Arrays are fixed in size.	1. Collections are growable in nature. I.e. based on our requirement we can increase or decrease the size.
2. Wrt memory arrays are not recommended to use.	2. Wrt to memory collections are recommended to use.
3. Wrt Performance Arrays are recommended to use.	3. Wrt Performance collections are not recommended to use.
4. Array can hold only homogeneous datatype elements	4. Collections can hold both homogeneous and heterogeneous elements.
5. There is no underlying data structure for arrays and hence readymade method support is not available	5. Every Collections class is implemented based on some standard data structure. Hence readymade method support is available for every requirement.
6. Array can hold both primitives and object types	6. Collections can hold only objects but not primitives.

**DURGASOFT**



Subscribe

## **What is Collection?**

**If we want to represent a group of individual objects as a single entity then we should go for Collection.**

**DURGASOFT**



# What is Collection Framework?

**It defines several classes and interfaces which can be used  
a group of objects as single entity.**

**DURGASOFT**



Subscribe

**Java**

**Collection**

**Collection Framework**

**C++**

**Container**

**STL (Standard Template Library)**

**DURGASOFT**



Subscribe

# **9-Key Interfaces of Collection Framework**

## **i. Collection :**

- \* If we want to represent a group of individual objects as a single entity then we should go for Collection.**
- \* Collection interface defines the most common methods which are applicable for any Collection object.**
- \* In general collection interface is considered as root interface of Collection Framework.**

**Note:** there is no concrete class which implements collection interface directly.

**DURGASOFT**





Durga Software Solutions

# Difference between Collection & Collections

- \* Collection is an interface which can be used to represent a group of individual objects as a single entity.
- \* Collections is an utility class present in java.util.package to define several utility methods (like Sorting, Searching..) for Collection objects.

2:07 / 2:36



More videos

Tap or swipe up to see all

**DURGASOFT**

# 9 key interfaces of Collection Framework

## ii. List :

- \* List is child interface of Collection.
- \* If we want to represent a group of individual objects as a single entity where duplicates are allowed and insertion order preserved then we should go for List.



Subscribe

## 9 key interfaces of Collection Framework

### iii. Set:

- \* It is the child interface of Collection.
- \* If we want to represent a group of individual objects as a single entity where duplicates are not allowed and insertion order not preserved then we should go for Set.

# 9 key interfaces of Collection Framework

## iii. Set :

Collection (1.2 version)



Set (1.2 version)



HashSet (1.2 version)



LinkedHashSet (1.4 version)

DURGASOFT



Subscribe

# Difference between List & Set

## List

- \* Duplicates are allowed
- \* Insertion order preserved

## Set


- \* Duplicates are not allowed
- \* Insertion order not preserved



## 9 key interfaces of Collection Framework

### iv. SortedSet:


- \* It is the child interface of Set.
- \* If we want to represent a group of individual objects as a single entity where duplicates are not allowed but all objects should be inserted according to some sorting order then we should go for SortedSet.

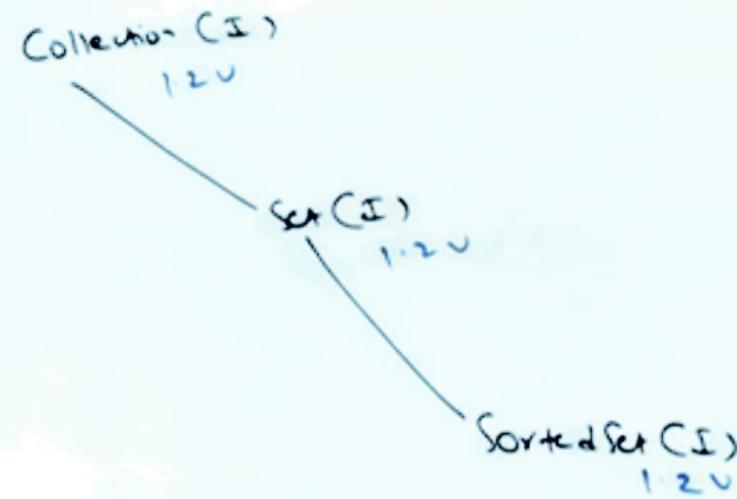

DURGASOFT



Subscribe

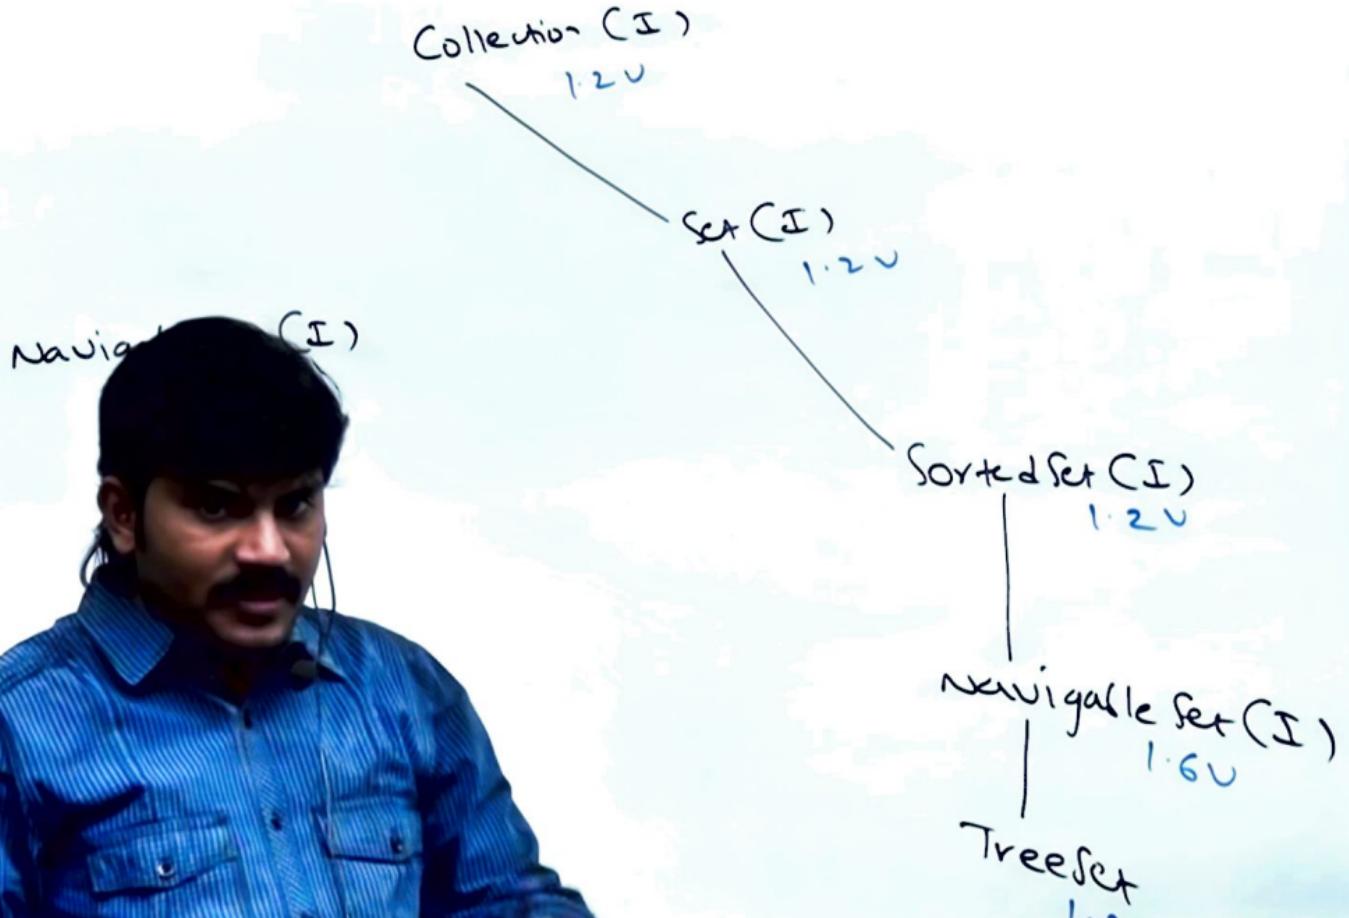

DURGASOFT



Subscribe


# 9 key interfaces of Collection Framework

## v. NavigableSet:

- \* It is the child interface of SortedSet if defines several methods for navigation purposes.



# 9 key interfaces of Collection Framework

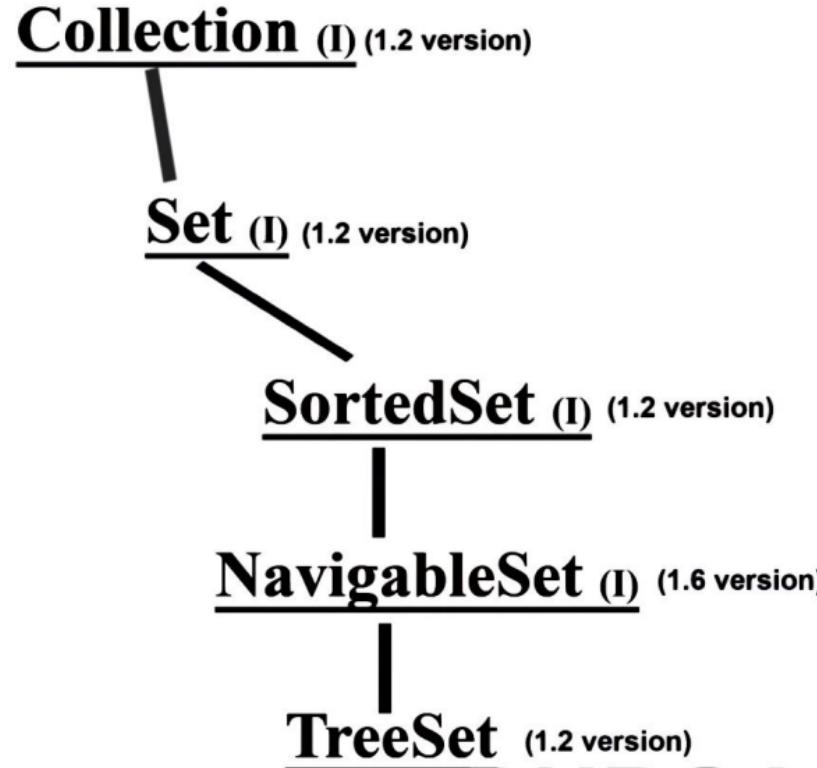

**DURGASOFT**



## 9 key interfaces of Collection Framework


### vi. Queue :

- \* It is child interface of Collection.
- \* If we want to represent a group of individual objects prior to processing then we should go for Queue.

Ex: before sending a mail all mail id's we have to store somewhere and in which order we saved in the same order mail's should be delivered (First in First out) for this requirement Queue concept is the best choice.

# 9 key interfaces of Collection Framework

vi. Queue :

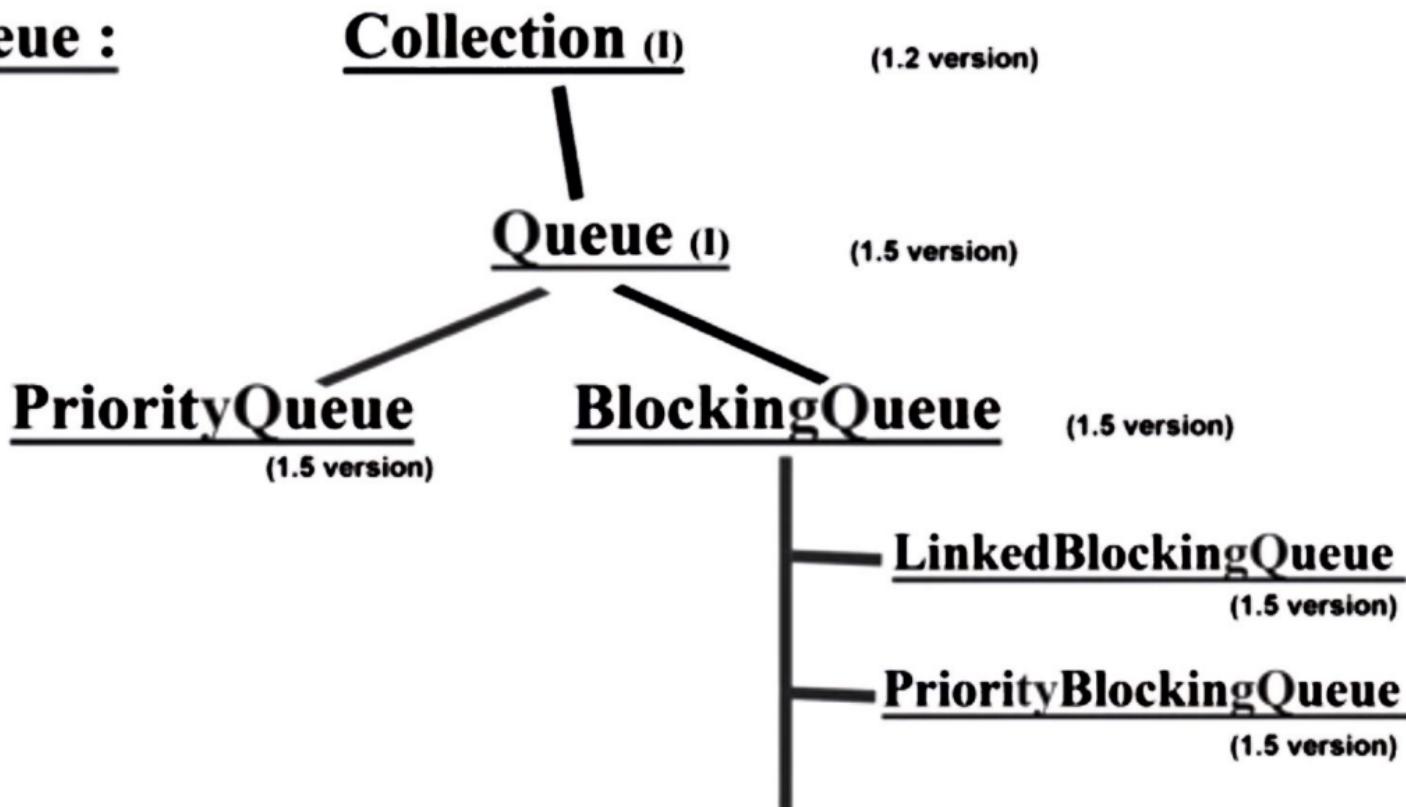

Subscribe

# 9 key interfaces of Collection Framework

## Note :

- \* All the above interfaces (Collection, List, Set, SortedSet, NavigableSet and Queue) meant for representing a group of individual objects.
- \* If we want to represent a group of objects as key value pairs then we should go for Map Interface.

# 9 key interfaces of Collection Framework

## vii. Map:

- \* Map is not the child interface of Collection.
- \* If we want to represent a group of individual objects as key value pairs then should go for Map.

Ex :	Roll No	Name
	101	Durga
	102	Ravi
	103	Venkat


Both key and value are objects, duplicated keys are not allowed but values can be duplicated



Subscribe

# 9 key interfaces of Collection Framework

## vii. Map :

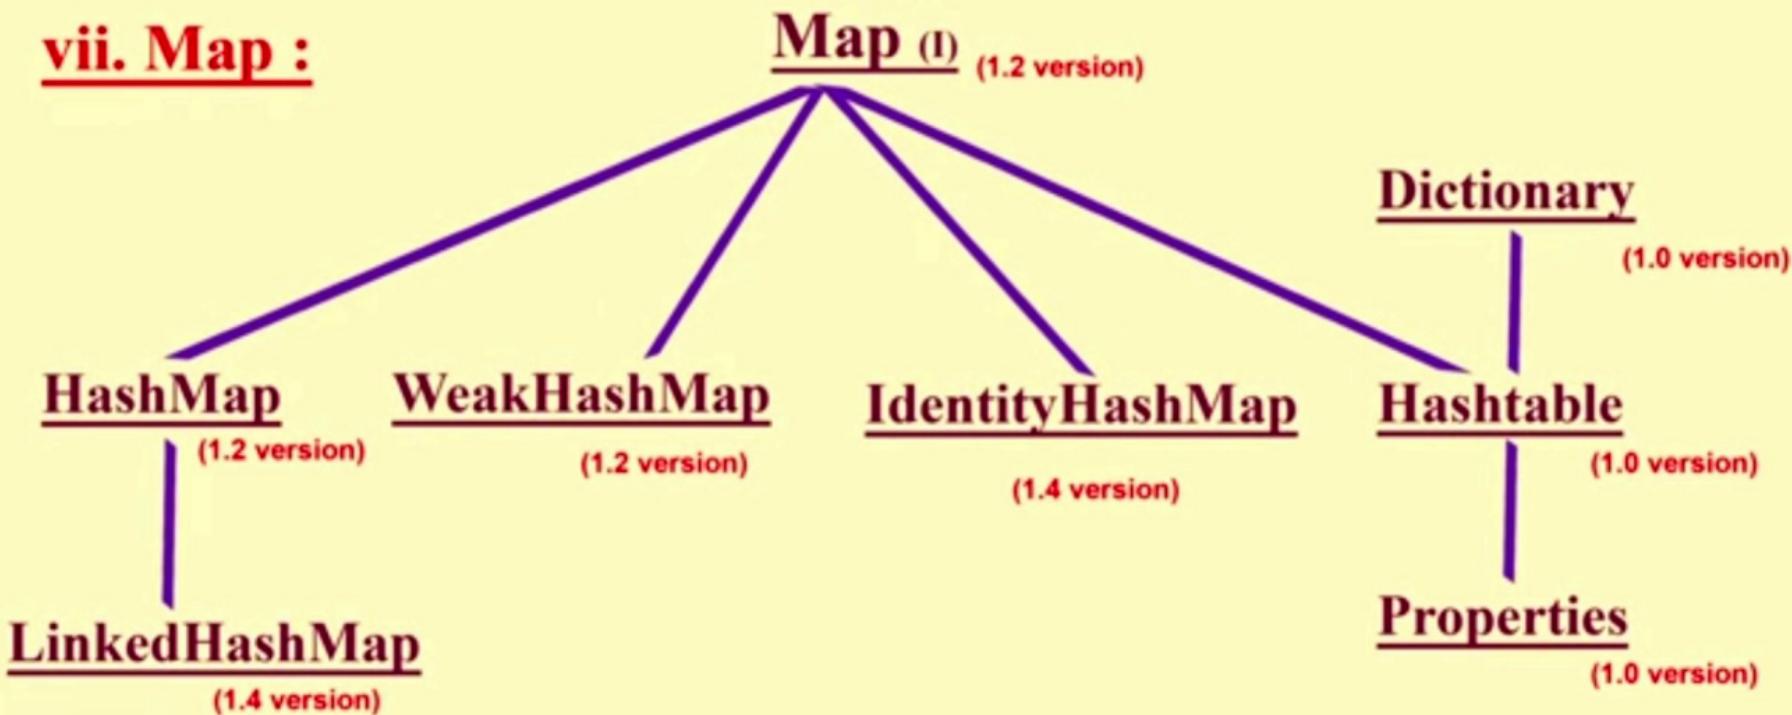



DURGASOFT



## ix. NavigableMap:


\* It is the child interface of sorted map, it defines several utility methods for navigation purpose.

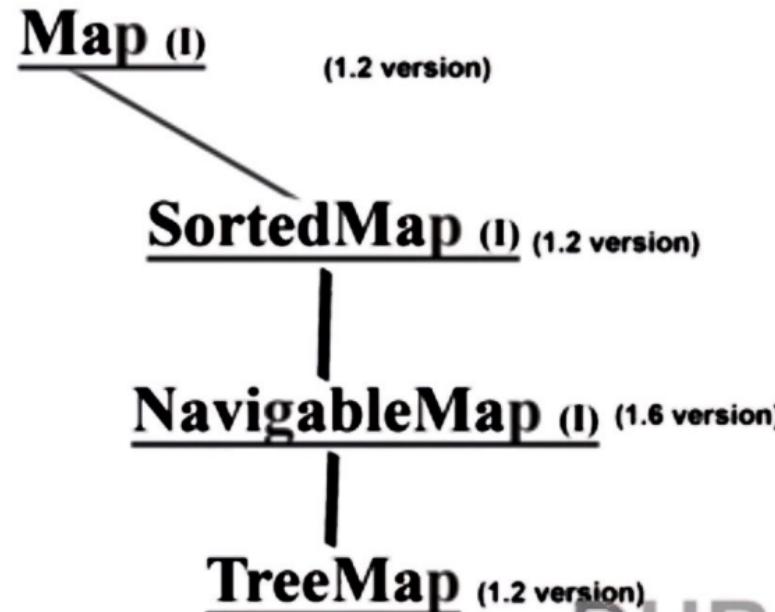

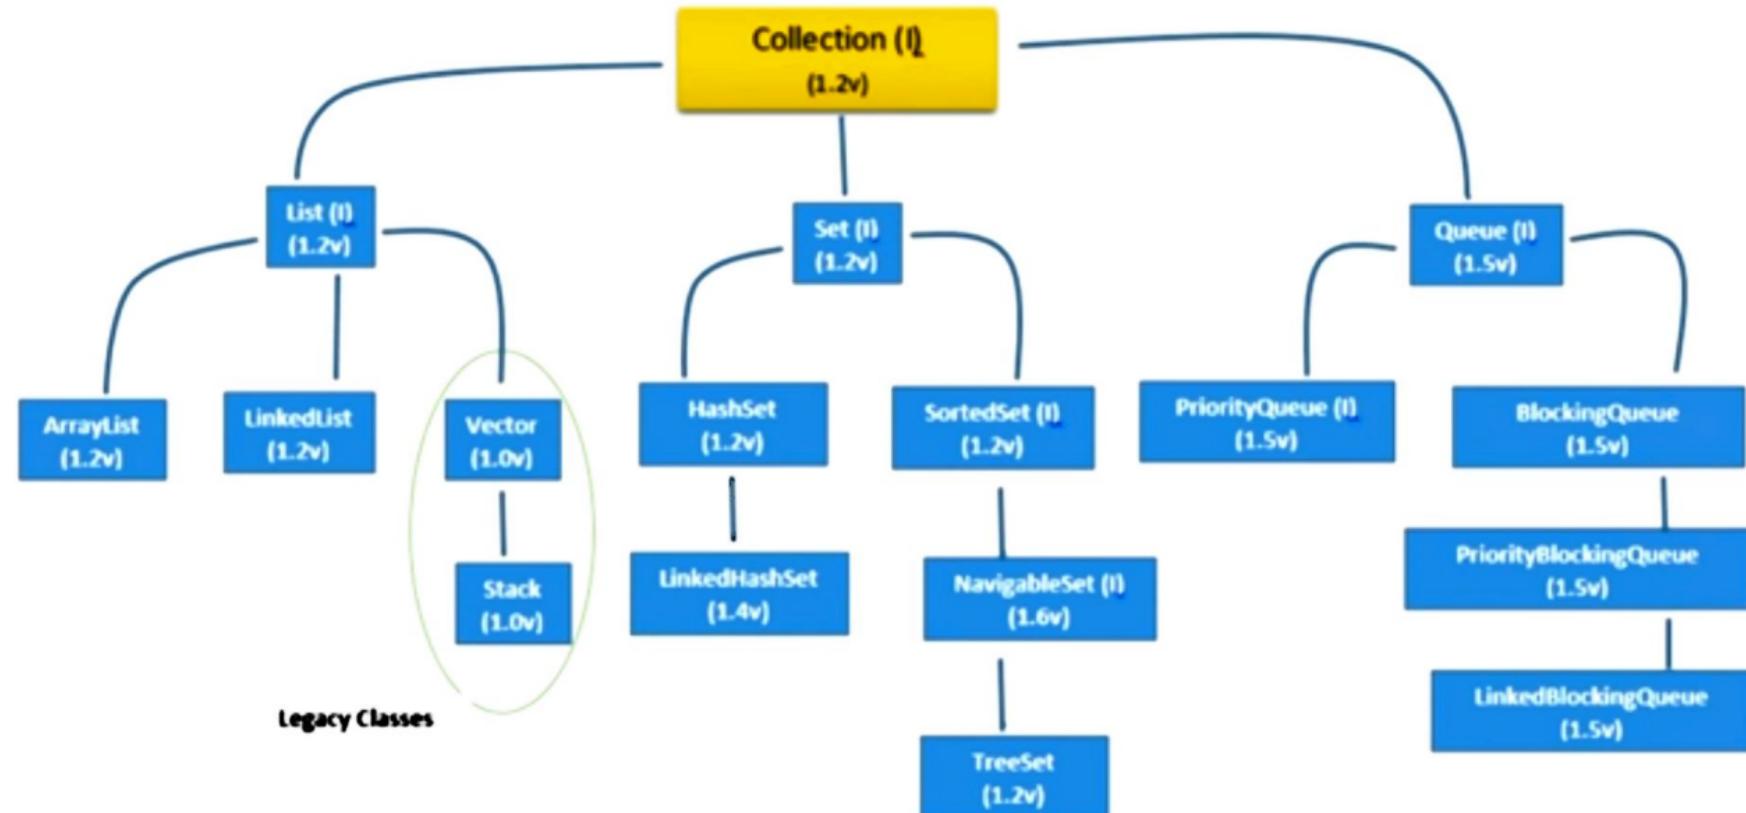

DURGASOFT

Subscribe

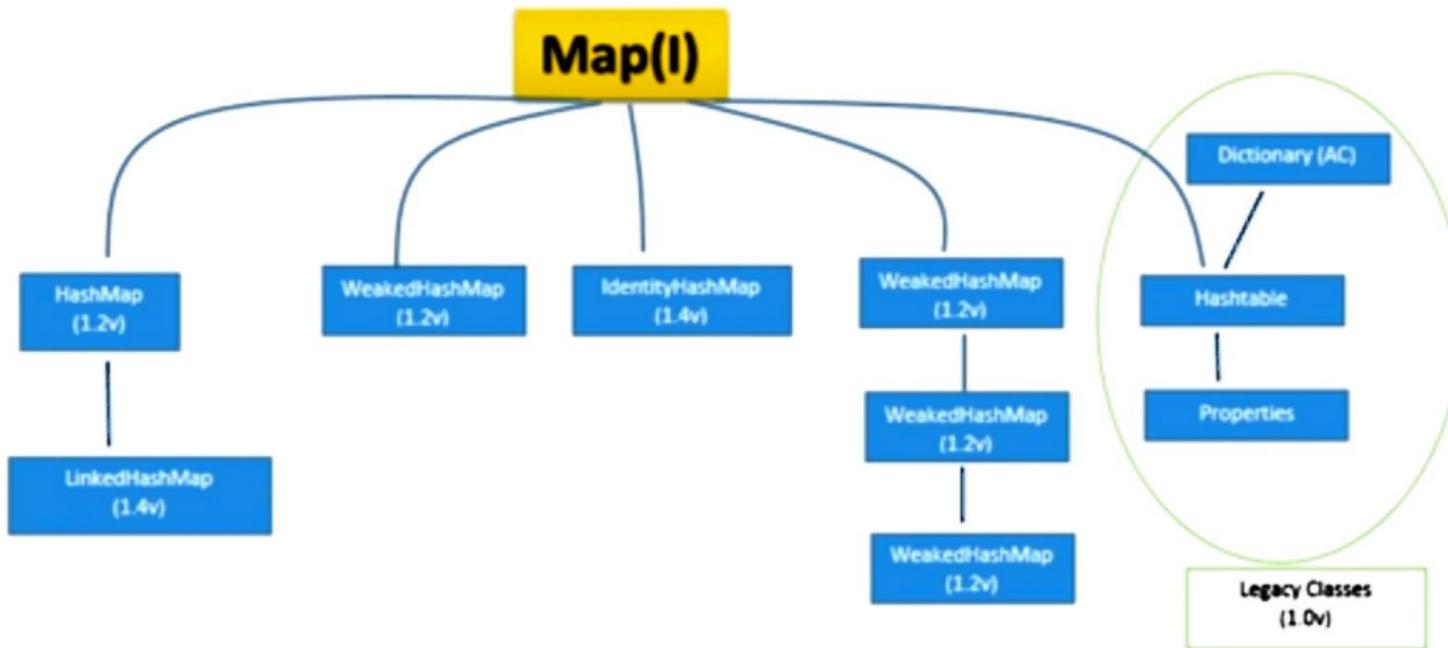

**Sorting:**

1. Comparable(I)
2. Comparator(I)

**Cursors:**

1. Enumeration(I)
2. Iterator(I)
3. ListIterator(I)

**Utility Classes:**

1. Collections
2. Arrays

DURGASOFT



## Collection Interface :

- \* If we want to represent a group of individual objects as a single entity then we should go for Collection.
- \* In general collection interface is considered as root interface of Collection Framework.
- \* Collection interface defines the most common methods which are applicable for any collection object



Subscribe

# Important methods of Collection Interface

**boolean add(Object o)**

**boolean addAll(Collection c)**

**boolean remove(Object o)**

**boolean removeAll(Collection c)**

**boolean retainAll(Collection c)**

**void clear()**

**boolean contains(Object o)**

**boolean containsAll(Collection c)**

**boolean isEmpty()**

**int size()**

**object[] toArray()**

**Iterator iterator()**



Subscribe

# Collection Interface

## **Note:**

**Collection interface doesn't contain any method to retrieve objects there is no concrete class which implements collection class directly.**



Subscribe

## List Interface :

- \* It is the child interface of Collection.
- \* If we want to represent a group of individual objects as a single entity where duplicates are allowed and insertion order must be preserved then we should go for List.
- \* We can differentiate duplicates by using index.
- \* We can preserve insertion order by using index, hence index play very important role in list interface.



## List interface specific methods

**void add(int index, Object o)**

**boolean addAll(int index, Collection c)**

**object get(int index)**

**object remove(int index)**

**object set(int index, Object new)**

**int indexOf(Object o)**

**int lastIndexOf(Object o)**

**ListIterator listIterator();**



## ArrayList

① Resizable Array or Growable Array

② Duplicates ✓

③ insertion order ✓

\* ④ Heterogeneous Object ✓  
[TreeSet & TreeMap]

⑤ null insertion ✓



Subscribe

# ArrayList

- The underlined data structure Resizable Array or Growable Array
- Duplicates are allowed.
- Insertion order is preserved.
- Heterogeneous objects are allowed [except TreeSet & TreeMap everywhere heterogeneous objects are allowed].
- Null insertion is possible.



Subscribe

# ArrayList Constructors

## 1. `ArrayList al = new ArrayList()`

Creates an empty Array list object with default initial capacity 10.  
Once Array List reaches its map capacity a new Array List will be  
created with new capacity = (currentcapacity \* 3/2) + 1.



Subscribe

## ArrayList Constructors

**2. ArrayList al = new ArrayList(int initialCapacity);**

**3. ArrayList al = new ArrayList(Collection c);**



Subscribe

# Example for ArrayList

```
import java.util.*;  
Class ArrayListDemo {  
public static void main(String[] args) {  
    ArrayList l = new ArrayList();  
    l.add("A");  
    l.add(10);  
    l.add("A");  
  
    l.add(null);  
    System.out.println(l); // [A, 10, A, null]  
    l.remove(2);  
    System.out.println(l); // [A, 10, null]  
    l.add("2", "m");  
    l.add("N");  
    System.out.println(l); // [A, 10, M, null,N]  
}  
}
```

- \* Usually we can use Collections to hold and transfer Objects from one place to another place, to provide support for this requirement every Collection already implements Serializable and Cloneable interfaces.



Subscribe

- \* **ArrayList and Vector classes implements RandomAccess interface so that we can access any Random element with the same speed.**
- \* **Hence if our frequent operation is retrieval operation then ArrayList is the best choice.**



Subscribe

# RandomAccess

- \* Present in `java.util` package.
- \* It doesn't contain any methods and it is a Marker interface



Subscribe

```
5  
6 -----  
7 ArrayList l1 = new ArrayList();  
8 LinkedList l2 = new LinkedList();  
9 System.out.println(l1 instanceof Serializable); //true  
0 System.out.println(l2 instanceof Cloneable); //true  
1 System.out.println(l1 instanceof RandomAccess); //true  
2 System.out.println(l2 instanceof RandomAccess); //false  
3  
4 ======
```



Subscribe

# ArrayList

```
ArrayList l1=new ArrayList();  
LinkedList l2=new LinkedList();  
System.out.println(l1 instanceof Serializable); //true  
System.out.println(l2 instanceof Cloneable); //true  
System.out.println(l1 instanceof RandomAccess); //true  
System.out.println(l2 instanceof RandomAccess); //false
```



Subscribe

# ArrayList

- \* **ArrayList is best choice if our frequent operation is retrieval operation (Because ArrayList implements RandomAccess interfaces)**
- \* **ArrayList is the worst choice if our frequent operation is insertion or deletion in the middle (Because several shift operation are require)**



Subscribe

# Difference between ArrayList & Vector

ArrayList	Vector
Every method present ArrayList is non synchronize	Every method present in LinkedList is synchronize
At a time multiple threads are allowed to operate on ArrayList Object and hence ArrayList is not thread safe	At a time only one thread is allowed to operate on Vector Object is thread safe
Threads are not required to wait to operate on ArrayList, hence relatively performance is high.	Threads are required to wait to operate on Vector Object and hence relatively performance is low
Introduced in 1.2 version And it is non legacy class	Introduced in 1.0 version and it is a legacy class

**DURGASOFT**




How to Get Synchronized version of AL object

```
AL    l1 = new AL();
```

```
Link  L = Collection.SynchronizedLink(l1);
```

NON-Synchronized

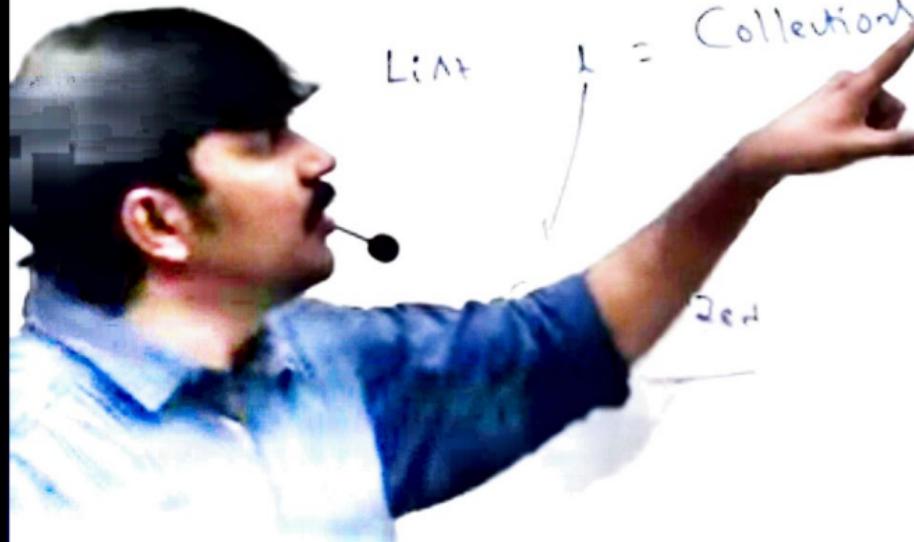

DURGASOFT



## How to get synchronized version of ArrayList Object?

- By default ArrayList is Object is non-synchronized but we can get synchronized version of ArrayList by using Collection class synchronizedList () method.

```
public static List synchronizedList(List l)
```



## How to get synchronized version of ArrayList Object?

**public static List synchronizedList(List l)**

### **Non-Synchronized**

```
ArrayList l1=new ArrayList();
```

### **Synchronized**

```
List l=Collections.synchronizedList(l1);
```



## How to get synchronized version of ArrayList Object?

- \* Similarly we can get Synchronized version of Set, Map Objects by using the following methods of Collections class.

**Public static Set synchronizedSet (Set s);**

**Public static Set synchronizedMap (Map m);**






DURGASOFT




Subscribe

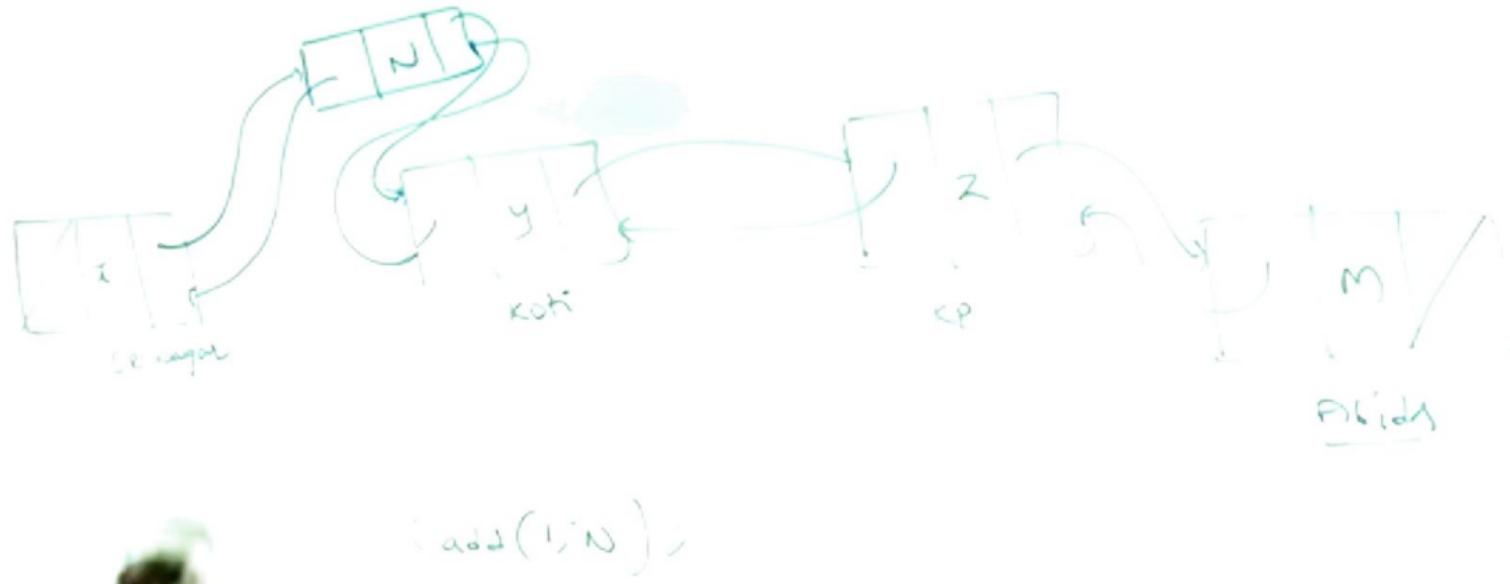

DURGASOFT



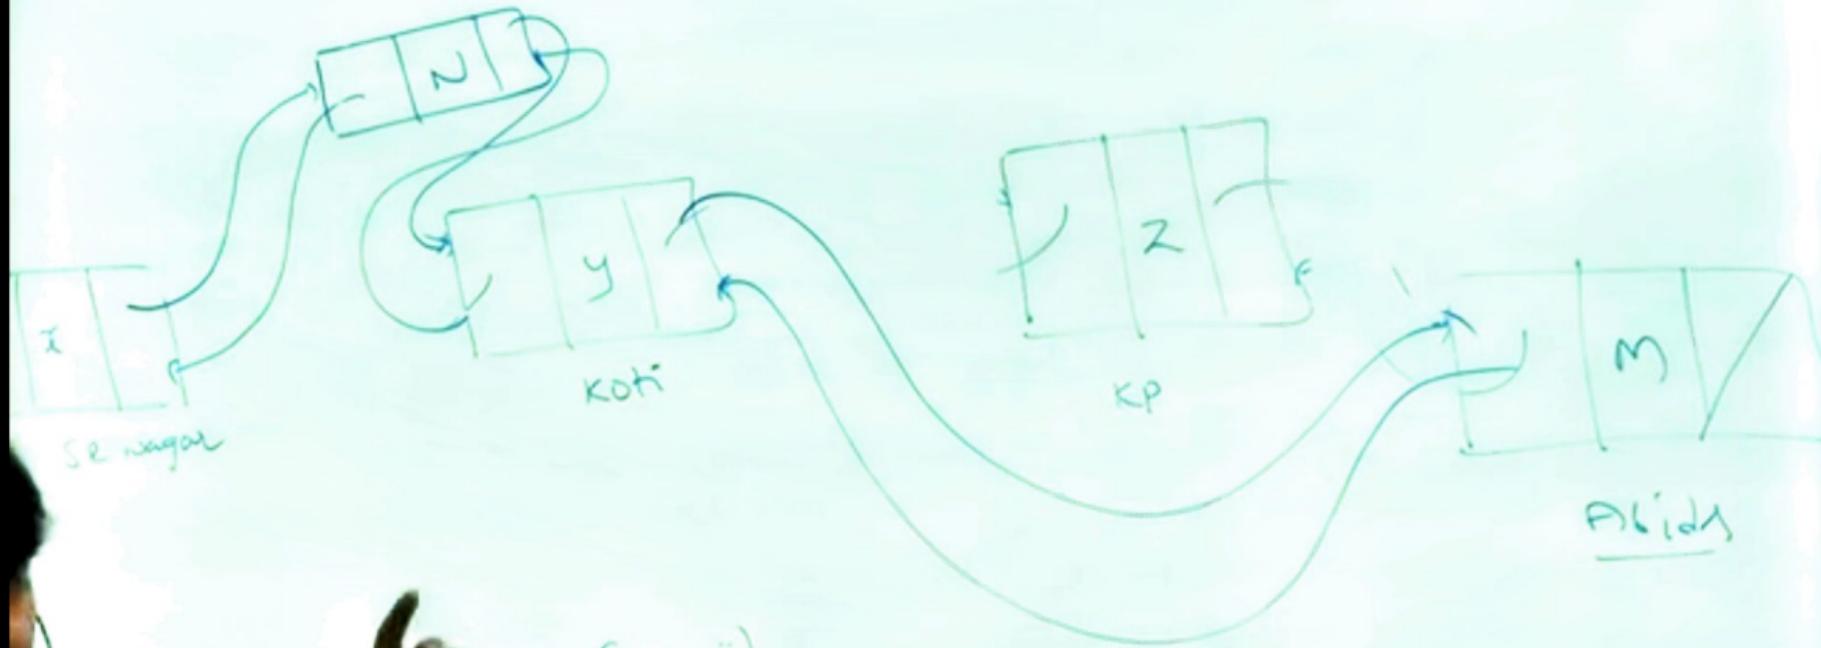

```
add(1;N);
l.remove(3);
```

DURGASOFT



Subscribe

## LinkedList

- \* The underlying data structure is Double Linked List.
- \* Insertion order is preserved .
- \* Duplicates are allowed.
- \* Heterogeneous Objects are allowed.
- \* Null insertion is possible.



# LinkedList

- \* **LinkedList implements Serializable and Clonable interfaces but not RandomAccess interface.**
- \* **LinkedList is the best choice if our frequent operation is insertion or deletion in the middle.**
- \* **LinkedList is the worst choice if our frequent operation is retrieval operation.**



# LinkedList

- \* Usually we can use **LinkedList** to implement stacks and queues to provide support for this requirement **LinkedList** class defines following specific methods.

```
void addFirst();
void addLast();
Object getFirst();
Object getLast();
Object removeFirst();
Object removeLast();
```



# LinkedList Constructors

- \* `LinkedList l1=new LinkedList();`

**Creates an empty LinkedList Object**

- \* `LinkedList l1=new LinkedList(Collection c);`

**Creates an equivalent LinkedList Object for the given Collection**



Subscribe



edList();

newList(Collection c);

ccc, venku, <sup>software</sup> -durga, 30, null, durga

[ccc, ve

# LinkedList Demo program

```
import java.util.*;
public class LinkedListDemo {
    public static void main() {
        LinkedList l1=new LinkedList ();
        l1.add ("durga");
        l1.add (30);
        l1.add (null);
        l1.add ("durga");
        l1.set (0,"software");
        l1.add (0,"venkey");
        l1.addFirst ("ccc");
        System.out.println (l1);//[ccc,venkey,software,30,null]
    }
}
```

DURGASOFT



Subscribe

# Difference between ArrayList & LinkedList

<u>ArrayList</u>	<u>LinkedList</u>
It is the best choice if our frequent operation is retrieval	It is the best choice if our frequent Operation is insertion and deletion
ArrayList is the worst choice if our frequent operation is insertion or deletion	LinkedList is the worst choice if our frequent operation is retrieval operation
Underlying data structure for ArrayList is resizable or growable Array.	Underlying data structure is Double Linked List.
ArrayList implements RandomAccess interface	LinkedList doesn't implement RandomAccess interface

**DURGASOFT**



Subscribe



ArrayList	LinkedList
① Best Retrieval	① Best choice in or close in the middle
② worst case insertion & deletion in middle	② worst choice Retrieval
③ Resizable (or) Growable Array	④ Double LL
④ Random Access	⑤ - R.A.X

DURGASOFT



Subscribe



- Vector
- ① Resizable Array | Growable Array
  - ② Duplicaten ✓
  - ③ Insertion order ✓
  - ④ null ✓ ;
  - ⑤ Heterogeneous ✓
  - ⑥ Serializable & Cloneable
  - ⑦ Random Access
- ⑧ Synchronization  
Thread - Safe ✓





# Vector

- \* The underlying Data structure for the vector is resizable array or growable array.
- \* Duplicate objects are allowed.
- \* Insertion order is preserved.
- \* 'null' insertion is possible.
- \* Heterogeneous objects are allowed.
- \* Vector class implemented Serializable, Cloneable and RandomAccess Interfaces.
- \* Most of the methods present in Vector are synchronized. Hence Vector object is Thread-safe.
- \* Best choice if the frequent operation is retrieval.



## Vector specific methods

For adding objects :

**add (Object o)**

[from Collection - List(l)]

**add (int index, Object o)**

[from List]

**addElement (Object o)**

[from Vector]





## Vector specific methods

### For removing Objects :

<b>Remove (Object o)</b>	[ from Collection ]
<b>removeElement (Object o)</b>	[ from Vector ]
<b>remove (int index)</b>	[ from List ]
<b>RemoveElementAt (int index)</b>	[ from Vector ]
<b>clear ()</b>	[ from Collection ]
<b>removeAllElements ()</b>	[ from Vector ]





## Vector specific methods

### For Accessing Elements :

**Object get (int index)** [ from Collection ]

**Object elementAt (int index)** [ from Vector ]

**Object firstElement ()** [ from Vector ]

**Object lastElement ()** [ from Vector ]

### Other Methods:

**int size();**

**int capacity ();**

**Enumeration elements ();**

## Constructors of vector class

**1) Vector v = new Vector();**

- Creates an empty vector object with default initial capacity 10,  
Once vector reaches it's max capacity a new vector Object  
will be Created with new capacity = 2 \* current capacity.

**2) Vector v = new Vector(int initialCapacity);**

- Creates an empty Vector Object with specified initial capacity

**3) Vector v = new Vector(int initialCapacity, int incrementalCapacity);**

**4) Vector v = new Vector(Collection c);**

- Creates an equivalent Vector Object for the given Collection



```
C:\durga_classes>javac VectorDemo1.java
Note: VectorDemo1.java uses unchecked or unsafe operations.
Note: Recompile with -Xlint:unchecked for details.
```

```
C:\durga_classes>java VectorDemo1
```

```
10
```

```
0
```

```
[1, 2, 3, 4, 5, 6, 7, 8, 9, 10, A]
```

```
C:\durga_classes>
```



```
1 import java.util.*;
2 class VectorDemo1
3 {
4     public static void main(String[] args)
5     {
6         Vector v = new Vector();
7         System.out.println(v.capacity());
8         for(int i = 1; i<=10; i++)
9         {
10             v.addElement(i);
11         }
12         System.out.println(v.capacity());
13         v.addElement("A");
14         System.out.println(v.capacity());
15         System.out.println(v); // [1,2,...,10,A]
16     }
17 }
18
19
```



```
1 public static void main(String[] args)
2 {
3     Vector v = new Vector(25);
4     System.out.println(v.capacity());
5     for(int i = 1; i<=10; i++)
6     {
7         v.addElement(i);
8
9         System.out.println(v.capacity());
10    v.addElement("A");
11
12    System.out.println(v.capacity());
13    System.out.println(v);
14    System.out.println(v); // [1,2,...,10,A]
15
16 }
17
18
19
```



DURGASOFT

Subscribe

Command Prompt

Note: Recompile with -xlint:unchecked for details.

C:\durga\_classes>java VectorDemo1

25

25

25

[1, 2, 3, 4, 5, 6, 7, 8, 9, 10, A]

C:\durga\_classes>\_



DURGASOFT



Subscribe

```
1 public static void main(String[] args)
2 {
3     Vector v = new Vector(10,5);
4     System.out.println(v.capacity());
5     for(int i = 1; i<=10; i++)
6     {
7         v.addElement(i);
8     }
9     System.out.println(v.capacity());
10    v.addElement("A");
11    System.out.println(v.capacity());
12    System.out.println(v);
13    // [1,2,...,10,A]
14 }
15
16
17
18
19
```

## Demo program for vector

```
import java.util.*;
class VectorDemo {
    public static void main(String arg[])
    {
        Vector v = new Vector();
        System.out.println (v.capacity());      // [10]
        for (int i = 0;i<10 ;i++ )
        {
            v.addElement (i);
        }
        System.out.println (v.capacity());      // [10]
        v.addElement("A");
        System.out.println (v.capacity());      // [20]
        System.out.println (v);
    }
}
```

# Stack

- \* It is a child class of Vector.
- \* It is specially designed class for Last In First Out order(LIFO)



# Constructor of Stack

**Stack s=new Stack ();**

DURGASOFT



Subscribe

## Methods in Stack

**1) Object push(Object obj);**

- For inserting an object to the stack

**2) Object pop();**

- To removes and returns top of the stack.

**3) Object peak();**

- To Returns the top of the stack without removal of object.


**4) int search(Object obj);**

- If the specified object is available it returns its offset from top of the stack.
- If the object is not available then it returns -1.

**5) Object pop();**

- For inserting an object to the stack



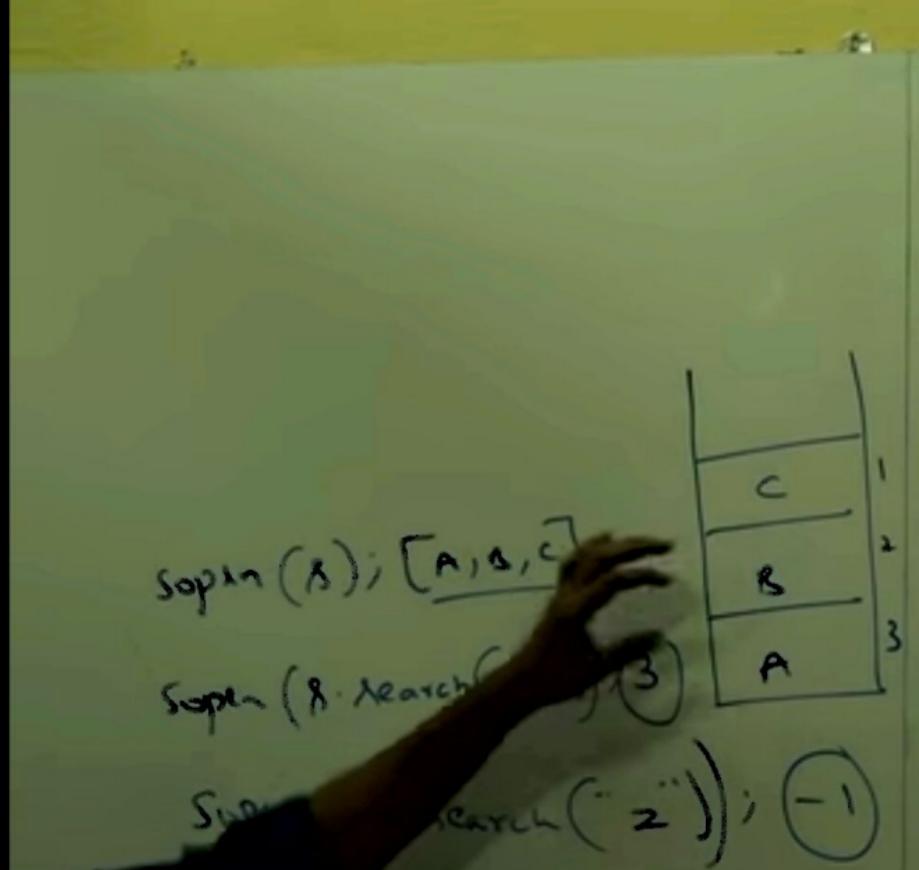

A screenshot of a Java IDE showing the code for `StackDemo`. The code creates a stack, pushes three elements ('A', 'B', 'C'), and then performs two pops, printing the results.

```
1 import java.util.*;
2 class StackDemo
3 {
4     public static void main(String[] args)
5     {
6         Stack s = new Stack();
7         s.push("A");
8         s.push("B");
9         s.push("C");
10        System.out.println(s);
11        System.out.println(s.pop());
12        System.out.println(s.pop());
13    }
14 }
15
```

DURGASOFT



## Demo program for Stack

```
import java.util.*;
class StackDemo {
    public static void main (String arg[])
    {
        Stack s = new Stack ();
        s.push ("A");
        s.push ("B");
        s.push ("C");
        System.out.println(s); // [A,B,C]
        System.out.println (s.search ("A")); // [3]
        System.out.println (s.search("Z")); // [-1]
    }
}
```



# Three cursors of Java

- \* If we want to retrieve Objects one by one from the Collection, then we should go for Cursors.
- \* There are three types of cursors are available in java.
  - \* Enumeration
  - \* Iterator
  - \* ListIterator



# Enumeration

- \* Introduced in 1.0 version(for Legacy).
- \* We can use Enumeration to get Objects one by one from the old Collection Objects(Legacy Collections).
- \* We can create Enumeration Object by using elements() method of Vector class.

**Public Enumeration elements ();**

**Example :**

**Enumeration e=v. elements ();**

**DURGASOFT**



Subscribe

# Method of Enumeration

\* Enumeration defines the following two methods

- \* public boolean hasMoreElements();
- \* public Object nextElement();



## Demo program for Enumeration

```
import java.util.*;
class EnumaretionDemo1 {
    public static void main(String arg[]) {
        Vector v = new Vector ();
        for (int i =0;i<=10 ;i++ ) {
            v.addElement (i);
        }
        System.out.println (v); // [0,1,2,3,4,5,...10]
    }
}
```

```
Enumeration e = v.elements ();
while (e.hasMoreElements()) {
    Integer i = (Integer) e.nextElement ();
    if((i%2) == 0)
        System.out.println (i); // [0 2 4 6 8 10]
}
System.out.println (v); // [0,1,2,3,4,...10]
}
```

DURGASOFT



Subscribe

# Enumeration

## **Limitations of Enumeration:**

- \* Enumeration concept is applicable only for legacy classes and hence it is not a universal cursor.
- \* By using Enumeration we can get only read access and we can't perform remove operation.

**Note:** To overcome above limitations of Enumeration we should go for Iterator.



# Iterator

- 1. We can apply Iterator concept for any Collection object hence it is universal cursor.**
- 2. By using Iterator we can perform both read and remove operations.**



# Iterator

- \* We can create Iterator object by using iterator () method of Collection interface.

```
public Iterator iterator();
```

Example:

```
Iterator itr=C.iterator();
```

- \* where C is any Collection Object



# Iterator

- \* We can create Iterator object by using iterator () method of Collection interface.

```
public Iterator iterator();
```

Example:

```
Iterator itr=C.iterator();
```

- \* where C is any Collection Object



# Methods in Iterator

- \* Iterator interface defines the following three methods.
  - i. public boolean hasNext ()
  - ii. public Object next()
  - iii. public void remove()



# Demo program for Iterator

```
import java.util.*;
class IteratorDemo {
    public static void main(String[] args) {
        ArrayList l=new ArrayList();
        for(int i=0;i<10;i++) {
            l.add(i);
        }
        System.out.println(l); // [0,1,2,-----10]
```

```
Iterator itr =l.iterator ();
While (itr.hasNext ()) {
    Integer n= (Integer) itr.next ();
    if (n%2==0)
        System.out.println (n); // 0 2 4 6 8
}
System.out.println (l); // [0,1,2,3,4...10]
}
```



## Limitations of Iterator

1. By using Enumeration and Iterator we can move only towards forward direction and we can't move to the backward direction, and hence these are single direction cursors.
2. By using Iterator we can perform only read and remove operations and we can't perform replacement of new Objects.

**Note :** To overcome above limitations of Iterator we should go for ListIterator



# ListIterator

1. By using ListIterator we can move either to the forward direction or to the backward direction, and hence ListIterator is bidirectional cursor.
2. By using ListIterator we can perform replacement and addition of new Objects in addition to read and remove operations.



# ListIterator

\* We can create ListIterator Object by using listIterator () method of List Interface.

```
public ListIterator listIterator ()
```

Example:

```
ListIterator itr=l.listIterator ();
```

\* where l is any List Object



## Methods in ListIterator

- \* **ListIterator is the child interface of Iterator and hence all methods of Iterator by default available to ListIterator.**
- \* **ListIterator Interface defines the following 9 methods**

forward direction

1. public boolean hasNext ()
2. public void next()
3. public int nextIndex ()

Backward direction

4. public boolean hasPrevious()
5. public void previous()
6. public int previousIndex ()

other capability methods

7. public void remove()
8. public void set(Object new)
9. public void add(object new)

DURGASOFT



# Demo program for ListIterator

```
import java.util.*;
class ListIteratorDemo {
    Public static void main (String arg[])
    {
        LinkedList l = new LinkedList ();
        l.add ("balakrishna");
        l.add ("chiru");
        l.add ("venky");
        l.add ("nag");
        System.out.println (l);
    // [balakrishna, venky, chiru, nag]
    }
}
```

```
ListIterator itr = l.listIterator ();
While (itr.hasNext ()) {
    String s = (String) itr.next ();
    if (s.equals ("venky")) {
        itr.remove ();
    } else If (s.equals ("nag")) {
        itr.add ("chaitu");
    } else if (s.equals ("chiru")) {
        itr.set ("charan");
    }
}
System.out.println (l);
// [balakrishna, charan, nag, chaitu]
}}
```



Subscribe

**DURGASOFT**

## ListIterator

**Note :** ListIterator is the most powerful cursor but its limitation is, it is applicable only for List implemented class objects and it is not a universal cursor.



<b>Property</b>	<b>Enumeration</b>	<b>Iterator</b>	<b>ListIterator</b>
Applicable for	Only legacy classes	Any Collection classes	Only List classes
Movement	Only forward direction(single direction)	Only forward direction(single direction)	Both forward and backward direction(bi directional)
Accessibility	Only read access	Both read and remove	Read ,remove, replace and addition of new objects
How to get it?	By using elements() method of Vector class	By using iterator() method of Collection interface	By using listIterator() method of List interface
Methods	2 methods hasMoreElements() nextElement()	3 methods hasNext () next() remove()	9 methods
Is it legacy	“yes” (1.0v)	“no” (1.2V)	“no” (1.2V)

**DURGASOFT**



Subscribe

## Implementation classes of cursors

```
import java.util.*;
class cursorDemo {
public static void main (String [] args) {
    Vector v=new Vector ();
    Enumeration e=v. element ();
    Iterator itr=v.iterator ();
    ListIterator ltr= v.listIterator();
    System.out.println (e.getClass (). getName ()); // java.util.Vector$1
    System.out.println (itr.getClass (). getName ()); // java.util.Vector$Iter
    System.out.println (ltr.getClass (). getName ()); // java.util.Vector$ListIter
}
}
```

DURGASOFT



Subscribe