

# C - if...else statement

An **if** statement can be followed by an optional **else** statement, which executes when the Boolean expression is false.

## Syntax


The syntax of an **if...else** statement in C programming language is –

```
if(boolean_expression) {  
    /* statement(s) will execute if the boolean expression is true */  
} else {  
    /* statement(s) will execute if the boolean expression is false */  
}
```

If the Boolean expression evaluates to **true**, then the **if block** will be executed, otherwise, the **else block** will be executed.

C programming language assumes any **non-zero** and **non-null** values as **true**, and if it is either **zero** or **null**, then it is assumed as **false** value.

## Flow Diagram

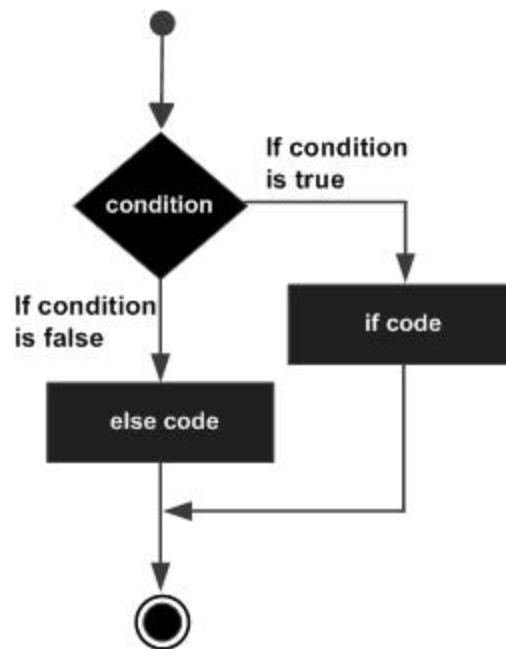

## Example

```
#include <stdio.h>
```

[Live Demo](#)

```
int main () {
```

```
    /* local variable definition */
```

```
    int a = 100;
```

```
    /* check the boolean condition */
```

```
    if( a < 20 ) {
```

```
        /* if condition is true then print the following */
```

```
        printf("a is less than 20\n" );
```

```
    } else {
```

```
        /* if condition is false then print the following */
```

```
        printf("a is not less than 20\n" );
```

```
    }
```

```
    printf("value of a is : %d\n", a);
```

```
    return 0;
```

```
}
```

When the above code is compiled and executed, it produces the following result –

```
a is not less than 20;  
value of a is : 100
```

## If...else if...else Statement

An **if** statement can be followed by an optional **else if...else** statement, which is very useful to test various conditions using single if...else if statement.

When using if...else if..else statements, there are few points to keep in mind –

- An if can have zero or one else's and it must come after any else if's.
- An if can have zero to many else if's and they must come before the else.
- Once an else if succeeds, none of the remaining else if's or else's will be tested.

## Syntax

The syntax of an **if...else if...else** statement in C programming language is –

```
if(boolean_expression 1) {  
    /* Executes when the boolean expression 1 is true */  
} else if( boolean_expression 2) {  
    /* Executes when the boolean expression 2 is true */  
} else if( boolean_expression 3) {  
    /* Executes when the boolean expression 3 is true */  
} else {  
    /* executes when the none of the above condition is true */  
}
```

## Example

```
#include <stdio.h>
```

[Live Demo](#)

```
int main () {
```

```
    /* local variable definition */
```

```
int a = 100;

/* check the boolean condition */
if( a == 10 ) {
    /* if condition is true then print the following */
    printf("Value of a is 10\n" );
} else if( a == 20 ) {
    /* if else if condition is true */
    printf("Value of a is 20\n" );
} else if( a == 30 ) {
    /* if else if condition is true */
    printf("Value of a is 30\n" );
} else {
    /* if none of the conditions is true */
    printf("None of the values is matching\n" );
}

printf("Exact value of a is: %d\n", a );

return 0;
}
```

When the above code is compiled and executed, it produces the following result –

```
None of the values is matching
Exact value of a is: 100
```