

Who won each game: five seed blocks × four cyclic rotations

Filled cell = that agent won. Label = that agent's seat in the game (seat 1 moves first).
Rows share raw dice streams; opportunities still diverge after the first differing decision.

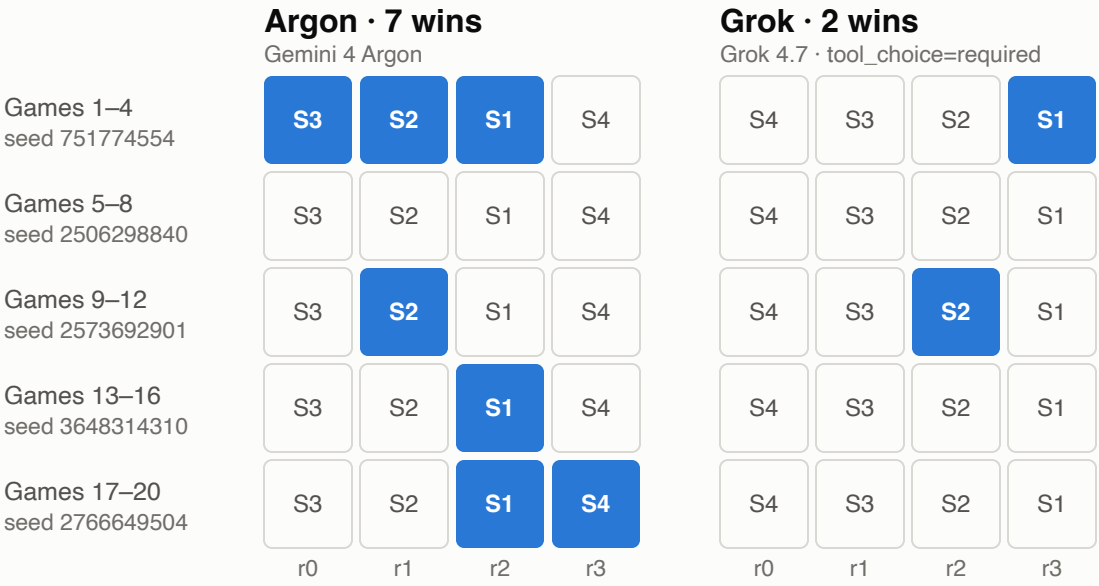

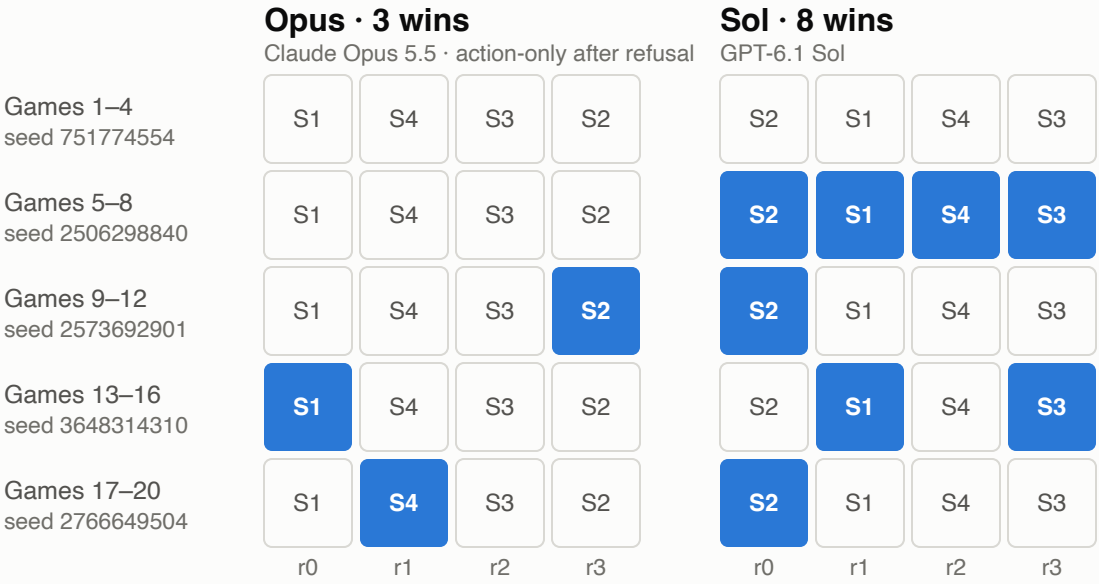

Wins by winner's seat: seat 1: 7, seat 2: 7, seat 3: 3, seat 4: 3. Columns r0–r3 = rotations within a block

Reference i.i.d. uniform nulls (ignore block dependence): P(prespecified agent ≥ 8/20) = 0.10;
P(any agent ≥ 8/20) = 0.40; P(seat 1 or 2 wins ≥ 14/20) = 0.058. No ranking or seat effect is established.
Source: phase3/opus/outcome_dependence.json (run/summary.json, seat_assignment.json, run_config.json).