

[HOME](#) [TOP](#) [CATALOG](#) [CONTESTS](#) [GYM](#) [PROBLEMSET](#) [GROUPS](#) [RATING](#) [EDU](#) [API](#) [CALENDAR](#) [HELP](#)
[PROBLEMS](#) [SUBMIT CODE](#) [MY SUBMISSIONS](#) [STATUS](#) [STANDINGS](#) [CUSTOM INVOCATION](#)

A. Can you Traverse-1?

time limit per test: 5 seconds

memory limit per test: 256 megabytes

 A useful tool for constructing graphs: https://csacademy.com/app/graph_editor/

You are given an **undirected unweighted** graph with N cities and M roads. The cities are numbered from 1 to N . You may assume, the graph is connected, meaning there is a path between any pair of cities. There are no self-loops (no road connects a city to itself) and no multiple edges between the same pair of cities.

Your task is to perform a Breadth-First Search (BFS) starting from node **1** and print the order in which the nodes are visited.

Pseudocode of BFS

The breadth-first-search procedure below assumes that the input graph $G = (V, E)$ is represented using adjacency lists.

BFS(G, s):

```
for each vertex  $u$  in  $G.V$ :
     $u.colour = 0$ 
```

```
 $Q = \emptyset$ ;
 $s.colour = 1$ 
ENQUEUE( $Q, s$ )
```

```
while  $Q \neq \emptyset$ :
     $u = \text{DEQUEUE}(Q)$ 
    for each  $v$  in  $G.Adj[u]$ :
        if  $v.colour == 0$ :
             $v.colour = 1$ 
            ENQUEUE( $Q, v$ )
```

Input

The first line contains two integers N and M ($1 \leq N \leq 2 \times 10^5, 1 \leq M \leq 3 \times 10^5$) — the number of cities and the total number of roads.

The next M lines will contain two integers u_i, v_i ($1 \leq u_i, v_i \leq N$) — denoting there is an edge between city u_i and city v_i .

Output

Print the BFS traversal starting from node 1 as a space-separated list of visited nodes. If there are multiple BFS path traversal order, you may print any.

Examples

input

Copy

```
4 3
1 4
3 2
1 3
```

CSE221 Assignment 05 Summer 2026

Finished

Contestant



→ Last submissions

Submission	Time	Verdict
386852009	Aug/13/2026 07:46	Accepted

output

Copy

1 3 4 2

input

Copy

```

6 10
3 1
1 6
6 4
4 5
5 2
6 2
4 3
5 6
3 6
1 5

```

output

Copy

1 3 5 6 4 2

input

Copy

```

4 5
1 3
3 4
4 2
3 2
1 4

```


output

Copy

1 3 4 2

Note

In Sample Test Case 1, the graph looks like this:

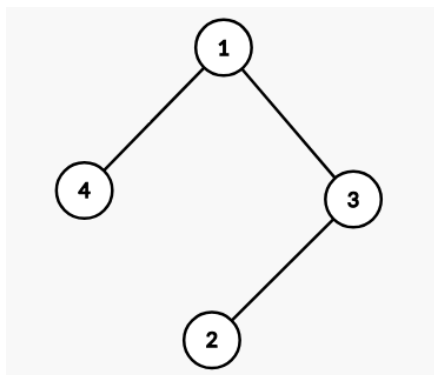

There are two valid paths that follow the BFS order: 1 4 3 2 and 1 3 4 2. You may print either one of these paths in the output.

[Codeforces](#) (c) Copyright 2010-2026 Mike Mirzayanov
The only programming contests Web 2.0 platform
Server time: Sep/21/2026 18:33:59^{UTC+6} (i1).
Desktop version, switch to [mobile version](#).
[Privacy Policy](#) | [Terms and Conditions](#)

Supported by



B. Can you Traverse-2?

time limit per test: 1 second

memory limit per test: 1024 megabytes

You are given an **undirected unweighted** graph with N cities and M roads. The cities are numbered from 1 to N . The graph is connected, and contains no self-loops or multiple edges.

Your task is to perform a Depth-First Search (DFS) starting from node **1** and print the order in which the nodes are visited.

Pseudocode of DFS

The depth-first-search procedure below assumes that the input graph $G = (V, E)$ is represented using adjacency lists.

```
colourInitializing(G):
    for each vertex u in G.V:
        u.colour = 0
```

```
DFS(G,u):
    u.colour = 1
    for each v in G.Adj[u]:
        if v.colour == 0:
            DFS(G,v)
```

Important Notes for Java Language

- **General Note:** Printing inside a recursive DFS is logically valid. However, expressions such as `pw.write(node + " ")` create temporary strings and perform a separate output operation for every visited node, adding unnecessary overhead. This overhead may be handled differently across Java versions. Therefore, code accepted in Java 8 may fail in Java 21 when the recursion depth is already very large.

- **Recommended Approach**

Store or append the traversal result during DFS, then print the complete result after the traversal finishes instead of printing inside every recursive call.

Important Notes for Python Language

- **General Note:** The following instructions apply to all problems that use deep recursion in Python, not only this problem. The recursion limit must be adjusted according to the maximum possible recursion depth of each problem.

Python has a default recursion limit (usually around 1000) to prevent stack overflow from runaway recursion. As a result, if you are using recursion to solve a problem, you must increase the recursion limit manually.

- **How to Increase the Recursion Depth**

```
import sys
```

CSE221 Assignment 05 Summer 2026

Finished

Contestant



→ Last submissions

Submission	Time	Verdict
386877001	Aug/13/2026 12:28	Accepted
386873038	Aug/13/2026 11:53	Wrong answer on test 1

```
sys.setrecursionlimit(#set_the_value)
```

• What Value to Set

Setting the recursion depth too high can cause a stack overflow or crash your program. This happens because each recursive call uses stack memory, and the system allocates only a limited amount of memory for the stack. If the recursion goes deeper than the system can handle, it may lead to a segmentation fault. Check what the maximum recursion depth might be in your problem. In this problem, the maximum number of nodes the input graph can have is 2×10^5 , so we set the limit accordingly. We add a small buffer (+5, or sometimes +10, +50, etc.) to avoid edge-case runtime errors.

```
import sys
sys.setrecursionlimit(2*100000+5)
```

• Choose Python over PyPy to Avoid MLE/RTE

While PyPy is generally faster due to Just-In-Time (JIT) compilation, it also uses more memory. In recursion-heavy problems, PyPy may consume significantly more stack memory per call compared to CPython. This can lead to Memory Limit Exceeded (MLE) errors on some platforms, especially when recursion depth is high. Therefore, for problems that involve deep recursion and strict memory constraints, it is safer to submit your solution using Python (CPython) rather than PyPy.

Input

The first line contains two integers N and M ($1 \leq N \leq 2 \times 10^5, 1 \leq M \leq 3 \times 10^5$) — the number of cities and the total number of roads.

The second line contains M integers $u_1, u_2, u_3 \dots u_m$ ($1 \leq u_i \leq N$) — where the i -th integer represents the node that is one endpoint of the i -th edge.

The third line contains M integers $v_1, v_2, v_3 \dots v_m$ ($1 \leq v_i \leq N$) — where the i -th integer represents the node that is other endpoint of the i -th edge.

The i -th edge of this graph is between the i -th node in the second line and the i -th node in the third line.

Output

Print the DFS traversal starting from node 1 as a space-separated list of visited nodes. If there are multiple DFS path traversal order, you may print any.

Examples

input	Copy
4 3 1 3 1 4 2 3	
output	Copy
1 3 2 4	
input	Copy
6 8 1 5 3 4 6 1 6 4 5 3 4 6 2 3 3 1	
output	Copy
1 3 4 6 2 5	
input	Copy
5 7 5 1 3 2 4 4 4 1 3 2 4 1 3 5	


output

Copy

1 3 2 4 5

Note

In the first Sample Input, the graph looks like this:

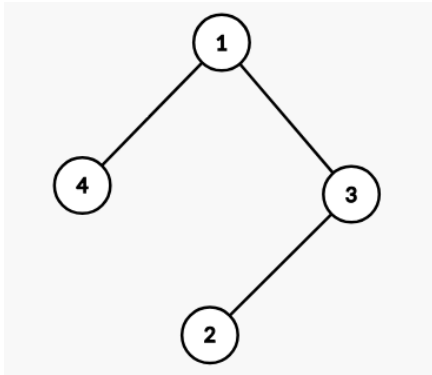

There are two valid paths that follow the DFS order: 1 4 3 2 and 1 3 2 4. You may print either one of these paths in the output.

[Codeforces](#) (c) Copyright 2010-2026 Mike Mirzayanov
The only programming contests Web 2.0 platform
Server time: Sep/21/2026 18:34:09^{UTC+6} (i1).
Desktop version, switch to [mobile version](#).
[Privacy Policy](#) | [Terms and Conditions](#)

Supported by



PROBLEMS SUBMIT CODE MY SUBMISSIONS STATUS STANDINGS CUSTOM INVOCATION

C. Lightning McQueen

time limit per test: 1 second
memory limit per test: 256 megabytes

You are given an **undirected unweighted** graph with N nodes and M edges. The nodes are numbered from 1 to N . The graph contains no self-loops or multiple edges.

There is a source and a destination. Your task is to find the shortest distance from the source node to destination node and print the path taken. If multiple shortest paths exist, print the one that is lexicographically smallest.

A path $P1 = [a_1, a_2, \dots a_n]$ is lexicographically smaller than a path $P2 = [b_1, b_2, \dots b_m]$ if at the first position where they differ, $a_i < b_i$. For example, $[1, 4, 3]$ is smaller than $[1, 5, 7, 1]$.

If no path exists, print -1 .

Input

The first line contains four integers N, M, S, D
($1 \leq N \leq 2 \times 10^5, 0 \leq M \leq 3 \times 10^5, 1 \leq S, D \leq N$) — the number of vertices, total number of edges, source and destination.

The second line contains M integers $u_1, u_2, u_3 \dots u_m$ ($1 \leq u_i \leq N$) — where the i -th integer represents the node that is one endpoint of the i -th edge.

The third line contains M integers $v_1, v_2, v_3 \dots v_m$ ($1 \leq v_i \leq N$) — where the i -th integer represents the node that is other endpoint of the i -th edge.

The i -th edge of this graph is between the i -th node in the second line and the i -th node in the third line.

Output

- If a path exists, print the length of the shortest path (number of edges) on the first line.
- On the second line, print the lexicographically smallest shortest path from source to destination.
- If no path exists, print -1 .

Examples

input	Copy
5 10 5 3 2 1 5 3 1 4 2 4 1 4 5 5 4 5 2 2 3 1 3 3	
output	Copy
1 5 3	

input	Copy
5 4 2 5 5 1 2 4 1 3 3 2	
output	Copy

CSE221 Assignment 05 Summer 2026

Finished

Contestant



→ Last submissions

Submission	Time	Verdict
386923160	Aug/13/2026 17:45	Accepted
386922478	Aug/13/2026 17:41	Runtime error on test 4
386922202	Aug/13/2026 17:39	Runtime error on test 1

```
3
2 3 1 5
```

input[Copy](#)

```
8 7 3 2
7 7 3 2 2 8 5
2 6 7 4 1 4 1
```

output[Copy](#)

```
2
3 7 2
```

input[Copy](#)

```
6 6 6 5
1 2 1 5 5 3
5 1 4 2 4 2
```

output[Copy](#)

```
-1
```

input[Copy](#)

```
1 0 1 1
```

output[Copy](#)

```
0
1
```

[Codeforces](#) (c) Copyright 2010-2026 Mike Mirzayanov
The only programming contests Web 2.0 platform
Server time: Sep/21/2026 18:34:16^{UTC+6} (i1).
Desktop version, switch to [mobile version](#).
[Privacy Policy](#) | [Terms and Conditions](#)

Supported by



D. Through the Jungle

time limit per test: 1 second
memory limit per test: 256 megabytes

You are given a **directed unweighted** graph with N nodes and M edges. The nodes are numbered from 1 to N . The graph contains no self-loops or multiple edges.

You have to find a shortest path from node S to node D that passes through node K . If multiple such paths exist, print any one of them. If no such path exists, print -1 .

Input

The first line contains five integers N, M, S, D, K ($1 \leq N \leq 2 \times 10^5, 1 \leq M \leq 3 \times 10^5, 1 \leq S, D, K \leq N$) — the number of vertices, total number of edges, source, destination and the mandatory node that must be included in the path.

The next M lines will contain two integers u_i, v_i ($1 \leq u_i, v_i \leq N$) — denoting there is an edge from city u_i to city v_i .

Output

- If a valid path exists from S to D through K , print the length of the path (number of edges) on the first line.
- On the second line, print the nodes in the path in order from S to D .
- If no such path exists, print -1 .

Examples

input

Copy

5 10 5 3 5
2 5
5 1
4 5
3 5
1 2
2 4
3 2
1 4
1 3
3 4

output

Copy

2
5 1 3

input

Copy

5 4 2 5 3
5 1
3 1
2 3
2 4

output

Copy

-1

input

Copy

CSE221 Assignment 05 Summer 2026

Finished

Contestant

→ Last submissions

Submission	Time	Verdict
386986510	Aug/14/2026 08:04	Accepted
386986215	Aug/14/2026 07:59	Wrong answer on test 2
386986170	Aug/14/2026 07:58	Wrong answer on test 2
386986086	Aug/14/2026 07:57	Wrong answer on test 2

```
8 7 3 2 4
7 2
6 7
7 3
2 4
1 2
8 4
5 1
```

output[Copy](#)

```
-1
```

input[Copy](#)

```
6 6 2 2 2
5 1
1 2
1 4
5 2
4 5
3 2
```

output[Copy](#)

```
0
2
```

[Codeforces](#) (c) Copyright 2010-2026 Mike Mirzayanov
The only programming contests Web 2.0 platform
Server time: Sep/21/2026 18:34:23^{UTC+6} (i1).
Desktop version, switch to [mobile version](#).
[Privacy Policy](#) | [Terms and Conditions](#)

Supported by



E. Easy Tree Queries

time limit per test: 1 second

memory limit per test: 1024 megabytes

There is a tree with N nodes. The tree is rooted at a given node R .

You will be given Q queries. In each query, you are asked to find the size of the subtree of a given node X .

Input

The first line contains two integers N, R ($1 \leq N \leq 2 \times 10^5, 1 \leq R \leq N$) — the number of nodes and the root of the tree.

The next $N - 1$ lines each contain two integers u_i, v_i ($1 \leq u_i, v_i \leq N$) — representing an bidirectional edge between nodes u_i and v_i .

The next line contains an integer Q ($1 \leq Q \leq 2 \times 10^5$) — the number of queries.

The next Q lines each contain a single integer X ($1 \leq X \leq N$) — the node whose subtree size you need to compute.

Output

For each query, print a single integer — the size of the subtree of node X .

Examples

input

Copy

4 1
3 1
1 2
4 2
3
1
4
2

output

Copy

4
1
2

input

Copy

5 3
1 2
5 3
3 2
2 4
5
3
5
4
2
1

output

Copy

5
1
1

CSE221 Assignment 05 Summer 2026

Finished

Contestant



→ Last submissions

Submission	Time	Verdict
387018245	Aug/14/2026 13:56	Accepted

```
3
1
```

input

Copy

```
8 2
1 7
7 3
3 6
6 5
5 2
2 8
8 4
8
6
4
2
1
7
5
8
3
```

output

Copy

```
4
1
8
1
2
5
2
3
```

input

Copy

```
1 1
1
1
```

output

Copy

```
1
```

[Codeforces](#) (c) Copyright 2010-2026 Mike Mirzayanov
The only programming contests Web 2.0 platform
Server time: Sep/21/2026 18:34:30^{UTC+6} (i1).
Desktop version, switch to [mobile version](#).
[Privacy Policy](#) | [Terms and Conditions](#)

Supported by



PROBLEMS SUBMIT CODE MY SUBMISSIONS STATUS STANDINGS CUSTOM INVOCATION

F. Reachability

time limit per test: 1.5 seconds
memory limit per test: 256 megabytes

You are given a **unweighted** graph with N cities and M **bidirectional** roads. The nodes are numbered from 1 to N . The graph contains no self-loops or multiple edges.

Your task is to answer Q queries of the form (x, y) , where you have to say if we can reach city y from city x using the roads.

Input

The first line contains three integers N , M and Q ($1 \leq N \leq 10^5, 1 \leq M \leq 10^5, 1 \leq Q \leq 10^5$) — the number of cities, total number of roads and total number of queries.

This is followed by M lines describing the M roads. The i -th line contains two integers u and v ($1 \leq u, v \leq N$), meaning that the i -th road connects city u and city v .

The final Q lines describe the queries. The i -th line contains two integers x and y ($1 \leq x, y \leq N$) describing the i -th query.

Output

For each query (x, y) , output YES if it is possible to reach y from x and output NO otherwise.

Examples

inputCopy

5 3 4
4 3
1 2
4 5
1 2
2 4
3 1
3 5

outputCopy

YES
NO
NO
YES

inputCopy

8 7 4
6 2
7 5
7 8
3 1
2 3
2 1
3 4
3 1
4 6
7 2
4 6

outputCopy

CSE221 Assignment 05 Summer 2026

Finished


Contestant



→ Last submissions


Submission	Time	Verdict
387100486	Aug/15/2026 06:47	Accepted
387100380	Aug/15/2026 06:45	Time limit exceeded on test 2
387100272	Aug/15/2026 06:43	Time limit exceeded on test 1
387100024	Aug/15/2026 06:38	Time limit exceeded on test 1

YES
YES
NO
YES

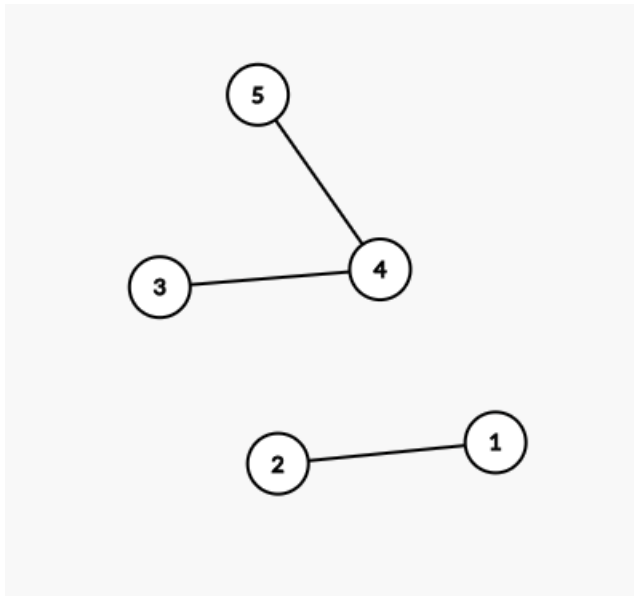Note

The graph in the first sample.

The image above represents the graph for the first sample. The answer to the first query 1 2 is YES because we can obviously go to 2 from 1. The answer to the second query 2 4 is NO because we can not go from 2 to 4 in this graph.

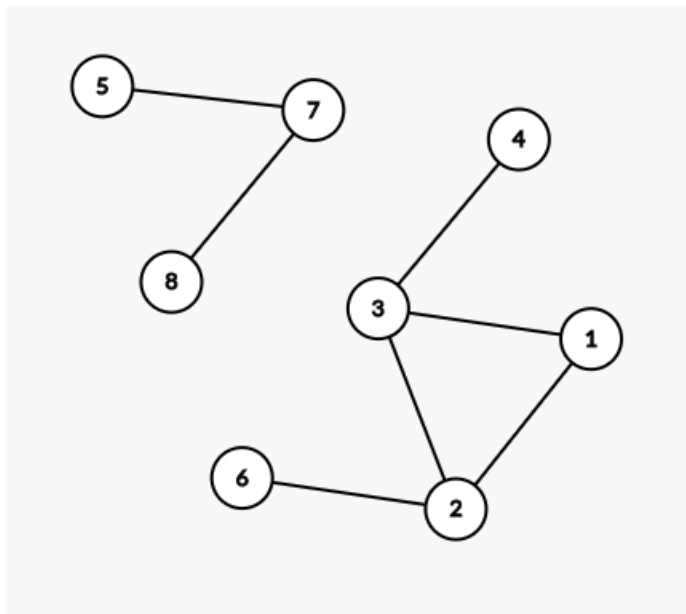

The graph in the second sample.

[Codeforces](#) (c) Copyright 2010-2026 Mike Mirzayanov
The only programming contests Web 2.0 platform
Server time: Sep/21/2026 18:34:39^{UTC+6} (i1).
Desktop version, switch to [mobile version](#).
[Privacy Policy](#) | [Terms and Conditions](#)

Supported by



[HOME](#) [TOP](#) [CATALOG](#) [CONTESTS](#) [GYM](#) [PROBLEMSET](#) [GROUPS](#) [RATING](#) [EDU](#) [API](#) [CALENDAR](#) [HELP](#)
[PROBLEMS](#) [SUBMIT CODE](#) [MY SUBMISSIONS](#) [STATUS](#) [STANDINGS](#) [CUSTOM INVOCATION](#)

G. Cycle Detection

time limit per test: 1 second

memory limit per test: 256 megabytes

You are given a **directed unweighted** graph with N nodes and M edges. The nodes are numbered from 1 to N . The graph contains no self-loops or multiple edges.

Write a code to find if there is any cycle in the graph. In graph theory, a cycle in a graph is a non-empty trail in which only the first and last vertices are equal. [Wikipedia]

Input

The first line contains two integers N and M ($1 \leq N \leq 2 \times 10^5, 1 \leq M \leq 2 \times 10^5$) — the number of vertices and total number of edges.

The next M lines will contain two integers u_i, v_i ($1 \leq u_i, v_i \leq N$) — denoting there is an edge from city u_i to city v_i .

Output

Print YES if the graph contains any cycle, otherwise print NO.

Examples

input	Copy
<pre>4 7 1 3 1 2 2 4 3 1 2 3 4 3 4 1</pre>	
output	Copy
YES	

input	Copy
<pre>6 5 6 5 6 4 6 3 4 5 6 2 4 1</pre>	
output	Copy
NO	

CSE221 Assignment 05 Summer 2026

Finished

Contestant



→ Last submissions

Submission	Time	Verdict
387111296	Aug/15/2026 09:25	Accepted



[HOME](#) [TOP](#) [CATALOG](#) [CONTESTS](#) [GYM](#) [PROBLEMSET](#) [GROUPS](#) [RATING](#) [EDU](#) [API](#) [CALENDAR](#) [HELP](#)
[PROBLEMS](#) [SUBMIT CODE](#) [MY SUBMISSIONS](#) [STATUS](#) [STANDINGS](#) [CUSTOM INVOCATION](#)

H. Diamonds under W

time limit per test: 1 second

memory limit per test: 256 megabytes

You are given a 2D grid with R rows and H columns.

Each cell in the grid is one of the following:

1. $.$ — Empty cell: You can move into this cell.
2. D — Cell with a diamond: You can move into this cell and collect the diamond.
3. $\#$ — Obstacle: You cannot move into this cell.

You may start from any non-obstacle cell and move in the four directions: up, down, left, or right. Your goal is to choose a starting cell such that you can collect the maximum number of diamonds

Input

The first line contains two integers R and H ($1 \leq R, H \leq 1000$) — the number of rows and columns of the grid. The next R lines each contain H characters, describing the grid.

Output

Print a single integer — the maximum number of diamonds you can collect starting from a valid cell.

Examples

input	Copy
<pre> 5 5 .#.DD ##.#. ####D #DDD# #..DD </pre>	
output	Copy
5	
input	Copy
<pre> 5 5 D#### ##.D# #..D# ####D ..##D </pre>	
output	Copy
3	
input	Copy
<pre> 5 5 ####. #...# ####. </pre>	

CSE221 Assignment 05 Summer 2026

Finished

Contestant



→ Last submissions

Submission	Time	Verdict
387161381	Aug/15/2026 16:58	Accepted

output

Copy

0

input

Copy

1 5
D....**output**

Copy

1

input

Copy

9 11
.#..D...D..
.#.#####.
D#.#..D...#.
D#D#..###.#D
.#.#..D#.#.
.#.#####.#D
D#..D...D#.
.#####.
...D..D...D**output**

Copy

15

[Codeforces](#) (c) Copyright 2010-2026 Mike Mirzayanov

The only programming contests Web 2.0 platform

Server time: Sep/21/2026 18:34:54^{UTC+6} (i1).

Desktop version, switch to [mobile version](#).

[Privacy Policy](#) | [Terms and Conditions](#)

Supported by

