Dinesh Kumar M (1NT21IS400)
Flutter Program: Scafold & SafeArea Observation
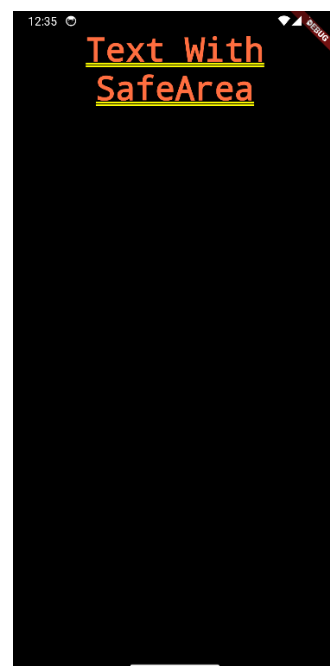
Text without SafeArea

```dart
import 'package:flutter/material.dart';

void main() {
  runApp(const MaterialApp(
    home: Text("Text Without SafeArea"),
  ));
}
```

Text within SafeArea

```dart
import 'package:flutter/material.dart';

void main() {
  runApp(MaterialApp(
    home: SafeArea(
      child: Text("Text With SafeArea",
        textAlign: TextAlign.center,
        style: TextStyle(
          fontSize: 40,
          fontWeight: FontWeight.w800,
          color: Colors.deepOrangeAccent,
        ),
      ),
    ),
  ));
}
```

Scafold:

```dart
import 'package:flutter/material.dart';

void main() {
  runApp(
    MaterialApp(
      home: Scaffold(
        appBar: AppBar(
          title: Text("Scafold Demo"),
        ),
        body: Center(
          child: Text(
            'This is a first App',
            style: TextStyle(
              fontSize: 40.0,
              fontStyle: FontStyle.italic,
              fontWeight: FontWeight.bold,
            ),
          ),
        ),
      ),
    ),
  );
}
```