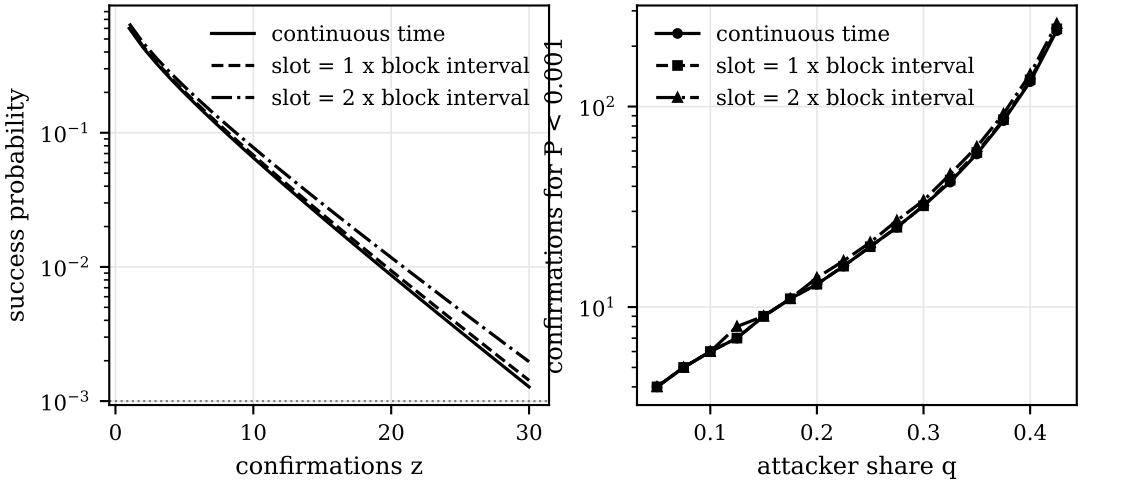
(a) attacker share q = 0.3: slotted races
continuous time
slot = 1 x block interval
slot = 2 x block interval
success probability
10^{-1}
10^{-2}
10^{-3}
0
10
20
30
confirmations z
(b) confirmations needed vs attacker share
continuous time
slot = 1 x block interval
slot = 2 x block interval
confirmations for P < 0.001
10^{2}
10^{1}
0.1
0.2
0.3
0.4
attacker share q