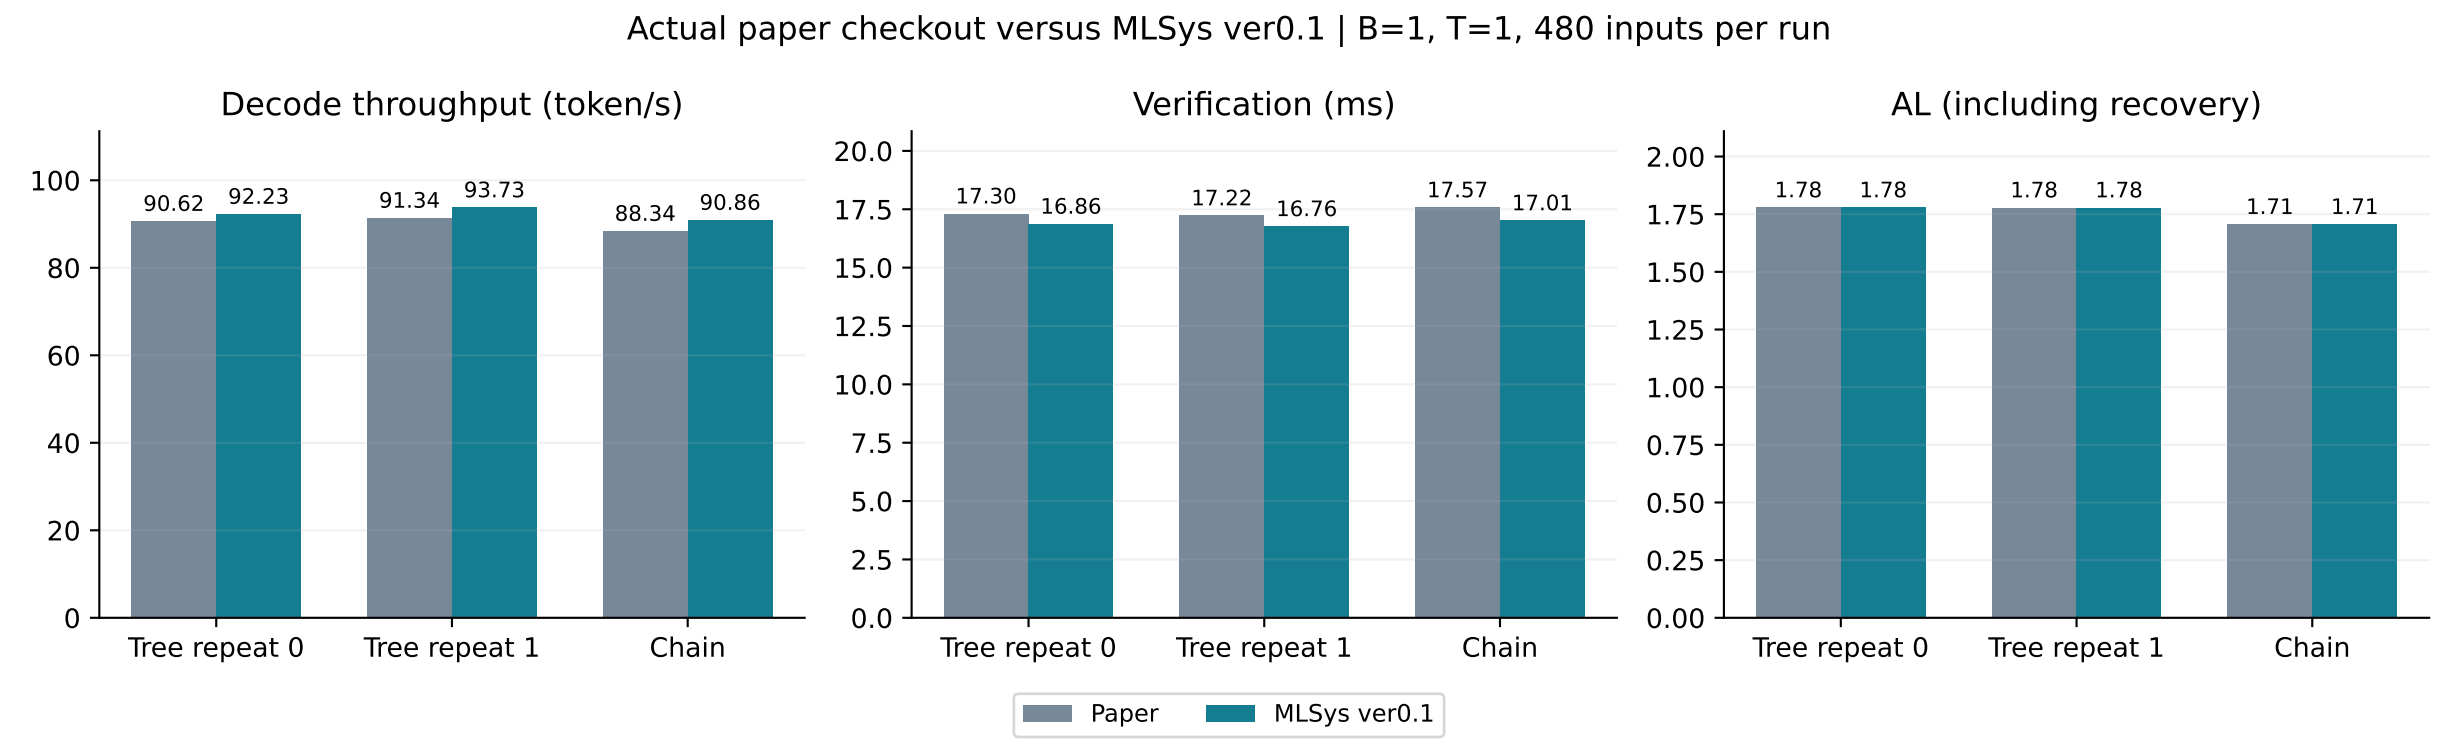
Actual paper checkout versus MLSys ver0.1 | B=1, T=1, 480 inputs per run
Decode throughput (token/s)
Verification (ms)
AL (including recovery)
90.62
92.23
91.34
93.73
88.34
90.86
17.30
16.86
17.22
16.76
17.57
17.01
1.78
1.78
1.78
1.78
1.71
1.71
Tree repeat 0
Tree repeat 1
Chain
Paper
MLSys ver0.1

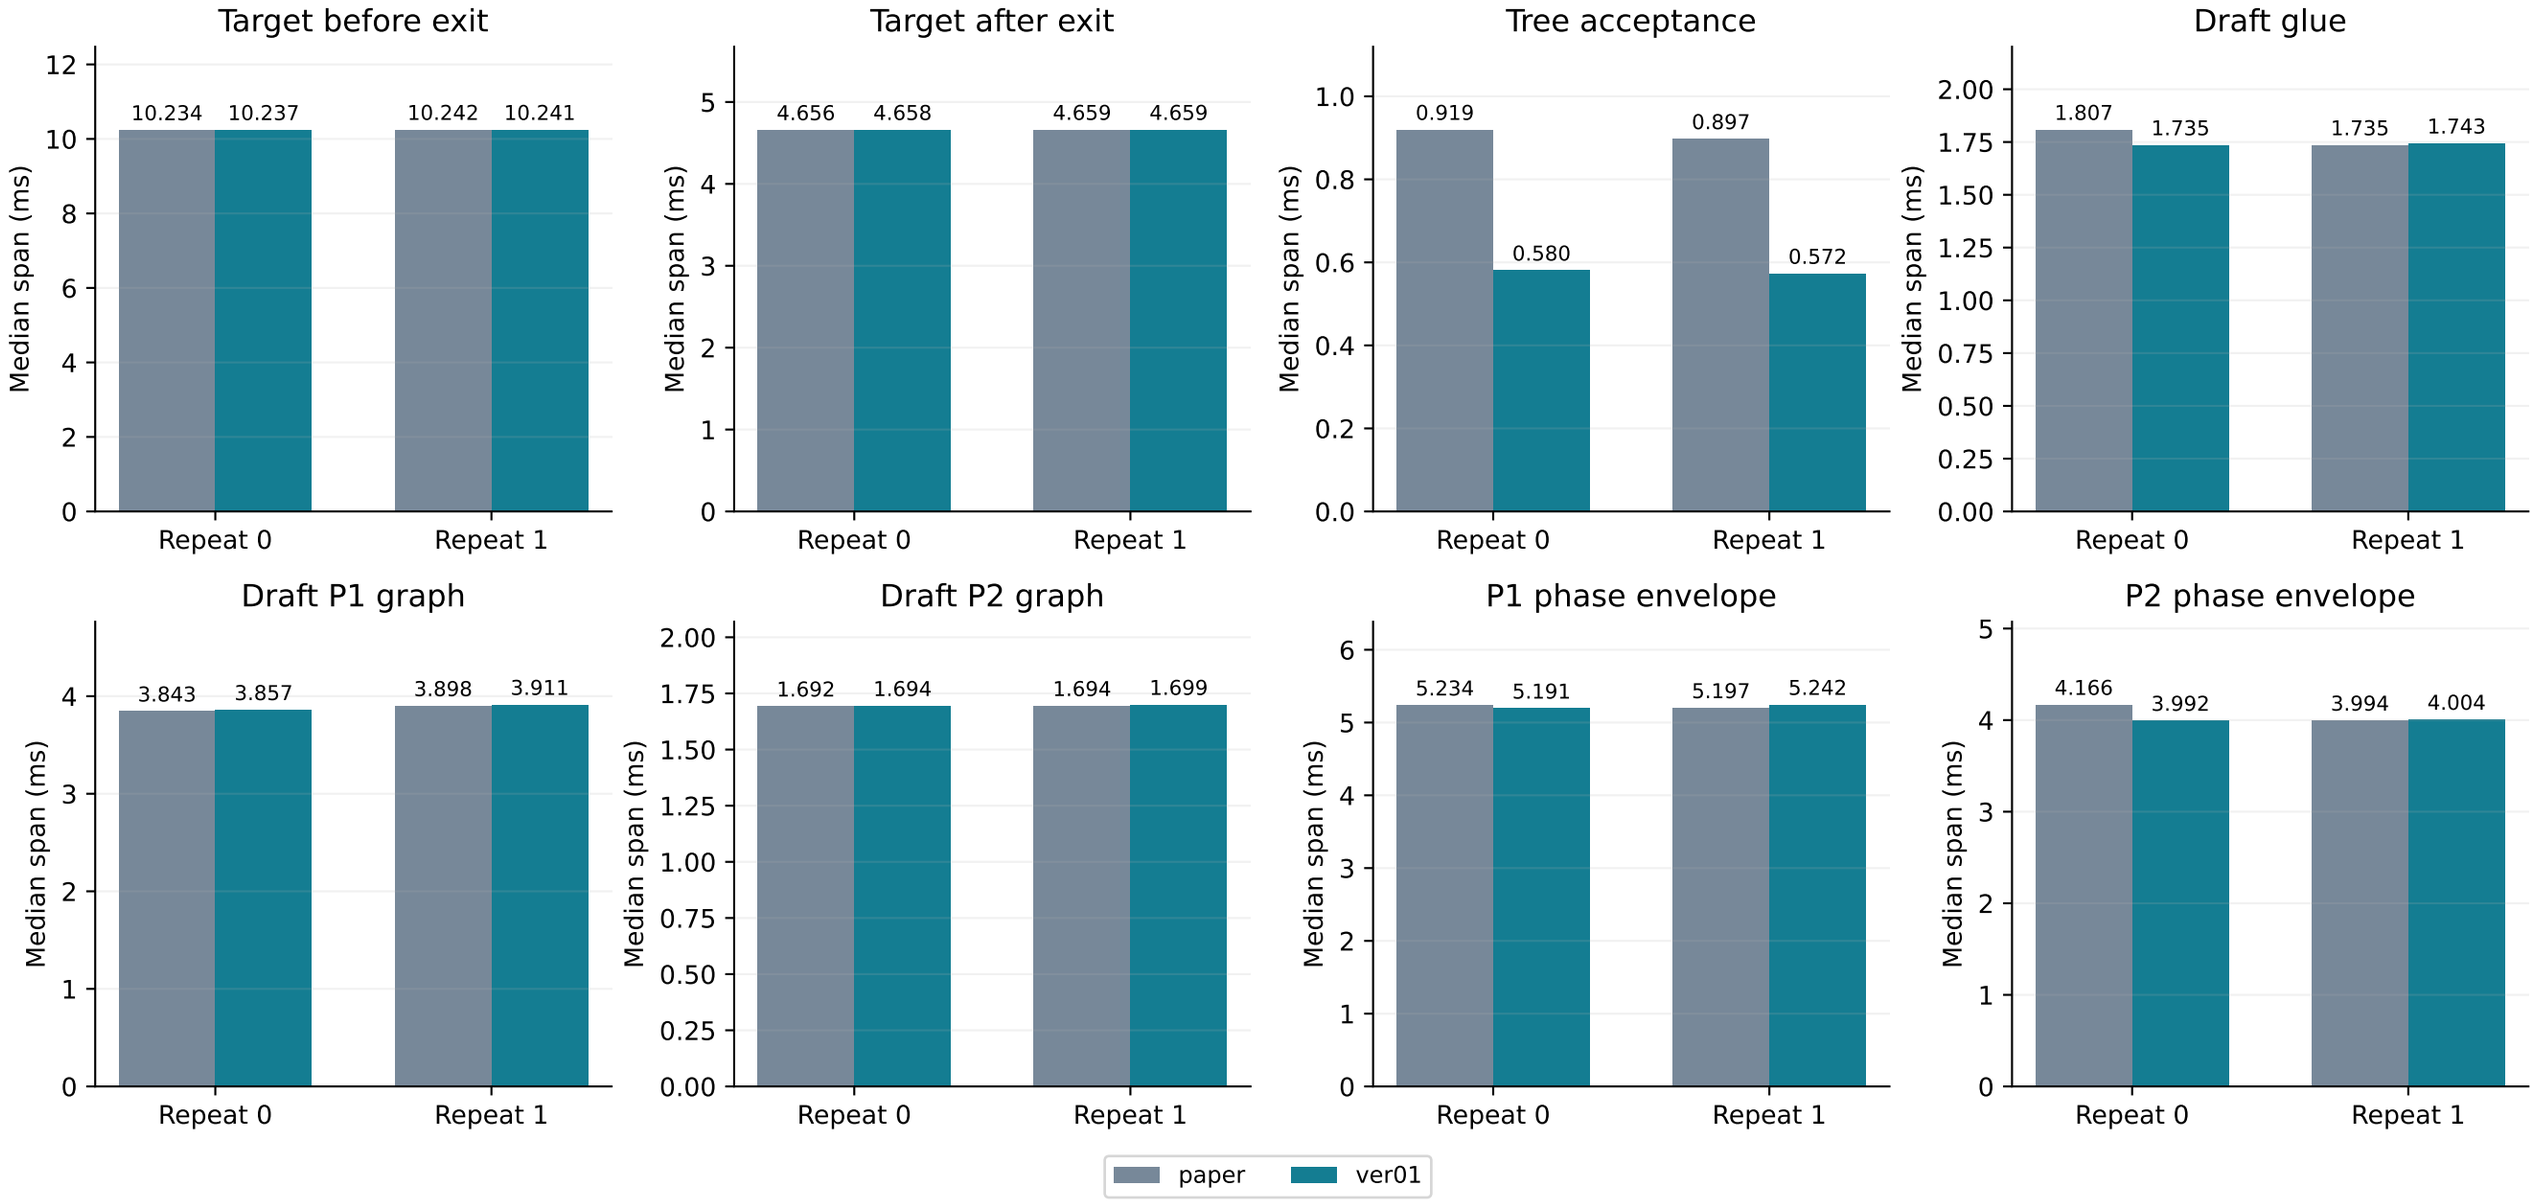
Separate 24-input diagnostics | overlapping and nested spans are not additive
Target before exit
Target after exit
Tree acceptance
Draft glue
Draft P1 graph
Draft P2 graph
P1 phase envelope
P2 phase envelope
Median span (ms)
Repeat 0
Repeat 1
10.234
10.237
10.242
10.241
4.656
4.658
4.659
4.659
0.919
0.580
0.897
0.572
1.807
1.735
1.735
1.743
3.843
3.857
3.898
3.911
1.692
1.694
1.694
1.699
5.234
5.191
5.197
5.242
4.166
3.992
3.994
4.004
paper
ver01

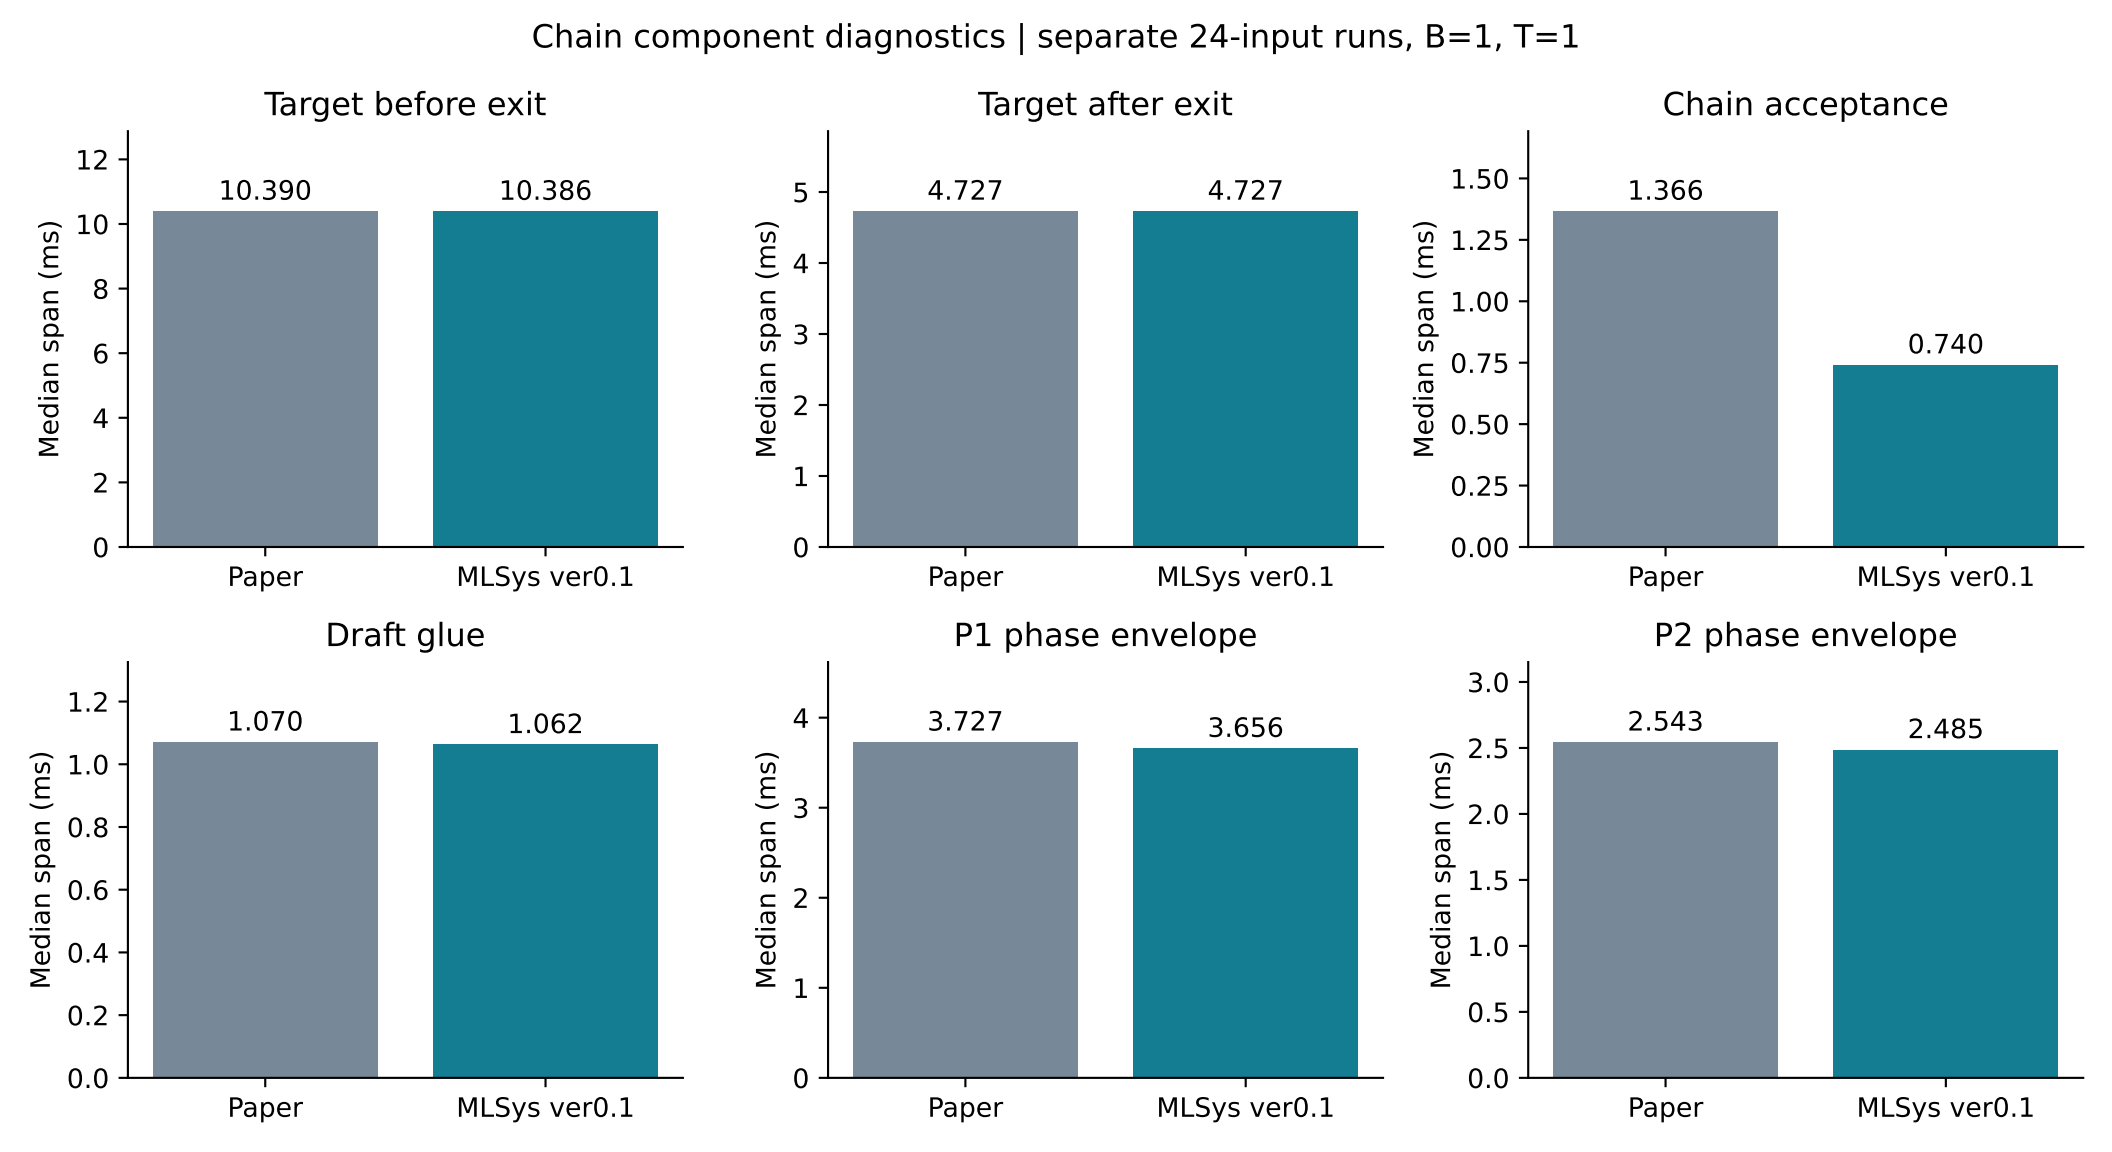
Chain component diagnostics | separate 24-input runs, B=1, T=1
Target before exit
Median span (ms)
10.390
10.386
Paper
MLSys ver0.1
Target after exit
4.727
4.727
Chain acceptance
1.366
0.740
Draft glue
1.070
1.062
P1 phase envelope
3.727
3.656
P2 phase envelope
2.543
2.485

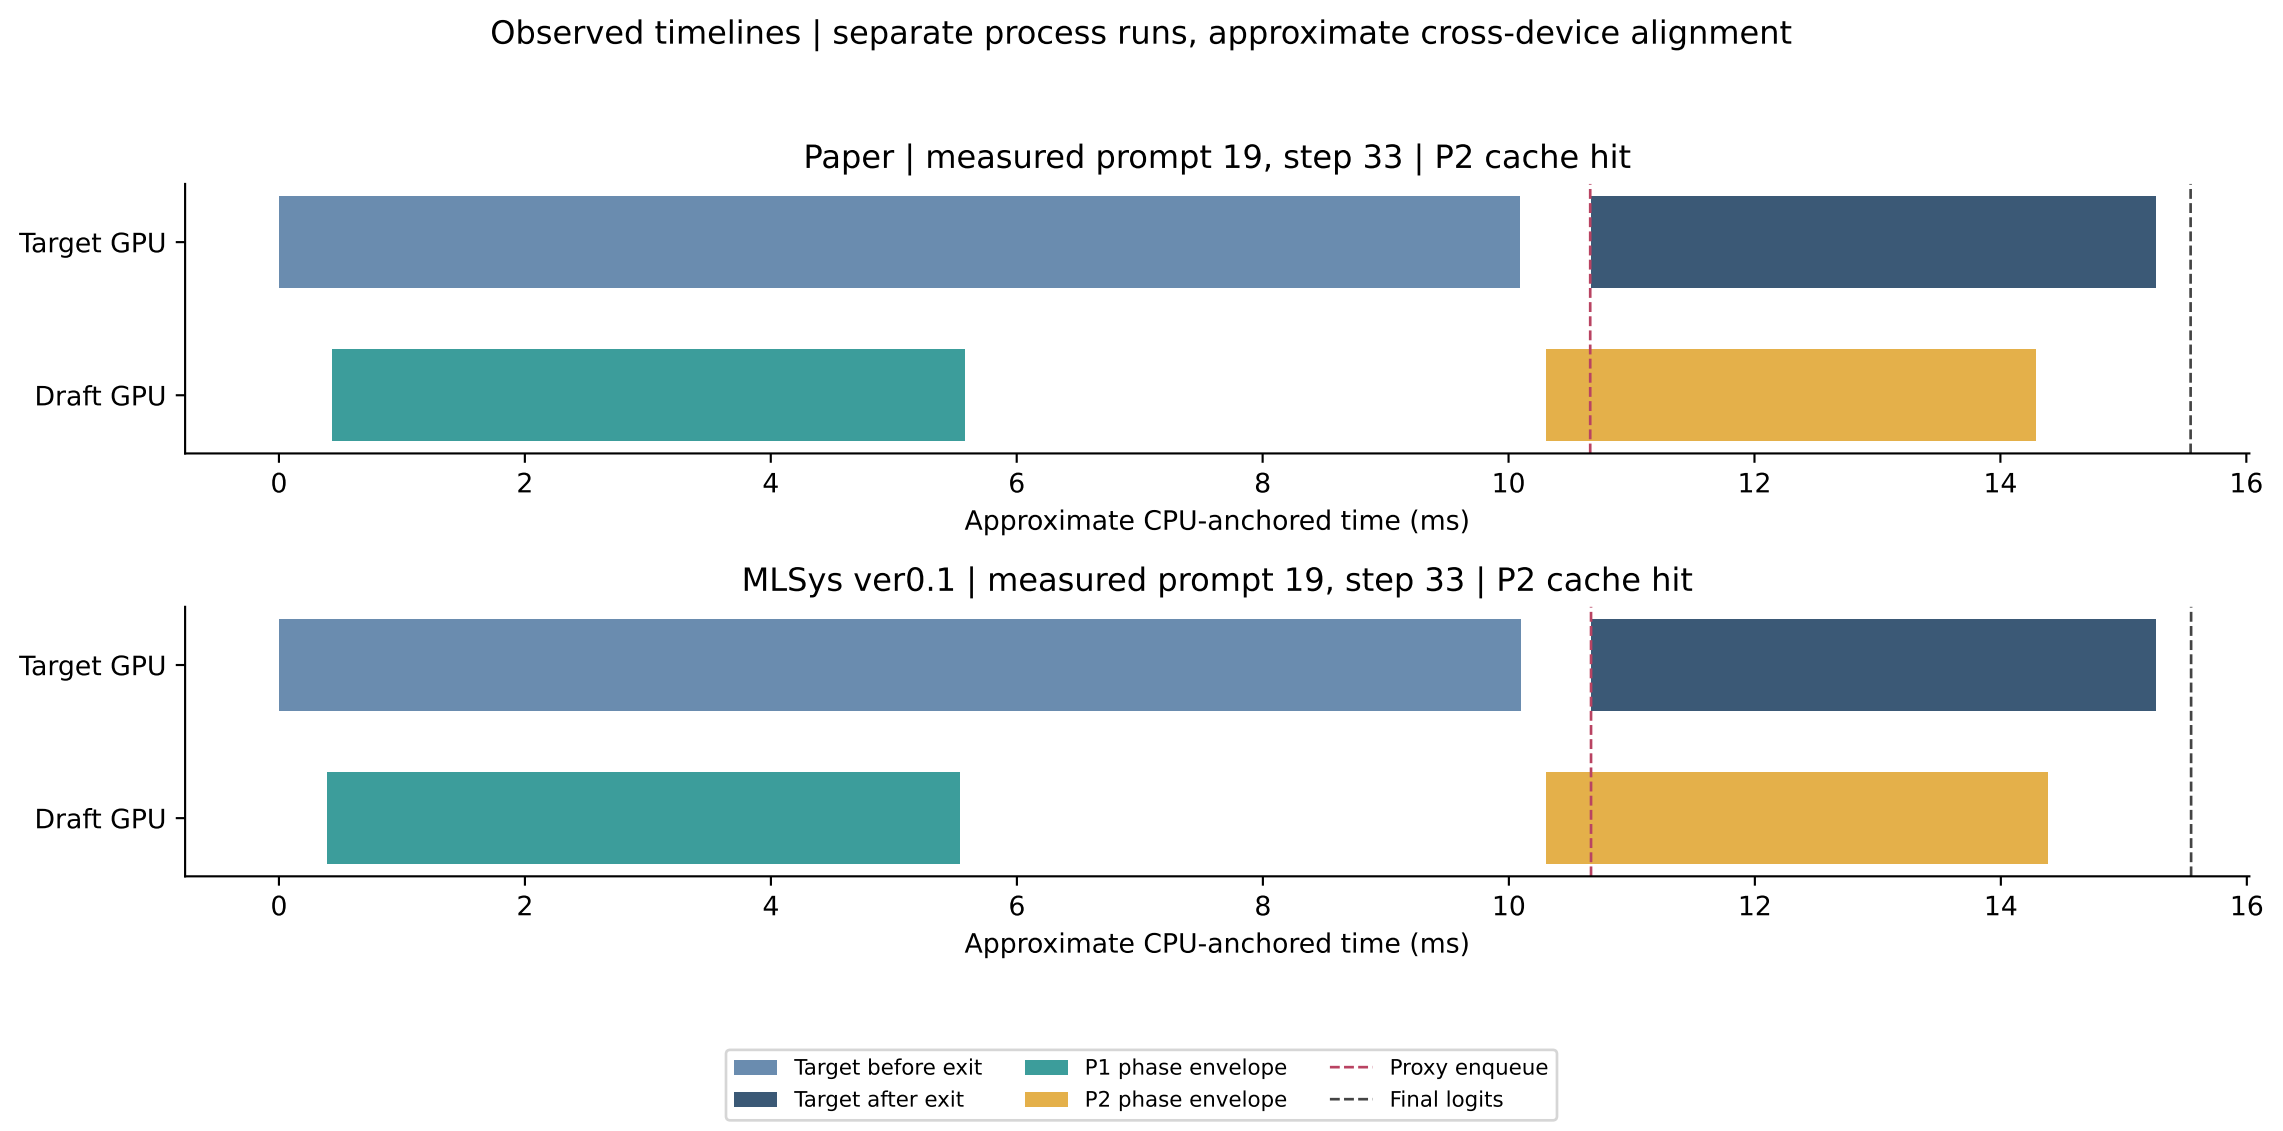
Observed timelines | separate process runs, approximate cross-device alignment
Paper | measured prompt 19, step 33 | P2 cache hit
Target GPU
Draft GPU
0
2
4
6
8
10
12
14
16
Approximate CPU-anchored time (ms)
MLSys ver0.1 | measured prompt 19, step 33 | P2 cache hit
Target GPU
Draft GPU
0
2
4
6
8
10
12
14
16
Approximate CPU-anchored time (ms)
Target before exit
Target after exit
P1 phase envelope
P2 phase envelope
Proxy enqueue
Final logits