
LayerSkip CodeLlama-34B + AMD-Llama-135M-code | Selected setting | P1 hit | UID humaneval_local_033_t0 | steps 7-8

Historical v1.0 59f46511 | exit 30 (0-based) | K1/K2 12/6 | G=M DS/PS 12/8 | C=3 | last | target GPUs=4 + draft GPU=1 | B=1, BF16, T=0.7

Red dashed line = next target request starts (observed deadline reference). Green circle = PS cache ready; triangle = draft ready to receive.

Both target steps and their DS/PS work share one time axis. Only the following request boundary is used for the second deadline.

In this measurement: no observed proxy computation / target graph_post overlap. Send enqueue does not measure transfer completion.

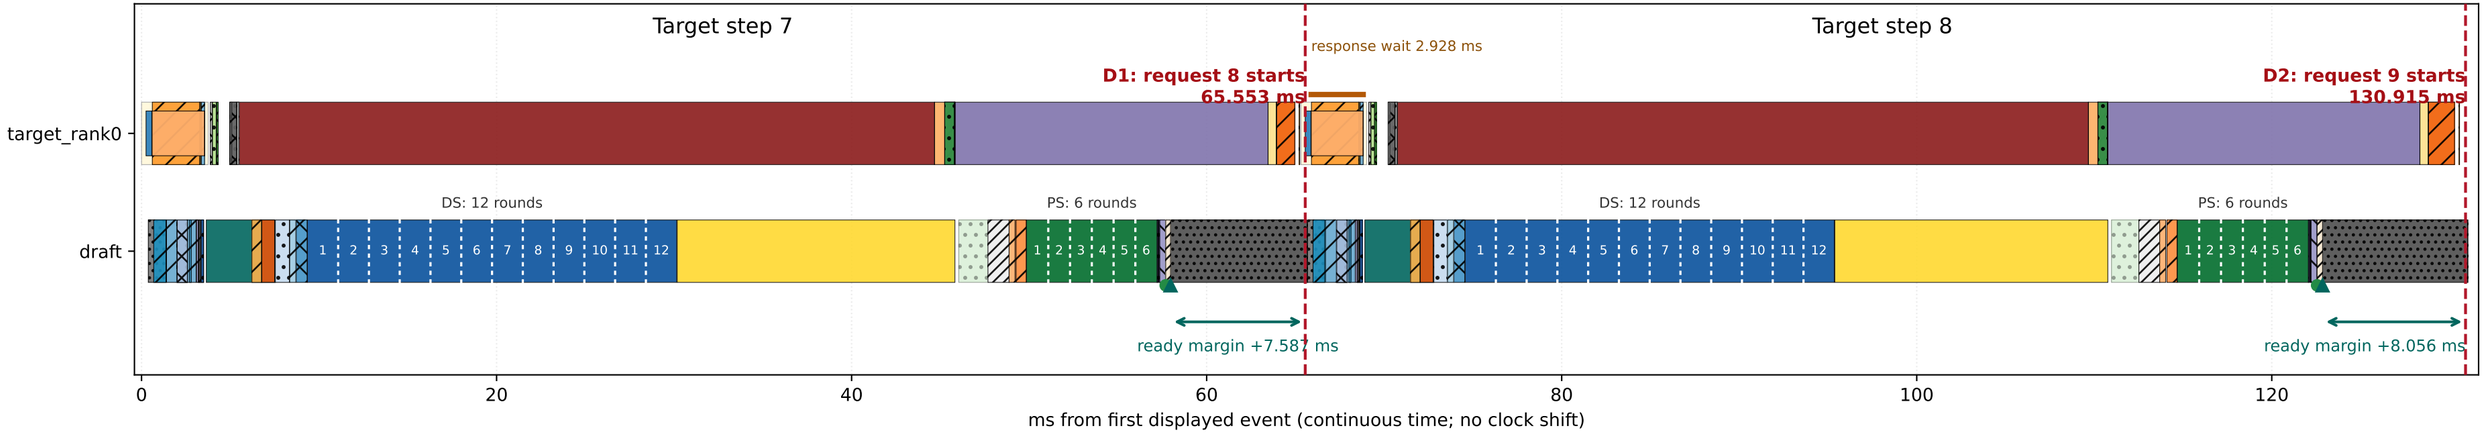

ALL ELIGIBLE STEPS FOR THIS SETTING (not the two example steps above); Overall is step-weighted.


Current outcome	Steps	Rate (%)	AL (tokens/step)	Profile TPS (tokens/s)
P1 hit	62	84.932	7.290	111.757
P2 hit	11	15.068	5.091	92.013
Miss	0	0.000	N/A	N/A
Overall	**73**	**100.000**	**6.959**	**109.174**

Rate = source / all steps; Overall rate = total hit (P1 + P2) / all. AL includes recovery/bonus. Profile TPS = emitted tokens / summed step seconds.

Current outcome	Steps	Step (ms)	DS total (ms)	DS spare* (ms)	DS graph/K1 (ms)	PS total (ms)	PS spare (ms)	PS graph/K2 (ms)
P1 hit	62	65.234	22.848	+14.976	1.747	11.967	+7.769	1.226
P2 hit	11	55.328	22.743	+8.651	1.743	11.867	+5.450	1.226
Miss	0	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Overall	**73**	**63.741**	**22.832**	**+14.023**	**1.746**	**11.952**	**+7.420**	**1.226**

Step = current target request start -> next request start. *DS spare = proxy send-ready - DS end; PS spare = next request start - draft receive-ready.

Positive spare = early; negative = late. Graph/K includes sampling/selection, not isolated transformer latency. These are profiled-subset TPS, not full evaluation TPS.

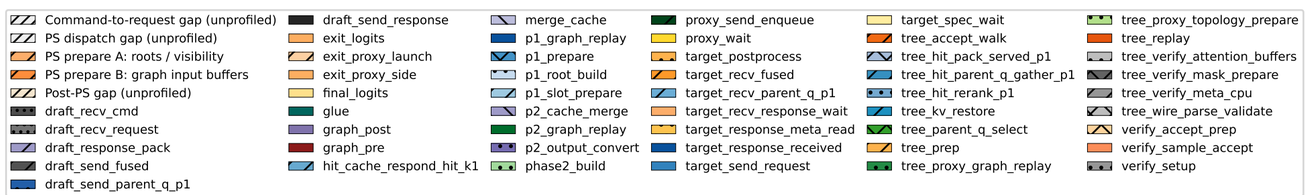

Hatched gaps = unprofiled elapsed intervals, NOT proven GPU idle. Nested spans are not additive. White graph dividers show counts, NOT per-forward measurements.

Raw intervals retained, no 0.02 ms visibility floor. Cross-device margins inherit CUDA-to-host clock alignment uncertainty; exact raw events and source hashes accompany this figure.


LayerSkip CodeLlama-34B + AMD-Llama-135M-code | Selected setting | P2 hit | UID humaneval_local_023_t0 | steps 25-26

Historical v1.0 59f46511 | exit 30 (0-based) | K1/K2 12/6 | G=M DS/PS 12/8 | C=3 | last | target GPUs=4 + draft GPU=1 | B=1, BF16, T=0.7

Red dashed line = next target request starts (observed deadline reference). Green circle = PS cache ready; triangle = draft ready to receive.

Both target steps and their DS/PS work share one time axis. Only the following request boundary is used for the second deadline.

In this measurement: no observed proxy computation / target graph_post overlap. Send enqueue does not measure transfer completion.

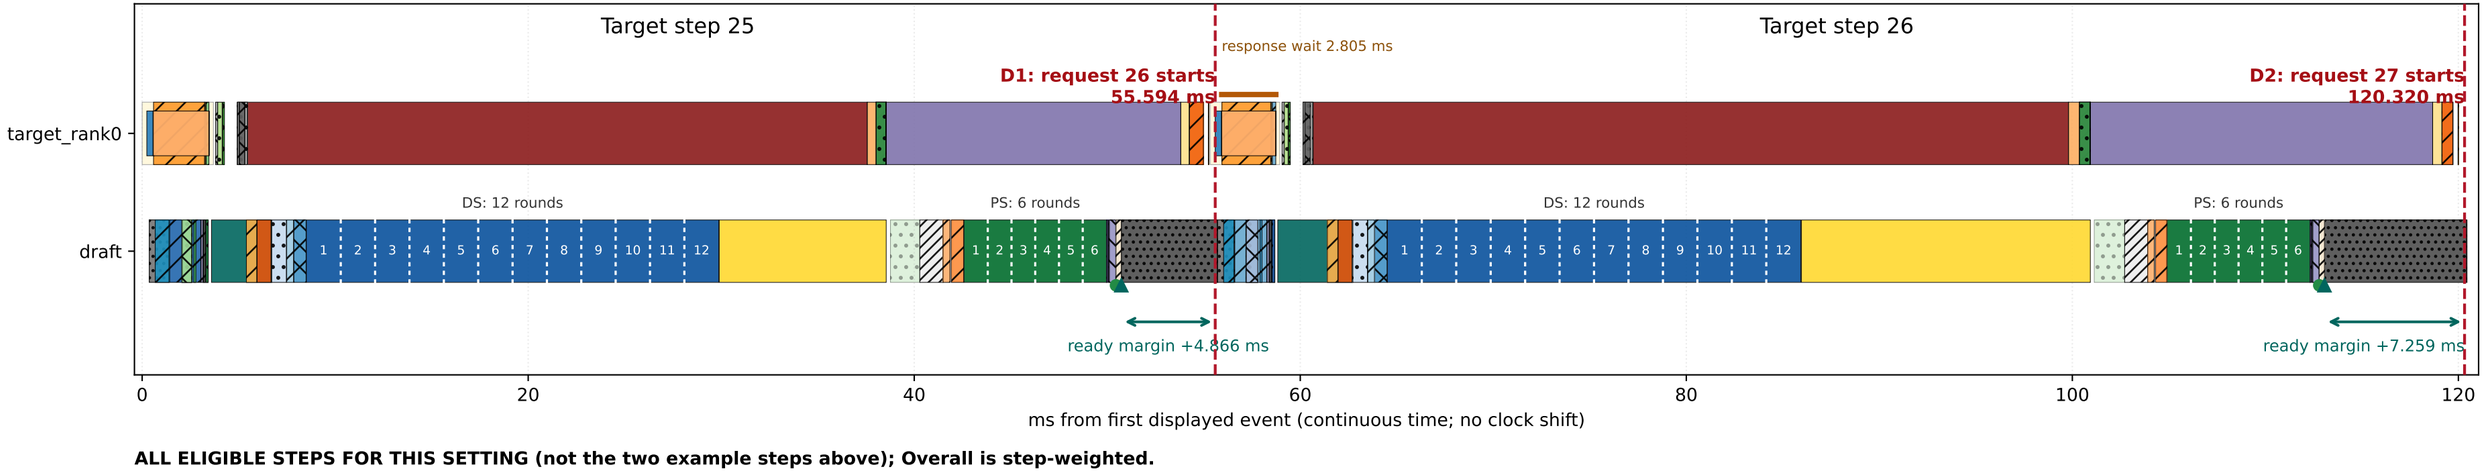

ALL ELIGIBLE STEPS FOR THIS SETTING (not the two example steps above); Overall is step-weighted.

Current outcome	Steps	Rate (%)	AL (tokens/step)	Profile TPS (tokens/s)
P1 hit	62	84.932	7.290	111.757
P2 hit	11	15.068	5.091	92.013
Miss	0	0.000	N/A	N/A
Overall	**73**	**100.000**	**6.959**	**109.174**

Rate = source / all steps; Overall rate = total hit (P1 + P2) / all. AL includes recovery/bonus. Profile TPS = emitted tokens / summed step seconds.

Current outcome	Steps	Step (ms)	DS total (ms)	DS spare* (ms)	DS graph/K1 (ms)	PS total (ms)	PS spare (ms)	PS graph/K2 (ms)
P1 hit	62	65.234	22.848	+14.976	1.747	11.967	+7.769	1.226
P2 hit	11	55.328	22.743	+8.651	1.743	11.867	+5.450	1.226
Miss	0	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Overall	**73**	**63.741**	**22.832**	**+14.023**	**1.746**	**11.952**	**+7.420**	**1.226**

Step = current target request start -> next request start. *DS spare = proxy send-ready - DS end; PS spare = next request start - draft receive-ready.

Positive spare = early; negative = late. Graph/K includes sampling/selection, not isolated transformer latency. These are profiled-subset TPS, not full evaluation TPS.

Command-to-request gap (unprofiled)
PS dispatch gap (unprofiled)
PS prepare A: roots / visibility
PS prepare B: graph input buffers
Post-PS gap (unprofiled)
draft_recv_cmd
draft_recv_request
draft_response_pack
draft_send_fused
draft_send_parent_q_p1
draft_send_parent_q_p2
draft_send_response
exit_logits
exit_proxy_launch
exit_proxy_side
final_logits
glue
graph_post
graph_pre
hit_cache_respond_hit_k1
hit_cache_respond_hit_k2
merge_cache
p1_graph_replay
p1_prepare
p1_root_build
p1_slot_prepare
p2_cache_merge
p2_graph_replay
p2_output_convert
phase2_build
proxy_send_enqueue
proxy_wait
target_postprocess
target_recv_fused
target_recv_parent_q_p1
target_recv_parent_q_p2
target_recv_response_wait
target_response_meta_read
target_response_received
target_send_request
target_spec_wait
tree_accept_walk
tree_hit_pack_served_p1
tree_hit_pack_served_p2
tree_hit_parent_q_gather_p1
tree_hit_parent_q_gather_p2
tree_hit_rerank_p1
tree_hit_rerank_p2
tree_kv_restore
tree_parent_q_select
tree_prep
tree_proxy_graph_replay
tree_proxy_topology_prepare
tree_replay
tree_verify_attention_buffers
tree_verify_mask_prepare
tree_verify_meta_cpu
tree_wire_parse_validate
verify_accept_prep
verify_sample_accept
verify_setup

Hatched gaps = unprofiled elapsed intervals, NOT proven GPU idle. Nested spans are not additive. White graph dividers show counts, NOT per-forward measurements.

Raw intervals retained, no 0.02 ms visibility floor. Cross-device margins inherit CUDA-to-host clock alignment uncertainty; exact raw events and source hashes accompany this figure.


LayerSkip CodeLlama-34B + AMD-Llama-135M-code | K1/K2 16/6 (throughput alternative) | P1 hit | UID humaneval_local_023_t0 | steps 9-10

Historical v1.0 59f46511 | exit 30 (0-based) | K1/K2 16/6 | G=M DS/PS 16/8 | C=3 | last | target GPUs=4 + draft GPU=1 | B=1, BF16, T=0.7

Red dashed line = next target request starts (observed deadline reference). Green circle = PS cache ready; triangle = draft ready to receive.

Both target steps and their DS/PS work share one time axis. Only the following request boundary is used for the second deadline.

In this measurement: no observed proxy computation / target graph_post overlap. Send enqueue does not measure transfer completion.

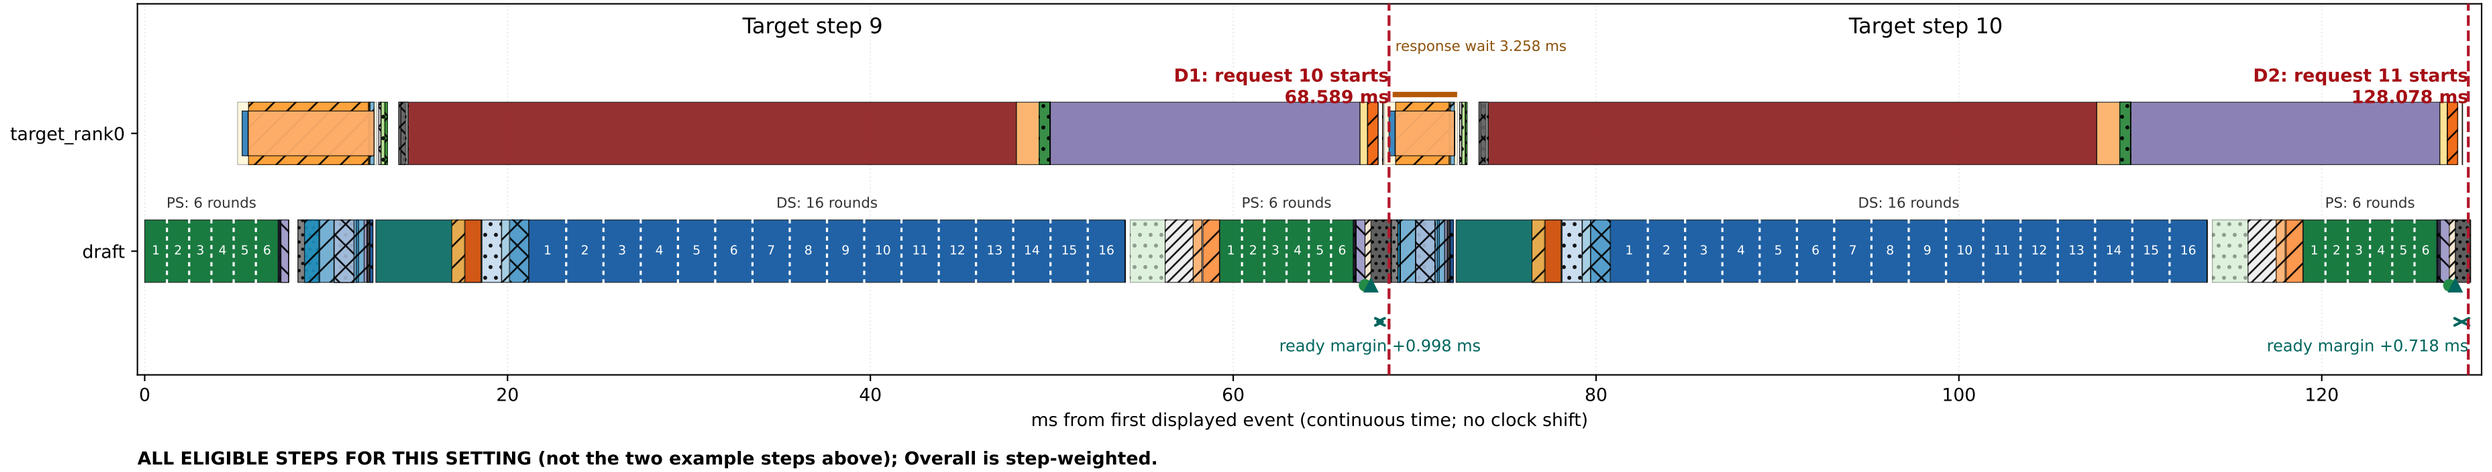

ALL ELIGIBLE STEPS FOR THIS SETTING (not the two example steps above); Overall is step-weighted.

Current outcome	Steps	Rate (%)	AL (tokens/step)	Profile TPS (tokens/s)
P1 hit	63	75.000	6.508	100.263
P2 hit	19	22.619	4.526	75.642
Miss	2	2.381	1.500	22.657
Overall	**84**	**97.619**	**5.940**	**93.122**

Rate = source / all steps; Overall rate = total hit (P1 + P2) / all. AL includes recovery/bonus. Profile TPS = emitted tokens / summed step seconds.

Current outcome	Steps	Step (ms)	DS total (ms)	DS spare* (ms)	DS graph/K1 (ms)	PS total (ms)	PS spare (ms)	PS graph/K2 (ms)
P1 hit	63	64.908	36.258	-5.479	2.059	14.165	-0.365	1.236
P2 hit	19	59.838	35.969	-6.511	2.058	14.526	-3.691	1.234
Miss	2	66.205	35.801	-8.284	1.867	13.198	-5.588	1.232
Overall	**84**	**63.792**	**36.182**	**-5.779**	**2.054**	**14.224**	**-1.241**	**1.235**

Step = current target request start -> next request start. *DS spare = proxy send-ready - DS end; PS spare = next request start - draft receive-ready.

Positive spare = early; negative = late. Graph/K includes sampling/selection, not isolated transformer latency. These are profiled-subset TPS, not full evaluation TPS.

Command-to-request gap (unprofiled)
PS dispatch gap (unprofiled)
PS prepare A: roots / visibility
PS prepare B: graph input buffers
Post-PS gap (unprofiled)
draft_recv_cmd
draft_recv_request
draft_response_pack
draft_send_fused
draft_send_parent_q_p1
draft_send_response
exit_logits
exit_proxy_launch
exit_proxy_side
final_logits
glue
graph_post
graph_pre
hit_cache_respond_hit_k1
merge_cache
p1_graph_replay
p1_prepare
p1_root_build
p1_slot_prepare
p2_cache_merge
p2_graph_replay
p2_output_convert
phase2_build
proxy_send_enqueue
proxy_wait
target_postprocess
target_recv_fused
target_recv_parent_q_p1
target_recv_response_wait
target_response_meta_read
target_response_received
target_send_request
target_spec_wait
tree_accept_walk
tree_hit_pack_served_p1
tree_hit_parent_q_gather_p1
tree_hit_rerank_p1
tree_kv_restore
tree_parent_q_select
tree_prep
tree_proxy_graph_replay
tree_proxy_topology_prepare
tree_replay
tree_verify_attention_buffers
tree_verify_mask_prepare
tree_verify_meta_cpu
tree_wire_parse_validate
verify_accept_prep
verify_sample_accept
verify_setup

Hatched gaps = unprofiled elapsed intervals, NOT proven GPU idle. Nested spans are not additive. White graph dividers show counts, NOT per-forward measurements.

Raw intervals retained, no 0.02 ms visibility floor. Cross-device margins inherit CUDA-to-host clock alignment uncertainty; exact raw events and source hashes accompany this figure.


LayerSkip CodeLlama-34B + AMD-Llama-135M-code | K1/K2 16/6 (throughput alternative) | P2 hit | UID humaneval_local_003_t0 | steps 8-9

Historical v1.0 59f46511 | exit 30 (0-based) | K1/K2 16/6 | G=M DS/PS 16/8 | C=3 | last | target GPUs=4 + draft GPU=1 | B=1, BF16, T=0.7

Red dashed line = next target request starts (observed deadline reference). Green circle = PS cache ready; triangle = draft ready to receive.

Both target steps and their DS/PS work share one time axis. Only the following request boundary is used for the second deadline.

In this measurement: no observed proxy computation / target graph_post overlap. Send enqueue does not measure transfer completion.

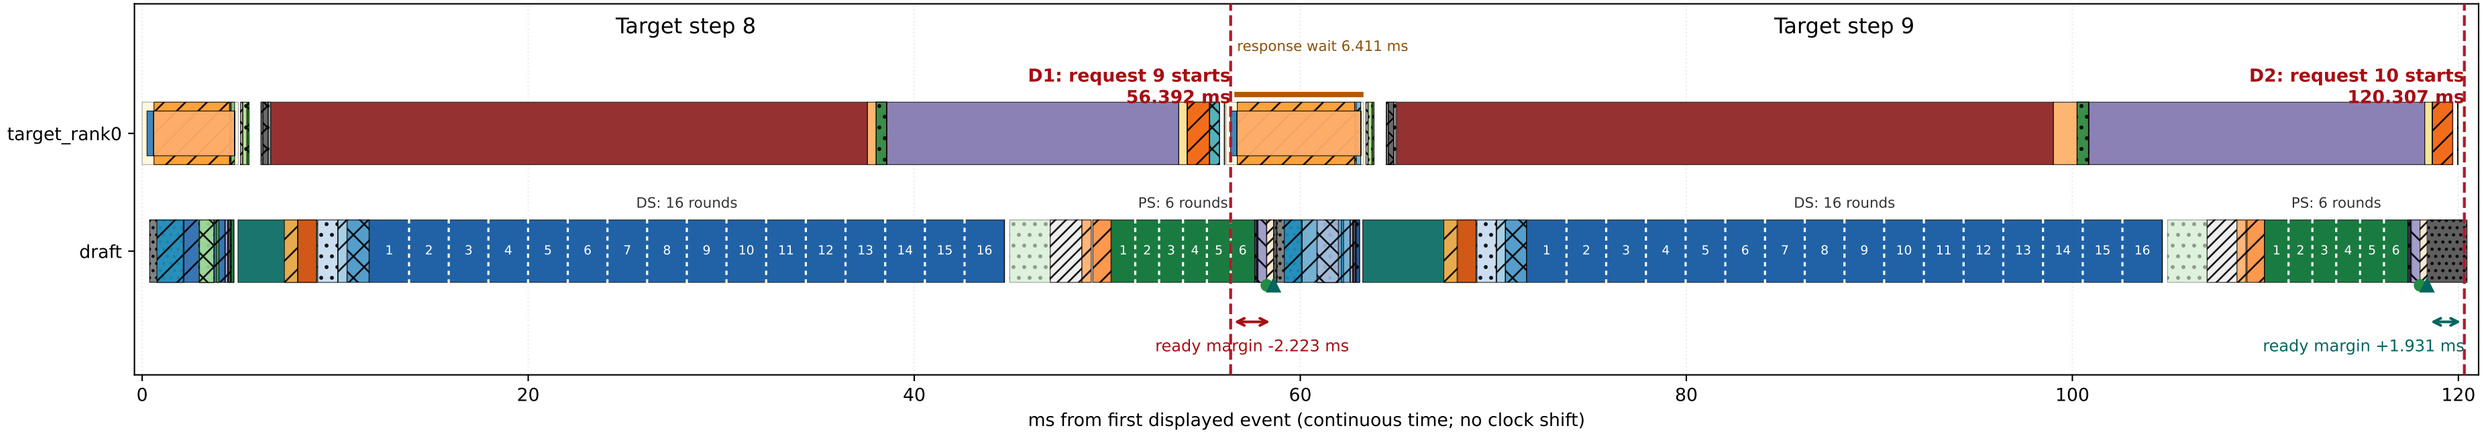

ALL ELIGIBLE STEPS FOR THIS SETTING (not the two example steps above); Overall is step-weighted.

Current outcome	Steps	Rate (%)	AL (tokens/step)	Profile TPS (tokens/s)
P1 hit	63	75.000	6.508	100.263
P2 hit	19	22.619	4.526	75.642
Miss	2	2.381	1.500	22.657
Overall	**84**	**97.619**	**5.940**	**93.122**

Rate = source / all steps; Overall rate = total hit (P1 + P2) / all. AL includes recovery/bonus. Profile TPS = emitted tokens / summed step seconds.

Current outcome	Steps	Step (ms)	DS total (ms)	DS spare* (ms)	DS graph/K1 (ms)	PS total (ms)	PS spare (ms)	PS graph/K2 (ms)
P1 hit	63	64.908	36.258	-5.479	2.059	14.165	-0.365	1.236
P2 hit	19	59.838	35.969	-6.511	2.058	14.526	-3.691	1.234
Miss	2	66.205	35.801	-8.284	1.867	13.198	-5.588	1.232
Overall	**84**	**63.792**	**36.182**	**-5.779**	**2.054**	**14.224**	**-1.241**	**1.235**

Step = current target request start -> next request start. *DS spare = proxy send-ready - DS end; PS spare = next request start - draft receive-ready.

Positive spare = early; negative = late. Graph/K includes sampling/selection, not isolated transformer latency. These are profiled-subset TPS, not full evaluation TPS.

Command-to-request gap (unprofiled)
PS dispatch gap (unprofiled)
PS prepare A: roots / visibility
PS prepare B: graph input buffers
Post-PS gap (unprofiled)
draft_recv_cmd
draft_recv_request
draft_response_pack
draft_send_fused
draft_send_parent_q_p1
draft_send_parent_q_p2
draft_send_response
exit_logits
exit_proxy_launch
exit_proxy_side
final_logits
glue
graph_post
graph_pre
hit_cache_respond_hit_k1
hit_cache_respond_hit_k2
merge_cache
p1_graph_replay
p1_prepare
p1_root_build
p1_slot_prepare
p2_cache_merge
p2_graph_replay
p2_output_convert
phase2_build
proxy_send_enqueue
proxy_wait
target_postprocess
target_recv_fused
target_recv_parent_q_p1
target_recv_parent_q_p2
target_recv_response_wait
target_response_meta_read
target_response_received
target_send_request
target_spec_wait
tree_accept_walk
tree_hit_pack_served_p1
tree_hit_pack_served_p2
tree_hit_parent_q_gather_p1
tree_hit_parent_q_gather_p2
tree_hit_rerank_p1
tree_hit_rerank_p2
tree_kv_commit
tree_kv_restore
tree_parent_q_select
tree_prep
tree_proxy_graph_replay
tree_proxy_topology_prepare
tree_replay
tree_verify_attention_buffers
tree_verify_mask_prepare
tree_verify_meta_cpu
tree_wire_parse_validate
verify_accept_prep
verify_sample_accept
verify_setup

Hatched gaps = unprofiled elapsed intervals, NOT proven GPU idle. Nested spans are not additive. White graph dividers show counts, NOT per-forward measurements.

Raw intervals retained, no 0.02 ms visibility floor. Cross-device margins inherit CUDA-to-host clock alignment uncertainty; exact raw events and source hashes accompany this figure.


LayerSkip CodeLlama-34B + AMD-Llama-135M-code | K1/K2 16/6 (throughput alternative) | Miss | UID humaneval_local_023_t0 | steps 6-7

Historical v1.0 59f46511 | exit 30 (0-based) | K1/K2 16/6 | G=M DS/PS 16/8 | C=3 | last | target GPUs=4 + draft GPU=1 | B=1, BF16, T=0.7

Red dashed line = next target request starts (observed deadline reference). Green circle = PS cache ready; triangle = draft ready to receive.

Both target steps and their DS/PS work share one time axis. Only the following request boundary is used for the second deadline.

In this measurement: no observed proxy computation / target graph_post overlap. Send enqueue does not measure transfer completion.

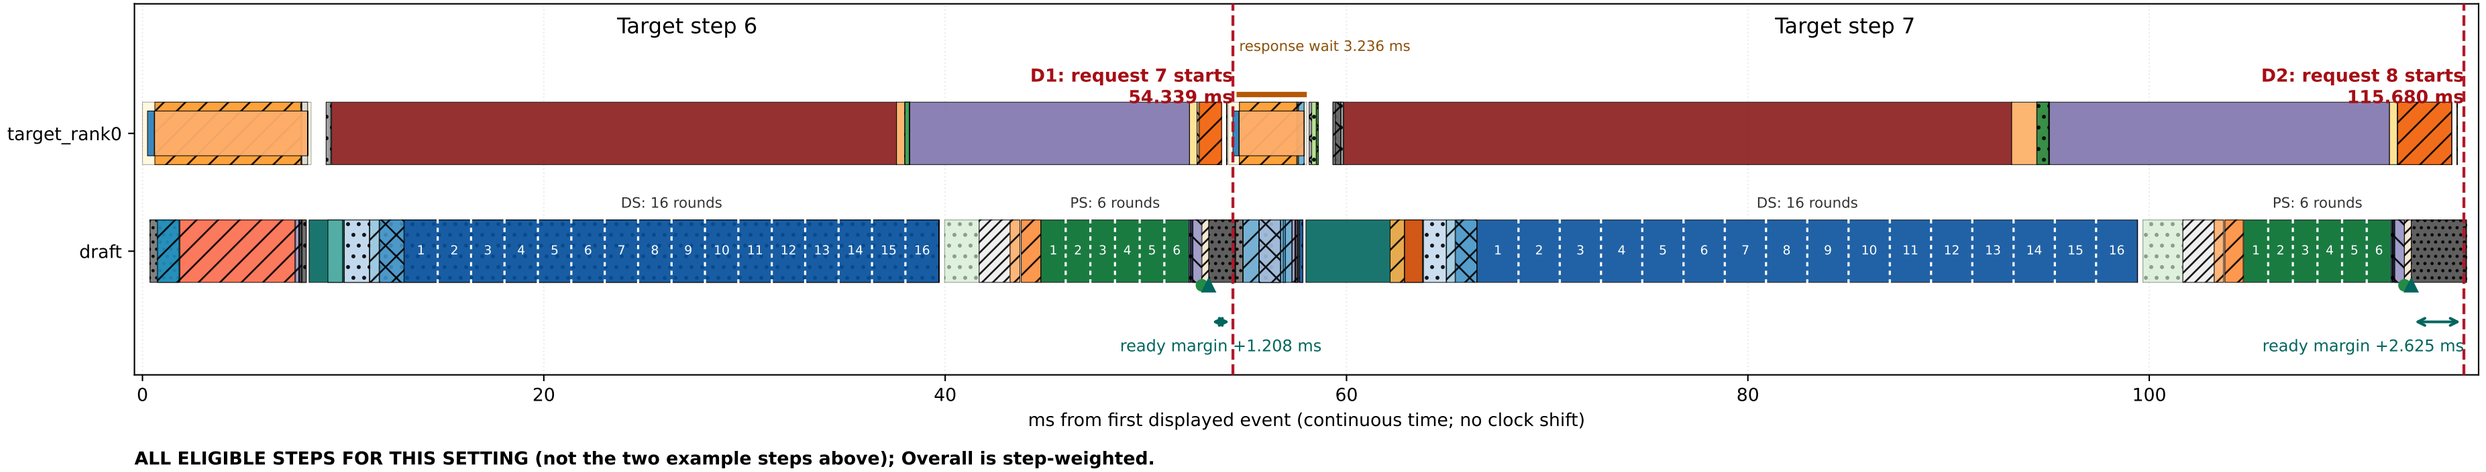

ALL ELIGIBLE STEPS FOR THIS SETTING (not the two example steps above); Overall is step-weighted.

Current outcome	Steps	Rate (%)	AL (tokens/step)	Profile TPS (tokens/s)
P1 hit	63	75.000	6.508	100.263
P2 hit	19	22.619	4.526	75.642
Miss	2	2.381	1.500	22.657
Overall	**84**	**97.619**	**5.940**	**93.122**

Rate = source / all steps; Overall rate = total hit (P1 + P2) / all. AL includes recovery/bonus. Profile TPS = emitted tokens / summed step seconds.

Current outcome	Steps	Step (ms)	DS total (ms)	DS spare* (ms)	DS graph/K1 (ms)	PS total (ms)	PS spare (ms)	PS graph/K2 (ms)
P1 hit	63	64.908	36.258	-5.479	2.059	14.165	-0.365	1.236
P2 hit	19	59.838	35.969	-6.511	2.058	14.526	-3.691	1.234
Miss	2	66.205	35.801	-8.284	1.867	13.198	-5.588	1.232
Overall	**84**	**63.792**	**36.182**	**-5.779**	**2.054**	**14.224**	**-1.241**	**1.235**

Step = current target request start -> next request start. *DS spare = proxy send-ready - DS end; PS spare = next request start - draft receive-ready.

Positive spare = early; negative = late. Graph/K includes sampling/selection, not isolated transformer latency. These are profiled-subset TPS, not full evaluation TPS.

Command-to-request gap (unprofiled)
PS dispatch gap (unprofiled)
PS prepare A: roots / visibility
PS prepare B: graph input buffers
Post-PS gap (unprofiled)
chain_accept
chain_proxy_graph_replay
draft_glue_replay
draft_recv_cmd
draft_recv_request
draft_response_pack
draft_send_chain_q
draft_send_fused
draft_send_parent_q_p1
draft_send_response
exit_logits
exit_proxy_launch
exit_proxy_side
final_logits
glue
graph_post
graph_pre
hit_cache_respond_hit_k1
hit_cache_respond_miss
merge_cache
p1_graph_replay
p1_prepare
p1_root_build
p1_slot_prepare
p2_cache_merge
p2_graph_replay
p2_output_convert
phase1_build
phase2_build
proxy_send_enqueue
proxy_wait
target_postprocess
target_recv_chain_q
target_recv_fused
target_recv_parent_q_p1
target_recv_response_wait
target_response_meta_read
target_response_received
target_send_request
target_spec_wait
tree_accept_walk
tree_hit_pack_served_p1
tree_hit_parent_q_gather_p1
tree_hit_rerank_p1
tree_kv_restore
tree_parent_q_select
tree_prep
tree_proxy_graph_replay
tree_proxy_topology_prepare
tree_replay
tree_verify_attention_buffers
tree_verify_mask_prepare
tree_verify_meta_cpu
tree_wire_parse_validate
verify_accept_prep
verify_sample_accept
verify_setup

Hatched gaps = unprofiled elapsed intervals, NOT proven GPU idle. Nested spans are not additive. White graph dividers show counts, NOT per-forward measurements.

Raw intervals retained, no 0.02 ms visibility floor. Cross-device margins inherit CUDA-to-host clock alignment uncertainty; exact raw events and source hashes accompany this figure.