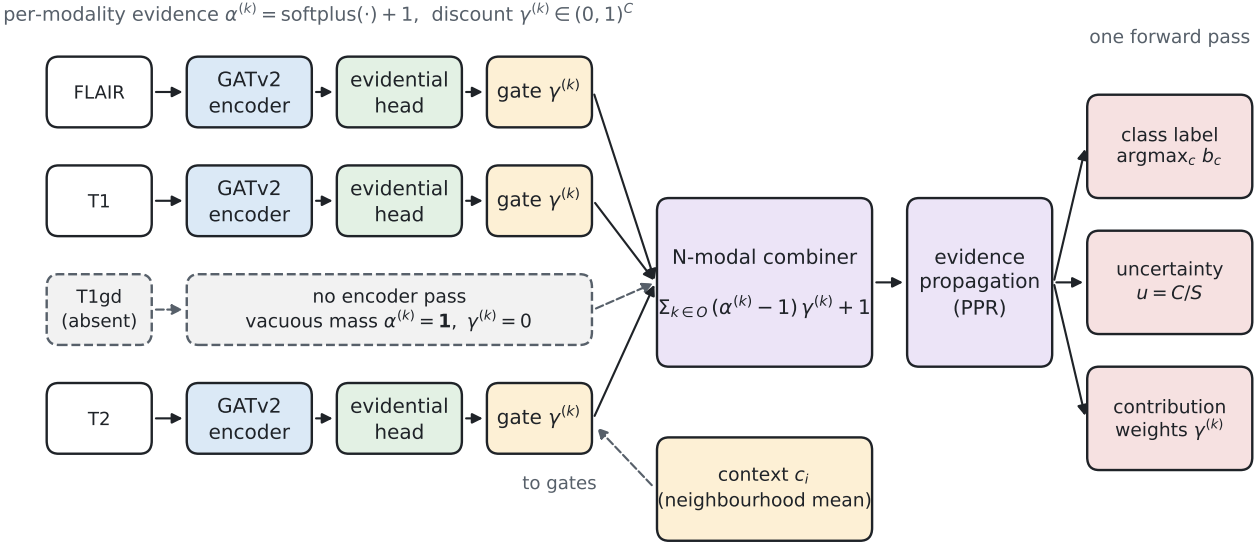
per-modality evidence $\alpha^{(k)} = \mathrm{softplus}(\cdot) + 1$, discount $\gamma^{(k)} \in (0,1)^C$
one forward pass
FLAIR
GATv2 encoder
evidential head
gate $\gamma^{(k)}$
T1
GATv2 encoder
evidential head
gate $\gamma^{(k)}$
T1gd (absent)
no encoder pass
vacuous mass $\alpha^{(k)} = \mathbf{1}$, $\gamma^{(k)} = 0$
T2
GATv2 encoder
evidential head
gate $\gamma^{(k)}$
to gates
N-modal combiner
$\Sigma_{k \in O} (\alpha^{(k)} - 1)\, \gamma^{(k)} + 1$
context c_i
(neighbourhood mean)
evidence propagation (PPR)
class label
$\mathrm{argmax}_c\ b_c$
uncertainty
$u = C/S$
contribution weights $\gamma^{(k)}$