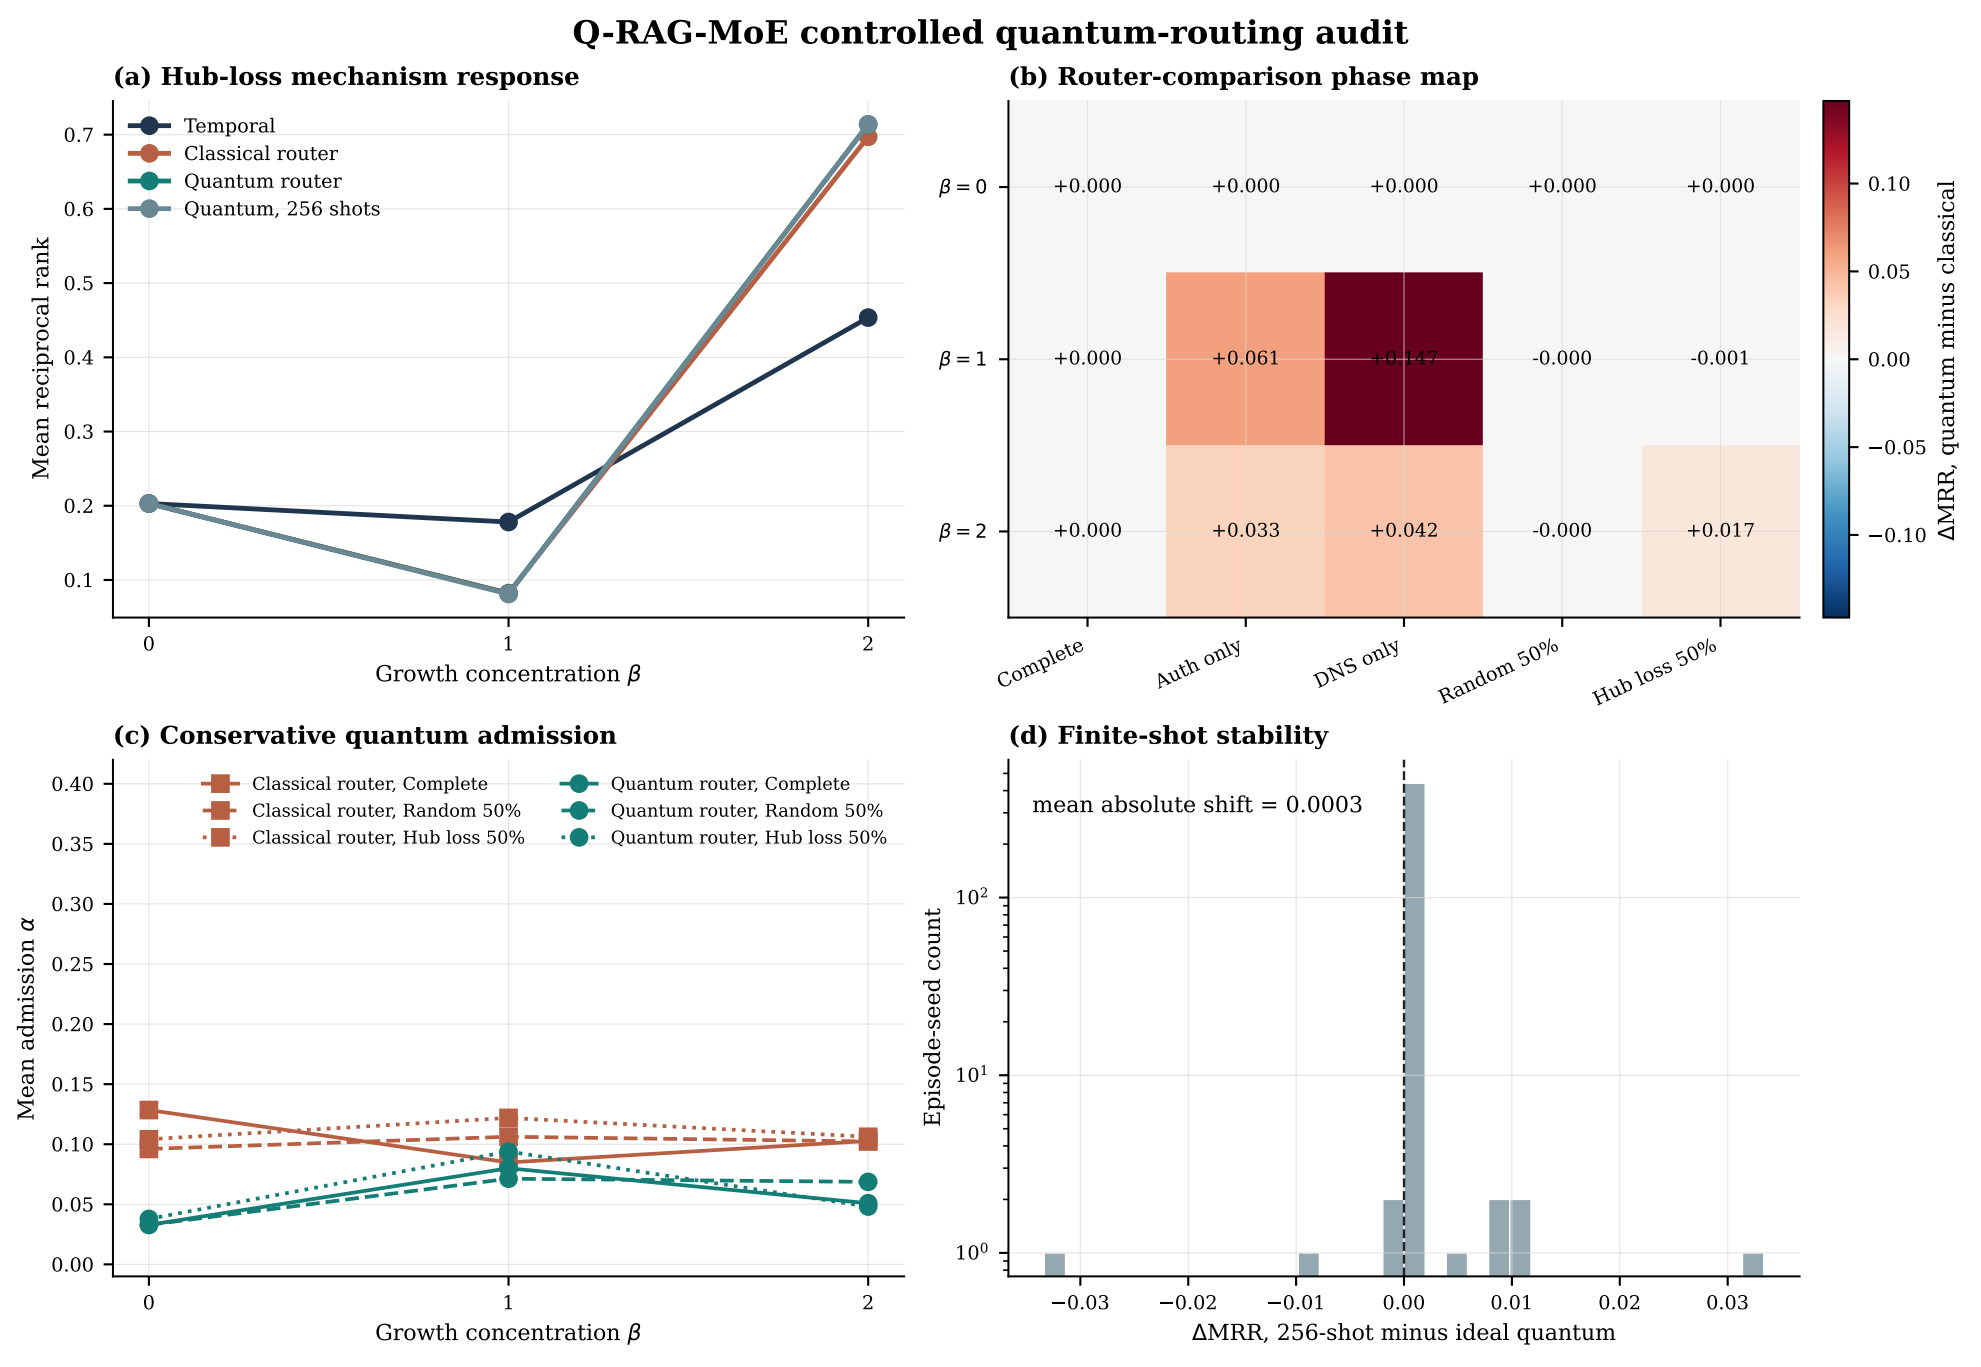
Q-RAG-MoE controlled quantum-routing audit
(a) Hub-loss mechanism response
Temporal
Classical router
Quantum router
Quantum, 256 shots
Mean reciprocal rank
Growth concentration β
(b) Router-comparison phase map
β = 0
β = 1
β = 2
+0.000
+0.000
+0.000
+0.000
+0.000
+0.000
+0.061
+0.147
-0.000
-0.001
+0.000
+0.033
+0.042
-0.000
+0.017
Complete
Auth only
DNS only
Random 50%
Hub loss 50%
ΔMRR, quantum minus classical
(c) Conservative quantum admission
Classical router, Complete
Classical router, Random 50%
Classical router, Hub loss 50%
Quantum router, Complete
Quantum router, Random 50%
Quantum router, Hub loss 50%
Mean admission α
Growth concentration β
(d) Finite-shot stability
mean absolute shift = 0.0003
Episode-seed count
ΔMRR, 256-shot minus ideal quantum