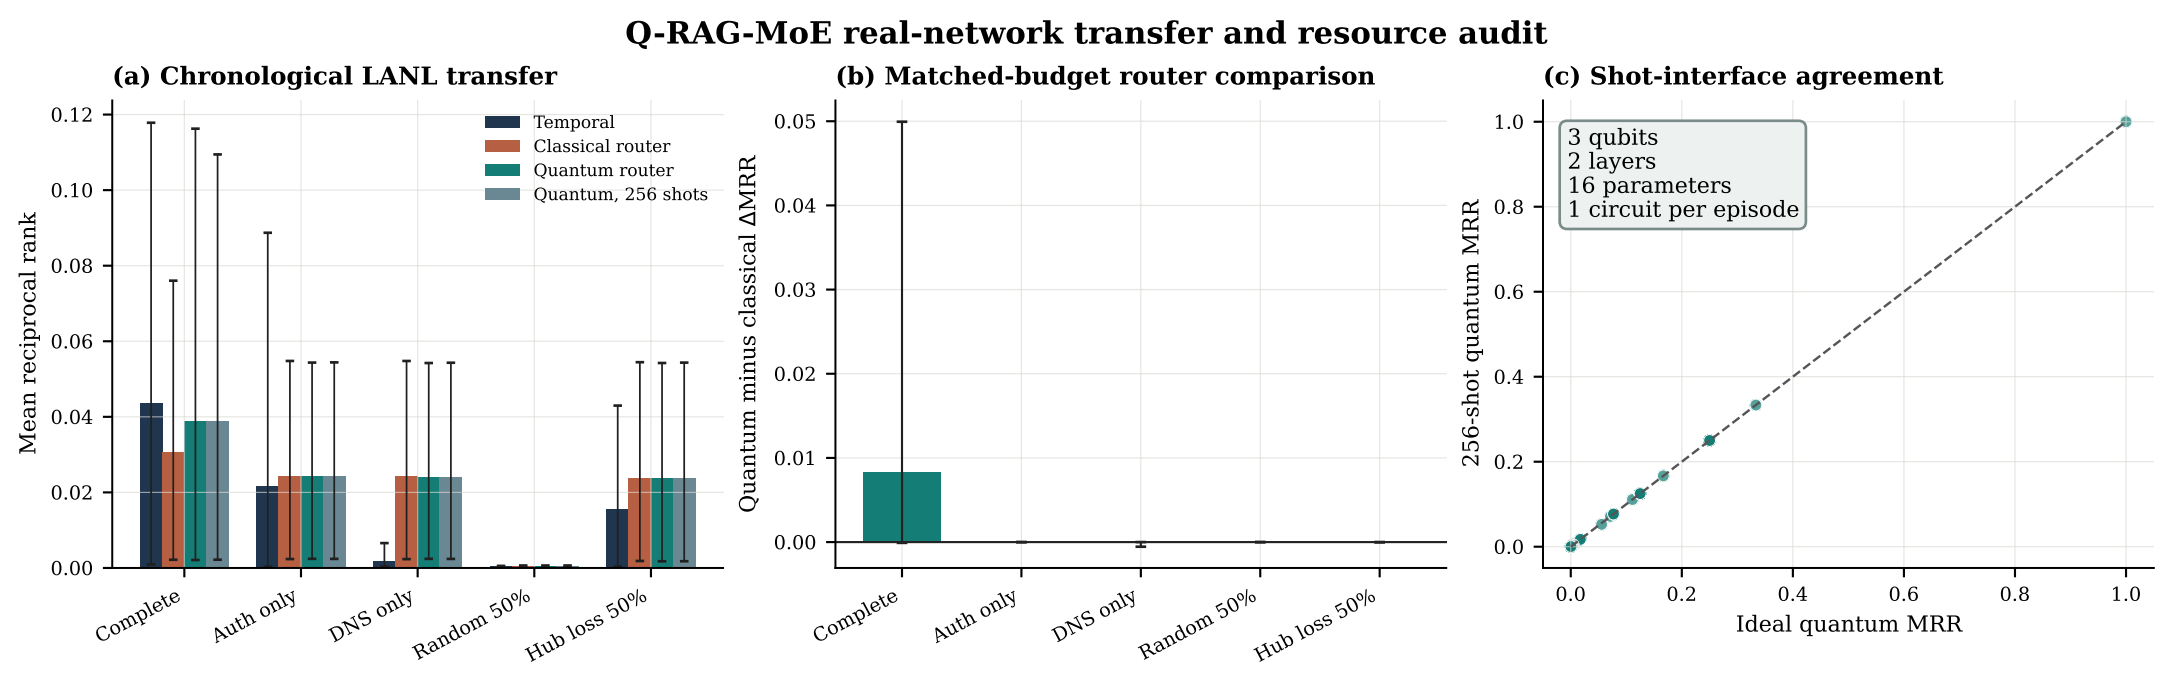
Q-RAG-MoE real-network transfer and resource audit
(a) Chronological LANL transfer
Mean reciprocal rank
Temporal
Classical router
Quantum router
Quantum, 256 shots
Complete
Auth only
DNS only
Random 50%
Hub loss 50%
(b) Matched-budget router comparison
Quantum minus classical ΔMRR
(c) Shot-interface agreement
3 qubits
2 layers
16 parameters
1 circuit per episode
256-shot quantum MRR
Ideal quantum MRR