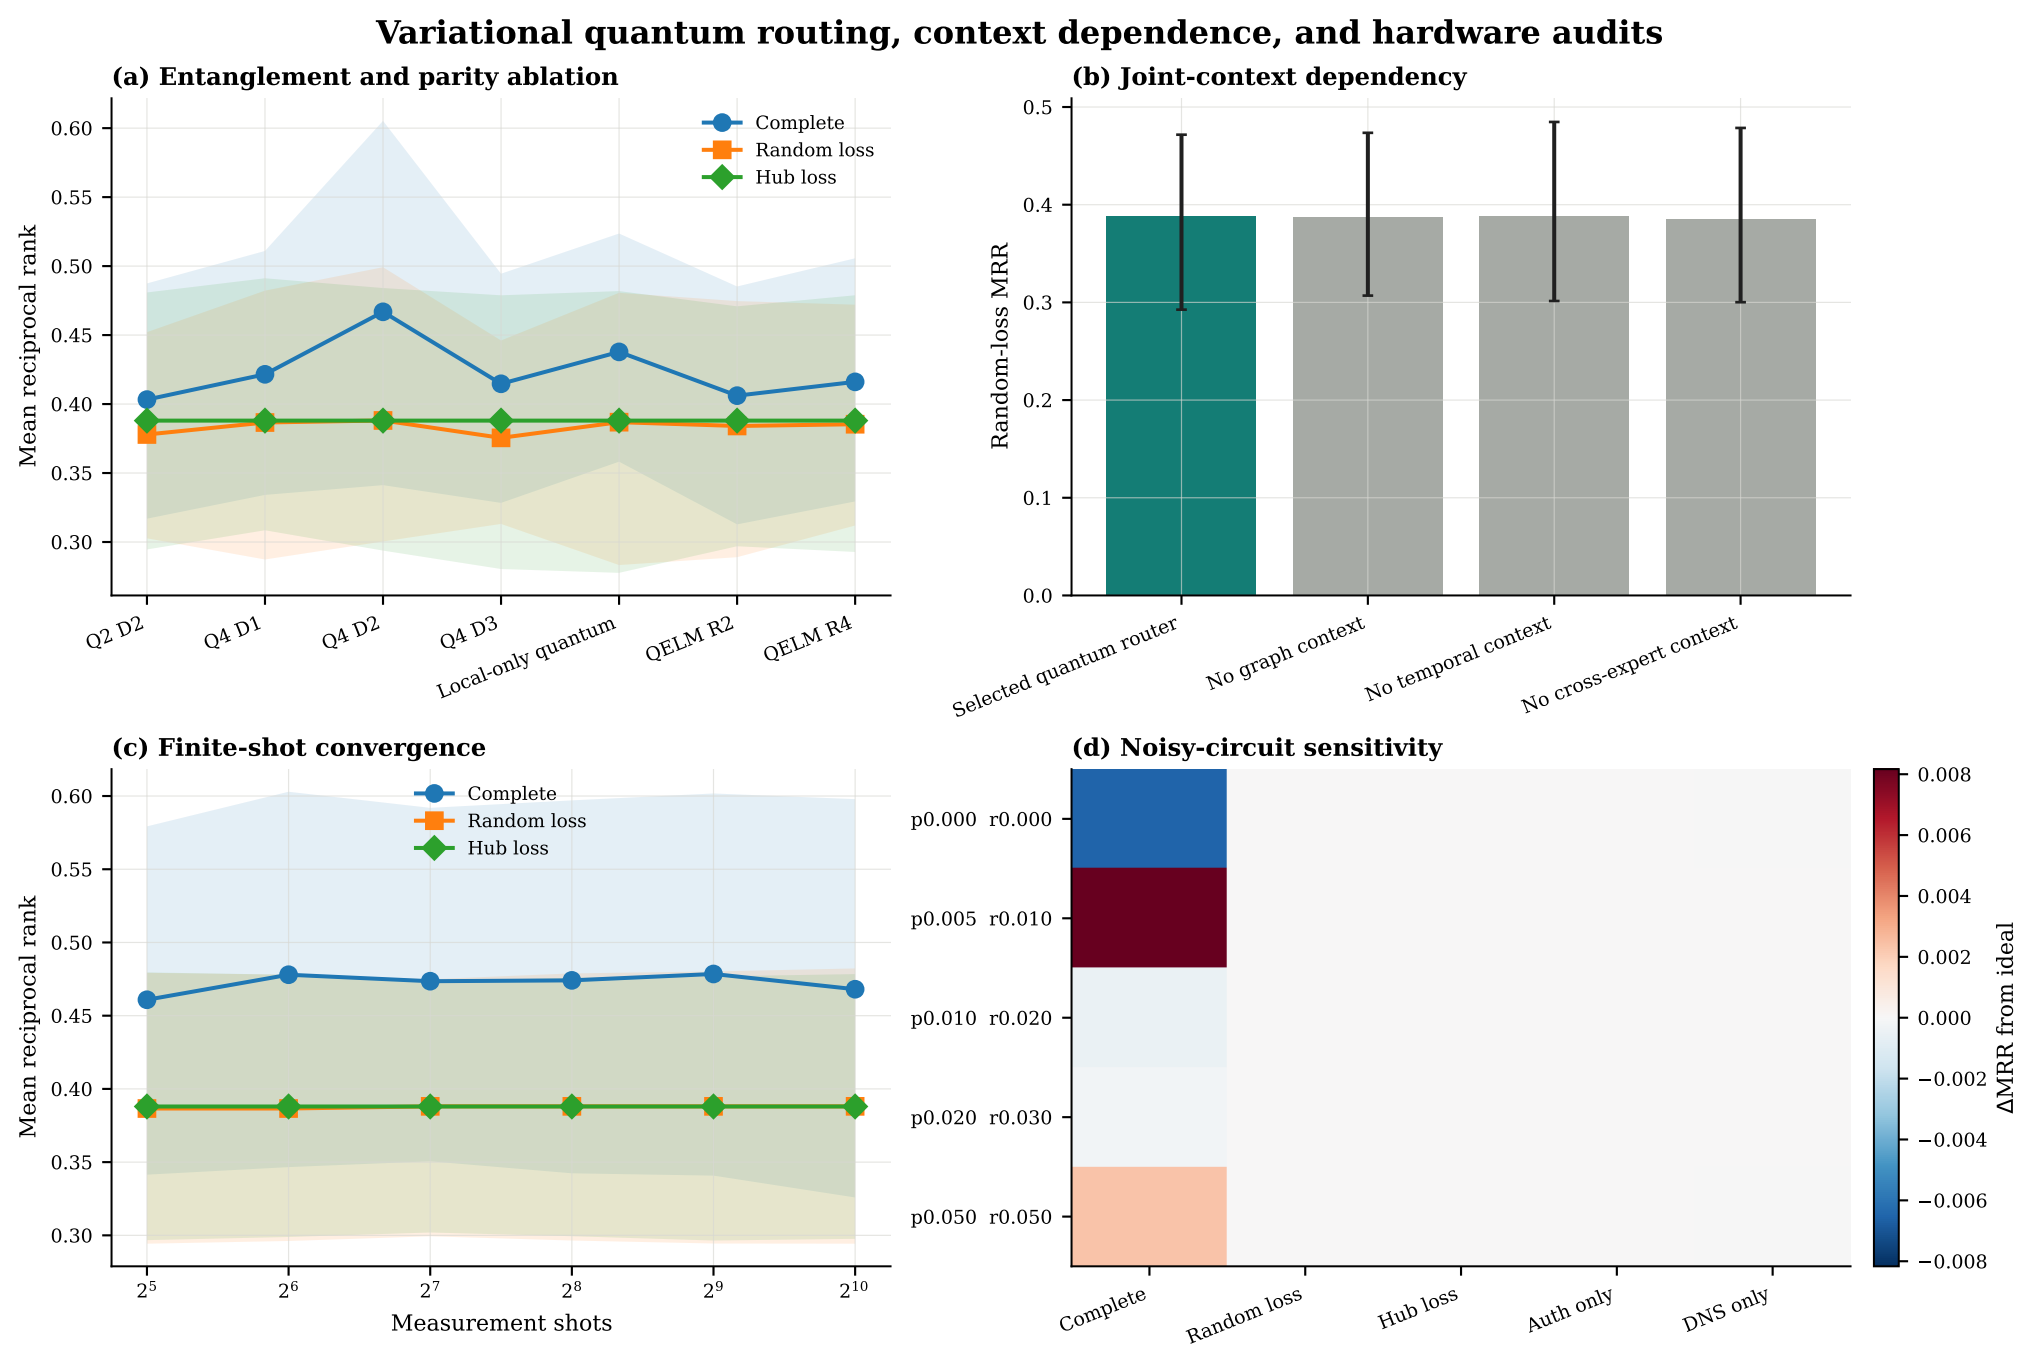
Variational quantum routing, context dependence, and hardware audits
(a) Entanglement and parity ablation
Mean reciprocal rank
Complete
Random loss
Hub loss
Q2 D2
Q4 D1
Q4 D2
Q4 D3
Local-only quantum
QELM R2
QELM R4
(b) Joint-context dependency
Random-loss MRR
Selected quantum router
No graph context
No temporal context
No cross-expert context
(c) Finite-shot convergence
Mean reciprocal rank
Measurement shots
(d) Noisy-circuit sensitivity
p0.000 r0.000
p0.005 r0.010
p0.010 r0.020
p0.020 r0.030
p0.050 r0.050
Complete
Random loss
Hub loss
Auth only
DNS only
ΔMRR from ideal