


Sigaya, Kyle Angelo G.

2021-1-02451

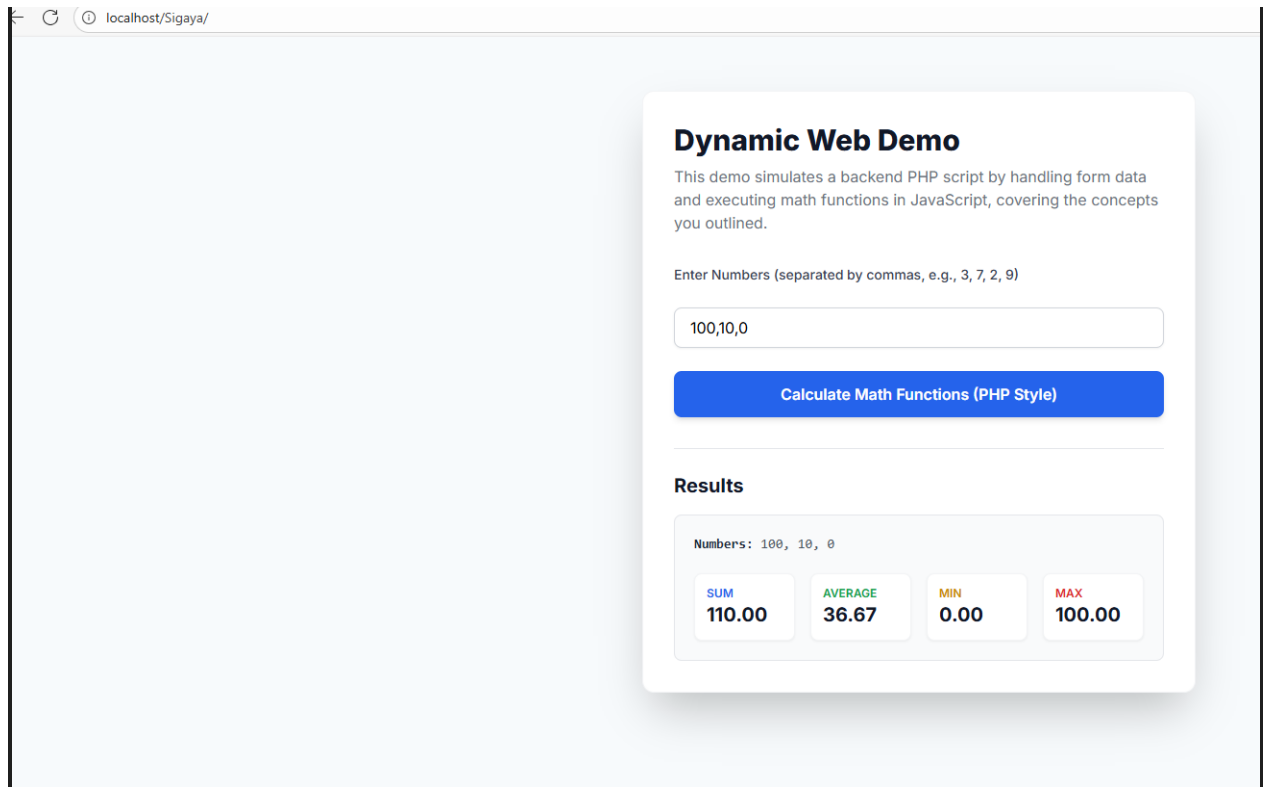

```
<!DOCTYPE html>

<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>PHP Concepts: Math Functions & Form Handling</title>

  <script src="https://cdn.tailwindcss.com"></script>
  <style>

    @import
url('https://fonts.googleapis.com/css2?family=Inter:wght@100..900&display=swap');
    body {
      font-family: 'Inter', sans-serif;
      background-color: #f7fafc;
    }
  </style>
</head>
<body class="min-h-screen flex items-start justify-center p-4">
```

```

    <div class="w-full max-w-xl bg-white shadow-2xl rounded-xl p-8 mt-10 border
border-gray-100">

        <h1 class="text-3xl font-extrabold text-gray-900 mb-2">Dynamic Web
Demo</h1>
        <p class="text-gray-500 mb-8">
            This demo simulates a backend PHP script by handling form data and
executing math functions in JavaScript, covering the concepts you outlined.
        </p>

        <div class="space-y-6">
            <label for="numberInput" class="block text-sm font-medium text-gray-
700">
                Enter Numbers (separated by commas, e.g., 3, 7, 2, 9)
            </label>
            <input
                type="text"
                id="numberInput"
                placeholder="e.g., 5, 12, 8, 25.5, 3"
                value="3, 7, 2, 9, 5.25"
                class="w-full px-4 py-2 border border-gray-300 rounded-lg
focus:ring-blue-500 focus:border-blue-500 transition duration-150 shadow-sm"
            >

            <button
                id="calculateButton"
                onclick="handleFormSubmission()"
                class="w-full bg-blue-600 hover:bg-blue-700 text-white font-
semibold py-3 rounded-lg shadow-md transition duration-200 focus:outline-none
focus:ring-4 focus:ring-blue-500 focus:ring-opacity-50"
            >
                Calculate Math Functions (PHP Style)
            </button>
        </div>

        <div id="resultsContainer" class="mt-8 pt-6 border-t border-gray-200">
            <h2 class="text-xl font-bold text-gray-900 mb-4">Results</h2>

            <div id="outputBox" class="bg-gray-50 border border-gray-200 rounded-
lg p-5 transition duration-300 min-h-[100px] flex items-center justify-center">
                <p id="initialMessage" class="text-gray-400 italic">Click
'Calculate' to see results.</p>

```

```

        <div id="calculationResults" class="hidden w-full space-y-3">

            </div>
        </div>

    </div>
</div>

<script>

    const base64ToArrayBuffer = (base64) => {
        const binary_string = window.atob(base64);
        const len = binary_string.length;
        const bytes = new Uint8Array(len);
        for (let i = 0; i < len; i++) {
            bytes[i] = binary_string.charCodeAt(i);
        }
        return bytes.buffer;
    }

    function parseNumbers(inputString) {
        if (!inputString) return [];
        return inputString
            .split(',')
            .map(s => s.trim())
            .filter(s => s !== '')
            .map(s => parseFloat(s))
            .filter(n => !isNaN(n));
    }

    function handleFormSubmission() {
        const inputElement = document.getElementById('numberInput');
        const resultsDiv = document.getElementById('calculationResults');
        const initialMessage = document.getElementById('initialMessage');
        const outputBox = document.getElementById('outputBox');

        const numbers = parseNumbers(inputElement.value);

        initialMessage.classList.add('hidden');
        resultsDiv.classList.remove('hidden');

        if (numbers.length === 0) {

```

```

        resultsDiv.innerHTML = '<p class="text-red-500 font-medium">Please enter a valid list of numbers.</p>';
        outputBox.classList.remove('bg-gray-50');
        outputBox.classList.add('bg-red-50');
        return;
    }

    outputBox.classList.remove('bg-red-50');
    outputBox.classList.add('bg-gray-50');

    const sum = numbers.reduce((acc, curr) => acc + curr, 0);

    const avg = sum / numbers.length;

    const minVal = Math.min(...numbers);
    const maxVal = Math.max(...numbers);

    const format = (n) => n.toFixed(2);

    resultsDiv.innerHTML = `
        <p class="text-sm text-gray-600 font-mono break-all">
            <span class="font-bold text-gray-800">Numbers:</span>
        </p>
        <div class="grid grid-cols-2 md:grid-cols-4 gap-4 pt-2">
            <div class="p-3 bg-white rounded-lg shadow-sm border border-gray-100">
                <p class="text-xs font-semibold text-blue-600 uppercase">Sum</p>
                <p class="text-xl font-bold text-gray-900">${format(sum)}</p>
            </div>
            <div class="p-3 bg-white rounded-lg shadow-sm border border-gray-100">
                <p class="text-xs font-semibold text-green-600 uppercase">Average</p>
                <p class="text-xl font-bold text-gray-900">${format(avg)}</p>
            </div>
        </div>
    `;

```

```

        <p class="text-xs font-semibold text-yellow-600
uppercase">Min</p>
        <p class="text-xl font-bold text-gray-
900">${format(minVal)}</p>
    </div>
    <div class="p-3 bg-white rounded-lg shadow-sm border border-
gray-100">
        <p class="text-xs font-semibold text-red-600
uppercase">Max</p>
        <p class="text-xl font-bold text-gray-
900">${format(maxVal)}</p>
    </div>
</div>
    `;
}

    window.onload = function() {
        handleFormSubmission();
    };

</script>
</body>
</html>

```