CSS Essentials

Alexander Thalhammer | @LX_T

Essentials

- Shorthands
- Box model
- Box sizing
- Display & pos.
- Width & height
- Pseudo classes
- Pseudo elements
- Grouping styles
- BEM syntax
- Important props

Agenda

Shorthand Props

- border: 10px solid gold;
  - border-width: 10px; border-style: solid; border-color: gold

- margin:
- padding:

- background:

- be careful they overwrite (excluded) defaults

Shorthand margin (same as padding)

- margin: 10px;
- margin: 10px 20px;
- margin: 10px 20px 15px;
- margin: 10px 20px 15x 5px;

Box Model

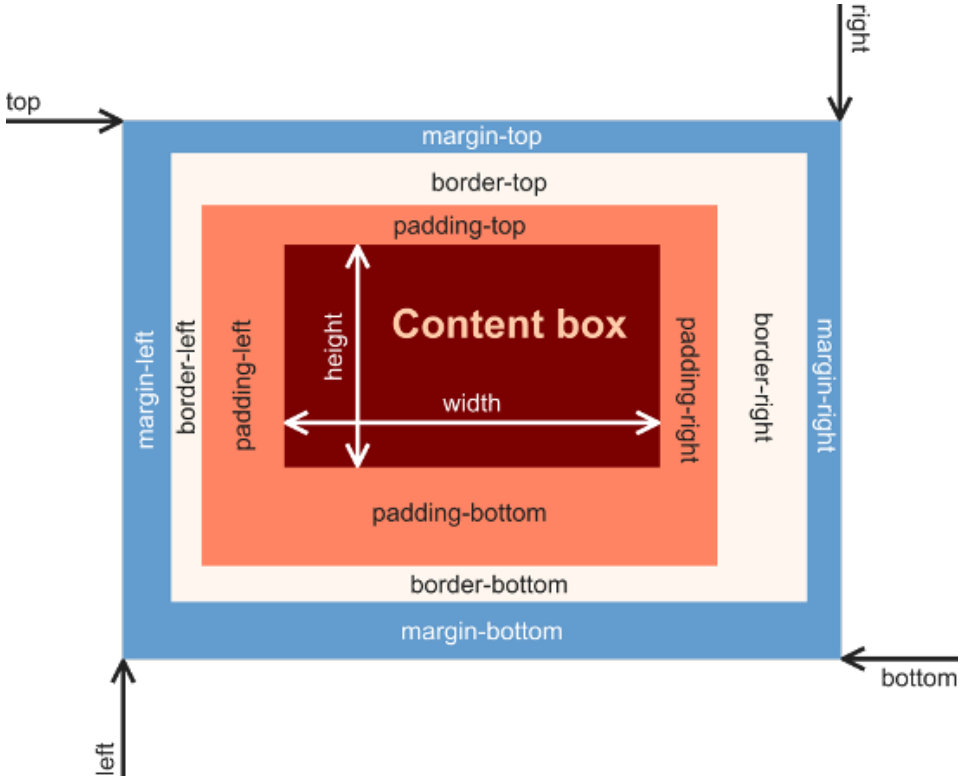

https://c-arts-modelle.de/schlaufuchs_web/html_css/css_grundstruktur/CSS_box_modell.html

Demo

Box Model

ANGULAR
ARCHITECTS

Margin Collapse

```
<style>
    p {
        margin-top: 24px;
        margin-bottom: 24px;
    }
</style>

<p>Paragraph One</p>
<p>Paragraph Two</p>
```

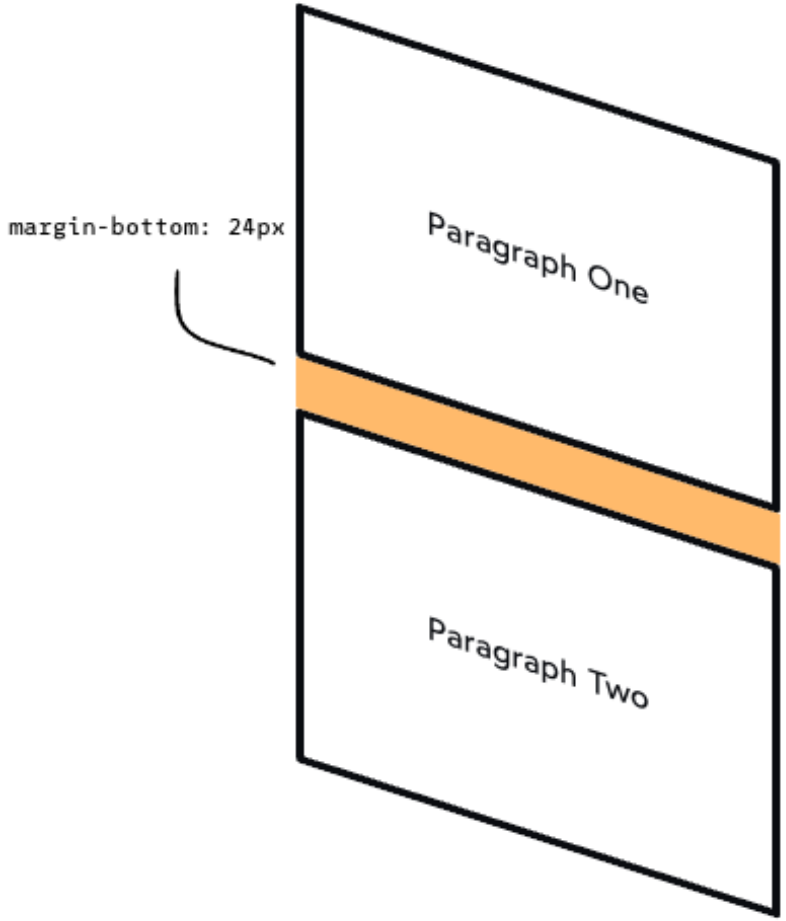

only block elements!

https://www.joshwcomeau.com/css/rules-of-margin-collapse/

Box Sizing

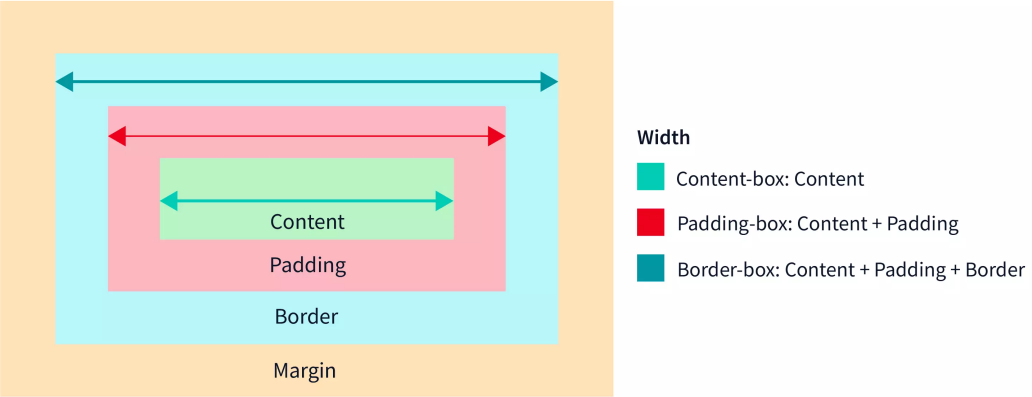

SCALER Topics

https://www.scaler.com/topics/css/box-sizing-in-css/

```
* { box-sizing: border-box }
```

Demo

Box Model & Box Sizing

ANGULAR
ARCHITECTS

Display

- block
- inline
- inline-block
- none
- …

https://developer.mozilla.org/en-US/docs/Web/CSS/display

ANGULAR
ARCHITECTS

Positioning I

- position:
  - static (default)
  - relative
  - fixed (out of flow)
  - absolute (oof)
  - sticky
    - relative, then fixed

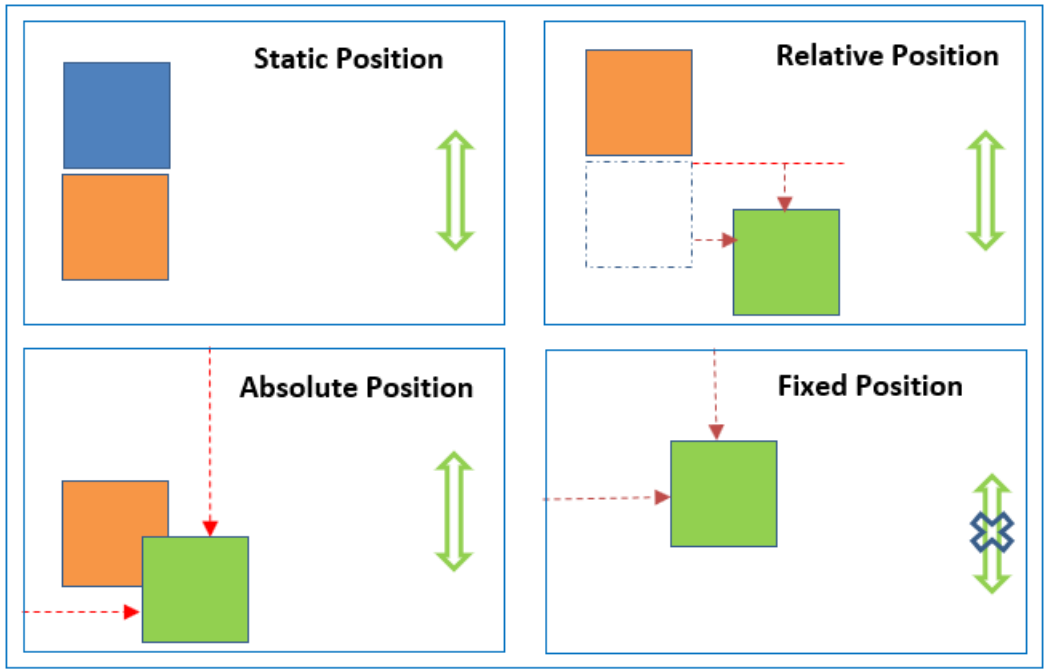

https://www.csssolid.com/css-position.html

Positioning II

- position:
  - relative | fixed | absolute | sticky

- top
- right
- bottom
- left

- z-index (the higher the value the more on top)

Width & Height

- **block elements** (div, h1-h6, ol, ul, pre, form) vs
- **inline** (span, em, strong, a, img, q, input)

- display: inline-block

- width (px or % or ...)
  - default 100% for block elements, can be reduced
  - content fit for inline, cannot be changed

- height (px or ... ?)
  - content fit for b.e., can have fixed or relative (of parent fixed) values
  - content fit for inline, cannot be changed

Pseudo classes

- a:hover
- a:active
- input:focus
- :first-child / :last-child
- :first-of-type / :last-of-type
- :not()

https://developer.mozilla.org/en-US/docs/Web/CSS/Pseudo-classes

Pseudo elements

- a::before & a::after
- p::first-letter
- div::first-line

https://developer.mozilla.org/en-US/docs/Web/CSS/Pseudo-elements

Grouping styles

```
a::before,
a::after {
  // styles
}
```

BEM syntax

.my-class__child--type

```
.block {}
.block__element {}
.block__element--modifier {}
.block--modifier {}
```

https://chettriyuvraj.hashnode.dev/bem-naming-convention-in-css

Important properties (know by <3)

- display & position
- width & height
- margin, border, padding
- color, background-color
- font, font-weight, text-decoration

And some more ☺

- vertical-align: top | middle | bottom;
- border-radius: 5px | 50%;
- list-style: none;
- box-shadow: 2px 2px 2px 2px rgba(0, 0, 0, 0.5);
- float: left; ... clear: both; // but there are better options :-P
- overflow: hidden | scroll;

Demo

Properties

ANGULAR
ARCHITECTS

Best Practices

- Be careful with collapsing margins
- Use shorthands where possible
- Use box-sizing: border-box globally
- Use the BEM syntax
- Know important properties by <3
- Order and group props consistently

Tips

Essentials

- Shorthands
- Box model
- Box sizing
- Display & pos.
- Width & height
- Pseudo classes
- Pseudo elements
- Grouping styles
- BEM syntax
- Important props

Summary

Questions?

ANGULAR
ARCHITECTS