



ANGULAR  
**ARCHITECTS**  
INSIDE KNOWLEDGE

# Template-driven Forms and Validation

Alex Thalhammer

# Outline

- Approaches
- Template-driven forms
  - How to use
- Reactive forms
  - How to use



# Forms in Angular

## Template-driven

- Add ngModel within the HTML-template
- Angular creates object tree for form
- FormsModule

## Reactive

- We create the object tree in our component (.ts)
- More control, more power
- ReactiveFormsModule



# Template-driven Forms



# Template-driven Forms

```
export class FlightSearchComponent {  
  from = "";  
  to = "";  
  
  constructor(private readonly flightService: FlightService) {  
    this.from = 'Graz';  
    this.to = 'Hamburg';  
  }  
}
```



# Template-driven Forms

```
export class FlightSearchComponent {  
  from = 'Graz';  
  to = 'Hamburg';  
  
  private readonly flightService = inject(FlightService);  
}
```




# View

```
<form>

  <input type="text" name="from"
    [(ngModel)]="from" required minlength="3">


  [...]

</form>
```

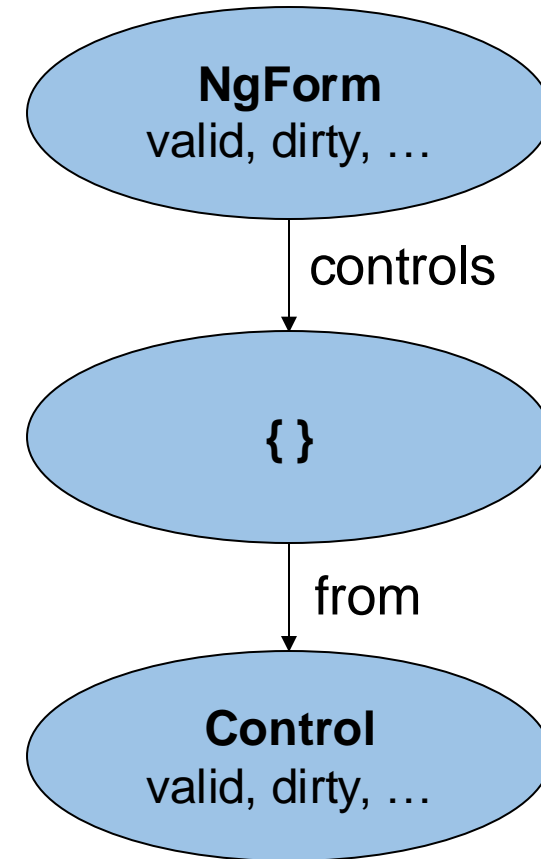

# View

```
<form #flightSearchForm="ngForm">  
  <input type="text" name="from"  
    [(ngModel)]="from" required minlength="3">  
  [...]  
</form>
```

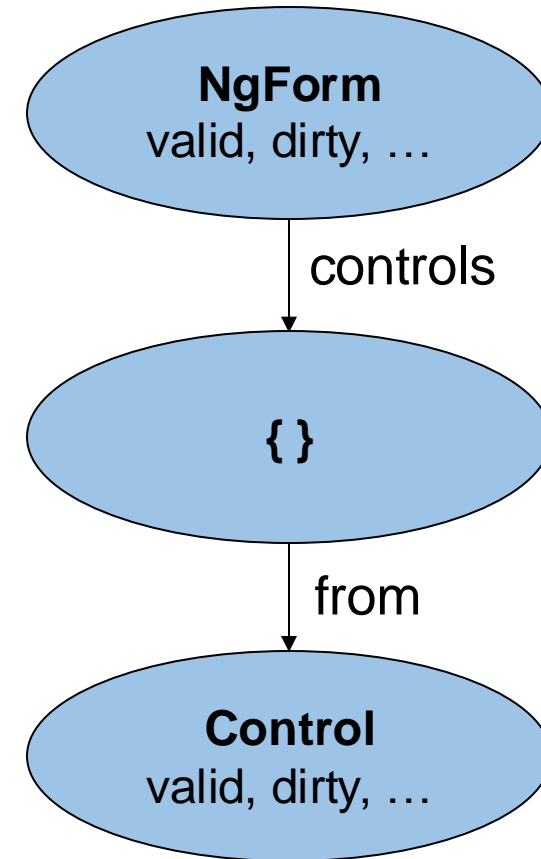




# View

```
<form #f="ngForm">

  <input type="text" name="from"
    [(ngModel)]="from" required minlength="3">

    @if (f.controls['from'].invalid) {
      ...From error...
    }
</form>
```

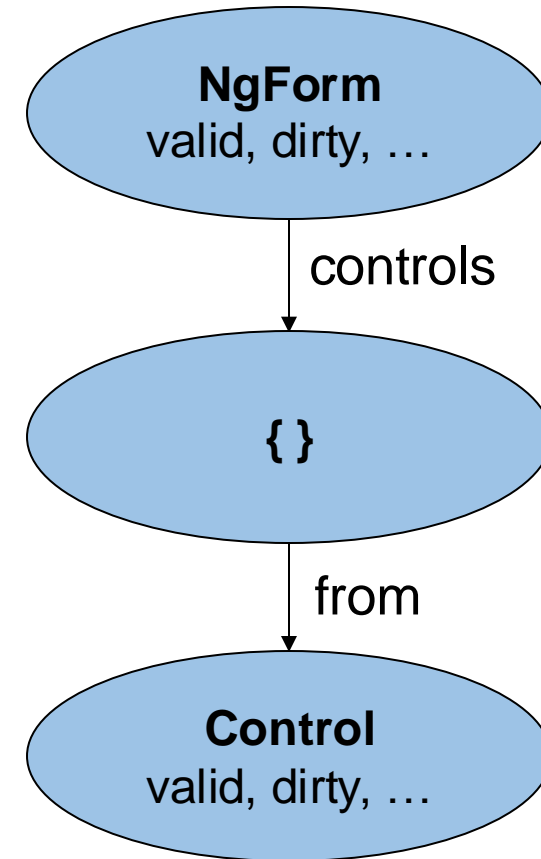


# View

```
<form #f="ngForm">

  <input type="text" name="from"
    [(ngModel)]="from" required minlength="3">

  @if (f.controls['from'].invalid) {
    ...From error...
  }

  @if (f.controls['from'].errors['required']) {
    ...From is required...
  }
</form>
```

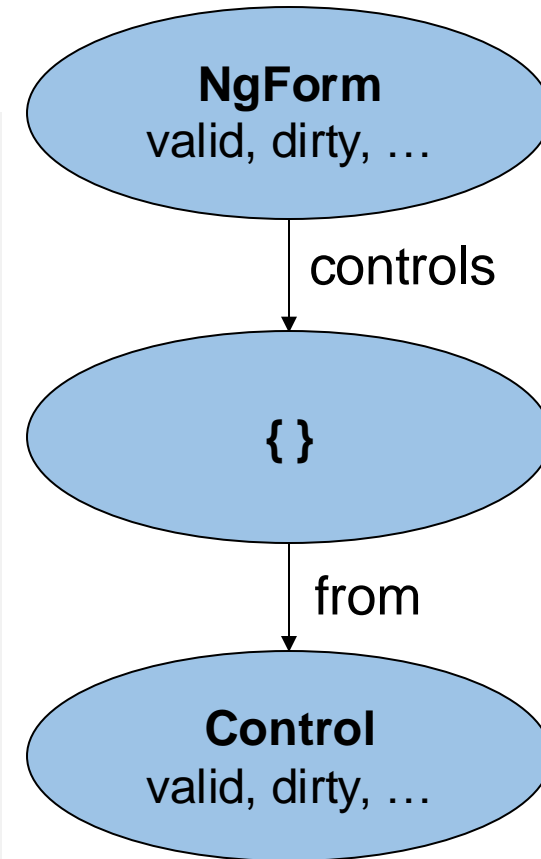

# DEMO



ANGULAR  
**ARCHITECTS**  
INSIDE KNOWLEDGE



SOFTWARE  
**ARCHITECT**

# LAB



ANGULAR  
**ARCHITECTS**  
INSIDE KNOWLEDGE



SOFTWARE  
**ARCHITECT**

# Custom Validators



# Directives

- Add behaviour to a component or any other HTML tag
- Built in examples
  - Attribute directives: `ngModel`, `ngClass`, `ngStyle`
  - Structural directives: `*ngIf`, `*ngFor`, `*ngSwitch`
- Custom attribute directives
  - E.g. validation directive
- No template (in contrast to components)

# Validation directive

```
<input [(ngModel)]="from" name="from" city>
```



# Validation directive

```
@Directive({
  selector: 'input[city]'
})
export class CityValidatorDirective implements Validator {
  validate(c: AbstractControl): ValidationErrors | null {
    const value = c.value;

    [...]

    if (...) return { city: true }; // error

    return null; // no error
  }
}
```





# Validation directive

```
@Directive({
  selector: 'input[city]',
  providers: [{ provide: NG_VALIDATORS,
    useExisting: CityValidatorDirective,
    multi: true }]
})
export class CityValidatorDirective implements Validator {
  validate(c: AbstractControl): ValidationErrors | null {
    const value = c.value;

    [...]

    if (...) return {city: true}; --> .errors['city']

    return null; // no error
  }
}
```

# Using parameter

```
<input [(ngModel)]="from" name="from"  
      [city]="['Graz', 'Hamburg', 'Zürich']">
```



# Using parameter

```
@Directive({
  selector: 'input[city]',
  providers: [{ provide: NG_VALIDATORS,
                 useExisting: CityValidatorDirective,
                 multi: true }]
})
export class CityValidatorDirective implements Validator {

  @Input() city: string[] = [];

  validate(c: AbstractControl): ValidationErrors | null {
    [...]
  }
}
```



# Using parameters

```
@Directive({
  selector: 'input[city]',
  providers: [{ provide: NG_VALIDATORS,
                 useExisting: CityValidatorDirective,
                 multi: true }]
})
export class CityValidatorDirective implements Validator {

  @Input() city: string[] = [];
  @Input() cityStrategy = '';

  validate(c: AbstractControl): ValidationErrors | null {
    [...]
  }
}
```



# Using parameters

```
<input [(ngModel)]="from" name="from"  
      [city]="['Graz', 'Hamburg', 'Zürich']" cityStrategy="strict">
```



# DEMO



ANGULAR  
**ARCHITECTS**  
INSIDE KNOWLEDGE



SOFTWARE  
**ARCHITECT**

# Asynchronous validation directives

```
@Directive({
  selector: 'input[asyncCity]',
  providers: [ ... ]
})
export class AsyncCityValidatorDirective implements AsyncValidator {
  validate(control: AbstractControl): Observable<ValidationErrors | null> {
    [...]
  }
}
```



# Asynchronous validation directives

Token: NG\_ASYNC\_VALIDATORS



# DEMO



ANGULAR  
**ARCHITECTS**  
INSIDE KNOWLEDGE



SOFTWARE  
**ARCHITECT**

# Multifield Validators

```
@Directive({
  selector: 'form[roundTrip]',
  providers: [ ... ]
})
export class RoundTripValidatorDirective implements Validator {
  validate(control: AbstractControl): ValidationErrors | null {
    [...]
  }
}
```



# Multifield Validators

```
export class RoundTripValidatorDirective implements Validator {  
  validate(control: AbstractControl): ValidationErrors | null {  
    const form = control as FormGroup;  
  
    const from = form.controls['from'];  
    const to = form.controls['to'];  
  
    if (!from || !to) {  
      return null;  
    }  
  
    [...]  
  }  
}
```



# Multifield Validators

```
export class RoundTripValidatorDirective implements Validator {  
  validate(control: AbstractControl): ValidationErrors | null {  
    const group = control as FormGroup;  
  
    const from = group.controls['from'];  
    const to = group.controls['to'];  
  
    if (!from || !to) return null;  
  
    if (from.value && from.value === to.value) return { roundTrip: true };  
  
    return null;  
  }  
}
```



# DEMO



ANGULAR  
**ARCHITECTS**  
INSIDE KNOWLEDGE



SOFTWARE  
**ARCHITECT**

# LAB



ANGULAR  
**ARCHITECTS**  
INSIDE KNOWLEDGE



SOFTWARE  
**ARCHITECT**