



Azure – Proxmox Notes

1. Create a Debian 12 x64 virtual machine in Microsoft Azure.
 - VM Size: Standard D4s v3
 - RAM: 16 GB
2. SSH into the VM:
`ssh rdridi@20.68.169.72`
3. Update and upgrade the system:
`sudo apt update && sudo apt full-upgrade -y`
`sudo reboot`
4. Verify that virtualization support is enabled:
`egrep -c '(vmx|svm)' /proc/cpuinfo`
The returned value should be greater than 1.
Reference: [linux - How to detect if VT-X has been turned on in the BIOS? - GeeksforGeeks](#)
5. Install the required packages:
`sudo apt install wget curl gnupg2 software-properties-common apt-transport-https ca-certificates -y`
6. Add the Proxmox repository:
`echo "deb http://download.proxmox.com/debian/pve bookworm pve-no-subscription" |`
`sudo tee /etc/apt/sources.list.d/pve-install-repo.lis`
7. Import the Proxmox repository key:
`sudo wget https://enterprise.proxmox.com/debian/proxmox-release-bookworm.gpg`
`-O /etc/apt/trusted.gpg.d/proxmox-release-bookworm.gpg`
Reference [How to install Proxmox on Debian 12 - IONOS](#)
8. Update package lists and verify available upgrades:
`sudo apt update`
`apt list --upgradable`
9. Install Proxmox VE:
`sudo apt install proxmox-ve postfix open-iscsi -y`

10. When prompted during installation, select:

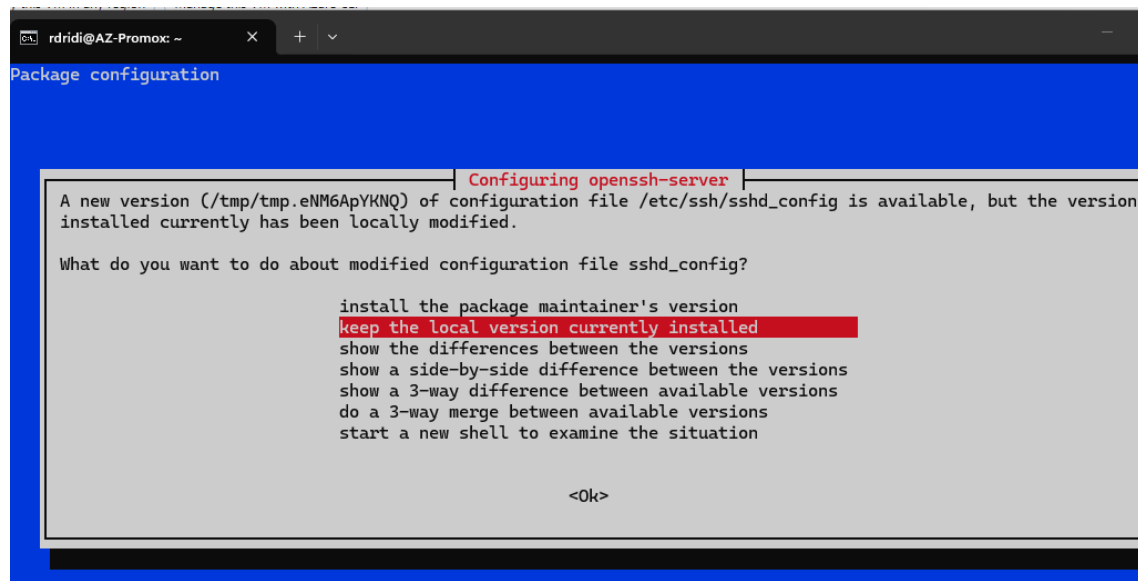

11. Add an Azure firewall rule to allow inbound traffic on port 8006.

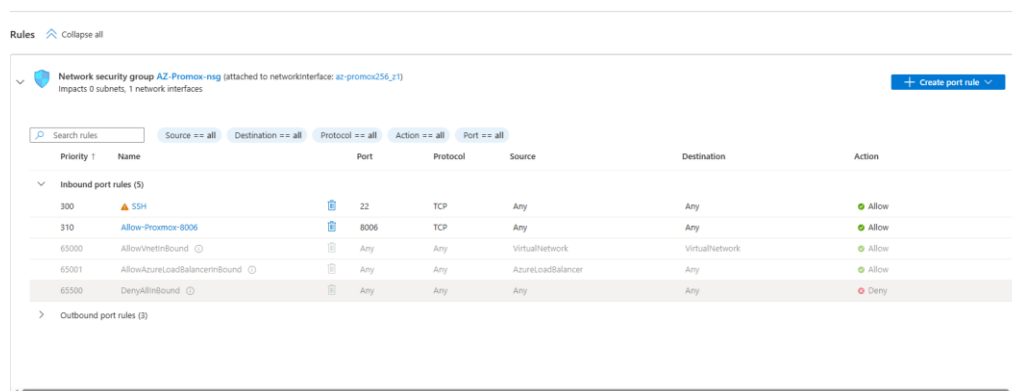

12. Disable IPv6:

```
sudo nano /etc/sysctl.conf
```

Add the following lines:

```
net.ipv6.conf.all.disable_ipv6 = 1  
net.ipv6.conf.default.disable_ipv6 = 1  
net.ipv6.conf.eth0.disable_ipv6 = 1
```

13. Apply the changes:

```
sudo pvecm updatecerts --force
```

```
sudo systemctl restart pveproxy
```

14. Access Proxmox Interface:

<https://20.68.169.72:8006>

15. Log in using the root username and password.

16. Download the Ubuntu Server ISO image: <https://releases.ubuntu.com/22.04/ubuntu-22.04.5-live-server-amd64.iso>

17. Edit the Proxmox network configuration:

```
sudo nano /etc/network/interfaces
```

ADD:

```
auto vmbr0
```

```
iface vmbr0 inet static
```

```
address 10.2.0.4/24
```

```
gateway 10.2.0.1
```

```
bridge-ports eth0
```

```
bridge-stp off
```

```
bridge-fd 0
```

Reference: <https://blog.popescul.com/posts/2025/07/20/proxmox-bridge-dhcp-setup/>

18. Create a new Ubuntu VM within Proxmox and start it.

19. Complete the Ubuntu installation and log into the VM.

20. Create test files within the VM using the touch command.

21. Create a snapshot of the VM.

22. Delete the files and confirm their removal.

23. Restore the VM to the previous snapshot and verify that the files have reappeared.


24. Test creating a clone within Proxmox.

25. Export the VM from Proxmox to VMware format:

```
qemu-img convert -f qcow2 -O vmdk /var/lib/vz/images/100/vm-100-disk-0.qcow2  
/var/lib/vz/images/100/ubuntu-vmware-export.vmdk
```

26. Verify the exported VMDK file: `ls -lh /var/lib/vz/images/100/`

27. Use WinSCP to download the VMDK file locally.

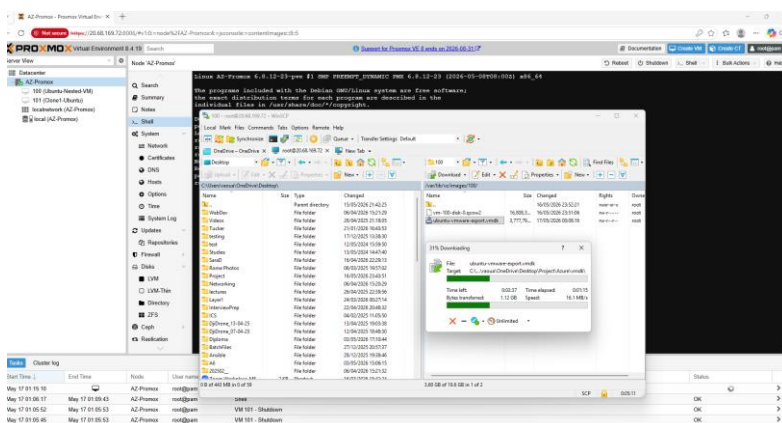

28. In VMware Workstation Pro, create a new VM using the exported VMDK disk.

